

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

PURPOSE

- The purpose of the Global Supplier Standards Manual is to communicate Johnson Controls Inc. requirements to the suppliers in our Automotive Experience Division that provide prototype parts. It is the expectation of Johnson Controls Inc. that all suppliers of Direct Materials comply with all of the requirements and expectations documented in this manual.
- Johnson Controls Inc. expects this manual to provide the foundation for our working relationship with our Suppliers. We will strive for excellence through continuous improvement in the products and services we receive through close working relationships with our suppliers.
- This standard is a supplement to and does not replace or alter other terms and conditions covered by purchase documents, procedures or requirements of engineering drawings or specifications.

SCOPE

Geographic Applicability-

- This policy applies globally to all JCI Automotive Experience (AE) Manufacturing and Parts Distributions locations that are involved in the purchase of products and services for use internally or resale.
- The Prototype manual is divided into 4 main sections
 1. General Quality Requirements
 2. Required Quality Documentation
 3. Quality Documentation – Process, Submission and Naming
 4. Miscellaneous and Special Requirements

1.0 General Quality Requirements

The requirements have to be fulfilled and documentation has to be prepared. Full documentation has to be sent with each delivery with regard to the definition of basic documents.

All documents have to be centralized within the “**Central-QRM-Documentation**”.

1.1 PPSW (Prototype Part Submission Warrant)

The cover sheet is mandatory for every delivery and each ordered part number. It is mandatory to fill out the complete PPSW.

Marked-Up-Drawing

Marked dimensions have to correlate to the items in the measurement report, e.g. position one on the drawing correlates to measurement one on the report. The supplier is responsible to prepare the marked-up drawing.

1.2 Inspection Report

The Inspection report is used to document dimensions and features not captured with the CMM report. Material, gage, functional checks, weld seam length, weld seam quantity, hardness, dimensions (fastener), etc. The Inspection report is to be integrated in Central-QRM-Documentation. Each item on the report has to correlate to the marked up drawing, e.g. position one on drawing correlates to position one on measurement report. At a minimum the report has to provide the following information:

- Nominal value
- Actual value
- Tolerance
- Assessment OK / NOK

1.4 CMM Report

A three piece 100% CMM measurement report is mandatory except for fasteners (see 2.5). If a PO is split in different production lots, three parts have to be measured with the first batch. With all following batches, one part has to be measured (see 2.2). At a minimum the report has to provide the following information:

- Nominal value
- Actual value
- Tolerance

- Assessment OK / NOK
- Alignment (datum structure, etc.)
- Road Map (see 2.7)
- Digital Picture of set up (see 2.6)

CMM reports shall only contain dimensions required on the engineering drawing i.e.; all GD &T feature control frames, hole diameters, etc. No reference dimensions are required and no "T"rim or "S"urface value (Approach Vector detail) will be allowed. All features MUST be checked as called out on the engineering drawing.

1.4.1 Production Pull-Ahead Part Approval

Parts are to be inspected with a third party JCI approved production gage. In case a gage is not available, a CMM report is required unless the GD&T allows a hand layout (1.3). In case material is out of specification, a CMM or Inspection report is mandatory for the DA approval. All other sections of this QRM manual shall apply.

1.4.2 Production Carry Over and Standard Parts

PPAP production and standard parts only require a shipper (see 1.10). No other quality documentation is required.

1.5 Box Label and Part Identification

General Note

E-coat resistant labels are the preferred identification method and can be used instead of engraving/etching. Each and every part or assembly has to be individually identified. Parts too small to carry the entire information can be handled by abbreviating the information. Parts too small to carry even the abbreviated information can be handled with a box label. The part, assembly, or box label has to contain the following information:

- Part Number
- Revision Level
- DA number if applicable
- Batch Number

If not clearly defined on drawing the position and method of identification has to be agreed upon with JCI.

Single Components

Engraved/Etched: If part is not e-coated by the supplier.

Labeling: If part has been e-coated by the supplier.

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

Sub and Final Assembly

Engraved/Etched: If the property is not to be e-coated the supplier.

Labeling: If a part has been e-coated by the supplier. All quality information gathered must reference the label number and the associated quality documentation has to match the bar code number.

1.5.1 Bar Code Requirement

The following information is intended to provide the supplier with the bar code information required to ship parts to the JCI prototype shop. All of the following requirements must be met.

Barcode

- Must be code 39 or code 128 format
- Data: SvvNNNNN
 - S=Serial Id prefix (Always capital "S")
 - vv= Vendor code (Assigned by JCI Prototype- never changes for supplier)
 - NNNNN= serial (00001-99999 or 00000-ZZZZZ; must be unique)

The bar code must be readable (scanner test) and no two labels can have the same serial number.

Human readable

- The serial number SvvNNNNN is required to be in human readable format
- The item number, revision deviation and batch numbers must uniquely identify an individual part
- Vendor Name



1.6 Inspection plan (if requested)

The inspection plan has to be provided by the supplier and has to be created per each part. The supplier's own format can be used, but has to be approved by JCI before first delivery. This requirement, if requested, will be listed on the JCI Purchase Order.

Even if not requested the absence of an inspection plan does not relieve the supplier from adhering to the specification on the drawing. The same is true even if an inspection plan has been approved by JCI (see 4.)

The minimum information captured in the inspection plan shall contain:

- Item of Inspection
- Type of Inspection
- Inspection Sequence
- Type of Documentation

1.7 Material Verification page 13

3rd party material verification is mandatory (mechanical, chemical, and statement of conformance). All sheet metal, tube, and wire material requires a 3rd party inspection. Do not start your manufacturing process without having the statement of conformance from your A2LA or 17025 certified laboratories.

All materials require a 3rd party certificate in addition to the mill certificate. The 3rd party certificate must reference the heat batch number of the mill certificate.

- Tube material shall be tested 180° opposite from weld seam (according to specification). A sub-size specimen is recommended. If available submit the sheet metal certificate of the sheet metal used to manufacture the tubing material.
- Wire (according to specification).

Fasteners shall be tested in accordance with the standard on the engineered drawing. This test does not require a 3rd party certificate, but must be provided in a report form by the supplier (see 2.3).

1.8 Weld Inspection / Macro Analysis (MIG/ MAG/Laser)

General Note

The cut and etch requirements need to be discussed on an individual basis; however, all safety critical welds require a full cut and etch report at all times. None critical welds need to show evidence of fusion (picture and minimum measurements). Any measurements need to be attached in the designated work book of the Central-QRM-Documentation. The report and pictures must be clearly identified and correlate back to the weld seam call out of the print. The measurements must be taken in accordance to the individual OEM specification. If not otherwise specified the supplier has to adhere to the JCI weld requirements as described in the specification

- GMAW Quality/AE-MOS-SP-XX-XX-E
- Laser Welding Quality/AE-MOS-SP-XX-XX-E;

For JCI Prototype manual welding requirements, see document: *Manual Prototype Welding Operator Qualification and Procedures – Vendors to Johnson Controls Co, Inc.* (available upon request).

Robotic

All robotic welded assemblies require weld length, position, visual integrity and presence check/measured of all welds on the first two parts and the last part of the batch. All other parts need to be visually inspected for weld presence and weld integrity and must be individually marked (color dot). All assemblies need to be serialized and all physical and/or visual measurements must be documented (see 1.3 and 1.5).

Manual

All manual welded assemblies require 100% weld length, position, visual integrity and presence check/measured and must be individually marked (color dot). All assemblies need to be serialized and all physical and/or visual measurements must be documented (see 1.3 and 1.5).

1.8.1 Spot Weld/ Resistance Welding

At a minimum the supplier has to adhere to the ISO 10447 standard. The result of the nugget dimension has to be measured and recorded accordingly. If provided with OEM specifications the OEM spec supersedes the ISO standard.

1.9 Deviation Authorization Form

With any NOK results or other deviations a DA number has to be requested by supplier to get a decision of further handling (release, rework, new parts, etc.) before sending the parts to JCI.

The supplier will get a feedback on this as follows:

- Approved DA >>>Parts released with NOK results>>>Parts can be shipped to JCI.
- Rejected DA>>>Parts not released with NOK results>>>Parts are **not allowed** to ship to JCI.

With a not released DA the parts have to be reworked or new parts have to be delivered including complete documentation.

With released parts the DA-number or DA form (ideally) has to be documented within the "Central-PPSWDocumentation".

The DA number shall be listed on the part label (see 1.5).

In advance of any part delivery the DA-request has to be sent to the coordinator in charge or the AQE (Quality Engineer) in order to achieve prompt release by JCI-Engineering. Any report with dimensions out of specification will be used as quality rejection criteria unless the paperwork is submitted with the DA-number.

1.10 Shipping Documentation

Any delivery requires a deliver note (shipper). International shipments must comply with the applicable customs regulations and documentation. The following content is required with the delivery note (shipper).

- Shipper
- PO-Number
- Part-Number / Rev.Level
- Batch #
- Counts of parts per each position

1.11 Packaging & Delivery of Measured Parts

All measured parts have to be physically separated from the rest of the lot. The samples used for measurement shall be numbered and correspond to the test report.

These measurement parts will be held back for later build trials making this separation is absolutely vital.

2.0 Required Quality Documentation

2.1 Prototype Part Submission Report / Warrant (PPSR)

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013


Part name <small>Bezeichnung</small>		Part number <small>Teilenummer</small>		SN 55-44 Revision <small>Index</small>													
Brkt. Mtg Front 60%		2365986		55-44 Revision B													
Drawing Number <small>Zeichnungsnummer</small>		Date <small>Stand</small>		Revision <small>Index</small>													
2365986		12/10/11		B Gewicht 2.626 kg													
<input type="checkbox"/> Manufactured to dataset <small>Gefertigt nach Datensatz</small>		<input type="checkbox"/> Manufactured to drawing/ see above <small>Gefertigt nach Zeichnung/ siehe oben</small>		Quantity produced 30 Date 17/01/12 <small>Geherfertigte Menge Datum</small>													
Number/name of dataset <small>Nummern/Namen Datensätze</small>				Date/Revision <small>Datum/ Index</small>													
Supplier name <small>Name/Lieferant</small> WXYZ		Supplier Code <small>Lieferantennummer</small> 12345		Customer Johnson Controls <small>Kunde</small>													
Address 1428 Elm St <small>Adresse</small>		49111 - Belleville		Address 47700 Halyard Drive, Plymouth, MI <small>Adresse</small> 48178													
Sales/Vertrieb <small>Kundendienst</small>		Phone 588-295-0000 <small>Telefon</small>		Purchase/Einkauf <small>Anfrage/Bestellung</small> Purchasing													
Contact person Fredrick Krueger <small>Kundenbeauftragter</small>		Phone 588-295-0000 <small>Telefon</small>		Contact person Purchasing <small>Anfrage/Bestellung</small>													
Email freddyk@elinst.com				Email 0													
Purchase Order No. PO 123456789 <small>Bestellnummer</small>				Project/Projekt 480A													
Materials Reporting - Materialnachweis <input type="checkbox"/> n/a <small>NOMINAL according to drawing</small> 3.2 mm +0.2 / -0.0 <small>SOLL gem. Zeichnung</small>		Charge 0 <small>ACTUAL</small> 3.2 <small>IST</small>															
Submission Results/ decision - Ergebnisse zur Teilesendung/ Entscheidung The results meet all drawing and specifications <input checked="" type="checkbox"/> Yes/ ja <input type="checkbox"/> No/ nein <small>(Die Ergebnisse entsprechen alle der Zeichnung und den Spezifikationen)</small>																	
Dimension/ Maße <small>Material/ Material</small> Function/ Funktion Test results/ Testergebnisse		<table border="1" style="width: 100%; text-align: center;"> <tr> <th>ok</th> <th>not</th> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> <tr> <td><input checked="" type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </table>		ok	not	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	Explanation, comment, advice ... <small>Erklärung, Kommentare, Hinweise ...</small>	
ok	not																
<input checked="" type="checkbox"/>	<input type="checkbox"/>																
<input checked="" type="checkbox"/>	<input type="checkbox"/>																
<input checked="" type="checkbox"/>	<input type="checkbox"/>																
<input checked="" type="checkbox"/>	<input type="checkbox"/>																
<input checked="" type="checkbox"/>	<input type="checkbox"/>																
Deviation is announced and DA requested <small>Abweichung ist bekannt gegeben und DA ist beantragt</small>		<input type="checkbox"/> Yes <input type="checkbox"/> No		DA is sent to/ DA wurde genehmigt an													
IF available, number of DA <small>Wenn bekannt, Nummer der DA</small>																	
Comments/ Kommentare:																	
Submission Checklist - Prüfliste für den Versand * Minimum requirement to accompany submission <small>Mindestanforderungen für die Begleitpapiere</small>																	
<input checked="" type="checkbox"/> JCI Measurement report (PPSW P_2) <small>JCI Messbericht (PPSW Seite 2)</small>		<input checked="" type="checkbox"/> * Correct Number of Parts <small>korrekte Anzahl der Teile</small>		<input type="checkbox"/> SC & CC List <small>SC & CC Liste</small>													
<input checked="" type="checkbox"/> Supplier's measurement report <small>Messbericht des Lieferanten</small>		<input type="checkbox"/> * Deviation Authorization (DA) <small>Abweichungsbefreiung (DA)</small>		<input type="checkbox"/> Certifications <small>Zertifizierungen</small>													
<input checked="" type="checkbox"/> Part Label <small>Teilendeckel</small>		<input checked="" type="checkbox"/> * Material certification (3.1) <small>Materialbescheinigung (3.1)</small>		<input type="checkbox"/> Auxiliary Drawings/Sketches <small>Hilfszeichnungen/Skizzen</small>													
<input type="checkbox"/> * Control Plan <small>Produktions- Lenkungsplan</small>		<input type="checkbox"/> Test results <small>Testergebnisse</small>		<input type="checkbox"/> Level part/ drawing not acc. order <small>Index Teil/ Zeichnung nicht gemäß Bestellung</small>													
<input checked="" type="checkbox"/> Drawing/ Zeichnung		<input type="checkbox"/> Assembly Description <small>Bestandbeschreibung</small>		<input type="checkbox"/>													
Declaration/ Erklärung <small>I affirm that the samples introduced by this warrant are representative of our parts and have been made to the applicable drawings/ dataset and specifications from specified materials. Ich bestätige hiermit, dass die/ unsere die mit dieser Genehmigung vorgelegt werden, repräsentativ für unsere Teile sind und nach den anzuwendenden Zeichnungen/ Datensätzen und Materialspezifikationen hergestellt wurden.</small>																	
Phone/ Telefon 588-295-0000		Date/ Datum 17/01/12		Print Name/ Name in Druckschrift Joe Smith													
Email freddyk@elinst.com				Signature/ Unterschrift													

Johnson Controls Automotive Experience
 Global Supplier Standards Manual
 Metal Prototype Quality Requirements
 May 2013

2.2 Measurement Report Frequency


Scenario	one PO; delivery in one Batch	Re- order	one PO; delivery in several Batches ; split by JC, e.g. possible changes	one PO; delivery in several Batches; split by supplier e.g. lack of capacity
Delivery (example)	100 parts / one Batch	50 parts	50 + 50 parts	20 + 80 parts
to be ordered by JCI	100 parts 3 CMM - reports	50 parts 3 CMM - reports	first 50 parts 3 CMM reports 1st batch 1 setup second 50 parts: 1 CMM report 2nd batch	100 parts 3 CMM - reports
to be delivered by Supplier				1 CMM - report per each additional batch, free of charge

2.3 Marked-Up Drawing

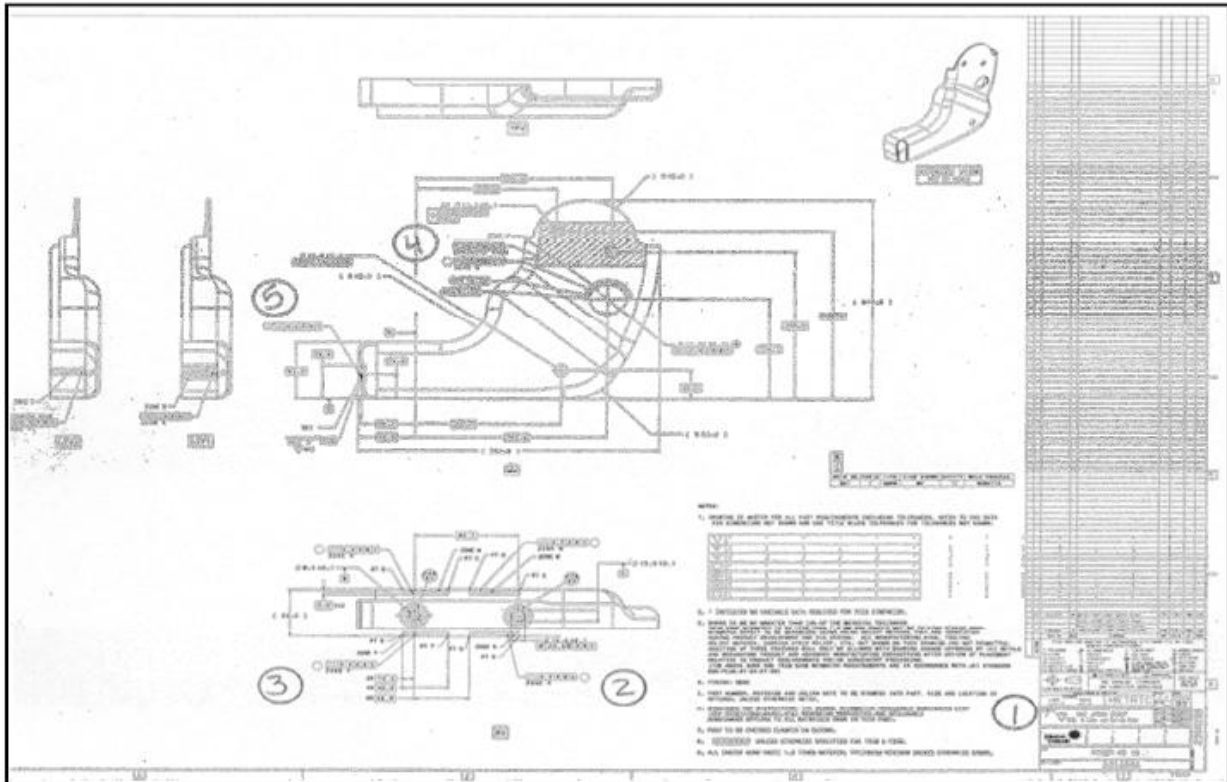

Johnson Controls Automotive Experience
 Global Supplier Standards Manual
 Metal Prototype Quality Requirements
 May 2013

2.4 Inspection Report



Prototype Part Submission Warrant (PPSW)

(Inspection report; dimensional report / Prüfbericht; Messbericht)

Part Description Pin

Teilbeschreibung

Serial No. 100

Laufende-Nr.

PPSW No. 08/1256

Part No. 1779639

Teilenummer

No.	Dimension or Specification - Nominalmaß	CC/SC	Inspection Results - Prüfwerte	OK	NOK
1	100 ± 0,2 mm		100,4		x
2	∅ 3,0 +0,1		3,08	x	
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					
25					

Date/Datum _____

Name/Name _____


ECEPLUS-FR-04-01-E_Rev.03
 (15-Apr-2008)

Johnson Controls, Inc.
 Proprietary and Confidential

Page 2 ; Printed: 02/07/2008

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

2.5 CMM Report

	PART NAME : 2288246_40% FRAME ASSY_102411		February 08, 2012	14:31
	REV NUMBER : 1	SER NUMBER :	STATS COUNT : 1	

DIM 1= POSITION OF CIRCLE CIR-9 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
Y	-0.02	0.00				-0.02	
Z	38.02	38.00				0.02	
DF	13.50	13.50	0.10	0.10	0.10	0.00	0.00 ----#----
TP		MMC	0.50		0.10	0.05 I	0.00 #-----
DIM 2= LOCATION OF PLANE PLANE 1 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL		DEV	OUTTOL
Y	393.15	393.40	1.00	1.00		-0.25 I	0.00 ---#-----
DIM 3= PROFILE OF SURFACE OF PLANE PLANE 1 FORMANDLOCATION UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL		DEV	OUTTOL
M	1.50	0.00	1.00	1.00	1.50		0.00 -#-- ---#
DIM 4= LOCATION OF CIRCLE CIR-1 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL		DEV	OUTTOL
Z	301.06	301.30	0.50	0.50		-0.24 L	0.00 --#-----
DIM 5A= POSITION OF CIRCLE CIR-1 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	-69.15	-69.50				0.35	
Z	301.06	301.30				-0.24	
DF	9.02	9.10	0.10	0.10	0.02	-0.08	0.00 -#-----
TP		MMC	1.00		0.02	0.84 B	0.00 -----#-
DIM 5B= POSITION OF CIRCLE CIR-2 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	-40.99	-41.40				0.41	
Z	345.45	345.60				-0.15	
DF	9.04	9.10	0.10	0.10	0.04	-0.06	0.00 -#-----
TP		MMC	1.00		0.04	0.87 B	0.00 -----#-
DIM 6= POSITION OF CIRCLE CIR-11 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	-1.44	0.00				-1.44	
Z	1.94	0.00				1.94	
DF	6.03	6.00	0.10	0.10		0.03	0.00 ----#----
TP		RFS	2.20		0.00	4.84 H	2.64 ----->
DIM 7A= POSITION OF CIRCLE CIR-10 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	-29.29	-29.10				-0.19	
Z	-83.17	-83.10				-0.07	
DF	6.04	6.00	0.10	0.10	0.06	0.04	0.00 ----#----
TP		MMC	4.00		0.06	0.41 F	0.00 #-----
DIM 7B= POSITION OF CIRCLE CIR-11 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	-30.73	-29.10				-1.63	
Z	-81.23	-83.10				1.87	
DF	6.03	6.00	0.10	0.10	0.07	0.03	0.00 ----#----
TP		MMC	4.00		0.07	4.97 H	0.90 ----->
DIM 8= 3D DISTANCE FROM PLANE PLANE 1 TO POINT PT-10, SHORTEST=OFF, NO RADIUS UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL		DEV	OUTTOL
M	7.32	7.50	0.00	7.50		-0.18	0.00 -----#
DIM 9= POSITION OF CIRCLE CIR-12 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
Y	310.89	311.70				-0.81	
Z	-21.86	-22.50				0.64	
DF	8.12	8.10	0.20	0.00	0.02	0.02	0.00 #-----
TP		MMC	1.00		0.02	2.07 I	1.05 ----->
DIM 10= POSITION OF CIRCLE CIR-6 UNITS=MM							
AX	MEAS	NOMINAL	+TOL	-TOL	BONUS	DEV	OUTTOL
X	15.44	15.10				0.34	
Z	264.68	265.30				-0.62	
DF	6.19	6.00	0.10	0.10	0.00	0.19	0.09 ----->


2.6 Measurement Setup

To make measurements reproducible and to allow counter measuring at least one (1) photo of the measurement setup is required.



Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

2.7 Road Map

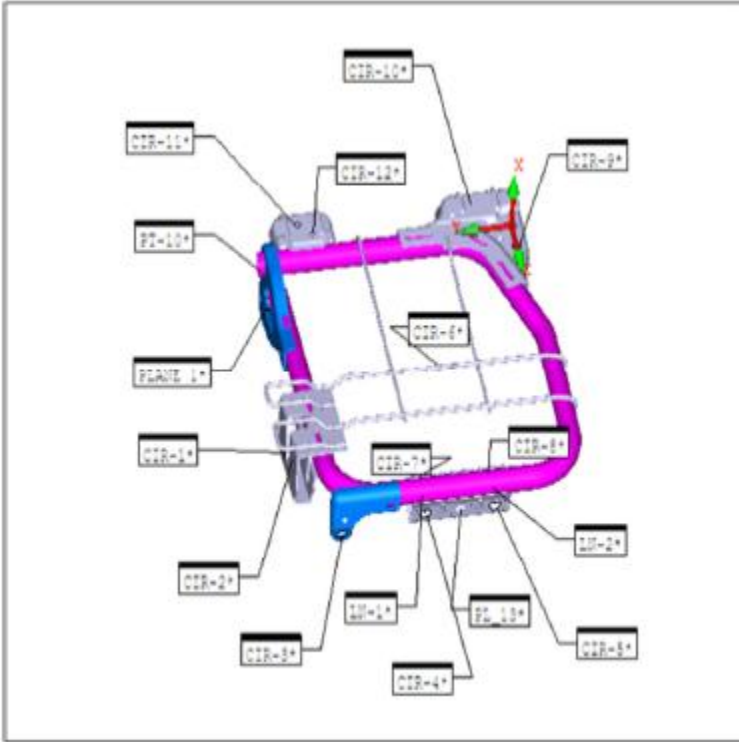

2.7.1 Box Label

YES		NO		STATUS OF MATERIAL	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	PARTS MEET DIMENSIONAL REQUIERMENTS	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	PARTS MEET FUNCTIONAL REQUIERMENTS	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	PARTS MEET APPEARANCE REQUIREMENTS	
<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	PARTS PRODUCED WITH SPECIFIED MATERIAL	

EGEPLUS-PR-04-01-E_Rev04

Johnson Controls Automotive Experience
 Global Supplier Standards Manual
 Metal Prototype Quality Requirements
 May 2013

2.8 Material Certificate
 Mechanical Report

Chemical Report

Statement of Conformance

VETEC Laboratories
 A Division of Tool Inc.
 1220 Lincoln • Tulsa, OK 74104-0777
 Phone: (918) 436-4072 • Fax: (918) 436-4072
 www.vetec.com

Test Date: Tuesday, December 03, 2011
 Mechanical Testing Conducted to ASTM A36, S16, A370 and ASTM E848 3, when Toler. Allowance

Customer Name: ACCU-RITE TOOL & DIE
 Vendor/Venue Order: 2487
 Purchase Order: 002542
 Reference No.: P#1
 Testing Test Case: P.K.
 Sample Content: *Handwritten: P.K. Hays*
 STD Control Item File Name

WEL	Tolerance	Yield	UTS	Elong	A	B	C	D
3.2224	3.2220	50000	70700	20.0	5.0	0.10	0.10	0.10

Sample ID: 002542-022423

VETEC Laboratories
 1220 Lincoln • Tulsa, OK 74104-0777
 Phone: (918) 436-4072 • Fax: (918) 436-4072
 www.vetec.com

CHEMISTRY TEST RESULTS

REPORT TO: David Bonamico, ACCU-RITE TOOL & DIE, 21200 Columbia, Houston, TX 77058-0236, Phone: (281) 771-6433, Fax: (281) 413-4738
 BILL TO: Account Payable, ACCU-Engineering, Inc., P.O. Box 128, Houston, TX 77086-0128

REPORT DATE: 12/03/2011
 RESULTS: 26.135
 CUSTOMER P.O.#: 002749
 DATE SAMPLE RECEIVED: 12/02/2011
 VETEC W.O.#: 11-3457

REFERENCE INFORMATION:
 TEST SPECIFICATION: Chemistry 211614112 (Steel 1045-0400)

ANALYZED SAMPLE NO: 010258-022423

Element	Result (%)
C	0.071 %
Mn	1.273 %
P	0.012 %
S	0.004 %
Si	0.017 %
Ca	0.011 %
Mo	0.015 %
Cr	0.200 %
Ni	0.017 %
V	0.024 %
Al	0.040 %
W	0.070 %
Ti	0.011 %

TEST COMMENTS: none
 Testing Technician: P.K.
Handwritten: Michael P. Hays
 MICHAEL P. HAYS, Director of Analytical Services
 Additional Analysts Signature

VETEC Laboratories
 1220 Lincoln • Tulsa, OK 74104-0777
 Phone: (918) 436-4072 • Fax: (918) 436-4072
 www.vetec.com

TEST RESULTS

REPORT TO: Dave Bonamico, ACCU-Engineering, Inc., 21200 Columbia, Houston, TX 77058-0236, Phone: (281) 771-6433, Fax: (281) 413-4738
 BILL TO: Account Payable, ACCU-Engineering, Inc., P.O. Box 128, Houston, TX 77086-0128

REPORT DATE: 12/03/2011
 RESULTS: 26.135
 CUSTOMER P.O.#: 002749
 DATE SAMPLE RECEIVED: 12/02/2011
 VETEC W.O.#: 11-3457

REFERENCE INFORMATION:
 TEST SPECIFICATION: Chemistry 211614112 (Steel 1045-0400)

TEST SPECIFICATION:
 Substrate: 1045
 08-12-58-102423 - Submitted sample as tested conforms to requirements of 1045-0400

TEST COMMENTS:
 none
Handwritten: Michael P. Hays
 MICHAEL P. HAYS, Director of Analytical Services
 Additional Analysts Signature

American Association for Laboratory Accreditation (2011-04-04)

Pittsburgh STEEL COMPANY
 1000 BROADWAY, PITTSBURGH, PA 15202-1000
 (412) 324-2000 - FAX (412) 324-2000

Shipped Date: 11/02/11
 Shipper No: 002922
FREIGHT PREPAID - CLASS 80

BILL OF LADING - (CUSTOMER COPY) - STRONG ST - SALES 3 of 4

Bill To: ACCU-RITE TOOL & DIE, 21200 COLUMBIA, SHELLEY TOWNSHIP, MI 48312 USA
 Ship To: ACCU-RITE TOOL & DIE, 21200 COLUMBIA, SHELLEY TOWNSHIP, MI 48312 USA

Commodity: 1045 CARBON STEEL
 Terms: 1045 CARBON STEEL, METRIC
 Loading: FORK LIFT
 Ship Via: STEEL MAN TRANSPORTATION LLC
 P.D.B. DELIVERED

NO.	QTY	WEIGHT	SIZE	SHAPE	MARKING	DESCRIPTION
308441	10	1,380	079.180 X	43.6250 X	120.0000	Hot Rolled Pickled / Coiled Bar 1045-0400

TOTAL: 10, 1,380, 1,380
 NET WT: 1,380
 GROSS WT: 1,380

SHIPPER'S WEIGHT AND SCALE CERTIFICATE
 THIS BILL OF LADING IS ISSUED UNDER THE PROVISIONS OF THE UNITED STATES CARBO-IRON ACT OF 1910 AND THE UNITED STATES METRIC CONVERSION ACT OF 1975.

ALL LOADS MUST BE TAMPED - NO EXCEPTIONS


Driver/Carrier hereby certifies that the trailer has been loaded pursuant to my directions and to an appropriate manner. The trailer has been loaded to my satisfaction and is safe for transportation upon public/trade highways.

Prepared By: DWS
 OWNER YOU MUST DECKE WEATHER CONDITIONS
 ALL MATERIAL RECEIVED IN GOOD CONDITION

Mill Certificate

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

2.9 Robotic Weld Inspection / Macro Analysis




ROBOTIC WELD INSPECTION DATA SHEET

PROJECT: NISSAN X126
DRAWING #: PN-2288246
REV-LEVEL: 1

CUSTOMER: Nissan
DESCRIPTION: 402 NISSAN BACK
SPEC: ES-E4EB-1K251-AA

WELD #	DESCRIPTION	ROOT #	DEPTH OF PENETRATION	DEPTH OF FUSION LEG	DEPTH OF FUSION LEG	LENGTH OF LEG 1	LENGTH OF LEG 2	EFFECTIVE THROAT	T1 MAT. THICKNES	T2 MAT. THICKNES	MELT THROUGH	GAP*	UNDERCUT	POROSITY	WELD LENGTH
*SEE NOTE 1 T1 =		102	T1 MIN	102	T1 MIN	102	T1 - GAP	102	T1 - GAP	102	T1 MIN	*SEE NOTE		*SEE NOTE	
T1 =	1,76	0,176	0,176	0,176	1,584	1,584	1,232								SCALE
WELD #	3	0,82	0,77	0,55	2,2	3,45	2,71	1,76	6,2	N/A	0,06	0,12	N/A		
PASS / FAIL		Pass	Pass	Pass	Pass	Pass	Pass								SCALE
T1 =	1,76	0,176	0,176	0,176	1,584	1,584	1,232								
WELD #	16	1,3	0,23	0,62	5	5,66	4,88	1,79	2,73	N/A	0,4	N/A	N/A		
PASS / FAIL		Pass	Pass	Pass	Pass	Pass	Pass								

WELD SETTINGS	
METHOD	Fanuc 100
W	Fanuc 100
VOLTS	22,5
W	22,5
AMPS	176
W	176
WIRE FEED	405 IPM
W	405 IPM
TRAVEL	34,5 IPM
W	34,5 IPM
WELD TYPE	Single
W	Filet
POSITION	Flat
W	Flat

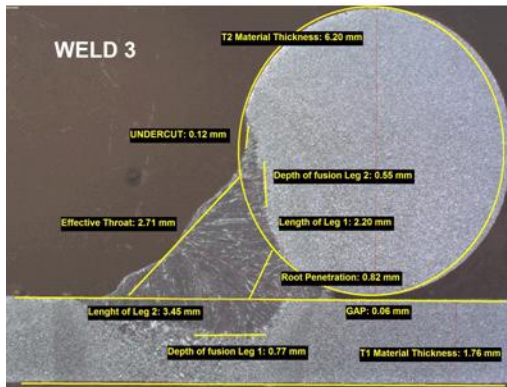

* NOT SPECIFIED, HOWEVER ASG PLANTS STRIVE FOR 0.2MM OF T1 AS A "DO CARE" MEASURE.
 † THE MAXIMUM ALLOWABLE GAP AT ENDS OF EACH WELD LENGTH, AND AT SECTION IS THE LESSER VALUE OF T1 OR 1.5MM, WHICHEVER IS SMALLER. ACTUAL DIMENSION SHALL NOT EXCEED 1.5MM IN ANY CASE.
 ‡ THE MAXIMUM ALLOWABLE UNDERCUT DEPTH IS 0.2MM OF THE MINIMUM SPECIFIED THICKNESS OF THE METAL THAT

WELD INSPECTOR: MIKE MASON CWI / CWE # 09070291 ANST ACCP LEVEL II # 196697
DATE: 25.04.2012

Johnson Controls Automotive Experience
 Global Supplier Standards Manual
 Metal Prototype Quality Requirements
 May 2013

2.10 Deviation Authorization Request

DA 6187517: Properties		aepurep Dec 6, 2012
Lead Program Affected	1015282	
Description	1st Row Allow lower rail rear ball stop position change to 88 +/- 1.0mm from 98 +/- 1.0mm on ASM Upper and Lower Track Marriage drawing no. 2513460 and Lower Rail Core drawing no. 1113298 for CV BUILD	
Start Date	Dec 6, 2012 12:00:00 PM	
End Date		
Quantity	110	
Extend End Date		
Customer Auth No.		
Cost Impact		
Reason For DA	8. Other (describe in Comments/Special instructions)	
Comments	Married rails slide efforts out of specification. Lower rail rear ball stop position change to 88 +/- 1.0mm from 98 +/- 1.0mm. ECR will follow.	
Quality Effect		
Owner	aepurep	
Originator	aepurep	
Originated	Dec 6, 2012 2:50:36 PM	
Modified	Dec 6, 2012 2:53:53 PM	
Vault	JCI North America	
State	Review	
Policy	EPC DA	

3.0 Quality Documentation – Process, Submission and Naming

To avoid excessive paperwork, waste of paper and unnecessary queries the Central-QRM-Documentation shall be submitted digitally only.

3.1 Naming convention:

Follow the naming convention for the file name: **Part number_Supplier manufacturing lot number (alpha numerical)_revision level_project name**

Example: 2395855_AZ12_B_X12G

Submission Process

True Prototype Parts

Please send the digital copy of the quality documentation (excel file format) to the following e-mail address aeplymouth-prototype@jci.com and/or the JCI Prototype SAQE unless otherwise requested. If a file is larger than 8Mb please submit via JCDX to the SAQE. The subject must entail the following content:

Part Number + Project Name+ Supplier Name

Production Pull-Ahead Parts

Please send the digital copy of the quality documentation (excel file format) to your JCI Quality Engineer. After review of the quality documentation the Quality Engineer will forward the information to the JCI Prototype SAQE. If a file is larger than 8Mb please submit via JCDX. The subject must entail the following content:

Part Number + Project Name+ Supplier Name

Parts will be placed “on hold” until the quality documentation has been submitted.

4.0 Miscellaneous & Special Agreements

4.1 The supplier guarantees to adhere to the requirements on the drawing. Surface and material requirements, i.e.; no burrs or corrosion, no scratches, damage, varnish/paint runs and appropriate packaging, are basic requirements and even if not reflected on drawings must be inspected by the supplier.

4.2 If "not OK"-parts (= quality report stating the parts are not OK) are delivered without an approved DA (Deviation authorization) the quality reports may not be

Johnson Controls Automotive Experience
Global Supplier Standards Manual
Metal Prototype Quality Requirements
May 2013

paid by Johnson Controls. The costs for JCI internal re-work and (if applicable) transport costs (back to the supplier) may be charged to the supplier.