



# BOSCH



# CORDLESS CATALOGUE

Blue Professional Power Tools

**6 YEARS**

**Tool & Battery  
Guarantee\***

\*With online registration

# BITURBO

BRUSHLESS

UP TO  
**2,000W**  
OF POWER



**NEW HIGH PERFORMANCE  
BRUSHLESS MOTOR**

**OUR MOST POWERFUL  
BATTERY EVER**




GBH 18V-45 C GBH 18V-36 C GBH 18V-34 CF GWS 18V-15 C GWS 18V-15 SC GWX 18V-15 C GWX 18V-15 SC GDS 18V-1000 1/2"



GDS 18V-1050 3/4" GKS 18V-68 C GKS 18V-68 GC GKT 18V-52 GC GCM 18V-216 GCM 18V-305 GDC GTS 18V-216

PLUS  
MORE

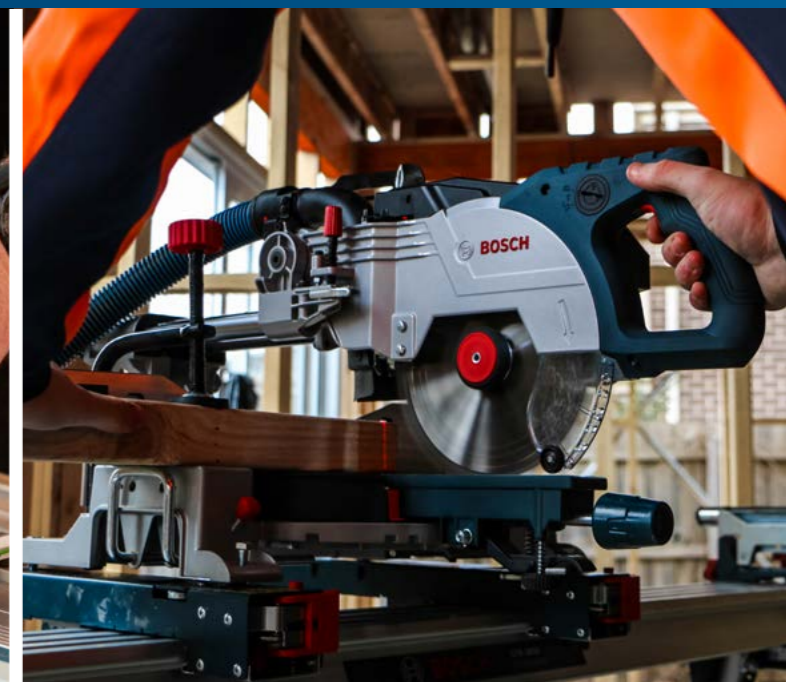

# SPARE PARTS

## AUSTRALIA

### THE BOSCH ONLINE SPARE PARTS SHOP (AU ONLY): 24-HOUR SPARE PART ORDERING FOR YOUR POWER TOOLS


#### Precise, safe and reliable:

- Bosch offers the spare parts for your tools (such as angle grinders or drills): From the armature to carbon brushes.
- Order your original spare parts from our online shop and your order will be expressed shipped right to your door!
- The repair of power tools must be carried out by a competent person

#### The benefits for you:

- Spare parts are easy to select via an exploded drawing
- Fast delivery thanks to the high availability of spare parts
- Direct access to genuine Bosch spare parts

#### Ordering your spare part is easy:

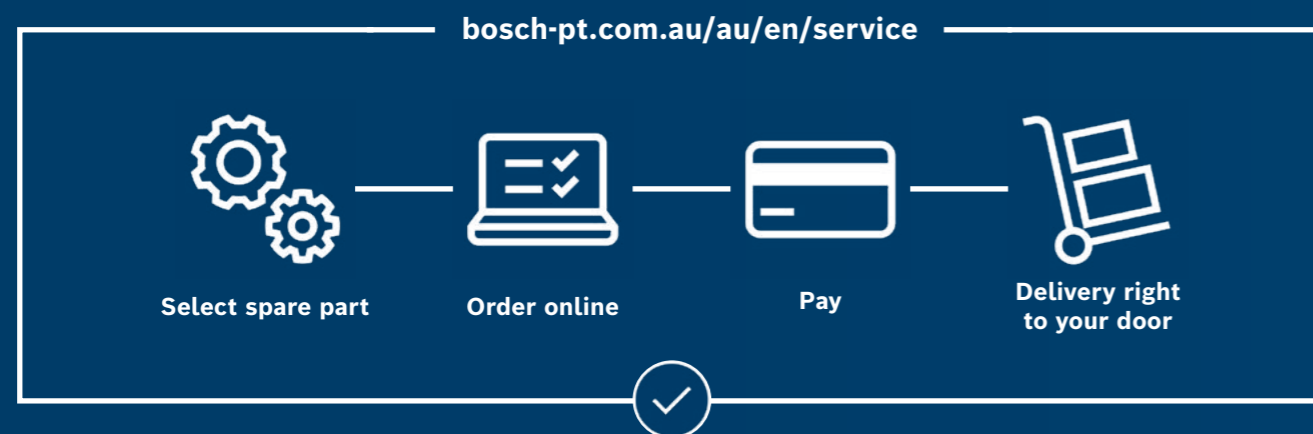

#### Find your local Australian service dealer at:

- [bosch-pt.com.au/au/en/dl/dealerlocator/dealersearch/](https://bosch-pt.com.au/au/en/dl/dealerlocator/dealersearch/)

## NEW ZEALAND

#### Search for the right spare part at:

- [boschtoolservice.com/nz/en/boschprof/spareparts/search](https://boschtoolservice.com/nz/en/boschprof/spareparts/search)

#### Find your local New Zealand service dealer at:

- [bosch-pt.co.nz/nz/en/dl/dealerlocator/dealersearch/](https://bosch-pt.co.nz/nz/en/dl/dealerlocator/dealersearch/)

#### Find answers to frequently asked questions at:

- [bosch-pt.co.nz/nz/en/service/after-sales-service/faq/](https://bosch-pt.co.nz/nz/en/service/after-sales-service/faq/)

# SUMMARY OF CONTENTS

## 18V CORDLESS SYSTEM

1

## 12V CORDLESS SYSTEM

2

## 3.6V CORDLESS SCREWDRIVER

3

## STORAGE SOLUTIONS


4

**6 YEARS**

**Tool & Battery Guarantee\***

\*With online registration

All you have to do is register your power tool, measuring tool, battery or charger online within 4 weeks of purchase and extend your warranty to 6 years!

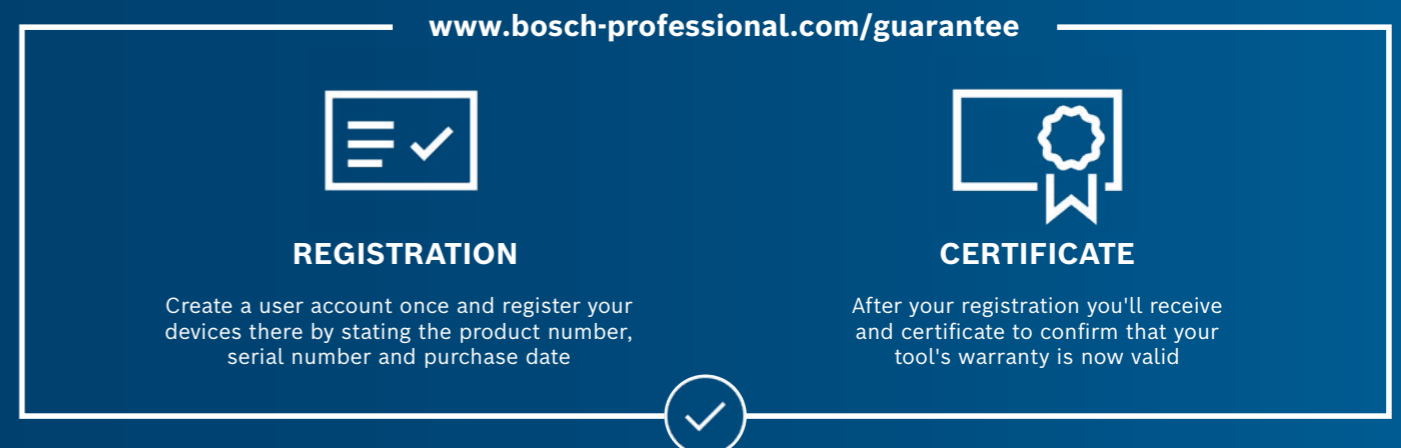

# LEADERS IN POWER TOOL SAFETY

## VIBRATION CONTROL

Bosch Vibration Control effectively reduces vibrations felt by the user by up to 60%, protecting the user and decreasing down time. Featured on Bosch Grinders, Rotary Hammers and Demolition Hammers.



## BRAKE SYSTEM

Brakes the motor of the tool in 1-3 seconds depending on the tool. Bosch X-LOCK tool-less disc change for angle grinders delivers 1sec braking times. Available on 18V and 240V Angle Grinders with this symbol.



## DROP CONTROL

Sensor Technology means power is shut off if the tool is dropped from the users hand, preventing uncontrolled tool operation. Now featured on Bosch 18V Brushless Angle Grinders.



## KICKBACK CONTROL

Immediately shuts off power to the tool in the event of Kickback, protecting the user and decreasing downtime. Now featured on 40+ Bosch 18V and 240V tools including grinders, hammers, drills.



## RESTART PROTECTION

Stops accidental restart if the power is disconnected then reconnected, protecting users from potential injury hazard. Now featured on most Bosch 18V cordless tools and many 240V safety series tools.



## SOFT START

The soft start system allows the tool to start off at a low RPM and accelerates to maximum RPM for safer tool handling. The prevents a sudden jump in the users hand.

Check out more of our safety features at:  
[bosch-pt.com.au](http://bosch-pt.com.au)



**6 YEARS**  
**Tool & Battery Guarantee\***

\*With online registration

# PROFESSIONAL 18V SYSTEM

**ULTIMATE PERFORMANCE.  
 MAXIMUM FREEDOM.**

10	Combo Kits
12	Batteries
14	Chargers
15	Starter kits
16	Hammer drills
17	Rotary hammers
19	Impact drivers
20	Dual impact drivers & wrenches
21	Impact wrenches
22	X-LOCK angle grinders
24	Angle grinders
25	Straight grinder / Nibbler / Shear / Metal saw
26	Circular saw
27	Table top saws / Jigsaws
28	Recip saws / Planer / Sander / Multi Tool
29	Radio / Blower
30	Work lights
31	Dust Extractors / Caulk gun / Tripods
32	Heated workwear
33	Rotation Laser

# 18V COMBO KITS

## 2 PCE 4.0Ah BRUSHLESS COMBO KIT



Part Number	0 615 991 FH5
60Nm Hammer Drill	GSB 18V-60 C
200Nm Impact Driver & Wrench	GDX 18V-200
2x 4.0Ah Batteries	GBA 18V 4.0Ah
18V 4.0A Charger	GAL 18V-40
Tool Bag	Tool Bag

## 2 PCE 4.0Ah BRUSHLESS ProCORE18V COMBO KIT



Part Number	0 615 990 L25
60Nm Hammer Drill	GSB 18V-60 C
200Nm Impact Driver	GDR 18V-200 C
2x 4.0Ah ProCORE18V Batteries	GBA 4.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Tool Bag	Tool Bag

## 5 PCE 5.0Ah BRUSHLESS COMBO KIT

COMING 2021



Part Number	TBC
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
Recip Saw	GSA 18V-32
184mm Circular Saw	GKS 18V-68 C
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Tool Bag	Tool Bag

## 6 PCE 8.0Ah BRUSHLESS ProCORE18V COMBO KIT



Part Number	0 615 990 L26
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200 C
125mm Side Switch Angle Grinder	GWS 18V-125 C
26mm SDS+ Rotary hammer	GBH 18V-26
Recip Saw	GSA 18V-32
1900 Lumen Worklight	GLI 18V-1900
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Hard case	L-BOXX 136

## 2 PCE 8.0Ah BRUSHLESS ProCORE18V COMBO KIT



Part Number	0 615 990 L24
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200 C
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Hard case	L-BOXX 136

## 3 PCE 5.0Ah BRUSHLESS COMBO KIT



Part Number	TBC
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
2x 5.0Ah Batteries	GBA 18V 5.0Ah
18V 4.0A Charger	GAL 18V-40
Tool Bag	Tool Bag

## 8 PCE 5.0Ah BRUSHLESS COMBO KIT

COMING 2021



Part Number	TBC
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
Recip Saw	GSA 18V-32
184mm Circular Saw	GKS 18V-68 C
300 Lumen Worklight	GLI 18V-300
Worksite Bluetooth Radio	GPB 18V-2 C
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Tool Bag	Tool Bag

## 3 PCE 8.0Ah BRUSHLESS ProCORE18V COMBO KIT



Part Number	0 615 990 L27
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200 C
125mm Side Switch Angle Grinder	GWS 18V-10
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
18V 8.0A Charger	GAL 1880 CV
Hard case	L-BOXX 136

## 4 PCE 5.0Ah BRUSHLESS COMBO KIT



Part Number	0 615 990 M19
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
2x 5.0Ah Batteries	GBA 18V 5.0Ah
18V 4.0A Charger	GAL 18V-40
Tool Bag	Tool Bag

## 10 PCE 5.0Ah BRUSHLESS COMBO KIT

COMING 2021



Part Number	TBC
110Nm Hammer Drill	GSB 18V-85 C
200Nm Impact Driver & Wrench	GDX 18V-200
Starlock Multi-Tool	GOP 18V-28
125mm Side Switch Angle Grinder	GWS 18V-10
26mm SDS+ Rotary hammer	GBH 18V-26
Recip Saw	GSA 18V-32
184mm Circular Saw	GKS 18V-68 C
300 Lumen Worklight	GLI 18V-300
Worksite Bluetooth Radio	GPB 18V-2 C
Blower	GBL 18V-120
3x 5.0Ah Batteries	GBA 18V 5.0Ah
2x 8.0Ah ProCORE18V Batteries	GBA 8.0Ah ProCORE18V
1x 4.0Ah ProCORE18V Battery	GBA 4.0Ah ProCORE18V
Tool Bag	Tool Bag

For more information & kits visit our websites at:

AUS: [bosch-pt.com.au/au/en/](http://bosch-pt.com.au/au/en/)

NZ: [bosch-pt.co.nz/nz/en/](http://bosch-pt.co.nz/nz/en/)

# 18V BATTERIES & CHARGERS

## 18V 2.0Ah Battery



<b>Technical data</b>	GBA 18V 2.0Ah
Part number	1 607 A35 0BG
Battery voltage	18 V
Weight	350 g

## 18V 3.0Ah Battery



<b>Technical data</b>	GBA 18V 3.0Ah
Part number	1 600 Z00 01K
Battery voltage	18 V
Weight	600 g

## 18V 4.0Ah Battery



<b>Technical data</b>	GBA 18V 4.0Ah
Part number	1 600 A00 163
Battery voltage	18 V
Weight	610 g

## 18V 5.0Ah Battery



<b>Technical data</b>	GBA 18V 5.0Ah
Part number	1 600 A00 129
Battery voltage	18 V
Weight	620 g

## 18V 6.0Ah Battery



<b>Technical data</b>	GBA 18V 6.0Ah
Part number	0 615 990 H0K
Battery voltage	18 V
Weight	620 g

## Battery Adaptor & USB Charger



<b>Technical data</b>	GAA 18V-24
Part number	1 600 A00 J61
Battery charging voltage	18 V
Weight	125 g

# ProCORE 18V

## OUR MOST POWERFUL BATTERY EVER

Up to  
**2,000W**  
of power when  
paired with  
**BITURBO**  
BRUSHLESS

Packed with advanced 21700  
cell technology delivering  
**2x THE POWER\***



\*Compared standard Bosch Batteries

With Coolpack 2.0 get  
**2x THE LIFETIME\***



\*Compared standard Bosch Batteries

All backed by a

**6 YEARS**

**Tool & Battery  
Guarantee\***

\*With online registration

## 4.0Ah

Power without the weight

Part number 1 600 A01 6GB  
Weight 515 g

## 8.0Ah

Twice the runtime

Part number 1 600 A01 6GK  
Weight 955 g

## 12.0Ah

Power to run all day

Part number 1 600 A01 6GU  
Weight 1.35 g



# 18V BATTERIES & CHARGERS

## 12V + 18V 3.0A Multi-voltage charger



Technical data		GAL 18V-30
Part number		1 600 A01 1AB
Battery charging voltage		12V + 18V
Weight		800 g
Charge rate (per hour)		3.0 A

## 18V 4.0A Charger

NEW!



Technical data		GAL 18V-40
Part number		1 600 A01 9RN
Battery charging voltage		14,4 – 18 V
Weight		550 g
Charge rate (per hour)		4.0 A

## 18V 8.0A Fast Charger



Technical data		GAL 1880 CV
Part number		1 600 A00 NSM
Battery charging voltage		18 V
Weight		950 g
Charge rate (per hour)		8.0 A

## 18V 8.0A Multi-Bay Charger

NEW!



Technical data		GAL 18V 6-80
Part number		1 600 A01 U9P
Battery charging voltage		18 V
Weight		1.8 kg
Charge rate (per hour)		8.0 A

## 18V 16.0A Super Fast Charger

NEW!



Technical data		GAL 18V-160 C & GCY 42
Part number		1 600 A01 9SE
Battery charging voltage		14,4 – 18 V
Weight		950 g
Charge rate (per hour)		16.0 A

**16.0 A**  
**16.0 A Charging**  
 Power boost mode for faster charging and less down time.

**Active Air Cooling**  
 2 internal fans for perfect heat management and early start of charging.

**Bluetooth connected**  
 Determine the state of health of the battery and setup different charging modes

# 18V BATTERIES & CHARGERS

## 18V 2.0Ah + Charger

TBC



## 18V 4.0Ah + Charger

1 600 A01 BA2



## 18V 5.0Ah + Charger

0 615 990 M1Z



## 18V Twin 5.0Ah + Charger

0 615 990 M20



## ProCORE18V 4.0Ah + Charger

1 600 A01 U7U



## ProCORE18V 8.0Ah + Fast Charger

0 615 990 L5U



## ProCORE18V 12.0Ah + Fast Charger

TBC



## ProCORE18V 12.0Ah + Super Fast Charger

1 600 A01 TW4





# 18V SYSTEM

## 55Nm Brushless Hammer Drill

Battery not included



Technical data	
Part number	GSB 18V-55 0 615 990 M1Y
Torque (soft/hard/max.)	55 Nm
No-load speed (1st gear / 2nd gear)	0 - 450 / 0 - 1.750 rpm
Max. screw diameter	8 mm
Max. drilling diameter in wood	35 mm
Max. drilling diameter in masonry	10 mm
Max. drilling diameter in steel	10 mm
<b>1 Piece Kit</b>	<b>0 615 990 J4J</b>
2 x 4.0Ah Batteries, GAL 18V-40 Charger, Tool bag	
<b>1 Piece Kit</b>	<b>TBC</b>
2 x 5.0Ah Batteries, GAL 18V-40 Charger, Tool bag	

## 60Nm Brushless Hammer Drill

Battery not included



Technical data	
Part number	GSB 18V-60 C 0 615 990 J9U
Torque (soft/hard/max.)	60 Nm
No-load speed (1st gear / 2nd gear)	0 - 600 / 0 - 1.900 rpm
Max. screw diameter	10 mm
Max. drilling diameter in wood	38 mm
Max. drilling diameter in masonry	13 mm
Max. drilling diameter in steel	13 mm

## 110Nm Brushless Hammer Drill

Battery not included



Technical data	
Part number	GSB 18V-85 C 0 615 990 J9S
Torque	110 Nm
No-load speed (1st gear / 2nd gear)	0 - 480 / 0 - 2.100 rpm
Max. screw diameter	12 mm
Max. drilling diameter in wood	82 mm
Max. drilling diameter in masonry	16 mm
Max. drilling diameter in steel	13 mm

## 21mm Brushless SDS+ Rotary hammer

Battery not included



Technical data	
Part number	GBH 18V-21 0 611 911 100
Drilling dia. in concrete with hammer drill bits	4 - 21 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	13 mm
Max. impact energy	2 J
Rated speed	0 - 1.800 rpm
Impact rate at rated speed	0 - 5.100 bpm
Tool holder	SDS plus

## 12mm Brushless SDS+ Rotary hammer

Battery not included



Technical data	
Part number	GBH 18 V-LI 0 611 905 300
Drilling dia. in concrete with hammer drill bits	4 - 12 mm
Max. drilling diameter in metal	8 mm
Max. drilling diameter in wood	16 mm
Max. impact energy	1 J
Rated speed	0 - 1.050 rpm
Impact rate at rated speed	0 - 1.050 rpm
Tool holder	SDS plus



# 18V SYSTEM

## 26mm Brushless SDS+ Rotary hammer

Battery not included



Technical data	
Part number	GBH 18V-26 0 611 909 000
Drilling dia. in concrete with hammer drill bits	4 - 26 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	2.6 J
Rated speed	0 - 980 rpm
Impact rate at rated speed	0 - 4.350 bpm
Tool holder	SDS plus
F model comes complete with	
Part number	GBH 18V-26 F 0 611 910 000
SDS plus quick-change chuck (2 608 572 213)	x
Quick change chuck 13 mm (2 608 572 212)	x

## 26mm Brushless SDS+ Rotary hammer

Battery not included



Technical data	
Part number	GBH 18V-26 D 0 611 916 040
Drilling dia. in concrete with hammer drill bits	4 - 26 mm
Max. drilling diameter in metal	13 mm
Max. drilling diameter in wood	30 mm
Max. impact energy	2.5 J
Rated speed	0 - 980 rpm
Impact rate at rated speed	0 - 4.350 bpm
Tool holder	SDS plus
<b>Comes complete with</b>	
Auxiliary handle (2 602 025 141)	x
Depth stop 210 mm (1 613 001 010)	x
Machine cloth (part number 1 619 200 413)	x

## 16mm Dust Extractor

Battery not included



Technical data	
Part number	GDE 18V-16 1 600 A00 51M
<b>Comes complete with</b>	
Drilling diameter	max. 16mm
Maximum drilling depth	100 mm

## 18V 26mm Dust Extractor

Battery not included



Technical data	
Part number	GDE 18V-26 D 1 600 A01 TX0
<b>Comes complete with</b>	
Dust eye fixed chuck, 16 mm diameter (1 600 A01 E28)	x
Dust eye fixed chuck, 26 mm diameter (1 600 A01 E29)	x
Dust eye quick change chuck, 16 mm diameter (1 600 A01 W0K)	x
Dust eye quick change chuck, 26 mm diameter (1 600 A01 W0J)	x
Extension (1 600 A01 E27)	x
Metal adapter (1 600 A01 W0P)	x



4 cutter full carbide head with  
**3x longer life than competitors.**

View the full range at  
AUS: [bosch-pt.com.au/en/bulldogxtreme-sds-plus-drill-bits-2682457-ocs-ac/](https://bosch-pt.com.au/en/bulldogxtreme-sds-plus-drill-bits-2682457-ocs-ac/)  
NZ: [bosch-pt.co.nz/en/bulldogxtreme-sds-plus-drill-bits-2682457-ocs-ac/](https://bosch-pt.co.nz/en/bulldogxtreme-sds-plus-drill-bits-2682457-ocs-ac/)

# 18V SYSTEM

## 34mm Brushless SDS+ Rotary hammer

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GBH 18V-34 F
Part number	0 611 914 001
Equivalent corded input power	950 W
Possible drilling diameter (Concrete)	6-32 mm
Optimal drilling diameter (Concrete)	12-30 mm
Max. impact energy	5.8 J
Rated speed	500 rpm
Impact rate	2,900 bpm
Tool holder	SDS plus



## 36mm Brushless SDS Max Rotary hammer

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GBH 18V-36 C
Part number	0 611 915 001
Equivalent corded input power	1,000 W
Possible drilling diameter (Concrete)	12-40 mm
Optimal drilling diameter (Concrete)	16-32 mm
Max. impact energy	7.5 J
Rated speed	500 rpm
Impact rate	2,900 bpm
Tool holder	SDS Max & Quick change



## 45mm Brushless SDS Max Rotary hammer

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GBH 18V-45 C
Part number	0 611 913 040
Equivalent corded input power	1500 W
Possible drilling diameter (Concrete)	12 - 45 mm
Optimal drilling diameter (Concrete)	20 - 40 mm
Max. impact energy	12.5 J
Rated speed	0 - 305 rpm
Impact Rate (drilling / chiselling)	2,720 / 2,760 bpm
Tool holder	SDS Max



# 18V SYSTEM

## Brushless Drywall Screwdriver

Battery not included



Collated feed attachment is sold separately



Technical data	GSR 18V-EC TE
Part number	0 601 9C8 040
Battery voltage	18 V
Torque	25 Nm
No-load speed	0 - 4,200 rpm
Max. screw diameter	4.2 mm

Optional accessory	MA 55 Collated feed attachment
Part number	1 600 200 00Y
Self-drilling screw diameter	6 mm

Comes complete with  
1 x screwdriver bit PH 2 x

## 160Nm Impact Driver

Battery not included



Technical data	GDR 18V-160
Part number	0 615 990 M2D
Torque, max.	160 Nm
Screw diameter	
No-load speed	0-2,800 rpm
Impact rate	0-3,600 bpm
Tool holder	1/4" internal hexagon

## 200Nm Brushless Impact Driver

Battery not included




Technical data	GDR 18V-200
Part number	0 615 990 M1W
Torque	200 Nm
Screw diameter	M 6 - M 16
No-load speed	0-3,400 rpm
Impact rate	0-4,000 bpm
Tool holder	1/4" internal hexagon

## 200Nm Brushless Impact Driver

Battery not included



Technical data	GDR 18V-200 C
Part number	0 615 990 L13
Torque	200 Nm
Screw diameter	M 6 - M 16
No-load speed (1st / 2nd / 3rd)	0-1,100 rpm / 0-2,300 rpm / 0-3,400 rpm
Impact rate	0-4,000 bpm
Tool holder	1/4" internal hexagon

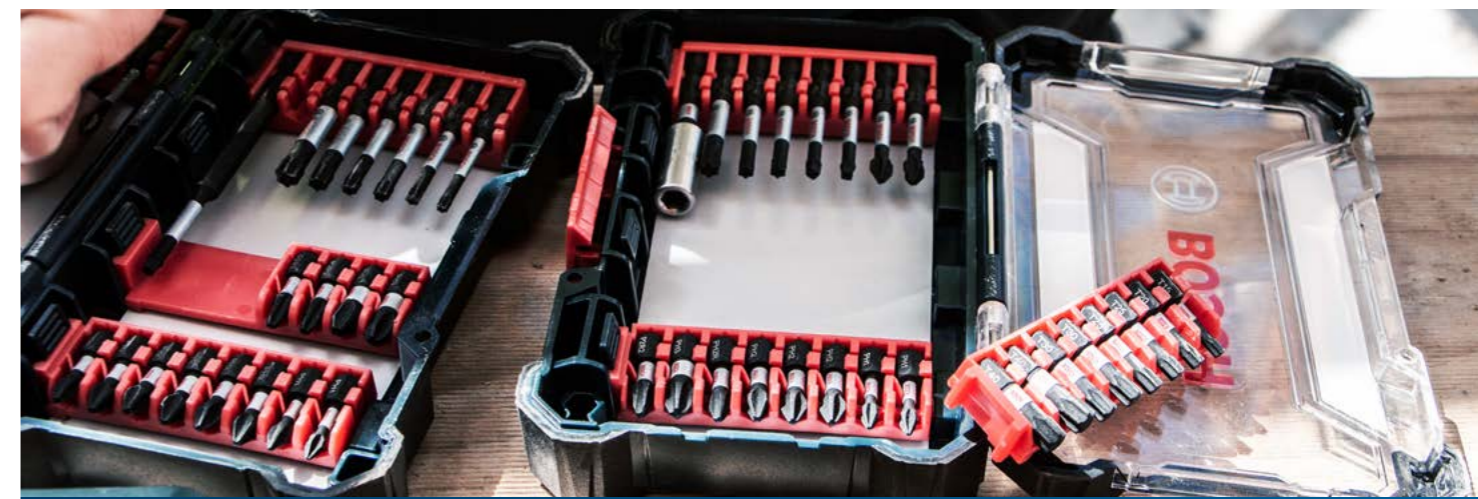

# 10x LONGER LIFE.

Impact tough screwdriver bits + a customisable case system.



# 18V SYSTEM

1

## DUAL IMPACT DRIVER & WRENCH

**WORLD'S FIRST**



### 200Nm Brushless Impact Driver & Wrench

**NEW!**

Battery not included



Technical data	GDX 18V-200
Part number	0 601 9J2 001
Torque	200 Nm
Screw diameter	M 6 – M 16
No-load speed	0-3.400 rpm
Impact rate	0-4.200 bpm
Tool holder	1/4" internal hexagon and 1/2" external square

### 200Nm Brushless Impact Driver & Wrench

Battery not included



Technical data	GDX 18V-200 C
Part number	0 615 990 L12
Torque	200 Nm
Screw diameter	M 6 – M 16
No-load speed	0-3.400 rpm
Impact rate	0-4.000 bpm
Tool holder	1/4" internal hexagon and 1/2" external square

# 18V SYSTEM

1

### 200Nm Brushless Impact Wrench

**NEW!**

Battery not included



Technical data	GDS 18V-200
Part number	0 615 990 L6K
Torque	300 Nm
Screw diameter	M 10 – M 18
No-load speed	0-2.400 rpm
Impact rate	0-3.400 bpm
Tool holder	1/2" external square friction ring + through hole

### 300Nm Brushless Impact Wrench

**NEW!**

Battery not included



Technical data	GDS 18V-300
Part number	0 615 990 L6K
Torque	300 Nm
Screw diameter	M 10 – M 18
No-load speed	0-2.400 rpm
Impact rate	0-3.400 bpm
Tool holder	1/2" external square friction ring + through hole

### 650Nm Impact Wrench

Battery not included



Technical data	GDS 18V-LI HT
Part number	0 601 9B1 300
Torque	650 Nm
Screw diameter	M 12 – M 20
No-load speed	0-1.900 rpm
Impact rate	0-2.100 bpm
Tool holder	1/2" external square

## SOCKETS.

View the range at  
 AUS: [bosch-pt.com.au/au/en/impact-control-sockets-2593455-ocs-ac/](http://bosch-pt.com.au/au/en/impact-control-sockets-2593455-ocs-ac/)  
 NZ: [bosch-pt.co.nz/nz/en/impact-control-sockets-2593455-ocs-ac/](http://bosch-pt.co.nz/nz/en/impact-control-sockets-2593455-ocs-ac/)

### 1000Nm 1/2" Brushless Impact Wrench

**NEW!**

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GDS 18V-1000 1/2"
Part number	0 601 9J8 300
Torque	1000 Nm
Speed settings	3
No-load speed	0-880/1.170/1.750 rpm
Impact rate	0-1.760/2.340/2.600 bpm
Tool holder	1/2" Friction ring
Comes complete with	0 601 9J8 301
L-BOXX 136 (1 600 A00 1RR)	x
Comes complete with	0 601 9J8 300
Carton	x

### 1050Nm 3/4" Brushless Impact Wrench

**NEW!**

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GDS 18V-1050 3/4"
Part number	0 601 9J8 500
Torque	1050 Nm
Speed settings	3
No-load speed	0-880/1.170/1.750 rpm
Impact rate	0-1.760/2.340/2.600 bpm
Tool holder	3/4" Friction ring + pinhole
Comes complete with	0 601 9J8 501
L-BOXX 136 (1 600 A00 1RR)	x
Comes complete with	0 601 9J8 500
Carton	x

### 125mm Side Switch X-LOCK Grinder

Battery not included

**XLOCK**



<b>Technical data</b>	GWX 18V-7
Part number	0 601 9H9 101
No-load speed	11,000
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
Carton	x
Auxiliary handle (1 602 025 024)	x

### 125mm Brushless Side Switch X-LOCK Grinder

Battery not included



**XLOCK**



<b>Technical data</b>	GWX 18V-10
Part number	0 601 7B0 101
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
<b>Comes complete with</b>	
Carton	x

### 125mm Brushless Side Switch X-LOCK Grinder

Battery not included



**XLOCK**



<b>Technical data</b>	GWX 18V-10 C
Part number	0 601 7B0 200
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
<b>1 Piece Kit</b>	0 615 990 M0H
2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case	

### 125mm Brushless Paddle Switch X-LOCK Grinder

Battery not included



**XLOCK**



<b>Technical data</b>	GWX 18V-10 PC
Part number	0 601 7B0 700
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
<b>1 Piece Kit</b>	0 615 990 M0J
2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case	

## 25 Global Brands on XLOCK 90 Bosch Accessories available



### 125mm Brushless Paddle Switch X-LOCK Grinder

Battery not included



**XLOCK**



<b>Technical data</b>	GWX 18V-10 PSC
Part number	0 601 7B0 800
No-load speed	4,500 - 9,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
<b>1 Piece Kit</b>	0 615 990 M0G
2 x 8.0Ah ProCORE18V Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case	

### 125mm Brushless Side Switch X-LOCK Grinder

Battery not included

**XLOCK**  
**BITURBO**  
BRUSHLESS



<b>Technical data</b>	GWX 18V-15 C
Part number	0 601 9H6 400
No-load speed	11,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

### 125mm Brushless Side Switch X-LOCK Grinder

Battery not included

**XLOCK**  
**BITURBO**  
BRUSHLESS



<b>Technical data</b>	GWX 18V-15 SC
Part number	0601 7B0 400
No-load speed	3,400 - 11,000 rpm
Grinding/cutting disc, diameter	125 mm
<b>Comes complete with</b>	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

# XLOCK

**WORLD'S FIRST**

The ultimate quick-change system for Angle Grinders.

**XTRA SAFE**


Rapid stop X-BRAKE. No incorrect mounting.

**XTRA FAST**

5x Faster accessory change.

**XTRA EASY**

Click disc on. Pull lever to release.

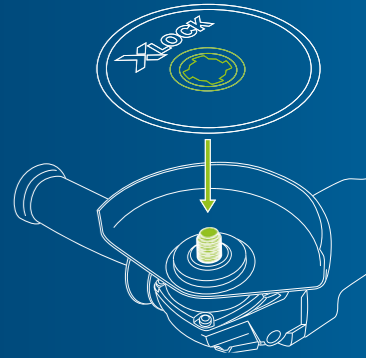

**UNIVERSAL FIT**  
Cutting, grinding, diamond

## CLICK IN. CLICK OUT.



View the range at  
[bosch-pt.com.au/au/en/x-lock](http://bosch-pt.com.au/au/en/x-lock)

## 125mm Brushless Side Switch Grinder

NEW!

Battery not included



Technical data	
Part number	GWS 18V-7 0 601 9H9 001
No-load speed	11,000
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Carton	x
Auxiliary handle (1 602 025 024)	x

## 125mm Brushless Side Switch Grinder

Battery not included



Technical data	
Part number	GWS 18V-10 C 0 601 9G3 10A
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
Carton	x
Vibration Control auxiliary handle (2 602 025 171)	x

## 125mm Brushless Paddle Switch Grinder

Battery not included



Technical data	
Part number	GWS 18V-10 PC 0 601 9G3 E0A
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
Carton	x
Vibration Control auxiliary handle (2 602 025 171)	x

## 125mm Brushless Side Switch Grinder

NEW!

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	
Part number	GWS 18V-15 C 0 615 990 L8G
No-load speed	11,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

## 125mm Brushless Side Switch Grinder

NEW!

Battery not included



Technical data	
Part number	GWS 18V-10 0 601 9J4 002
No-load speed	9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Comes complete with	
Carton	x
Auxiliary handle (1 602 025 024)	x

## 125mm Brushless Side Switch Grinder

Battery not included



Technical data	
Part number	GWS 18V-10 SC + Bluetooth module 0 601 9G3 40B
No-load speed	4,500 – 9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x
<b>1 Piece Kit</b>	<b>0 615 990 M1G</b>
2 x 5.0Ah Batteries, GAL 1880 CV Charger, L-BOXX 136 Carry case	

## 125mm Brushless Paddle Switch Grinder

Battery not included



Technical data	
Part number	GWS 18V-10 PSC + GCY 42 0 601 9G3 F0B
No-load speed	4,500 – 9,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

## 125mm Brushless Side Switch Grinder

NEW!

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	
Part number	GWS 18V-15 SC TBC
No-load speed	3,400 – 11,000 rpm
Grinding/cutting disc, diameter	125 mm
Grinding spindle thread	M 14
Bore size, diameter	22.2 mm
Comes complete with	
L-BOXX 136 (1 600 A00 1RR)	x
Vibration Control auxiliary handle (2 602 025 171)	x

# 18V SYSTEM

## Straight Grinder

Battery not included



Technical data	
Part number	GGS 18 V-LI 0 601 9B5 300
No-load speed	22,000 rpm
Collet capacity	6mm / 8mm / 1/4"
Comes with	6mm

## Brushless Straight Grinder

Battery not included



Technical data	
Part number	GGS 18V-23 0 615 990 L72
No-load speed	23,000 rpm
Collet capacity	6mm / 8mm / 1/4"
Comes with	6mm

## 2.0mm Nibbler

Battery not included



Technical data	
Part number	GNA 18V-16 0 601 529 500
Cutting capacity in steel (800 N/mm <sup>2</sup> ), max.	0.7 mm
Cutting capacity in steel (600 N/mm <sup>2</sup> ), max.	1 mm
Cutting capacity in steel (400 N/mm <sup>2</sup> ), max.	1.6 mm
Cutting capacity in aluminium (250 N/mm <sup>2</sup> ), max.	2 mm
No-load stroke rate	1,400 spm
Minimum curve radius	40 mm

## 2.0mm Shear

Battery not included



Technical data	
Part number	GSC 18V-16 0 601 926 200
Cutting capacity in steel (400 N/mm <sup>2</sup> ), max.	1.6 mm
Cutting capacity in steel (600 N/mm <sup>2</sup> ), max.	1 mm
Cutting capacity in steel (800 N/mm <sup>2</sup> ), max.	0.7 mm
Cutting capacity in aluminium (250 N/mm <sup>2</sup> ), max.	2.0 mm
No-load stroke rate	3,400 spm
Minimum curve radius	15 mm

## 63mm Band Saw

Battery not included



Technical data	
Part number	GCB 18V-63 0 601 2A0 400
No-load speed	162 m/min
Saw blade dimensions	733.0 x 12.7 x 0.35 mm
Cutting capacity	63.5 x 63.5 mm

## Band Saw Blades

General purpose

CB 2818 BIM band saw blade, 18tpi 2 608 649 000



Fine blade

CB 2824 BIM band saw blade, 24tpi 2 608 649 001



# 18V SYSTEM

## 165mm Circular Saw

Battery not included



Technical data	GKS 18 V-LI
Part number	0 601 66H 040
No-load speed	3,900 rpm
Max. cutting capacity in wood (90°)	51 mm
Max. cutting capacity in wood (45°)	40 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm

## 165mm Circular Saw

Battery not included



Technical data	GKS 18V-57 G
Part number	0 615 990 J9R
No-load speed	3,400 rpm
Max. cutting capacity in wood (90°)	57 mm
Max. cutting capacity in wood (45°)	39 mm
Saw blade diameter	165 mm
Saw blade bore diameter	20 mm

## 184mm Brushless Circular Saw

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GKS 18V-68 C
Part number	0 601 6B5 040
No-load speed	5,000 rpm
Saw blade diameter	184 mm
Saw blade bore diameter	30 mm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
<b>Comes complete with</b>	
Parallel guide	1 608 190 007
1 x circular saw blade, Standard for Wood	2 608 644 590

## 184mm Brushless Circular Saw

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GKS 18V-68 GC
Part number	0 601 6B5 140
No-load speed	2,500 – 5,000 rpm
Saw blade diameter	184 mm
Saw blade bore diameter	30 mm
Max. cutting capacity in wood (90°)	68 mm
Max. cutting capacity in wood (45°)	50 mm
<b>Comes complete with</b>	
Parallel guide	1 608 190 007
1 x circular saw blade, Standard for Wood	2 608 644 590
L-BOXX 238	1 600 A01 2G2

## 140mm Brushless Rail/Track Saw

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GKT 18V-52 GC
Part number	0 601 6B4 040
No-load speed	2,800 – 5,500 rpm
Saw blade diameter	140 mm
Saw blade bore diameter	20 mm
Bevel angle	-1 - 47°
Baseplate	305 x 169 mm
<b>Comes complete with</b>	
L-BOXX 238	1 600 A01 2G2
1 x circular saw blade for General Purpose	2 608 644 644

## Accessories

Specialised Rail/Track Saw Blades	
Ø 5 1/2" 140mm x 20 42 TEETH track saw blade 2608644644	
FSN Rail System	
800mm	1 600 Z00 005
1100mm	1 600 Z00 006
1600mm	1 600 Z00 00F
2100mm	1 600 Z00 007
3100mm	1 600 Z00 008
Guile Rail Connector	
	1 600 Z00 009
Angled Guide Rail	
	1 600 Z00 00A
Rail Bag	
1650mm	1 610 Z00 020
Locking Clamps	
	1 600 A00 1F8

# 18V SYSTEM

## 216mm BITURBO Brushless Mitre Saw

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GCM 18V-216
Part number	0 601 B41 040
Cutting capacity, 0°	70 x 270 mm
Cutting capacity, 45° mitre	70 x 190 mm
Cutting capacity, 45° bevel	45 x 270 mm
Mitre setting	47° L / 47° R
Bevel setting	45° L / 0° R
Tool dimensions (width x length x height)	520 x 770 x 630 mm
No-load speed	4,600 rpm
Saw blade diameter	216 mm
Weight	14,7 kg
<b>Comes complete with</b>	
1 x circular saw blade, Standard for Wood.	x
Insert plate (1 609 B03 717)	x
SDS saw blade lock (1 609 B05 323)	x

## 305mm BITURBO Brushless Glide Saw

Battery not included

**BITURBO**  
BRUSHLESS



Technical data	GCM 18V-305
Part number	0 601 B43 040
Max. Cutting depth 0°	120 mm
Max. Cutting depth 45°	60 mm
Max. Cross cut capacity 0°/45°	400°/240 mm
Mitre setting	52°/60°
Bevel setting	47°/47°
Tool dimensions (width x length x height)	630 x 790 x 565 mm
No-load speed	2,550 - 4,000 rpm
Saw blade diameter	305 mm
Weight (with battery)	27.8 kg

\*With Spacer

## 216mm BITURBO Brushless Table Saw

Battery not included

**BITURBO**  
BRUSHLESS




Technical data	GTS 18V-216
Part number	TBC
Cutting height, 90°	70 mm
Rip capacity	635 mm
Bevel range	0° - 45°
Tool dimensions (width x length x height)	658 x 332 x 553
No-load speed	4,000 rpm
Saw blade diameter	216 mm
Weight	20.2 kg

# SAW BLADES.

The widest range, covering all applications and sizes.

View the full range at  
 AUS: [bosch-pt.com.au/en/circular-saw-blades-2592810-ocs-ac/](http://bosch-pt.com.au/en/circular-saw-blades-2592810-ocs-ac/)  
 NZ: [bosch-pt.com.au/en/circular-saw-blades-2592810-ocs-ac/](http://bosch-pt.com.au/en/circular-saw-blades-2592810-ocs-ac/)

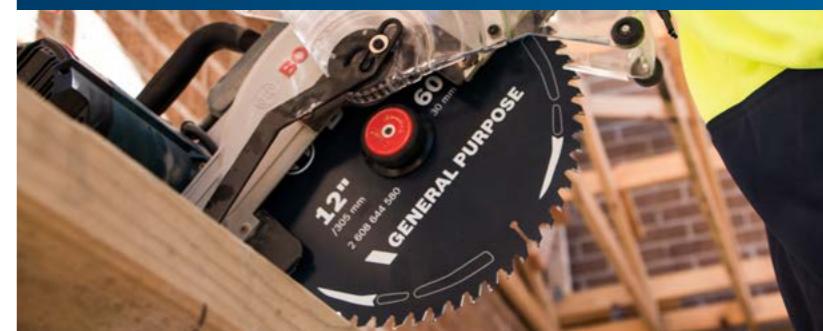

## Bow Handle Jigsaw

Battery not included



Technical data	GST 18 V-LI B
Part number	0 601 5A6 100
Stroke rate at no load	0 – 2,700 spm
Cutting depth in wood / aluminium / metal	120 mm / 20mm / 8mm
Stroke height	23mm
<b>Comes complete with</b>	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x

## Barrel Grip Jigsaw

Battery not included



Technical data	GST 18 V-LI S
Part number	0 601 5A5 100
Stroke rate at no load	550 – 2,700 spm
Cutting depth in wood / aluminium / unalloyed steel	120 mm / 20mm / 8mm
Stroke height	23mm
<b>Comes complete with</b>	
1 x jigsaw blade T 144 DP, Precision for Wood.	x
1 x jigsaw blade T 244 D, Speed for Wood.	x
1 x jigsaw blade T 308 B, Extra-clean for Wood.	x
<b>L-Boxx version</b>	0 601 5A5 101
In hard case L-Boxx 136	

# 18V SYSTEM

## Recip Saw

Battery not included



Technical data	GSA 18 V-LI C
Part number	0 601 6A5 040
Stroke lengths	21 mm
Stroke rate (1st gear / 2nd gear)	0 - 3,050 spm
Cutting depth in wood	200 mm
Cutting depth in metal profiles and metal pipes	100 mm
<b>Comes complete with</b>	
	1 x reciprocating saw blade, Flexible for Metal. x
	1 x reciprocating saw blade, Flexible for Metal. x
	1 x reciprocating saw blade, Flexible for Wood + Metal.

## Brushless Recip Saw

Battery not included



Technical data	GSA 18V-32
Part number	0 615 990 M02
Stroke lengths	32 mm
Stroke rate (1st gear / 2nd gear)	0 - 2,500 spm
Cutting depth in wood	230 mm
Cutting depth in metal profiles and metal pipes	175 mm
<b>Comes complete with</b>	
	1 x reciprocating saw blade Heavy for Wood + Metal. x
	1 x reciprocating saw blade Endurance for Heavy Metal. x

## 82mm Planer

Battery not included



Technical data	GHO 18 V-LI
Part number	0 615 990 G9S
No-load speed	14,000 rpm
Planing width, max.	82 mm
Rebating depth	0 - 8 mm
Cutting depth	0 - 1,6 mm

## Recip Saw

Battery not included



Technical data	GSA 18 V-LI
Part number	0 601 64J 042
Stroke lengths	28 mm
Stroke rate (1st gear / 2nd gear)	2,400 - 2,700 spm

## Orbital Sander

Battery not included



Technical data	GSS 18V-10
Part number	0 601 9D0 241
No-load orbital stroke rate	11,000 - 22,000 opm
Orbit diameter	1,6 mm
Sanding plate, width	113 mm
Sanding plate, length	101 mm
<b>Comes complete with</b>	
	1 x sanding sheet C470, Best for Wood + Paint x
	Base plate, 113 x 101 mm (2 608 601 446) x
	with sanding plate (2 608 601 443)
	Hole punch (2 608 190 059) x
<b>Additional optional accessories</b>	
	Orbital Plaque GSS 18V: 100 x150 mm 2608601448
	Placa Orbital GSS 18V: 80 x130 mm 2608601447

## Starlock Multi-Tool

Battery not included



Technical data	GOP 18V-28
Part number	0 601 8B6 040
No-load rotation	8,000 - 20,000 opm
Oscillation angle on left and right	1,4 °
<b>Comes complete with</b>	
	1 x StarlockPlus BIM plunge cut saw blade x
	(2 608 662 558)

# 18V SYSTEM

## Bluetooth Radio

Battery not included



Technical data	GPB 18V-2 C
Part number	0 601 4A3 040
Sources	FM, Bluetooth, AUX
FM Frequency	87.5 - 108
Radio Presets	8 x FM
Weight without Battery	2.32 kg
Dimensions	347.5 x 176.3 x 153.9 mm

NEW!

## Bluetooth & DAB+ Radio

Battery not included



Technical data	GPB 18V-2 SC
Part number	0 601 4A3 140
Sources	FM, DAB+, Bluetooth, AUX
FM Frequency	87.5 - 108
DAB+ Frequency	174.928-239.200
Radio Presets	8 x FM, 8 x DAB+
Weight without Battery	2.32 kg
Dimensions	347.5 x 176.3 x 153.9 mm

NEW!

## Bluetooth & DAB+ Radio

Battery not included



Technical data	GPB 18V-5 SC
Part number	0 601 4A4 140
Sources	FM, DAB+, Bluetooth, AUX
FM Frequency	87.5 - 108
DAB+ Frequency	174.928-239.200
Radio Presets	4 x FM, 4 x DAB+
Weight without Battery	8.6 kg
Dimensions	351 x 368 x 341 mm

NEW!

## Blower

Battery not included



Technical data	GBL 18V-120
Part number	0 601 9F5 140
No-load speed	17,000 rpm
Max. air speed	75 m/s
Max. airflow	120 m³/h
Runtime	Speed I : 9 min/Ah; Speed II : 5 min/Ah
Weight excl. battery	1,1 kg
<b>Comes complete with</b>	
	4 x Accessories (Nozzle, Extension tube, Deep x hole Nozzle, Dust Collection Tube)



**STARLOCK**

**AS VERSATILE AS YOUR JOB.**

View the full range at  
 AUS: [bosch-pt.com.au/en/cutting-sawing-2593060-ocs-ac/](http://bosch-pt.com.au/en/cutting-sawing-2593060-ocs-ac/)  
 NZ: [bosch-pt.com.au/en/cutting-sawing-2593060-ocs-ac/](http://bosch-pt.com.au/en/cutting-sawing-2593060-ocs-ac/)

# 18V SYSTEM

## 300 Lumen Worklight

Battery not included



Technical data	GLI 18V-300
Part number	0 601 4A1 100
Max. operating time 18V	300 mins/Ah
Weight excl. battery	0,3 kg
Luminous flux	300 lumen

## 420 Lumen Worklight

Battery not included



Technical data	GLI VarILED
Part number	0 601 443 400
Max. operating time 18V	135 mins/Ah
Weight excl. battery	0,3 kg
Luminous flux	420 lumen

## 1,200 Lumen Worklight

Battery not included



Technical data	GLI 18V-1200 C
Part number	0 601 446 700
Max. operating time (high setting)	16 hours (12.0Ah)
Max. operating time (low setting)	26 hours (12.0Ah)
Weight excl. battery	1.4 kg
Luminous flux	1200 lumen
Compatible tripod thread	1/4"
Dust & splash protection	IP64
Suits tripod	BT 150 (0 601 096 B00)

## 2,200 Lumen Worklight

Battery not included



Technical data	GLI 18V-2200 C
Part number	0 601 446 501
Max. operating time (high setting)	3.5 hours (12.0Ah)
Max. operating time (low setting)	8.8 hours (12.0Ah)
Weight excl. battery	1.9 kg
Luminous flux	2200 lumen
Compatible tripod thread	5/8"
Dust & splash protection	IP64
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

## 4,000 Lumen Worklight

Battery not included



Technical data	GLI 18V-4000 C
Part number	0 601 446 800
Max. operating time (high setting)	6 hours (12.0Ah)
Max. operating time (low setting)	24 hours (12.0Ah)
Weight excl. battery	2 kg
Luminous flux	4,000 lumen
Preset levels	1000 / 2000 / 4000 lm
Compatible tripod thread	5/8"
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

## 10,000 Lumen Worklight

Battery not included



Technical data	GLI 18V-10000 C
Part number	0 601 446 900
Max. operating time (high setting)	2.5 hours (12.0Ah)
Max. operating time (low setting)	24 hours (12.0Ah)
Weight excl. battery	3,9 kg
Luminous flux	10,000 lumen
Preset levels	1000 / 5000 / 10,000 lm
Compatible tripod thread	5/8"
Suits tripod	BT 150 5/8" (0 601 096 C80) BT 170 HD (0 601 091 300) BT 170 HD (0 601 091 400)

NEW!

NEW!

# 18V SYSTEM

## 700ml Dust Extractor

Battery not included



Technical data	GAS 18V-1
Part number	0 601 9C6 200
Container volume	0.70 l
Filter surface area	55 cm <sup>2</sup>
Max. vacuum pressure (turbine)	60 mbar
Max. airflow rate (turbine)	10,0 l/s

## 10L Wet & Dry Dust Extractor

Battery not included



Technical data	GAS 18V-10 L
Part number	0 601 9C6 300
Filter surface area	2.375 cm <sup>2</sup>
Max. vacuum pressure (turbine)	90 mbar
Max. airflow rate (turbine)	24,0 l/s
<b>Comes complete with</b>	
1 x 1.6 m hose (2 608 000 658)	x
1 x crevice nozzle, 250 mm (2 608 000 661)	x
1 x elbow pipe (2 608 000 659)	x
3-piece suction pipe set (2 608 000 660)	x
<b>Wheeled model comes with</b>	
<b>Technical data</b>	<b>GAS 18V-10 L NEW</b>
Part number	0 601 9C6 302
Carry Strap	x

## M-Class 10L Wet & Dry Dust Extractor

Battery not included



Technical data	GAS 18V-12 M
Part number	TBC
Max. vacuum pressure (turbine)	150 mbar
Runtime	30 min (with 12.0Ah)
Weight	7.4 kg
Filter cleaning	Semi-automatic
<b>Comes complete with</b>	
3.2 m antistatic hose	x

COMING 2021  
WORLD'S FIRST

## 600ml Calking Gun

Battery not included



Technical data	GCG 18V-600
Part number	0 601 9C4 001
Push Force	3,5 kN
Capacity Cartridges	310; 400 ml
Capacity Sachets	400; 600 ml
Feed rate	9 mm/sec
Weight excl. battery	2,2 kg

## 18V Worklight / 12V Measuring tool Tripods



Technical data	BT 150
Part number	0 601 096 B00
Tripod thread	1/4"
Work height	52-147 cm
<b>Technical data</b>	<b>BT 150 (5/8")</b>
Part number	0 601 096 C80
Tripod thread	5/8"
Work height	52-147 cm



Technical data	BT 170 HD
Part number	0 601 091 300
Tripod thread	5/8"
Work height	107-165 cm
<b>Technical data</b>	<b>BT 300 HD</b>
Part number	0 601 091 400
Tripod thread	5/8"
Work height	122-295 cm



# HEATED CLOTHING

## FEEL THE HEAT

Heat pads on the chest & lower back



## 3 TEMP SETTINGS



## DUAL POWER

12V Compact & light weight  
18V Maximised runtime

### Heated Jacket

Battery not included

**NEW!**



Technical data		GHJ 12+18V XA	
Part number	S:	0 618 800 ODX	
	M:	0 618 800 ODY	
	L:	0 618 800 ODZ	
	XL:	0 618 800 OE0	
	2XL:	0 618 800 OE1	
	3XL:	0 618 800 OE2	
Material Composition	Polyester & Spandex		
Fabric construction	Softshell		
Available colours	Black		
Certification	Oeko-Tex Standard 100		
Battery voltage	12,0 V		
Heat Levels	3		
Heat Zones	3 (right / left chest, lower back)		
Heat-up Time	3 mins		

**Comes complete with**  
Battery adapter GAA 12V-21 Professional (0 618 800 079)

### Heated Vest

Battery not included

**NEW!**



Technical data		GHV 12+18V XV	
Part number	S:	0 618 800 OEA	
	M:	0 618 800 OEB	
	L:	0 618 800 OEC	
	XL:	0 618 800 OED	
	2XL:	0 618 800 OEE	
	3XL:	0 618 800 OEF	
Material Composition	Polyester & Spandex		
Fabric construction	Softshell		
Available colours	Black		
Certification	Oeko-Tex Standard 100		
Battery voltage	12,0 V		
Heat Levels	3		
Heat Zones	3 (right / left chest, lower back)		
Heat-up Time	3 mins		

**Comes complete with**  
Battery adapter GAA 12V-21 Professional (0 618 800 079)

### Heated Hoodie

Battery not included

**NEW!**



Technical data		GHH 12+18V XV	
Part number	S:	0 618 800 OEP	
	M:	0 618 800 OER	
	L:	0 618 800 OES	
	XL:	0 618 800 OET	
	2XL:	0 618 800 OEU	
	3XL:	0 618 800 OEV	
Material Composition	Polyester & Spandex		
Available colours	Black		
Certification	Oeko-Tex Standard 100		
Battery voltage	12,0 V		
Heat Levels	3		
Heat Zones	3 (right / left chest, lower back)		
Heat-up Time	3 mins		

**Comes complete with**  
Battery adapter GAA 12V-21 Professional (0 618 800 079)

### 12V Compatible Battery Adaptor

Battery not included

- ✓ Power your heated jacket
- ✓ Charge your phone



GAA 12V-21 0 618 800 079  
Included with Heated Clothing

### 18V Compatible Battery Adaptor

Battery not included

- ✓ Power your heated jacket
- ✓ Charge your phone



GAA 18V-24 1 600 A00 J61  
Not included with Heated Clothing

# 18V SYSTEM

## 600M 18V ROTATION LASER GRL 600 CHV 0 601 061 F40

**NEW!**



Technical data	
Part number	0 601 061 F40
Battery voltage	18 V
Working range with receiver	600 m (diameter)
Levelling accuracy	± 0.05 mm/m horizontal ± 0.1 mm/m vertical
Dust and splash protection	IP68
Self-levelling range	±8.5% (±5°)
Rotational speed	150/300/600 min <sup>-1</sup>
Laser class	2
Power source	Alkaline (4 D-cells) or 18V LI
Operating time (Max.)	60h with 4.0Ah ProCORE18V 70h with 4 D-cell batteries
Colour of laser line	Red
Tripod thread	2 x 5/8" (Horizontal / Vertical)
Projection	1 x 360° line
Recommended laser receiver	LR 60
Weight	4.3 kg with 4.0Ah ProCORE18V 4.6 kg with 4 D-cell batteries

Comes complete with	
LR 60 laser receiver w/ RB 60 bracket	
RC 6 remote control	
WM 6 wall mount	
GAL 18V-40 battery charger	
BA 1 battery adapter	
4x D batteries, 4x AA batteries	
Red laser glasses	
Red target plate	
Tripod carrying straps	
Carrying case	



**6 YEARS**

**Tool & Battery Guarantee\***

\*With online registration



**BLUETOOTH CONNECTIVITY**  
Bluetooth®-connection paired with Levelling Remote App offers remote-control adjustment of the tool via a smartphone.



**USER CALIBRATION**  
Thanks to the simple calibration instructions via the Bosch Levelling Remote App, calibrate the tool yourself, conveniently, step-by-step.



**LR 60 RECEIVER**  
High quality, IP67 rated receiver with 125mm reception area, dual sided display and offset feature in mm and inches.

**DUAL POWER SOURCE**  
For added flexibility with either D-Cell Alkaline or Bosch Li compatible batteries.



**IP68**

IP68 dust tight and waterproof including the battery compartment



**DIAL-IN DUAL SLOPE**  
Suitable for an even wider range of applications using the digital dial-in of grade (X and/or Y).



**DISPLAY**  
Large backlit display for optimum overview and simple operation.



**ROBUST DESIGN WITH PROTECTIVE HANDLES**  
For a 2m tripod-tipover rating



**6 YEARS**  
Tool & Battery  
Guarantee\*

\*With online registration

# PROFESSIONAL 12V SYSTEM

**REAL POWER.  
UNREAL SIZE.**

36	12V Combo Kits
38	Batteries & Chargers
39	Starter kits
40	Drilling
41	Cutting, Shears, Radio & Dust Extraction
42	Saws, Multitool, Lighting
43	Planer & Router
44	Measuring Tools



# 12V BATTERIES & CHARGERS

## 12V 2.0Ah Battery



Technical data	GBA 12V 2.0Ah
Part number	1 600 Z00 02X
Battery voltage	12 V
Weight	180 g

## 12V 3.0Ah Battery



Technical data	GBA 12V 3.0Ah
Part number	1 600 A00 X79
Battery voltage	12 V
Weight	180 g

## 12V 4.0Ah Battery



Technical data	GBA 12V 4.0Ah
Part number	1 600 Z00 02Y
Battery voltage	12 V
Weight	385 g

## 12V 6.0Ah Battery



Technical data	GBA 12V 6.0Ah
Part number	1 600 A00 X7H
Battery voltage	12 V
Weight	385 g

## 12V 4.0Ah Fast Charger

**NEW!**



Technical data	GAL 12V-40
Part number	1 600 A01 9R7
Battery charging voltage	10,8 – 12 V
Weight	450 g
Charge rate (per hour)	4.0 A

## 12V + 18V 3.0Ah Multi-voltage charger



Technical data	GAX 18V-30
Part number	1 600 A01 1AB
Battery charging voltage	12 V + 18 V
Weight	800 g
Charge rate (per hour)	3.0 A

# 12V BATTERIES & CHARGERS

## 12V 2.0ah + Fast Charger

0 615 990 GA6



## 12V 4.0ah + Multi Voltage Charger

0 615 990 L1T



## 12V 6.0ah + Fast Charger

TBC



## Battery Adaptor & USB Charger

Battery not included



Technical data	GAA 12V-21
Part number	0 618 800 079
Weight	80 g



### Why does last 20% charge take the longest?

This is to protect the cells in the battery from over heating. Giving you longer battery life.



### Fan cooling & ventilation

Bosch fan cooled chargers drag air through the battery cells to cool while charging. Ensure chargers are placed in well ventilated areas to keep cool.

# 12V SYSTEM

## 30Nm Hammer Drill

Battery not included



Technical data	GSB 12V-15
Part number	0 601 9B6 901
Torque	30 Nm
No-load speed (1st gear / 2nd gear)	0 - 380 / 0 - 1.300 rpm
Max. screw diameter	7 mm
Max. drilling diameter in wood	19 mm
Max. drilling diameter in masonry	10 mm
Max. drilling diameter in steel	10 mm

## 35Nm Brushless Hammer Drill

Battery not included



Technical data	GSB 12V-35
Part number	0 601 9J9 010
Torque	35 Nm
No-load speed (1/min)	0 - 460 / 1750 rpm
Max. screw diameter	8 mm
Max. drilling diameter in wood	32 mm
Max. drilling diameter in masonry	10 mm
Max. drilling diameter in steel	10 mm

## 20Nm Brushless Drill Driver

Battery not included



Technical data	GSR 12V-20
Part number	0 601 9D4 002
Torque	20 Nm
Screw diameter	7 mm
No-load speed (1st gear)	0 - 400 rpm
No-load speed (2nd gear)	0 - 1,300 rpm
Max. drilling diameter in wood	30 mm
Max. drilling diameter in steel	10 mm

## 110Nm Brushless Impact Driver

Battery not included



Technical data	GDR 12V-110
Part number	0 601 9E0 002
Torque	110 Nm
Screw diameter	M 2 - M 12
No-load speed	1st level 0-1,200 rpm, 2nd level 0-2,600 rpm
Impact rate	1st level 0-2,700 bpm, 2nd level 0-3,100 bpm
Tool holder	1/4" internal hexagon

## 115Nm Brushless Impact Wrench

Battery not included



Technical data	GDS 12V-115
Part number	0 601 9E0 101
Torque	115 Nm
Screw diameter	M 4 - M 12
No-load speed	0-2.600 rpm
No-load speed (1st level)	0-1.200 rpm
Impact rate	0-3.100 bpm
Tool holder	3/8" external square

## 11Nm Right Angle Drill

Battery not included



Technical data	GWB 12V-10
Part number	0 601 390 905
Torque	11 Nm
Max. screw diameter	6 mm
Max. drilling diameter in wood	10 mm

# 12V SYSTEM

## Rotary tool

Battery not included



Technical data	GRO 12V-35
Part number	0 601 9C5 040
No-load speed	5.000 - 35.000 rpm
<b>Comes complete with</b>	
Arbour (2 610 927 731)	x
Collet (1 619 P11 363)	x
Cutting disc (2 615 110 426)	x
Housing adapter (1 619 P11 344)	x

## 76mm Multi Cutter

Battery not included



Technical data	GWS 12V-76
Part number	0 601 9F2 000
No-load speed	19.500 rpm
Grinding/cutting disc, diameter	76 mm
Bore size, diameter	10,0 mm
Grinding spindle thread	M 5
<b>Comes complete with</b>	
1 x carbide cutting disc	x
2 x inox cutting disc	x

## 12V Shears

Battery not included



Technical data	GUS 12V-300
Part number	0 601 9B2 901
No-load stroke rate	700 spm
Cutting capacity in PVC (with 4 Ah), max.	300 m
Cutting depth	11 mm

## 12V Metal Shears

Battery not included



Technical data	GSC 12V-13
Part number	0 601 926 105
No-load stroke rate	3,600 spm
Minimum curve radius	15 mm
Cutting cap. in steel (400 N/mm <sup>2</sup> ), max.	1.3 mm
Cutting cap. in aluminium (250 N/mm <sup>2</sup> ), max.	2 mm

## Worksite Radio

Battery not included



Technical data	GPB 12V
Part number	0 601 429 241
Radio	AM / FM
Weight	1.41kg
Battery voltage	12 V
Presets	10

## Dust Extractor

Battery not included



Technical data	GAS 12V
Part number	0 601 9E3 000
Container volume	0.35 l
Filter surface area	408 cm <sup>2</sup>
Max. vacuum pressure (turbine)	45 mbar
Max. airflow rate (turbine)	15,0 l/s

# 12V SYSTEM

## Recip Saw

Battery not included



<b>Technical data</b>	<b>GSA 12V-14</b>
Part number	0 601 64L 902
Stroke lengths	14,5 mm
Cutting depth in wood	65 mm
Cutting depth in metal profiles and metal pipes	50 mm
Stroke rate (1st gear / 2nd gear)	0 - 3.000 spm
<b>Comes complete with</b>	
1 x reciprocating saw blade for Wood + Metal	x
1 x reciprocating saw blade for Metal	x

## 85mm Circular Saw

Battery not included



<b>Technical data</b>	<b>GKS 12V-26</b>
Part number	0 601 6A1 001
No-load speed	1.400 rpm
Max. cutting capacity in wood (90°)	26,5 mm
Max. cutting capacity in wood (45°)	17 mm
Saw blade diameter	85 mm
Saw blade bore diameter	15 mm
<b>Comes complete with</b>	
1 x circular saw blade, Standard for Wood	x
Parallel guide/guide rail adapter	x

## Starlock Multi tool

Battery not included



**STARLOCK**



<b>Technical data</b>	<b>GOP 12V-28 EC</b>
Part number	0 601 8B5 001
No-load rotation	5,000 - 20,000 opm
Oscillation angle on left and right	1,4 °

## Jigsaw

Battery not included



<b>Technical data</b>	<b>GST 12V-70</b>
Part number	0 601 5A1 040
Stroke rate at no load	1.500 - 2.800 spm
Cutting depth in wood	70 mm
Mitre cuts	0-45 °
Pendulum	3 stage
<b>Comes complete with</b>	
Anti-splinter guard (2 601 016 093)	x
Covering Hood (1 619 P10 583)	x
Pad (1 619 P07 958)	x

## 300 Lumen Worklight

Battery not included



<b>Technical data</b>	<b>GLI 12V-300</b>
Part number	0 601 4A1 000
Max. operating time 12 V	180 mins/Ah
Weight excl. battery	0,15 kg
Luminous flux	300 lumen

## 330 Lumen Worklight

Battery not included



<b>Technical data</b>	<b>GLI 12V-330</b>
Part number	0 601 4A0 000
Max. operating time 12 V	180 mins/Ah
Weight excl. battery	0,3 kg
Luminous flux	330 lumen
Brightness levels	2

# 12V SYSTEM



## WORLD'S FIRST 12V PLANER & ROUTER

- ✓ Lightweight
- ✓ Best ergonomics
- ✓ Most compact
- ✓ Precision woodworking

## 56mm Planer

Battery not included



<b>Technical data</b>	<b>GHO 12V-20</b>
Part number	0 601 5A7 070
No-load speed	14.500 rpm
Planing width, max.	56 mm
Rebating depth	0 - 17 mm
Cutting depth	0 - 2 mm
<b>Comes complete with</b>	
2 x planer blade (2 608 000 672)	x

## 8mm Router

Battery not included



<b>Technical data</b>	<b>GKF 12V-8</b>
Part number	0 601 6B0 072
No-load speed	13.000 rpm
Compatible collet diameters	6 mm / 8 mm / 1/4"
Weight excl. battery	1,1 kg
<b>Comes complete with</b>	
Collet with nut 1/4" (1 600 A00 H85)	x
Open-ended spanner 17 mm (2 609 110 438)	x

# 12V SYSTEM

## MEASURING TOOLS

### 50m Green Beam Combi Laser

Battery not included



Technical data	GCL 2-50 CG
Part number	0 601 066 H80
Working range without receiver	20 m
Working range with receiver	50 m
Accuracy	± 0.3 mm/m
Self-levelling range	± 4°
Compatible laser receivers	LR 7
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
Rotating mount RM 2 Professional (0 601 092 700)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Laser target plate	x
Pouch	x
<b>Optional Accessories</b>	
RM 3 Connected base	0 601 092 800
LR 7 Laser receiver	0 601 069 J00

### 400°C Thermo Detector

Battery not included



Technical data	GTC 400 C
Part number	0 601 083 150
Measurement range	-10 °C to +400 °C
Measuring accuracy of IR	±3.0 °C
Dust and splash protection	IP 53
Data transfer	MicroUSB, Wi-Fi
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Micro USB cable (2 609 120 670)	x
Protective Bag	x
Hand Strap	x

### 120mm Stud Finder

Battery not included



Technical data	D-Tect 120
Part number	0 601 081 3K0
Accuracy	± 10 mm
Max. detection depth	120 mm
Detection depth, magnetic metal, max.	120 mm
Detection depth, non-magnetic metal, max.	120 mm
Detection depth, live cables, max.	60 mm
Detection depth, wooden substructures, max.	38 mm
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x

6 YEARS

Tool & Battery Guarantee\*

\*With online registration

### 120m Green Beam 3 x 360° Line Laser

Battery not included



Technical data	GLL 3-80 CG
Part number	0 601 063 U80
Working range without receiver	30 m
Working range with receiver	120 m
Accuracy	± 0.2 mm/m
Self-levelling range	± 4°
Compatible laser receivers	LR 7
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
Universal Holder BM 1 Professional (0 601 015 A00)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Laser target plate	x
Carrying case	x
Pouch	x
Clamp (1 609 B00 839)	x
<b>Optional Accessories</b>	
RM 3 Connected base	0 601 092 800
LR 7 Laser receiver	0 601 069 J00

### 1000°C Thermo Detector

Battery not included



Technical data	GIS 1000 C
Part number	0 601 083 340
Measurement range	-40 °C to +1000 °C
Measuring accuracy of IR	±1.0 °C
Working range	0.1 – 5 m
Data transfer	MicroUSB, Bluetooth™, Bluetooth™ Smart
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Carrying bag	x

### 120cm Inspection Camera

Battery not included



Technical data	GIC 120 C
Part number	0 601 241 2K0
Display size	3,5"
Display resolution	320 x 240 px
Diameter of camera head	8,5 mm
Length of camera cable	120 cm
<b>Comes complete with</b>	
4 x 1.5 V LR6 battery (AA)	x
4GB MicroSD card	x
AA1 alkaline battery adapter (1 608 M00 C1B)	x
Camera cable for GIC 120 C, 8,5 mm diameter, x 120 cm long (1 600 A00 9B9)	x
Micro USB Cable	x
Pouch	x
<b>Optional Accessories</b>	
3m camera cable	1 600 A00 9BA
3.8mm / 1.2m narrow head camera cable	1 600 A00 9BC

# 3.6V CORDLESS SCREWDRIVER

## BOSCH GO

0 601 9H2 140



NEW!

Technical data	0 601 9H2 140
Part number	0 601 9H2 140
Torque	5 Nm
Torque settings	5
No load speed	360 rpm
Bit holder	1/4" internal hex
<b>Comes complete with</b>	
33-piece screwdriver bit set (1 600 A01 39X)	x
Carrying case	x
Micro USB cable (1 607 000 CG9)	x



Forward or reverse makes all jobs easier.



Push to screw in or out, or use the side button.



Tool stops immediately after deactivation.



Adjust torque for precise drilling adjustments

33 bit accessory set included.



# STORAGE SOLUTIONS

Use the system that's ideal for your workshop, for transport and for the job site.

Make your tools even more mobile – this intelligent transport and storage system is perfectly tailored to the needs of PROs.



4

INLAYS



### 1/2 inlays (L-BOXX 136)

GSB 18V (1 600 A00 2WB)  
GSR/B-VE/GSB/GSR/GSR HX18V-LI (6 082 850 4VZ)



### Suits L-BOXX 136

Impact Wrench GDR / GDS 18V-LI (6 082 850 4K2)  
Angle Grinder GWS 18V-LI (6 082 850 4HB)  
Rotary Hammer GBH EC 18V-LI (6 082 850 4X9)  
Impact Drill GSB 19/ 21-2 (6 082 850 4HP)  
Rotary Hammer GBH 2-18/20/22/23/26 (6 082 850 4HM)  
Jigsaw GST 135/150 (6 082 850 4HR)  
Angle Grinder GWS 7/8/10/11/14-125 (6 082 850 4HN)



### Suit L-BOXX 238

Circular Saw GKS 18V-LI (6 082 850 4H9)  
Reciprocating Saw GSA 18V-LI (6 082 850 4HA)



### FLEXIBLE INLAY for individual use

136 mm (1 600 A00 1S1)

### TRANSPORTATION



L-BOXX Roller (1 600 A00 1S9)




Aluminium caddy (1 600 A00 1SA)

4

BASIC ELEMENTS

NEW!

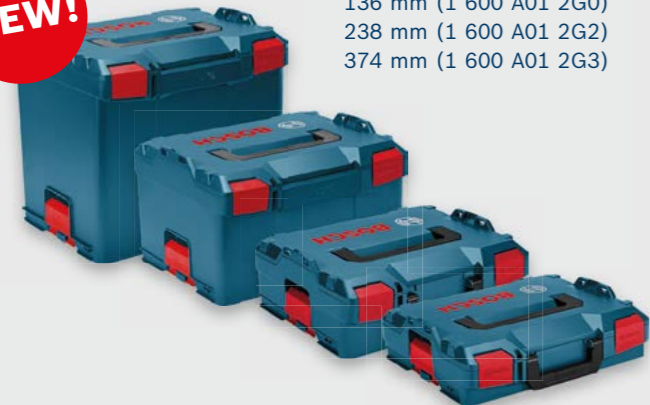

### L-BOXX

102 mm (1 600 A01 2FZ)  
136 mm (1 600 A01 2G0)  
238 mm (1 600 A01 2G2)  
374 mm (1 600 A01 2G3)



i-BOXX shelf 3 pcs (3x shelf + lid) (1 600 A00 1SF)




LS-BOXX 306 mm (1 600 A00 1RU)



L-CASE (stackable on L-Boxx, but not connectable)



Toolbox fits L-BOXX 238/374 (6 082 850 50A)



LT-BOXX 272 mm (1 600 A00 223)



Full flexibility

TOOL BAGS



Single 12V Bag 1 600 A00 3BG



Single 18V Bag 1 600 A00 3BH



Medium Tool Bag 1 600 A00 3BJ



Large Tool Bag 1 600 A00 3BK

SMALL ITEMS STORAGE



L-BOXX Organiser 6 082 850 4HT



Tray 72 mm (1 600 A00 1SD)



i-BOXX + inset boxes 53 mm (1 600 A00 1S7)



L-BOXX Mini for i-BOXX 72 mm (1 600 A00 7SF)





**STARLOCK**



Pro**CORE** 18V



**XLOCK**  
Technology by **BOSCH**



**DUST SAFETY SOLUTIONS**



**BITURBO**  
BRUSHLESS



**SPEEDCLEAN**



**LEADERS IN CARBIDE**

**GOOD.  
BETTER.**

**BOSCH.**

**6 YEARS**

**Tool & Battery Guarantee\***

\*With online registration

# NOTES

**6 YEARS**

**Tool & Battery  
Guarantee\***

\*With online registration

**6 YEARS**

**Tool & Battery  
Guarantee\***

\*With online registration



**FOR EXCLUSIVE NEWS AND DEALS  
JOIN THE BLUE CREW**

[boschbluecrew.com.au](http://boschbluecrew.com.au)

**REGISTER FOR YOUR 6 YEAR TOOL &  
BATTERY WARRANTY**

[www.bosch-professional.com/guarantee](http://www.bosch-professional.com/guarantee)



**6 YEARS**

**Tool & Battery  
Guarantee\***

\*With online registration

**Robert Bosch (Australia) Pty. Ltd.**

1555 Centre Road  
Clayton, VIC 3168  
PH: +61 3 9541 5555  
[bosch-pt.com.au/au/en/](http://bosch-pt.com.au/au/en/)

**Robert Bosch (New Zealand) Pty. Ltd.**

PO Box 13324  
Onehunga, Auckland 1643  
PH: 0800 543 353  
[bosch-pt.co.nz/nz/en/](http://bosch-pt.co.nz/nz/en/)

Find a digital version of this catalogue on our website

No liability is accepted for printing errors.

Subject to technical alterations.

1619M00Z3A

 **@BoschBlueCrew**

 **@BoschBlueCrewANZ**