

2011 Product Catalog

Security & Communication Solutions



Inside: 26 New Products
that can solve your communications and security problems!

Access Control.....	36-43	Enhanced Weather Protection	9	Paging Products	16-21
ADA Emergency Phones.....	4-8	Enclosures	14, 34	Self Amplified Paging	17
Alarm Dialers.....	13	Hot Line Products.....	10-12	Service Observers	29
Apartment Entry	38-40	Gadgets	15	Video (CCTV) Products	37
Door/Gate Entry.....	36-43	Long Loop Adapters	31	Wireless Clocks	21

Quick Index - Alphabetical by Model Number. Document On Demand (DOD) number, Description and Catalog Page Number

Model	Description	Catalog DOD #	Page	Model	Description	Catalog DOD #	Page	Model	Description	Catalog DOD #	Page
25AE, 30AE	Paging Horn Paging Spkr	498	19	HF-3W	Handsfree Talkback Paging	470	18	PROX-1	Prox Card Reader	221	39
35AE	Paging Spkr w/Vol Cont	498	19	HID-2	Weigand Keypad	199	39	PROX-2	Prox Card Reader	219	39
ACA-1A	Auto Attendant	005	27	K-600D	Night Bell Over Paging	475	18	PROXCARD	26-bit Weigand Card	198	39
AES-2000S/F	Apt Entry Sys. w/Display	202	39	K-1200	Apt. Entry Phone System	182	38	PS-1A, PS-2, PS-3	Replacement Pwr Supplies	510	31
AES-2005S/F	Apt. Entry Sys. w/Camera	204	37, 39	K-1205	Video Entry Phone System	183	37, 38	PS-48-RGA	Talk Batt/Ringing Supply	515	31
BLK-3-EWP	Blue Strobe Light Kit	653	28	K-1500-6A	Space Saving Panel Phone	352	11	PTR-1	Prof Telecom Record Adpt.	438	29
C-200	E Series Controller	169	41	K-1500-7	Panel Phone, Stainless	352	11	Q170600	Electronic Ringer	834	10
C-250	E Series Controller	172	41	K-1500-E	Handset Elevator Phone	220	14	RAD-1A	Remote Access Paging/Audio	410	22
C-1000B	W Series Controller	168	36	K-1500-EHFA	Handsfree Elevator Phone	220	14	RAD-AMP	Amp. Remote Access Device	415	22
C-2000B	E Series Controller	156	41	K-1500P-D	No Dial Desk Phone	355	11	RC-2A	Remote DTMF Controller	160	40
C-3000	No CO Line Apt Entry Sys	162	40	K-1500P-W	No Dial Wall Phone	355	11	RC-3	Remote DTMF Controller	165	40
C-4000	4 Door Prox Card System	164	40	K-1600-EHFA	ADA Elevator Phone	215	5	RG-4	1 Line Ring Shaper/Booster	416	30
CL Series	Wireless Clocks/Accessories	466	21	K-1700-3	Keypad Entry Phone	157	38	RG-10A	Ring Booster	420	31
CPA-7B	6 Watt Paging Amp.	455	16	K-1705-3	Keypad Video Phone	159	37, 38	RG-204	4 Line Ring Shaper/Booster	417	30
CPC-1	CPC Disconnect 1 Line	442	15, 31	K-1900-3	1 Door Apt. Entry Controller	312	38	RG-212	12 Line Ring Shaper/Booster	419	30
CPC-4	CPC Disconnect 4 Line	444	31	K-1900-4	Pulse Auto Dialer	315	12	RG-224	24 Line Ring Shaper/Booster	418	17
CTG-1	Clock Tones Over Paging	460	20	K-1900-5	Touch Tone Auto Dialer	317	12	SA-Series	Self-Amplified Paging	520	17
CTG-2	Clock Tone/Message Page	463	21	K-1900-6	Hot Line Network Board	360	11	SC-911	Strobe Controller	236	28
Directories	For Apt. Entry Systems	158	38	K-1900-7	Hot Line Panel Phone	364	11	SL-1	Blue Strobe Light	240	28
DLE-200B	Telephone Line Simulator	605	32	K-1900-8	Hot Line Phone w/Keypad	362	11	SLP-1	Single Line Paging	478	16
DLE-300	Telephone Line Simulator	607	32	K-1900-9	100 Number Speed Dialer	321	12	SLP-4	Paging and Door Chime Cont.	479	20
DNA-510	Mass Notification Paging	492	20	K-1900-30	Smart Touch Tone Dialer	300	12	SO-24A	Silently Monitor Phone Lines	690	29
DVA-1003B	[3]1 Minute Digital Announcer	125	26	K-1900D-2	Hot Line Dialer Phone	360	10	SO-24 AK	Digital Phone Kit for SO-24A	819	29
DVA-2WA	7 Min MOH Digital Announcer	110	26	K-1900W-2	Hot Line Dialer Phone	360	10	SQRG-12	TMS-6X/12A Ring Generator	060	27
DVA-3003	[3]4 Minute Digital Announcer	127	26	K-202-DVA	2 Input Voice Alarm Dialer	305	13	SR-1	Single Line Loud Ringer	477	19
DVA-500A	1 Min Digital Announcer	115	26	K-2000-DVA	8 Input Voice Alarm Dialer	303	13	SRC-1	Secure Relay Controller	176	40
DVA-LPA	Line Powered Announcer	128	26	K-6000-DVA	Voice Message Delivery Sys.	307	13	SV-5W	Speaker Volume Control	488	19
DVA-TNT	Time & Temp Announcer	129	26	LC-3	3 Line Conncentrator	223	8	TBB-1B	Talk Battery Booster	630	15, 31
E-10A, E-20B	Door Entry Phones	210	14, 42	LC-8	8 Phone Line Conncentrator	225	8	TDR-1	Time Delay Relay	421	15
E-30	Entry Phone w/Dialer	212	7	LDB-1	Loop Detector Board	406	15	TG-1, TG-2	Telephone Line Privacy	560	23
E-30-PT	Entry Phone, Push To Talk	214	7	LDB-2	Ring and Loop Detector	408	15	TMS-2	2 Line Call Sequencer	062	27
E-35	Video Entry Phone	178	7, 37	LDB-3	Ring and/or Loop Detector	409	15	TMS-6X	6 Line Call Sequencer	065	27
E-40 Series	Single Gang Entry Phone	187	42	LLA-1	1 Line Long Loop Extender	615	31	TMS-12A	12 Line Call Sequencer	070	27
E-50 Series	Single Gang Video Phone	191	37, 42	LLA-4	4 Line Long Loop Extender	620	31	TMS-RDMA	Status Display for Sequencer	075	27
E-60 Series	Double Gang Entry Phone	206	43	LM-1A	Message Waiting Lamp	662	28	TR-1	Toll Restrictor	705	22
E-65 Series	Double Gang Video Phone	203	43	LM-24D, LM-24S	Line Status Monitor	670	28	VCAM-1	Replacement Video Camera	190	37
E-70 Series	2 Gang Card Reader Phone	207	43	LPR-1	Line Powered Ringer	550	33	VCAM-1IR	Replacement IR Video Cam.	190	37
E-75 Series	Video Card Reader Phone	208	43	LS-4x4	Line Scanner/Sharing	270	23	VE-3X5	Surface	424	34
E-1600A Series	ADA Emergency Phones	215	47	LS-911	Line Sharing Device	238	8	VE-5X5/PNL/SS	Mounting	424	34
E-1600A-BLT-EWP	Blue Light Tower Phone	217	5	LSD-2	Line Seizure Device	262	8	VE-5X10/PNL/SS	Boxes and	424	34
E-1600A-BLT2EWP	2 Button Tower Phone	217	5	LSR-1	Line Seizure Relay	230	8	VE-6X7/PNL/SS	Panels	424	34
E-1600A-TP-EWP	ADA Replacement	218	6	M2W	Telephone Speaker Amp.	480	18	VE-9x12 Series	Outdoor	413	14
E-1600A-TP2-EWP	Emergency Phones	218	6	MTG-10	Multi Tone Generator	482	15	VE-9x20 Series	Enclosures	413	14
ERAM-60	Memory Expansion	813	26	NS-1	Night Switch	540	18	VE-GNP Series	Gooseneck Pedestals	424	34
ERAM-4M	Memory Expansion	854	39	PA-2A	Paging/Ringing 2 watt Amp.	485	16	VE-LIGHT	Lighting Kit	428	34
ES-1	Wiegand Controller	193	39	PA-30	Paging/Ringing 30 watt Amp.	489	16	VR-1B	Telephone Status Indicator	697	28
ES-3	Door Control for AES-2000	195	39	PAN-1	Panasonic Doorphone Adapt.	145	15	W-1000	Door Box w/Ring Voltage	170	36
EV-1	Outbound Announcer	135	26	PB-1	Panic Button Kit	233	8	W-2000A	Door Box w/Ring Voltage	170	36
FAXJ-1000	Fax/Auto Routing Switch	261	23	PB-100	Programmer for AES-2000	232	25	W-3000	Door Box w/Ring Voltage	180	37
FBI-1A	Anti-Feedback Paging	494	18	PC-7	Phone line Privacy Cord	560	23	W-3005	Video Doorbox w/Ring Volt	181	36
GLS-1	Ground to Loop Start Conv.	570	30	PF-6A	Power Fail Phone Line Bypass	680	30	ZPI-4	Zone Paging Controller	499	19
FXI-1	IP Paging Interface	494	18	PI-1A	Telecom Paging Interface	490	18				
HD-1	Handset DTMF Dialer	405	28	PJ-14	2 Line Privacy Device	560	23				

Compatible IP Gateway Equipment - Page 35

① Indicates products available with enhanced weather protection (Page 9) DOD# 859

See what's **NEW!**

• www.vikingelectronics.com • help@vikingelectronics.com • Info: 715.386.8861

How to Contact Us:

Information: (715) 386-8861

Online: www.VikingElectronics.com

Email: Help@VikingElectronics.com

FREE Product Support is available to Professional Installers who have purchased a **VIKING** product through an authorized Distributor. Call: 715-386-8666 Monday thru Friday 8 am to 5 pm Central Time Product Support E-mail ProductSupport@VikingElectronics.com

Fax Number: (715) 386-4344

All Viking products are available nationwide through distributors listed on the back cover.

Need additional copies of this catalog? Call, fax or E-mail us.

One Year Warranty

All **VIKING**® products are warranted to be free from defects in workmanship and material for a period of one year from the date of purchase. For complete information request **DOD# 101**.

Compatible IP Gateway Equipment - Page 35

Blue Clues - For a definition of a term in blue see Telecom Glossary pages 24 & 25.

Index of Applications... **DOD# 800**

Improved features in purple print.

FREE American Product Support

When you call **VIKING** for product support, you'll be talking to a professional located right here in our Hudson, WI plant, not half way around the world. American product support, located right here in America. What a concept!

Our full product support team may be unavailable from 4:00 to 5:00pm (Central Time) on Mondays. They're meeting with engineering to relay any field concerns and get up-to-date information on new products and developments.



Visit our comprehensive website

- Download product catalogs
- Rapid click-throughs
- Up-to-date information at your fingertips
- Online Product Training Center
- Download Application and Technical Documents on every product!

NEW: "Document On Demand" Search

Viking wants to make it easy for you to get the product information you need, so we've added a new search to our website called "**Document On Demand**" (DOD). All Viking catalogs and literature have DOD #'s. Enter the DOD # on our homepage for a direct link to product cut sheets.

Look for **DOD** numbers throughout this catalog!



Need a product that's not in this catalog? Call or E-mail us!



ASK VIKING FIRST!
(715) 386-8861
If we don't make what you need we'll refer you to someone who does.

*ADA Compliant Emergency Phones

- Complies with ASME A17.1 Elevator Code
- Phone Numbers and I.D. Announcement Stored in Non-Volatile Memory
- Battery Back-Up Not Required
- Analog PABX, CO Line or FXS Port powered - 2 Wire Installation
- Automatically Dials 4 Additional 1 - 20 Numbers on Busy or No Answer
- Compatible With Central Station Monitoring
- Temperature range (-15 to 130)

ADA Compliant with Braille Label
and "Call Connected" LED

E-1600-02A



Viking Electronic's 1600A Series Emergency Phones are designed to provide quick and reliable access to emergency personnel via two-way, handsfree voice communication over the public switched telephone network. The 1600A Series have braille labels and meet ADA* requirements for elevator telephones. Compatible with analog PABX, CO line or FXS port and ringdown circuits.

The 1600A Series can be programmed on site or remotely from a Touch Tone phone. All parameters, phone numbers, location numbers, and voice announcement are stored in non-volatile E2 memory. Batteries are not required for memory retention.

When the "Push for Help" button is pressed, the 1600A Series phone goes off-hook, and the built-in Touch Tone or rotary dialer calls the pre-programmed 1 to 20 digit number. The "Call Connected" LED flashes during dialing. **In the event that the line is busy or there is no answer, the unit can automatically dial up to 4 more numbers.** 1600A phones light the "Call Connected" LED and send a field-programmed 1 to 20 digit Touch Tone number or **16 second voice announcement** indicating the location of the emergency phone.

*American's with Disabilities Act of 1990 contains federal regulations regarding elevator telephones (Public Law 101-336)

Handsfree Emergency Phones - Models E-1600-45A, E-1600A, and E-1600-60A

ADA Compliant with Braille Label and "Call Connected" LED

- Material: .062" (16 gauge) steel, powder painted
- Mounting: Surface mount to walls, posts, single gang boxes or recess mount in elevator phone boxes
- Two-wire installation - analog PABX, CO line or FXS port powered
- Dimensions: 5.25" x 4.0" x 2.0"

! When installing E Series door entry phones outdoors, always use the EWP version - See page 9



E-1600-45A
Safety Yellow



E-1600A
Emergency Red



E-1600-60A
Police Blue

Model	DOD #
E-1600A	215
E-1600-45A	215
E-1600-60A	215

42" Handsfree Emergency Tower Phone

ADA Compliant with Braille Label, "Call Connected" LED and Blue Strobe Light

General Emergency Phone Features and Operation:

(refer to 1600A series on page 4)

- 1,000,000 candle power strobe, maximum Strobe Power Run: 200 feet using 24 gauge wire
- Mounting: Surface mount to rigid wall or post
- Material: Enclosure - .125 aluminum, 76.2mm x 152.4mm (3" x 6") tube, powder painted high-visible yellow, Phone - .074 (14 gauge) stainless steel with stainless steel button, Strobe - Vandal resistant polycarbonate plastic
- Connections: Color-coded wires with gel-filled butt connectors
- **Enhanced Weather Protection (EWP)** standard and **power supply included**
- Two-button version available with "Info" and "Help" buttons
- Dimensions: 42" x 6" x 4.5"

Model	Description	DOD #
E-1600A-BLT-EWP	42" Yellow Tower Phone	217
E-1600A-BLT2EWP	Two Button 42" Yellow Tower Phone	217



Vandal Resistant Handsfree Emergency Phone

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

(refer to 1600A series on page 4)

- Material: .074" (14 gauge) brushed stainless steel
- Mounting: Surface mount to walls, posts, single gang boxes or recess mount in elevator phone boxes
- **Optional Enhanced Weather Protection (EWP)** (see page 9)
- Two-wire installation - analog **PABX**, **CO** line or **FXS** port powered
- Dimensions: 7.22" x 5.86" x 1.55"

Model	Description	DOD #
E-1600-03B	Stainless Steel Emergency Phone	215



Vandal Resistant Handsfree Emergency Phone

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

(refer to 1600A series on page 4)

- Material: .125" (11 gauge) brushed stainless steel
- Two-wire installation - analog **PABX**, **CO** line or **FXS** port powered
- Dimensions: 13.0" x 10.5" x 2"
- Mounting: Flush mount in elevator cabs, ATMs, stairwells, hallways, etc.

Model	Description	DOD #
E-1600-02A	Stainless Steel Emergency Phone	215



Handsfree Emergency Phone for Elevator Phone Box

ADA Compliant with Braille Label and "Call Connected" LED

General Emergency Phone Features and Operation:

(refer to 1600A series on page 4)

- Material: 0.062" (16 gauge) red powder painted steel
- Two-wire installation - analog **PABX**, **CO** line or **FXS** port powered
- Dimensions: 9.875" x 6.86" x 2.1"
- Mounting: Recess mounting in standard elevator phone box (10" x 7" x 3")

Model	Description	DOD #
K-1600-EHFA	Handsfree Elevator Phone	215



Document On Demand (DOD): Enter this number at vikingelectronics.com for more product info (see page 3)

Two Button 5" x 5" ADA Stainless Steel Emergency Phones

Emergency Phone Features and Operation: (See page 4)

- Material: 14 gauge brushed stainless steel
- Mounting: Flush mount with included plastic rough-in, surface mount with optional VE-5x5 enclosure (Page 34)
- Two wire installation – analog **PABX**, **CO** line or **FXS** port powered

- Dimensions: 5.0" x 5.0" x 2.25"
- **Two button version dials up to 3 additional numbers for general info or directions**

 When installing E Series emergency phones outdoors, always use the EWP version – See page 9

Model	Description	DOD #
E-1600-20A	Two Button Emergency Phone	215



Replacement Phone for Talk-A-Phone Applications

ADA Compliant with Braille label, "Call Connected" LED

Emergency Phone Features and Operations: (See page 4)

- Direct replacement for the Talk-A-Phone ETP-400(V) panel phone, Code Blue towers require redrilling and tapping
- Material: 11 gauge brushed stainless steel
- Mounting: Flush mount to Talk-A-Phone ETP towers, wall mounts, boxes and Pedestals
- Analog **PABX**, **CO** line or **FXS** port powered emergency phone (**LDB-3** requires power) and **Enhanced Weather Protection (EWP)** standard
- Dimensions: 9.5" x 11.75" x 2.0"
- Two button version dials up to 3 additional numbers for general info or directions

Model	Description	DOD #
E-1600A-TP-EWP	Talk-A-Phone Replacement	218
E-1600A-TP2-EWP	Two Button Replacement	218



Universal Emergency Phone Kit

ADA Compliant, Ideal for Custom Elevator Panels

General Emergency Phone Features and Operation: (See page 4)

- Material: 0.062" (16 gauge) zinc plated steel
- Analog **PABX**, **CO** line or **FXS** port powered
- Dimensions: 5.0" x 5.0" x 2.25"
- Mounting: Install behind elevator panels for installations requiring a custom panel

Model	Description	DOD #
E-1600-55A	Panel kit	215



Non-Chassis Emergency Phones

ADA Compliant, Comes with Braille Label and LED

General Emergency Phone Features and Operation: (See page 4)

- **E-1600A** parts kit without a chassis
- Model **E-1600-52A** has 2 push buttons, one "Info" and one "Help"
- Ideal for applications that don't require traditional housing
- **Kit includes: printed circuit board, speaker, microphone switch(s), RJ-11 jack and cable harness assembly**
- Analog **PABX**, **CO** line or **FXS** port powered
- **Optional Enhanced Weather Protection (EWP) available (see page 9)**
- Connections: 2-position terminal block or gel-filled butt connectors

Model	Description	DOD #
E-1600-50A	Non-Chassis Emergency Phone	215
E-1600-52A	Non-Chassis Two-Button Phone	215



Viking Emergency Poolside Phones Can Help Save Lives!



E-1600-30A
Brushed Stainless
Steel **ADA** Compliant
phone (see page 4)

For other Emer-
gency Phones see
pages 4-8



NEW

E-1600-30A-EWP
shown in optional
surface mount box.
(Page 34)

Pool Phone Laws

The map shows the states in red that are required by code to have pool emergency phones. If your state is not shown in red, it does not mean you are exempt. Please check your local codes for guidance.



**State by State
Regulations**
DOD # 870

Model	Description	DOD #
E-1600-30A	ADA Compliant Emergency Phone	215

Handsfree Speaker Phone with Dialer

- Analog **PABX**, **CO** line or **FXS** port powered entry or emergency phone
- Stainless steel faceplate with metal call button

When the call button is pressed, the **E-30** automatically dials a pre-programmed 1-20 digit number. The phone will dial up to 4 additional numbers if a busy signal or no-answer is detected. The phone numbers are programmed from any touch tone phone and stored in non-volatile memory. The **E-30** can be set to auto-answer and disconnects on silence, busy, dial tone, **CPC** or time out. The unit is designed for non-**ADA** emergency, door and gate entry applications. Temperature range is -15° F to 130° F. Size is 5" x 5" x 2.25".

When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
E-30	Emergency Handsfree Phone	212



Model E-30
shown in optional
VE-5x5 surface mount box
(Page 34)



Model E-30-PT
shown in optional
VE-5x5 surface mount box
(Page 34)

"Push to Talk" Speaker Phone

The **E-30-PT** has the same audio, temperature and dialer specifications as the **E-30** (above). The unit is designed to be used in place of the **E-10A**, **E-20B** or **E-30** handsfree phones in noisy applications. In applications where the background noise can be louder than the person calling, a handset type phone is recommended.

Video Speaker Phone with Di- aler

The **E-35** has the same audio, temperature and dialer specifications as the **E-30** (above). The **E-35** also includes a high resolution color CCTV camera – refer to page 33 for camera specifications. The camera operates up to 150 feet on **CAT-5E** cable. **Power supply included.**



Model E-35
shown in optional
VE-5x5 surface mount box
(Page 34)


Model	Description	DOD #
E-30-PT	Push to Talk Entry Phone	214
E-35	Video Entry Phone with Dialer	178



When installing E Series door entry phones outdoors, always use the EWP version - See page 9

8 Elevator Phones Share One Line

Save Thousands of Dollars Per Year
Concentrator allows inbound and outbound calls

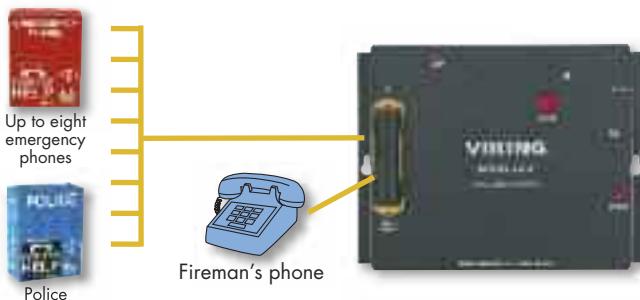

Viking's Line Concentrator eliminates the monthly charges for individual phone lines to each elevator cab in an office, college, hotel, hospital, etc. A call initiated by any emergency phone seizes the analog **PABX**, **CO** line or **FXS** port while other phones are blocked. Call waiting tones alert the distant party that other phones have gone off-hook.

Inbound calls are answered by the **LC-8**. The distant party then enters a DTMF code to connect to 1 of the 8 phones. **Power supply included.**

New software available for the **FAXJ-1000** (page 23) to intercom between fire floor phone, security office phone, machine room phone and up to 8 emergency phones

Request DOD# 882

Model **DOD #**
LC-8 **225**

3 Emergency Phones Share One Line



The **LC-3** operates similar to the **LC-8** above. The first emergency phone to call is given the line. If a second phone attempts to make a call, it will receive a busy signal. A fire phone port is provided to talk to any of the 3 phones. **Power supply included.**

Model **DOD #**
LC-3 **233**

Silent Panic Button Kit for E-1600A Series



Model **DOD #**
PB-1 **233**

Applications include:

- Court Rooms
- Convenience Stores
- Gas Stations • Motels
- All Night Restaurants

Can be mounted under desk, counter, etc. and connected to a **Viking E-1600A**. When the button is pressed, the **E-1600A** (Page 4) calls up to five numbers and gives a pre-recorded message. The **E-1600A** speaker is disabled but the called party hears what is happening. The **LED** indicates activation.

A Smart Line Sharing Device with Inbound Switching Capability

- Routes both incoming and outgoing calls
- Allows an Emergency device to share a phone line with other devices (fax machines, phones, modems)
- Gives priority to the Emergency devices
- Incoming calls routed to one of two ports by Caller ID, **Distinctive Ring** or Call Back
- Status **LED** displays mode of operation
- Can store up to 12 Caller ID numbers




Model **DOD #**
LSD-2 **262**

- Provides a busy signal to the phone port when an Emergency device is in use

Power supply included.

Your Emergency Device can Share a C.O. Line with Your Phone System

Share Lines – Save Hundreds of Dollars Per Year

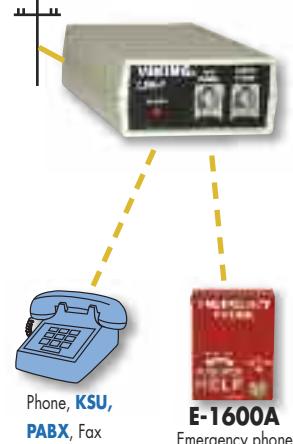

Viking's Emergency Line Seizure Relay allows the Elevator/Emergency phone or alarm dialer to share an existing **C.O.** line. When the emergency phone or alarm dialer initiates a call, the line is taken away from its normal use and receives new dial tone for the emergency call. Any call in process is disconnected. The **LSR-1** always connects to emergency device during power failure. **Power supply included.**

Model **DOD #**
LSR-1 **230**

Analog Line-Sharing For IP PBX's, VoIP Phone Systems

The **LS-911** offers a cost-effective, reliable method of handling 911 emergency calls for IP PBX's and networked phone systems. Connected to an **FXO** port, it lets you enjoy the advantages of conventional analog 911 service, including traceability and 911 callback, without having to dedicate an analog line exclusively for this purpose.

911 calls routed to the **LS-911** receive priority, taking the analog line from the fax, card reader etc. if it is in use. A special recall feature maintains the availability of the line in the event the emergency call is disconnected, so 911 personnel can call back to reestablish the connection. **Power supply included.**



Model **DOD #**
LS-911 **238**

EWP Products Last Longer and Save Money!

Outdoor environments cause ordinary circuit boards to fail early. But Viking's **Enhanced Weather Protection (EWP)** products are weather-sealed with a thick protective coating that keeps the elements out. **EWP** is so effective that our early production models are still out in the field, working as well as the day they were installed - without a single service call. That was over 8 years ago! So, if you want to save money on your outdoor installations, invest a bit more upfront in **EWP**. Just order Viking products with an **EWP** suffix. Then install it and forget it.



EWP board working under water

Features

- Sealed switch, **LED**, trim pots, push button and microphone connections
- Sealed connectors
- Mylar speaker with special weatherproof boot
- Field adjustable trim pots and DIP switches
- Closed cell foam gasketing to prevent water penetration
- Weatherproof connectors filled with anti-corrosive gel
- **EWP** products conform to NEMA (National Electrical Manufacturers Association) 3R requirements.



Tough and durable urethane potting

Applications

- Exposure to harsh elements (outdoor emergency or entry phones)
- High-humidity environments (tropical environments and areas where it gets hot and humid)
- Corrosive atmosphere environments, salt air
- High pollution environments
- High vehicle exhaust environments (road-side assistance and parking garages)



E-50-SS-EWP
page 42

K-1200-EWP
Shown in optional
VE-5x10-SS surface
mount box page 38

E-1600A-EWP
page 4

K-1700-3-EWP
Shown in optional **VE-6x7**
surface mount box
page 38

Model	Description	DOD #	Page
BLK-3-EWP	Blue Strobe Light Kit	653	28
E-1600-02A-EWP	Stainless Steel Emergency Phone	215	5
E-1600A-EWP	Red Emergency Phone	215	4
E-1600-20A-EWP	Two-Button Emergency Phone	215	6
E-1600-45A-EWP	Yellow Emergency Phone	215	4
E-1600-03B-EWP	Stainless Steel Emergency Phone	215	5
E-1600-30A-EWP	Stainless Steel Emergency Phone	215	7
E-1600-50A-EWP	No-Chassis Emergency Phone	215	6
E-1600-52A-EWP	No-Chassis Emergency Phone	215	6
E-1600-55A-EWP	Custom Emergency Phone Kit	215	6
E-1600-60A-EWP	Blue Emergency Phone	215	4
E-1600A-BLT-EWP	Strobe Light Tower Phone	217	5
E-1600A-BLT2EWP	Two Button Tower Phone	217	5
E-1600A-TP-EWP	Talk-A-Phone Replacement	218	6
E-1600A-TP2EWP	Talk-A-Phone Replacement	218	6
E-10A-EWP	Speaker Phone	210	14/42
E-20B-EWP	Speaker Phone	210	14/42
E-30-EWP	Speaker Phone	212	7
E-35-EWP	Video Speaker Phone	178	7/37
E-40-SS-EWP	Single Gang Entry Phone	187	42
E-40-BN/WH/PB/BK-EWP	Compact Entry Phone	187	42
E-50-SS-EWP	Compact Video Entry Phone	191	37/42
E-50-BN/WH/PB/BK-EWP	Compact Video Entry Phone	191	37/42
E-60-SS-EWP	Double Gang Entry Phone	206	43
E-60-BN/WH/PB/BK-EWP	Double Gang Entry Phone	206	43
E-65-SS-EWP	Double Gang Video Entry Phone	203	43
E-65-BN/WH/PB/BK-EWP	Double Gang Video Entry Phone	203	43
E-70-SS-EWP	Entry Phone with Prox Card Reader	207	43
E-70-BN/WH/PB/BK-EWP	Entry Phone with Prox Card Reader	207	43
E-75-SS-EWP	Video Phone with Prox Card Reader	208	43
E-75-BN/WH/PB/BK-EWP	Video Phone with Prox Card Reader	208	43
K-1200-EWP	12 Button Entry Phone	182	37
K-1205-EWP	12 Button Video Entry Phone	183	37/38
K-1700-3-EWP	Keypad Door Phone	157	38
K-1700-3-BN-EWP	Bronze Keypad Door Phone	157	38
K-1705-3-EWP	Video Keypad Door Phone	159	37/38
K-1705-3-BN-EWP	Bronze Video Keypad Door Phone	159	37/38
K-1900-7-EWP	Stainless Steel Panel Phone	364	11
K-1900-8-EWP	Panel Phone with Keypad	362	11
PROX-1	Proximity Card Reader	221	39
PROX-2	Proximity Card Reader/Keypad	219	39
VCAM-1	Compact Color Video Camera Kit	190	37
VCAM-1IR	Video Camera Kit IR Compatible	190	37
W-1000-EWP	Doorbox	170	36
W-2000A-EWP	Doorbox	170	36
W-3000-EWP	Doorbox	180	36
W-3005-EWP	Video Doorbox	181	36/37

Hot-Line Single Number Dialer Phones

- Auto Dialing Emergency/Courtesy Phones
- Dials a Pre-Programmed Number Whenever the Handset is Lifted
- 1-32 digit programmable speed dial number
- Telephone line powered and touch tone programmable
- Hearing aid compatible amplified handsets with rotary handset volume control
- Touch tone and 10/20 pps pulse dialing
- Non-volatile memory (no batteries required)
- Restricts fraudulent calls from hand held dialers
- Available in red or ash color
- Operates on a **C.O.** line or analog **PABX/KSU** extensions

Applications:	Courtesy and Emergency Phones	Cash Machines
	Customer Service	Taxi Service
	Airline/Hotel/Rental Car Reservations	Security
	Help Lines	
	POS Displays	

Replace leased ringdown circuits using standard loop start **C.O. lines**. The Hot-Line phone automatically dials the programmed number whenever the handset is picked up. Four-second pauses can be programmed for use on **Centrex** or behind **PABX**.

Model	Description	DOD #
K-1900D-2	Red Hot-Line Desk Phone	360
K-1900W-2	Red Hot-Line Wall Phone	360
K-1900D-2 ASH	Ash Hot-Line Desk Phone	360
K-1900W-2 ASH	Ash Hot-Line Wall Phone	360



K-1900W-2

K-1900D -2

Free Programming (100 Unit Minimum)

Viking will pre-program hot line phones or dialers with any number up to 32 digits or pauses, at no charge (minimum quantity 100). To take advantage of this free service, contact us at 715-386-8861. The following models are covered by this program:

K-1900-5	K-1900W-2 (Red)
K-1900W-2 ASH	K-1900D-2 (Red)
K-1900D-2 ASH	K-1900-7

Need Hot-Line Phones with Special Colors?



ANY Pantone color available!

MINIMUM QUANTITY
NOW REDUCED TO
ONLY 500 UNITS!

**CALL SALES AT
(715) 386-8861
FOR DETAILS.**

You can add an electronic ringer to the **K-1900W-2** or **K-1900D-2**. Order **Viking Model Q170600 Ringer...** **DOD# 834**

Vandal Resistant Hot-Line Panel Phone

- Touch tone or pulse auto-dialing (up to 32 digits) programmable speed dial number
- Vandal resistant 0.125" (1/8") thick stainless steel panel, armored cable and metal cradle
- Optional Enhanced Weather Protection (EWP) (see page 9), EWP model has 54" armored cord
- Hearing aid compatible amplified handset with sealed push button volume control
- Optional surface mount box available, model VE-5x10 (see page 34)
- 316 Marine Grade Stainless Steel Panel
- Dimensions: 5"W x 10"H x 4"D

Model	Description	DOD #
K-1900-7	Hot-Line Panel Phone	364



Vandal Resistant Hot-Line Panel Phone with Built-In Keypad

- Auto-dials (up to 32 digits) programmable speed dial number
- Touch tone or pulse dialing with a programmable pre-dial pause
- Sealed metal touch tone keypad
- Multi-number dialer mode adds 5 speed dial numbers
- Vandal resistant 1/8" thick stainless steel panel, armored cable and metal cradle
- Optional Enhanced Weather Protection (EWP) (page 9)




Model	Description	DOD #
K-1900-8	Hot-Line Panel Phone with Keypad	362

- EWP model has 54" armored cord
- Hearing aid compatible amplified handset with sealed push button volume control
- Optional **VE-5x10** (page 34) surface mount box available
- 316 Marine Grade Stainless Steel Panel
- Dimensions: 5"W x 10"H x 4"D

Vandal Resistant Stainless Steel Manual Panel Phones

- **K-1500-6A**: 0.075" thick stainless steel panel
- **K-1500-7**: 0.125" (1/8") thick stainless steel panel
- Armored cable and heavy-duty hookswitch
- Compatible with Viking ringdown circuits
- Mounts on a standard double-gang electrical box
- 316 Marine Grade Stainless Steel Panel
- Optional **VE-5x10** (page 34) surface mount box available for model **K-1500-7**

Model	DOD #
K-1500-6A	352
K-1500-7	352

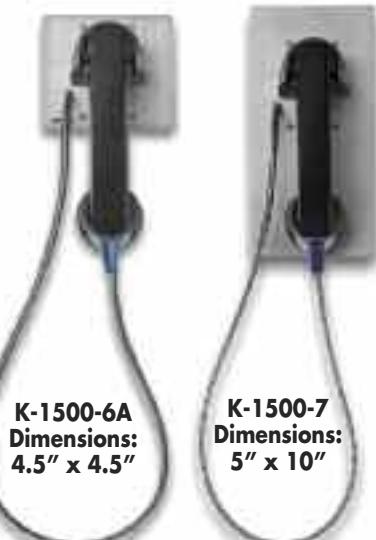

Network Insert Dialer

This electronic network, used in Viking's Hot-Line Phones, can be used to convert any standard phone into a single number hot-line phone.



Model	DOD #
K-1900-6	360



K-1500P-W

K-1500P-D

Manual (No Dial) Phones with Ringers

Ringdown, Courtesy or Emergency Phone Applications

These manual phones are compatible with ringdown circuits such as Viking's DLE-200B (page 32), dialers such as Viking's **K-1900-5** and **K-1900-30** (page 12) as well as an analog **PABX**, **CO line** or **FXS** port configured as a ringdown circuit.

Model	Description	DOD #
K-1500P-W	Red Manual Wall Phone	355
K-1500P-D	Red Manual Desk Phone	355
K-1500P-W-ASH	Ash Manual Wall Phone	355
K-1500P-D-ASH	Ash Manual Desk Phone	355

Touch Tone and Pulse Hot-Line Dialers

Applications: • Help Lines • POS Displays • Information Kiosks
 • Hotel/Car Reservations • Courtesy Phones • Money Transfer
 • **Non-Volatile Memory**
 • **No Batteries to Replace**
 • **Convert any Phone to a Hot-Line Dialer**

These analog **PABX**, **CO** line or **FXS** port powered dialers automatically dial the programmed number each time the connected phone goes off-hook. They can help eliminate mileage charges on leased lines, toll fraud on courtesy or emergency phones and hand-held dialers. They are compatible with analog **PABX**, **CO** line or **FXS** port and will not dial on incoming calls. **Program from any Touch Tone phone.**

Model **K-1900-4** provides 10 or 20 pps **pulse** dialing and with external switches, can dial up to 31 different 1 to 16 digit phone numbers. "Pulse only" phone lines usually cost less per month and cannot be hacked by hand-held dialers. **K-1900-4** can store 4-second pauses.

Model **K-1900-5** provides **1 to 32 digit Touch Tone** dialing and 1 and 4 second pauses as needed to use behind a **PABX**, **access a pager from an alarm contact**, etc. The **K-1900-5** blocks hand-held dialers and "hook-switch" or pulse dialing. The dialer can provide fast (50 mS) or normal (120 mS) on/off Touch Tones. The **K-1900-5** can be activated by a momentary contact closure (see **DOD# 818**).



K-1900-4



K-1900-5

Model	Description	DOD #
K-1900-4	Pulse Dialer	315
K-1900-5	Touch Tone Dialer	317



Model	DOD #
K-1900-9	321

100 Number Speed Dialer

- **Non-volatile memory**
- **Use on analog PABX, CO line or FXS port**
- **Use with any touch tone phone**

When used as a multi-number dialer the **K-1900-9** will allow the user to enter a 1 or 2 digit code that will speed dial a pre-programmed number. When the dialer calls the number, the user can be blocked from entering additional touch-tones. Alternatively, the **K-1900-9** can be programmed to allow touch-tones for use with interactive voice response systems.

The **K-1900-9** can also be programmed as a single number hot-line. Because the dialer is A.C. powered, it can be used on low current phone lines.

The **K-1900-9** has a programmable call timer and can be programmed on-site or from a remote location using a touch-tone phone. **Power supply included.**

Smart Touch Tone Dialer with Redialing

The **K-1900-30** is an automatic dialer that dials a 1-20 digit phone number, and can be programmed to call up to 4 additional phone numbers if the line is busy, or is not answered. The **K-1900-30** can be used to add the smart dialing features of a Viking Model **E-30** to other non-dialing **E-Series** or **K-Series** phones, or any analog phone.

The **K-1900-30** connects to an analog **PABX**, **CO** line or **FXS** port. Programming can be done locally, or remotely by calling the unit. **Power supply included.**

Model	DOD#
K-1900-30	300



Automated Voice Message Delivery System

Model K-6000-DVA can automatically notify up to 1000 people of an event cancellation, school, church or business closing or delayed opening with one call. You can also **record and forward** a caller's message to a group of phone numbers.

The **K-6000-DVA** is designed to connect to a standard analog **PABX**, **CO** line or **FXS** port. To activate the unit, an authorized administrator calls the **K-6000-DVA**, dials a 6 digit password, selects a pre-recorded message or records a live message up to 1 minute, then activates the unit via a touch tone command to automatically call all the phone numbers in a pre-programmed group. Up to 6 groups of phone numbers can be preprogrammed into the unit. On site each group can be initiated by a contact closure. Activating an "All Call" calls all preprogrammed numbers to be dialed.

Alternatively the unit can be activated on site by 1 of 6 contacts.

Power supply, USB Adapter and Application CD ROM included.


Six
Contacts



Model K-6000-DVA

NEW

User friendly
PC programmable



RS-232 to USB
Adapter Included.



Analog
PABX,
CO Line or
FXS Port

For faster calling
multiple units and
phone lines can be used
to form a "phone tree."

Model DOD #
K-6000-DVA **307**

Eight-Input Alarm Dialer with Digital Announcer

- "Store Caster" mode available
- **Non-Volatile memory** (no batteries required)
- Eight normally open or closed contact inputs

The **K-2000-DVA** is a programmable, eight input, multi-number auto dialer and digital announcer, designed for emergency and non-emergency message notification. It can store up to eight 32-digit numbers per input, for a total of up to 64 different numbers. The unit is capable of local or remote recording of up to eight different messages (one message per input), with a total recording time of eight minutes. In the "Store Caster" mode, eight different messages ("customer assistance needed in hardware please" etc.) can be provided.


Power supply included.

Eight
Contacts



Model K-2000-DVA

User friendly
PC programmable



RS-232 to USB
Adapter available.



Analog
PABX,
CO Line or
FXS Port

Model DOD #
K-2000-DVA **303**

Two-Input Alarm Dialer with Digital Announcer

- **Non-Volatile memory** (no batteries required)
- Two normally open or closed contact inputs

The **K-202-DVA** Voice Alarm Dialer is a smaller version of the popular **K-2000-DVA** above.

The **K-202-DVA** is a fully programmable two input, multi-number auto dialer and digital announcer, designed for emergency and non-emergency message notification. **Power supply included.**


- 2 messages (1 minute record time per input)
- Stores up to seven 32-digit phone numbers per input
- In the event that the dialer receives a busy or no answer it will automatically dial up to six more numbers until it gets through
- Local or remote programming and recording

Two
Contacts



Model K-202-DVA

Two
Contacts



Analog
PABX,
CO Line or
FXS Port

Model DOD #
K-202-DVA **305**

Enclosures for Installing Viking Products Outdoors

VE-9x12 and VE-9x20 provide weather protection for Viking products!

- Parking Lots
- Playgrounds
- College Campuses
- Maintenance Areas
- Swimming Pools
- Roadside Help Areas
- Hospitals
- Building Exteriors

These enclosures are constructed of cast aluminum. They are made for years of outdoor service. The heavy-duty aluminum doors are labeled 'Telephone' and have a gasket seal. The **VE-9x12-1** and **-2** allow you to choose between two panels that permit mounting many different Viking products. The **VE-9x20** provides mounting for panel phones with handsets.

Model	DOD #
VE-9x12-0	413
VE-9x12-1,2	413
VE-9x20-0	413
VE-9x20	413
VE-PBL	413
VE-SPG	413



VE-PBL – Push Button Lock for
VE-9x12 and
VE-9x20

VE-SPG – hinge door return
spring for **VE-9x12**.
(Not assembled)

VE-9x12 (R, Y or B)-0	VE-9x12 (R, Y or B)-1	VE-9x12 (R, Y or B)-2	VE-9x20 (R, Y or B)-0	VE-9x20 (R, Y or B)
Basic Enclosure - No internal mounting panel	E-1600A/E-1600-45A E-1600-03B, E-1600-60A K-1900W-2/K-1500P-W W-1000 W-2000A/E-20B	E-10A, E-1600-30A E-30/E-35/E-1600-20A W-1000 W-3000/W-3005	Basic Enclosure - No internal mounting panel	K-1500-7 K-1900-7 K-1900-8

For more
enclosures
see page 34



Model K-1500-E



Model K-1500-EHFA

Fits standard 10" x 7" x 3" elevator phone box



Model E-10A
5" x 5" flush mount



Model E-20B
4" x 5.25" surface mount

Also see New Models **E-40, E-50, E-60, E-65,
E-70 and E-75** (Page 42, 43)

Standard Elevator/Emergency Phones

Applications: Elevator, Parking Ramp, Campus, Door Entry
(For ADA compliant elevator phones see page 4)

- Intelligent auto disconnect on **CPC**, busy, dial tone, silence.
- **E-10A, E-20B, K-1500-EHFA** now detects ringing as low as 30V AC

These vandal-resistant analog **PABX**, **CO** line or **FXS** port powered Emergency Phones have no dial pads to help eliminate long distance fraud or abuse. There are 3 ways of using the unit: (1) Use on analog **PABX**, **CO** line or **FXS** port with **Viking's K-1900-4**, or **K-1900-5** Single Number Dialers (Page 12); (2) Use on analog **PABX**, **CO** line or **FXS** port programmed to automatically ring to security; (3) Use with **Viking's DLE-200B Ringdown Circuit**. (Page 32).

Handsfree models **E-10A, E-20B** and **K-1500-EHF** go off hook on the phone line when the button is pressed then auto disconnects on **CPC**, busy, dial tone or silence. The **E-10A, E-20B**, and **K-1500-EHFA** will auto answer on an incoming call. The **K-1500-E** will not answer.

- **K-1500-E** now with amplified handset per FCC regulations

**⚠ When installing E Series door entry phones outdoors,
always use the EWP version - See page 9**

Model	Description	DOD #
E-10A	Standard	210
E-20B	Emergency	210
K-1500-EHFA	Phones	220
K-1500-E		220



Panasonic Doorphone Station Adapter

The **PAN-1** allows a Viking "E" series speaker phone (**E-10A, E-20B, E-30, E-35, E-40, E-50, E-60, E-65, E-70, E-75**, etc.) to be connected in place of a Panasonic KX-T30865 or KX-T7775.

Power supply included.

Model	DOD #
PAN-1	145



Time Delay Relay

The **TDR-1** can be programmed to produce one of 8 closure times from .5 to 20 seconds. Can also be set up as a delay on operate relay. Accepts positive or negative-going logic level voltage or a contact closure. **Power supply included.**

Model	DOD #
TDR-1	421



Talk Battery Booster

Boost talk battery and loop current to line powered devices. **Power supply included.** (See page 31 for complete information.)

Model	DOD #
TBB-1B	630



Generate a CPC Disconnect

Voice mail, call sequencers, etc. behind **PABX, ISDN, VoIP, T-1** channel bank lines. (See page 31 for complete information.)

Model	DOD #
CPC-1	442



Multi-Tone Generator



Provides 10 different siren, warble, and chime tones.

The **MTG-10** can be connected to a paging source, phone system's paging port or background music. When a contact closure is provided to one of the inputs, the paging or background music is faded out and the appropriate tone is generated over the paging system. The siren and the evacuation whoop have priority and override any other tone.

The **MTG-10** can also be configured to provide a tone every 15 seconds to notify callers that their call is being recorded.

Power supply included.

Model	DOD #
MTG-10	482

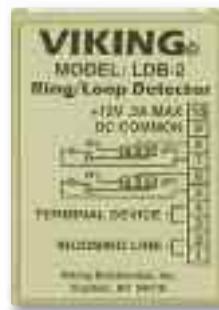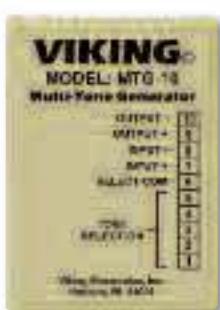

Loop and/or Ring Detector

Operate strobe lights, security cameras, etc. The **LDB-2** Ring/Loop Detect monitors an analog phone line for ringing and/or in use condition. 2 sets of relay contacts are activated when these conditions are detected. When monitoring for ring, the relay can be adjusted to stay on steady or follow a ring cadence. A 12 volt output is provided. **Power supply included.**

Model	DOD #
LDB-2	408



Advanced Loop and/or Ring Detector

Ideal for use with two-button emergency phones!

The **LDB-3** monitors an analog phoneline, **PABX** or **FXS** line and provides a **normally open** or **normally closed** contact during ringing, off hook or both. The unit can also provide a 12V DC 350 mA output for strobes. The **LDB-3** can follow the ring cadence or stay on steady during ring. It can be set up not to activate from "Info" on two-button phones.

Power supply included.

Model	DOD #
LDB-3	409



Model **DOD #**
PA-2A **485**

Multi-Line Loud Ringer/2 Watt Paging Amplifier

- For **PABX** and electronic key system applications
- Drives up to 3 eight Ohm paging horns/speakers

The **PA-2A** monitors up to 6 analog lines for ringing or can be activated by a phone system contact closure. A loud electronic warble (110 db @ 1 meter), a chime, a gong or a door chime can be selected to announce incoming calls. To page, connect to a paging port or unused **trunk** input or **FXO** port on a phone system. The unit provides 2 watts of power - enough to drive 3 eight ohm speakers. The **PA-2A** has an input for a loud ringing on/off switch, an output for controlling a 12 volt relay and a 600 ohm output for sourcing high powered paging amplifiers. The **PA-2A** includes one paging horn and **power supply**.

For additional ceiling speakers and paging horns use models **25AE**, **30AE** and **35AE** (see page 19 for specifications).



Model **DOD #**
CPA-7B **455**

General Purpose 6-Watt Telecom Paging Amplifier

- For **Centrex**, **PABX** and key system applications
- Drives up to 8 eight Ohm paging horns/speakers

The **CPA-7B** allows paging from a key, **PABX** or **Centrex** paging port, or connect to an unused **trunk** input or **FXO** port (provides 19 volts of talk battery). The **CPA-7B** can also answer a ringing analog **PABX** station, **Centrex**, **C.O.** line or **VoIP FXS**, to allow paging, then disconnect on **CPC** or adjustable time out. The **CPA-7B** provides an alert tone prior to paging. Background music can be added from an external source. An electronic warble tone is available for loud ringing or night bell applications. Multiple units can be cascaded to drive more speakers. One weatherproof paging horn and **power supply included**.

For additional ceiling speakers and paging horns use models **25AE**, **30AE** and **35AE** (see page 19 for specifications).



Model **DOD #**
PA-30 **489**

30 Watt Professional Telecom Paging Amplifier

- For **PABX** and electronic key system applications
- Drives up to 30 eight Ohm paging horns/speakers or 50 70V or 25V speakers

The **PA-30** provides paging from the phone system paging port or connect to an unused **trunk** input or **FXO** port (provides 40 volts of talk battery). The **PA-30** has separate inputs and volume controls for paging, auxiliary source, loud ringing and background music. A contact closure or ringing line can activate loud ringing. A warble, double gong, quadruple chime or door chime sound can be selected. The **PA-30** also has inputs for a night transfer (loud ringing) on/off switch. The **PA-30** has a 600 ohm output to drive additional amplifiers. Electronic switching eliminates pops and clicks. **Power supply included**.

For additional ceiling speakers and paging horns use models **25AE**, **30AE** and **35AE** (see page 19 for specifications).



Model **DOD #**
SLP-1 **478**

Single Line Paging Controller/2 Watt Amplifier


- Add paging, phone-to-phone intercom and door chimes to your whole house audio system.

The **SLP-1** allows the user to page family members or coworkers from any phone in your home or small business. Pages are heard over the same speakers installed for multi-zone music distribution. Music is muted during the page and optionally during phone calls. If the user is on an in- or out-bound call, the caller can be placed on hold with music during the page. The **SLP-1** can provide ringing and door chime over the system. An input for a lighted doorbell switch and an output for 12 volt trigger or relay contact is provided. The unit controls both mono and stereo sound systems. An auxiliary 2 watt mono amplifier can power 3 paging horns or speakers. Analog **PABX**, **CO** line or **FXS** port. **Power supply included.** (Also see **SLP-4** on page 20)

NEW Self-Amplified Paging System

Viking's **SA-Series Self-Amplified Paging System** eliminates a ladder climb every time users want to change any speaker's volume or features, and there is no need to manage background music zones. Just point the remote at the individual speaker and adjust the volume, mute background music but still receive pages, or mute both background music and paging.

Up to (25) SA-1S Self Amplified Speakers

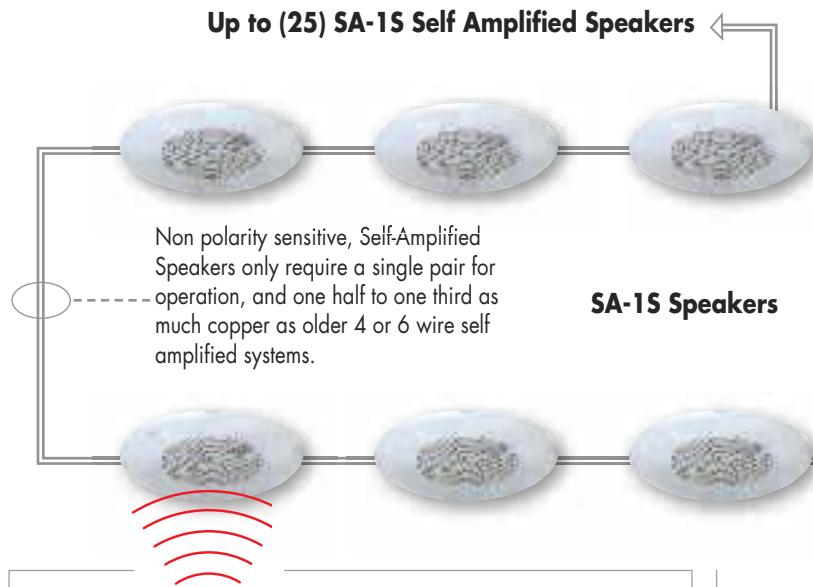

Infrared Remote

Model **SA-IR** is a three button infrared remote control for use with Model **SA-1S** self amplified paging speakers. Aim the infrared transmitter at the speaker. The up/down buttons allow users to set the appropriate volume level for each room, while the mute button eliminates just background music or all sounds.

Model **DOD #**
SA-IR 527

Self-Amplified Paging Control Unit

The **SA-25** Self-Amplified Paging control unit interfaces with virtually any telecom or IP phone system with a paging port, a ringing analog FXS or an FXO port. The system can provide background music from an external source and generate loud or night ringing from a ringing analog station or phone system contact closure. The **SA-25** control unit is backwards compatible with the older Legacy Valcom and Bogen 4-wire self-amplified speakers.

The **SA-25** can directly drive a combination of up to 25 self amplified Viking 2-wire and/or older Legacy 4-wire self-amplified speakers. **Power supply included.**

Model **DOD #**
SA-25 520

Remote Controlled Self-Amplified Speaker



Model **SA-1S** is an 8 inch paging speaker that has built in 1.5 watt power amplifier, an infrared remote control detector, and an integrated digital volume control, all built into an attractive

off-white grill for flush mounting in office ceilings. The **SA-1S** self-amplified paging speaker uses a proprietary two wire protocol in which both 40 volts DC power and audio are combined on the same pair of wires. Connect only to Viking Model **SA-25** controller or use the **SA-X12** expander to connect to any paging system.

Model **DOD #**
SA-1S 525

Expander/Adapter

Model **SA-X12** is a cost effective way to expand an existing paging system while adding remote control. Connect the **SA-X12** to any existing paging audio (600 ohms, 25V, 70V, 4, 8, or 16 ohms or an **SA-25** controller) and add up to (12) **SA-1S** speakers. **Power supply included.**



Model **DOD #**
SA-X12 529

Eliminate The Feedback "Squeal" When Paging

- Contact or VOX (adjustable sensitivity) activates Paging Amp
- Improved Fidelity (80K) • Output: 2V RMS into 600 Ohms

Now your paging amplifier can be turned up to any level and your phones can be located anywhere – even directly under a high-power paging horn. The unit maximizes efficiency by adjusting to the actual page length (up to 32 seconds). A **contact** is provided to activate the amplifier, if needed.

Power supply included.

HOW IT WORKS: The "live" input from the paging port is digitally recorded. When complete, the paging amplifier is activated and the page is replayed once or twice.



Model **DOD #**
FBI-1A **465**

Two-Way, Handsfree Talkback Amplifier

- Unused **Trunk Input** or **FXO Port**



Provides handsfree talkback paging for use in city desks, shipping, warehouses, service departments or any application where quick answers are needed. Connects to an unused **trunk** input or **FXO** port. Weatherproof bi-directional **paging horn (25AE)** and **power supply included**. One additional **25AE** paging horn can be used.

Model **DOD #**
HF-3W **470**

Loud Call Announce/Ringing Amplifier For electronic key telephones in noisy areas

The **M2W** will amplify call announce messages and ringing tones when connected to the speaker leads of an electronic or digital telephone. It cannot be connected to a 2500 set. Use model **PA-2A**. The **M2W** is also useful for expanding the number of speakers connected to a **Viking PA-2A** or **CPA-7B**. (Page 16) Each **M2W** can provide 2 watts of paging power to drive three paging speakers.

25AE paging horn and power supply included.



Maximum distance from **M2W** to paging horn is 250 feet.

Model **DOD #**
M2W **480**



Page Port, Trunk Input, FXO Paging Interface

- Night Bell • Mutes Music • 600 ohm output • VOX switching
- Provides Talk Battery for connection to an unused trunk input or FXO port.

Provides paging using phones (instead of a microphone) over a PA audio system. **VOX** contact closure mutes background music for phone systems with out a paging contact (Panasonic, S.W. Bell, Intertel, etc.). If a Paging Port is not available, use an unused **trunk** input or **FXO** port. **Power supply included.**

Model **DOD #**
PI-1A **490**

Universal Telecom/IP Paging Interface

- Select: FXO (loop start), FXS (ring trip) or paging port (VOX relay) interface mode
- 30 V Talk Battery for use with an FXO port or unused trunk input.
- 600 ohm volume controlled floating output - Mutes Music during page

In all modes the **FXI-1** provides normally open or normally closed relay contacts to activate the central paging amplifier equipment or connect to an external background music source. After paging, the **FXI-1** auto disconnects on **CPC**, busy signal, silence or default disconnect timer. An electronic night bell over paging feature can be activated from a momentary phone system contact closure. **Power supply included.**



Model **DOD #**
FXI-1 **494**

Night Bell Over Existing Paging System

Applications: Offices, Warehouses, Clinics – Anywhere people may be working after the receptionist goes home.

Connect to the night service line to provide electronic warble tone over an existing paging system whenever ring voltage is detected. The **K-600F** has both tone and level adjust and provides a relay **contact** for muting music or operation of external signalling devices, 120V bells, strobe lights, chimes, etc. The **K-600F** operates from 60V ringing.

For generating audible tones from a **contact closure** use model **PA-2A** (Page 16) or **PI-1A** analog **PABX**, **CO** line or **FXS** port. (above). **No power supply required.**



Model **DOD #**
K-600F **475**

Night Switch for Viking Products

The **NS-1** is an on/off toggle switch mounted in a convenient plastic case. The **NS-1** can be used with any product that requires an external switch closure. The compact design and foam mounting tape make it easy to install the **NS-1** almost anywhere. The **NS-1** has 24" wires and comes with two quick connectors.



Model **DOD #**
NS-1 **540**

4 Zone Paging Controller

- **Expand up to 8 zones using 2 units**
- **Switch up to 200 Watts to 8 ohm speakers**

Applications

- Multiple zone paging for **Centrex** systems
- Multiple zone paging for phone systems with paging ports, unused analog station/**FXS** ports or unused **trunk/FXO** ports
- Multilevel warehouse
- Multiple department manufacturing business
- Multi building office complex
- **Power supply included**



Compatible with these Viking Products

- PA-2A
- CPA-7B
- PA-30
- Any paging Amp up to 200 Watts

Model	Description	DOD #
ZPI-4	4 Zone Paging Controller	499

The **ZPI-4** is a four-zone Touch Tone controlled paging system capable of switching a line level (600 ohms) signal to amplifiers or an amplified signal (up to 200 watts to 70V or 8 ohm speakers). (Refer to tech practice **DOD# 499**.)

The **ZPI-4** features balanced audio circuitry throughout for low noise and compatibility with balanced or unbalanced paging system inputs and outputs. There are separate level controls for paging and background music. Background music can be disabled on a per-zone basis. Also provided, is a night bell with adjustable volume, activated by a dry contact closure or a ringing **C.O./analog PABX/KSU/FXS** station. The **ZPI-4** is compatible with ringing **C.O.** lines, **Centrex** lines and analog **PABX/KSU/FXS** station ports (Disconnects on silence, **CPC** or time out) as well as unused trunk inputs, and will interface directly with standard paging ports.

Single Line Smart Loud Ringer

- **Operates from a ringing analog line or a contact closure**
- 4 different tones available, Warble, Double Gong, Quadruple chime, Electronic Bell
- Provides a door chime tone for either a doorbell, door open or "Push for Assistance" sensor
- 90 db @ 1 meter, 105 db with external **25AE** paging horn
- **Power supply included**



Model	DOD #
SR-1	477

8-ohm Ceiling Speaker Assembly

Includes white grill, mounting hardware and 8" wide range speaker. For **1- and 2-way** applications with **CPA-7B, DVA-2WA, HF-3W, M2W, PA-2A and PA-30**.



Model	DOD #
30AE	498

Paging Speakers: How many? Where should I place them? What model? In outdoor, factory or warehouse environments, **25AE paging horns** are the best method of producing understandable sound because the directional design allows the installer to focus the sound cone down aisles and toward work areas. In office and restaurant environments, it is best to distribute sound more evenly. Ceiling-mounted **30AE and 35AE speakers** in close proximity offer the best distribution and are cost effective.

Ambient Noise Environment	Level	Typical Examples	Ceiling Height	Distance Btw. Spkrs
Quiet - Conversation very easily understood	5dB	Hotel lobby, hospital area, quiet office	9 ft.	35 ft. to 50 ft.
Normal - Conversation easily understood	60dB	Bank lobby, department store, typical auditorium	14 ft.	25 ft. to 35 ft.
Noisy - Voice must be raised to be understood	70dB*	Assembly line, supermarket, noisy restaurant	9 ft.	20 ft. to 25 ft.
Very Noisy - Conversation difficult or impossible	85dB*	Punch press, printing plant, garage, yard, paging horns	9 ft.	15 ft. to 20 ft.
			14 ft.	

* An FBI-1A Feedback Eliminator is recommended. (Page 18)

Outdoor/indoor 12-Watt 8-ohm Paging Horn



Use for any directional outdoor, factory paging application. Compatible with Viking Models: **CPA-7B, DVA-2WA, HF-3W, M2W, PA-2A and PA-30**.

Model	DOD #
25AE	498

Ceiling Speaker with Volume Control

Includes 8" wide range 8 ohm speaker, white grill, **built-in volume control** and mounting/installation hardware. Use for any office or commercial ceiling application. Compatible with all Viking 1-way paging amps: **CPA-7B, DVA-2WA, M2W, PA-2A and PA-30**, or any 8 or 16 ohm paging system. Not recommended for 2-way (talkback) paging applications (instead use **Model 30AE**).



Model	Description	DOD #
35AE	Ceiling Speaker with Volume Control	498

Speaker Volume Control

Adjust the volume of individual paging horns, ceiling or wall speakers. Compatible with Viking 1-way paging amps. or any 8 or 16 ohm or 25 volt paging system. Mounts in standard single gang electrical box. Not recommended for 2-way (talkback) applications.



Model	Description	DOD #
SV-5W	Speaker Volume Control	488

For a paging product feature comparison request DOD# 884

Add Paging & CD Quality Door Chimes to Your Whole House Audio System

- Select from 8 preloaded **CD quality** files or download your own custom **WAV files** via your **USB port**.
- Page from multiple lines by connecting multiple units

The **SLP-4** Single Line Paging controller will allow you to page family members or co-workers from any phone in your home or small business office. The pages can be heard over the same speakers that are installed for multi-zone music distribution.

The **SLP-4** provides inputs for 4 lighted doorbell switches. The inputs select 4 different **CD quality** sounds from a library of eight pre-recordings including Westminster 4 bell chimes, wind chime notes, barking dog, etc. Alternatively, users may record their own **CD quality** sounds into the **SLP-4** from their **PC's USB** port. When the doorbell switch is pressed, or the user pages, the music is muted while the appropriate sound or page is heard over the system speakers.

The **SLP-4** connects in series with a single existing phone line. The unit has a built-in 2 watt amplifier, stereo pre-amp output, music on hold input, intercom features, and selectable loud ringing.

Power supply included.

NEW Online: A library of over 80 different downloadable sounds on the Viking website to customize your **SLP-4**.

Go to www.vikingelectronics.com and click on "Library of Sounds" under Quick Links. Select model **SLP-4** to preview and download sounds directly to your computer - easily upload to the **SLP-4** via **USB**.



Compatible with the **C-200, C-250, C-1000B, C-2000B**

Model	Description	DOD #
SLP-4	Single Line Paging Adapter with 4 Chimes	479

Digital Mass Emergency Notification/Evacuation Announcer

- 5 Different Recorded Mass Notification/Evacuation Messages Over Your Existing Paging System
- Securely Activate, Reset or Live Page from a Remote Phone
- Select from 10 Different Alert Tones

Model **DNA-510** is a cost effective digital mass notification/ emergency announcer designed to work with a building or campus's existing paging system.

Model **DNA-510** can provide up to 10 different alert tones and up to 5 different digitally pre-recorded voice evacuation or lockdown instructions with a total record time of 2 minutes. Tones and messages can be repeated 1-99 times. The **DNA-510** connects to a phone line, **FXS** or **FXO** port, **PABX** station, or line input of a phone system and can be securely activated or reset from a remote location using a touch tone security code. A live page can also be broadcast.

When activated, the **DNA-510** will interrupt any current paging or background music and inject alert tones and emergency instructions over your paging system.

Power supply included.

Compatible with the **PA-2A, CPA-7B, PA-30** or any paging system.



Alert Tone Applications:

• Evacuation	• Terrorist Alert	• Flash Flood
• Lockdown	• Fire	• All Clear
• Severe Weather	• Tornado	

Model	Description	DOD #
DNA-510	Mass Notification Announcer	492

Clock Controlled Tone Generator Over Paging

- Timed single, double or triple chime, or buzzer tones
- Easy to program, easy to change
- Alarm and standard NFPA/ANSI evacuation tones
- Programmable day of week on/off feature

Provides your paging systems with up to 128 timed alert tones per 24 hour period. Different alert tones may be used to indicate start or end of shift, break, lunch, etc. Dry **contact closures** can activate alarm, fire, evacuation etc., sounds over paging. A door chime is also available for night ring or doorbell. These sounds can be activated remotely via a telephone using **Viking RC-3** (Page 40). Use with the **DVA-2WA** (Page 26) for timed announcements.

All programmed tone events are stored in **non-volatile memory**. A 9-volt NiMH rechargeable battery (factory installed) maintains clock time for over 8 hours during a power failure. In the event of battery failure, only the time needs to be re-entered.

For a self directed demo call, (715) 386-6643 Extension 5. **Power supply included.**



Model	DOD #
CTG-1	460

NEW Master Clock/Clock Controlled Tone Generator Over Existing Paging System

- Accurate time base synchronizes periodically with the atomic clock via Internal modem
- Can also be used as a Master Clock to synchronize Viking CL series clocks
- Automatic daylight savings time and leap year correction

Viking's model **CTG-2** is an advanced clock controlled tone/message generator designed to provide accurately timed tones and/or messages over your existing paging system. This provides a cost effective way of signaling school period changes, factory shifts, breaks, lunch periods or provide messages at specific times for store sales, promotions, closing times, airport loading zones, etc. The **CTG-2** can also be used as a master clock to automatically synchronize **Viking CL Series** clocks.

- Up to 14 schedules, and up to 1000 events
- Pre-loaded with common school, business and factory alert tones or download with your own messages/tones via the USB port
- Total of 6 minutes of CD quality WAV file record time
- 4 inputs for triggering emergency fire evacuation, severe weather, lock down and all clear alert tones or messages
- RS-485 output for communicating time sync data when used with **Viking CL Series** wireless analog and digital clocks (see below)

The **CTG-2** comes with programming software and a USB port to allow PC programming of timed events, schedules, Atomic clock synchronization, wave file down load, message volume,



Model DOD #
CTG-2 **463**

day light savings time, leap year, auxiliary relay control, etc.

Once programmed you can change the **CTG-2**'s schedules or turn the unit on or off remotely from any touch tone phone.

**Wireless Synchronized Clocks, RF Transmitters and Accessories**

Viking's Wireless Clock System provides reliable, accurately synchronized clocks for your entire facility. Eliminating dedicated clock wiring can save you thousands of dollars on installation and also allows for easy retrofitting. The system is comprised of a **CTG-2** master clock, a **CL-RFT** clock RF transmitter and Analog or Digital wireless slave clocks. The clocks will always display the correct time via Atomic clock updates from the **CTG-2**.



CL-A16

16" Analog Clocks

(shown with optional double mount bracket **CL-DMA16**)

Wireless Analog clocks are battery operated and require no wiring. Battery life using (2) D size Duracell Procell battery is more than 5 years. The clocks are updated every 4 hours from the **CTG-2**. Clocks can be located up to 2000 meters from the **CL-RPT** transmitter/repeater.

CAUTION: CL series clocks cannot be used as stand alone clocks. They must be used in conjunction with a **CTG-2** master clock and one or more **CL-RFT** transmitters.



CL-D2 & CL-D4

2.5" and 4" Digital Clocks (shown with optional double mount bracket **CL-DMD2** or **CL-DMD4**)

Wireless bright digital clocks require 120 volt VAC outlet (24V Power supply included). The clocks are updated every minute from the **CTG-2**.

12" Analog Clock


CL-A12

RF Transmitter/Repeater

The **CL-RFT** transmitter receives time sync data from the **CTG-2** and transmits to the clocks via 915 to 928 MHZ frequency hopping technology. Powerful 1 watt (30dBm) output communicates up to 2000 meters in open space. Can also be configured as a repeater for larger spaces. Dimensions 11"H x 8" W x 1.7" D. No FCC license required.




CL-RFT

**CL-WGA12 & 16
12" and 16" Analog
Clock Wire Guard**

Model	Description	DOD #
CTG-2	Master Clock	463
CL-A12	12" Analog Clock	460
CL-A16	16" Analog Clock	460
CL-D2	2.5" Digital Clock	460
CL-D4	4" Digital Clock	460
CL-RFT	RF Transmitter/Repeater	460
CL-DMA12	12" Double Mount (Analog)	460
CL-DMA16	16" Double Mount (Analog)	460
CL-DMD2	2.5" Double Mount (Digital)	460
CL-DMD4	4" Double Mount (Digital)	460
CL-SMD2	2.5" Surface Mount (Digital)	460
CL-SMD4	4" Surface Mount (Digital)	460
CL-WGA12	12" Wire Guard Analog	460
CL-WGA16	16" Wire Guard Analog	460
CL-WGD4	4" Wire Guard (Digital)	460

Amplified Remote Access Device

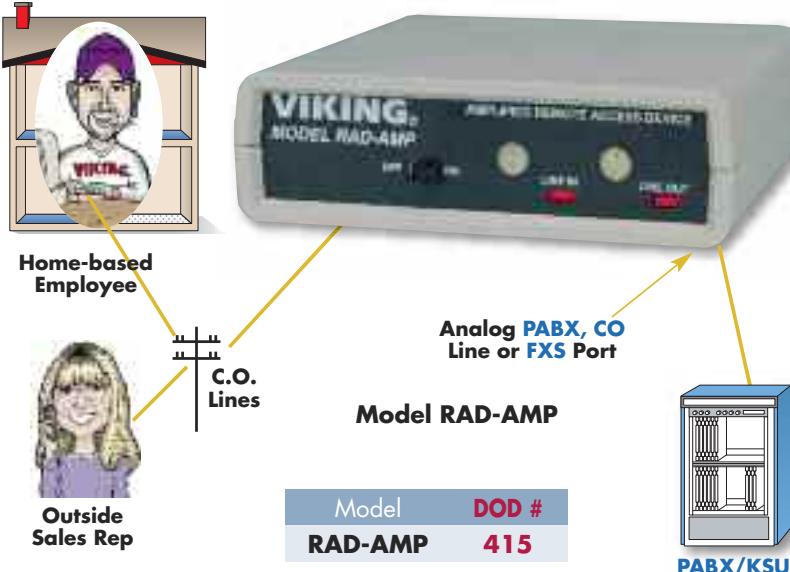

Telecommuting Features

- Works with cell and standard phones
- Supports **PABX** call transfer, voice mail, call conferencing and paging
- Log in, Log out capability
- Callers don't realize they've been transferred

Features


- Call Diverter, Line Extender • DISA
- Remote **SO-24A** Service Observation (Page 29)

The **RAD-AMP** is amplified for **DISA**, line extender, call diverter and remote access to **Viking's SO-24A Service Observer** (Page 29). The **RAD-AMP** disconnects on **CPC**, return dial tone, silence, busy signal or call timer.

It can provide two levels of security before allowing access to DISA or line extender applications. In line extender applications, the user does not have to hang up and redial the **RAD-AMP** to make another call. Simply dial "#2" to get a new dial tone. Dialing a "#1" provides a hook flash on the "Line Out" port to access **PABX/Centrex** features. **Power supply included.**

Phone Line Powered Remote Access Device

- Remote Access to 1 way Paging Amplifiers • Advertisements • Radio or Church Programs

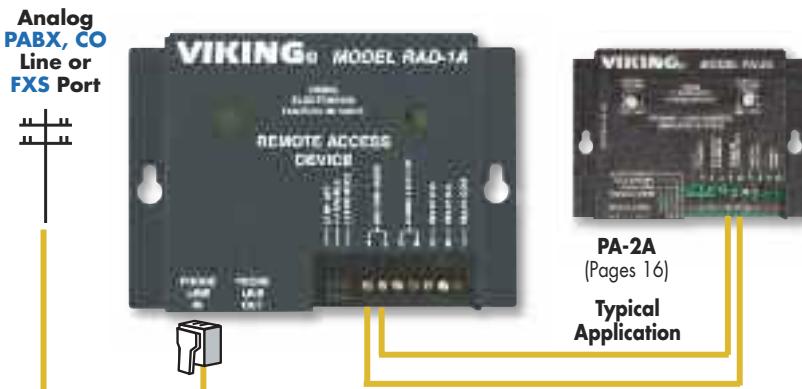

The **RAD-1A** is designed to allow you to call from any Touch Tone phone and then remotely access paging systems, digital recorders, etc. The unit connects to any **loop or ground start C.O., Centrex, PABX** line or **FXS** Port.

The **RAD-1A** answers on the first ring and disconnects on **CPC**, call time out, silence time out, or by dialing "#7". The **RAD-1A** provides a floating 600 ohm output and also an auxiliary relay **contact**.

The **RAD-1A**'s call timer can be set to limit access time from 3 seconds to 2 hours.

Model	DOD #
RAD-1A	410

Eliminate Long Distance Toll Abuse

- Field Programmable **Non-Volatile** Toll Restrictors

Applications: Courtesy Phones • Bars and Restaurants • Construction Site Phones • Employee Lunch Rooms • Time Share Condos

- Roommates • Prevents 976 & 900 Abuse • Hotel/Motel • Inbound Only Phones (with override) • Calling Card Only
- Emergency Phones



Model **TR-1** (shown open) are concealed in a standard **RJ-11** Jack.

Programmable Touch Tone and Rotary Toll Restrictor with Override Bypass Code

- **Non-Volatile Memory** - No batteries required
- 1 to 50 Minute Call Timer


- Analog **PABX, CO Line or FXS** Port Powered
- **Centrex and PABX** Compatible

Program up to 40 prefixes, area codes or phone numbers to be blocked or allowed. The **TR-1** can block all Operator assisted calls, Directory Assistance, 976 and 900 calls, and "1+" long distance, while "1-800", "911", and other user selected calls are allowed.

The **TR-1** features can be programmed on site or remotely using a Touch Tone phone. The programmer must know the unit's security code to change the programming. The 6 digit override bypass code allows parents or supervisors to make calls normally blocked by the **TR-1**.

Model	DOD #
TR-1	705

Fax machines, modems and credit card readers save time and improve communications.
Viking's Line Sharing devices can save you the monthly \$20 to \$60 cost of installing additional phone lines.
 Now you can enjoy all the benefits of a modem or fax without the additional telephone line charges.
Viking's Fax Switches pay for themselves in just a few short months.

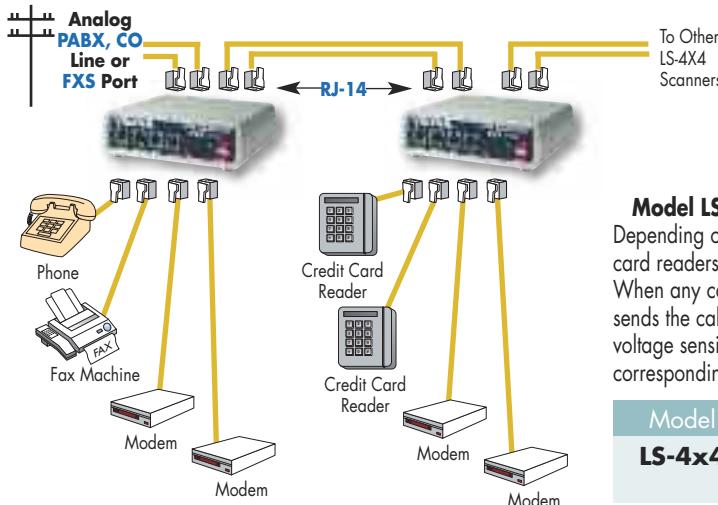

Line Scanner for Modem Pooling



Model LS-4x4 is a 4 device by 4 line unit which can be modularly expanded. Depending on the number of 4x4 scanners used, 4, 8, 12, 16, 20 or more modems, credit card readers, faxes, phones, etc., can share 1 to 4 analog **PABX, CO** lines or **FXS** ports. When any connected telecom device goes off hook, the **LS-4x4** scans for an open line and sends the call out. If no lines are available, the user receives a busy signal - compatible with voltage sensitive credit card readers. Incoming calls on each line can be routed to their corresponding device port. **Power supply included.**

Model	Description	DOD #
LS-4x4	Line Scanner for Modem Pooling	270

Single Line Privacy Devices

For punch down or terminal block installation in series with Tip or Ring.



For modular applications. One **TG-2** will protect two devices.

The 7 foot **Automatic Privacy Cord** replaces the standard modular line cord connecting your telephone, fax machine or modem to any type of telephone line.



Model	Description	DOD #
TG-1	Single Line Privacy Device	560
TG-2	Two Device Modular Device	560
PC-7	Automatic Privacy Cord	560
PJ-14	Two Line Privacy Device	560

Prevent Interruptions In Voice, Fax or Data

Viking's Teleguard Automatic Privacy Devices prevent your phone calls or fax/modem transmissions from being interrupted if someone accidentally picks up another extension. Teleguard also protects against eavesdroppers.

With **Viking's Teleguard**, whichever device accesses the analog **PABX, CO** line or **FXS** port first denies any other teleguard-equipped device access to the line until the call in progress is terminated. Incoming calls will ring into all devices simultaneously. The device that answers first denies any other teleguard-equipped device access.

Any telecom device not equipped with **Teleguard** can always break into a phone call or transmission.

Two Line Privacy Device




The **PJ-14** provides one or two lines of Teleguard protection built into a wall mountable **RJ-14** jack.

Four Port Enhanced Auto Routing Switch

- Allows any four analog devices to share a single line
- Ports are balanced to prevent noise on long runs**
- Caller ID information is stored and retransmitted during transfer**
- Provides realistic ring-back tones while re-ringing selected device**
- Routes calls via **CNG** tone, **distinctive ringing**, touch tones sent by calling device or manually
- Compatible with high speed modems
- Automatic "privacy" eliminates interruptions on both in and outbound calls
- Monitors for calling party control (**CPC**)
- Power supply included.**

Model	Description	DOD #
FAXJ-1000	Four Port Enhanced Auto Routing Switch	261

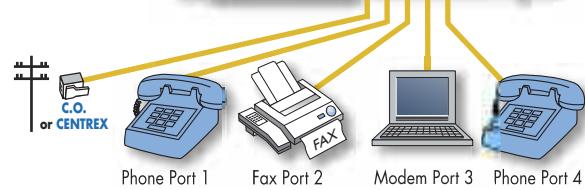

Glossary of Telecom Terms

26 Bit Wiegand Format - The industry standard data output of access control card readers.

ACD - Automatic Call Distributor - A device for distributing many calls uniformly among a group of agents or operators. The **ACD** pays attention to real time traffic load and other factors like which agent has been the busiest or idle the longest, to evenly distribute call traffic to the agents (also see **UCD**).

ADA - Americans with Disabilities Act - Legislation passed in 1992 to assure equal building access for the disabled, which also included equal access to emergency assistance in the event of an elevator emergency.

AGC - Automatic Gain Control - Electronic circuit which automatically increases the volume when someone is speaking quietly and drops the volume when someone is speaking loudly, to keep the transmitted signal constant.

A-Lead - Control leads that come from 1A2 key telephone to operate features like flashing of lights to indicate a busy, holding or ringing line.

Analog Single Line Station - An extension port on a **PABX/KSU** that will allow a standard household type phone to interface with the system. (**POTS**)

ATA - Analog Telephone Adapter - Analog Telephone Adapter, allows user to connect analog telecom devices to their **LAN**, **WAN** or internet (See **FXO**, **FXS**).

AWG - American Wire Gauge - The higher the **AWG** number the thinner the wire.

BOM - Beginning of Message - A short electrical pulse provided by a digital announcer when used in certain 4 wire **E & M** modes. The pulse alerts the **PABX** that the Beginning of a Message is coming.

Butt Set: a sophisticated, one piece, telephone used by technicians to diagnose telephone lines or equipment.

Call Progress Detection (Analysis) - A feature of some terminal devices that allows the **Terminal Device** to detect when a call has been answered, so the device can play a recorded announcement to the person that answered.

Carbon Transmitter (Handset) - The microphone of a telephone handset which uses carbon granules and a diaphragm. The diaphragm responds to voice and varies the pressure on the granules and hence, their resistance.

Cat 5E - This is a performance category for 8 conductor twisted pair wire. It defines the maximum data rate that a cable can handle.

CD Quality - Digital audio utilizing 16 bits of resolution at a sampling rate of 44.1k, which is the same as audio CD's. Better sounding than other compressed formats such as MP3.

C.O./CO - Central Office - A main telephone office where switching equipment is housed and customer lines originate. Also contains **Trunk** line connections to other Central Offices. A **C.O.** line is a phone line coming from the Central Office and terminating at the user's premise.

Central Station Monitoring - Service provided to monitor security systems and emergency phones 24 hours a day. Often uses a high speed **DTMF** communication format to automatically identify where the call is coming from.

Centrex - A name for an umbrella service offering of the local telephone company. Customers lease a portion of the Central Office switch to create a centralized point of control and routing. In concept, Centrex is providing similar features to a **PABX**. In some areas, also known as Centron, Cenpac, or **Plexar**.

CMOS - Complimentary, Metal Oxide Semiconductor - When used for the image sensor in video cameras it allows a wide operating temperature range with high reliability.

CNG - CallNG - 1100 Hz .5 second tone generated every 3.5 seconds by fax machines.

Contact Closure - Contacts that when "closed" connect a pair of wires together and disconnects the wires when "open". A doorbell button is a simple example of a momentary contact closure.

CPC - Calling Party Control (Disconnect Supervision) - A short break in the line current in the called party's phone line when the calling party hangs up. Not available on most **PABX**'s.

Demarcation Point (box) - Typically the point at which the phone line enters the building. The telephone company is responsible for all wiring up to this point.

DISA - Direct Inward System Access

DID - Direct Inward Dialing is a feature allowing callers to directly reach a **PABX** extension without an operator's assistance.

Distinctive Ringing (also known as ringmate, custom ring, identifying ring master) - Different patterns of ringing that allow a user to identify the source of the call, outside, or inside (intercom) or who the call is for. Usually two burst or three burst with different durations.

DSL - Digital Subscriber Line - High Speed digital data on standard two conductor voice grade telephone wiring. Allows high speed Internet access and telephone calls to take place simultaneously.

DSL Filter - Filter designed for **DSL** lines that prevents the normal telephones from hearing the high speed digital data and interfering with the data.

DTMF - Dual Tone Multi-Frequency (Touch Tone) - Audible tones which conform to North American Telephone Standards. These are generated by push-button telephones to dial telephone numbers, as well as to provide control or data input to voice processing systems. Especially significant in the operation of Viking automated attendants and fax/data line sharing devices.

E² Memory (See **Non-Volatile E² Memory**)

E & M Control /4 Wire E & M - An equipment signaling system usually used in **PABX** applications with a digital announcer. This interface control scheme is standard equipment on most Viking announcers.

Earth Ground - A wire conductor that terminates in the earth for electrical purposes.

FCC - Federal Communications Commission

Facility Code - A 3 digit number that each **Proxy Card** contains in order to provide greater security. Usually the cards used at a given building all have the same facility code.

Fiber Optic Modems - Devices to extend a telephone link on fiber optic cable.

FXO - An analog input **RJ-11** port just like a **POTS** trunk input on a **PABX** or key system. An FXO port receives talk battery and ring voltage.

FXS - An analog output **RJ-11** just like a station port on a phone system or **PABX** extension. It provides **Talk Battery**, dial tone, and **Ring Voltage**.

Ground Start Line - A type of call signaling. In this scheme, when a call is routed to a subscriber, the phone company will apply a ground signal on the TIP side of the line even before a **Ring Signal** is sent. By detecting this signal, phone systems can immediately determine that the line is about to be in use, and avoid call crashing.

Hook Switch Flash or Switch Hook Flash - A signal originated by momentarily depressing the switch hook on a single line phone. Typically used for accessing **C.O.** or **PABX** features.

Hz - Hertz - Indicates the frequency (number of cycles per second) of alternating current such as **Ringing Voltage** or Touch Tone signals.

Intercept - To stop a telephone call directed to an improper telephone number, and redirect that call to an operator or recording.

Industry Canada - Is the equivalent of U.S. **FCC**.

ISDN - Integrated Services Digital Network - An emerging international standard that defines interfaces for simultaneous voice and data transmission through a single channel over the public network.

ISDN Terminal Adapter - An interface between an **ISDN** line and a computer. Often these provide 1 or 2 analog **POTS** output ports.

KSU - Key Service Unit - A central control cabinet serving many multi-button key telephones. Contains equipment which enables the user to pick up and hold **PABX** or Central Office lines and provide flashing line, steady, busy, and wink hold signals. Dial intercom service is also an option.

LED - Light Emitting Diode.

Loop Current - (typically 20 to 50 mA) Current that flows from the **C.O.** when a telecom device goes off hook.

Loop Start Line - A type of calling signal that relies on a telecom device to allow DC current to flow when it goes into an off hook condition. The **C.O.** or **PABX** senses this current and intercepts it as a request for service. Also known as "**POTS**".

Loud Ringing - A tone sent over a paging system that is typically triggered by **Ring Voltage** or a dry **Contact Closure**.

MOH - Music On Hold

Night Ringing - The same as **Loud Ringing**, but usually disabled during the day or "normal business" hours.

N.O./N.C. - Normally Open/Normally Closed Contact.

"No KSU" - A phone containing all control functions normally associated with a **KSU**, thus not requiring a **KSU**.

Non-Volatile E² Memory - Memory that will not be lost from a power failure: Does not need battery backup.

OPX - Off Premise eXtension - A telephone line from the phone system terminated in a different building than the phone system.

PABX - Private Automatic Branch eXchange - Phone system used to switch telephones between extensions and to outside lines. For incoming and outgoing (dial 9) calls.

Page Code - An access code of a **PABX** that allows users to access the paging equipment to voice page.

Page Port - A 600 ohm audio output of a **PABX** intended to connect to an external paging amplifier.

Page Trigger - A signal provided to an amplifier to automatically switch the amplifiers input or mute background music during a page. Typically a "dry" **Contact Closure**, but in some cases can be a 5 volt DC or 12 volt DC trigger voltage.

PBX (See **PABX**)

PCB - Printed Circuit Board.

POTS - Plain Old Telephone Service (See **C.O.**, **Analog Single Line Station**, **Loop Start Line**).

Continued on next page

Phone (RCA) Plugs - Shielded cable and connector arrangement that is primarily used for low level audio or video connections.

Plexar - (See [Centrex](#))

Proxy Card - A credit card sized card that identifies itself when within close proximity of a reader. Card "swiping" is not necessary. The card contains a 3 digit [Facility Code](#), a 5 digit Internal card number and a 5 digit External Printed number, that may or may not match the Internal number.

Proxy Card Reader - A device used to read the data from a [Proxy Card](#). The [Proxy Card](#) can be read when held within a few inches of the reader.

Rack Mount - Equipment which is designed to mount in a standard steel framework consisting of parallel pairs of steel channel verticals spaced 19" and drilled for mounting screws.

RAD/RAN Device - Record/ANnounce - a device such as a Digital Announcer.

RAN Trunk/RAN Circuit - Record/ANnounce Trunk or Circuit - Connects the telephone system to a record/announce device.

REN - Ringer Equivalence Number - 1 REN = The energy to ring 1 Plain Old Telephone. The REN number can be found on the [FCC](#) label on the device. The total ringer load on a line is equal to the sum of all the REN numbers of all the telephone devices connected to the line.

RF - Radio Frequency - Electromagnetic waves operating between 10 KHz and 3 MHz propagated without guide [wire or cable] in free space.

RF Choke - A device intended to prevent [RF](#) waves from entering a wire or cable.

Ring Back Tone - The sound you hear when the phone you call is ringing.

Ringdown Circuit - A circuit connecting 2 devices so that when one device goes off hook it automatically rings the other device.

Ring Generator - (See [Ring Voltage](#)) - A circuit producing AC voltage that is higher than 50 Volts and has a frequency of 20 [Hz](#).

Ring Signal - (See [Ring Voltage](#)).

Ring Trip - The process of stopping the AC [Ring Signal](#) and connecting the voice path at the [C.O.](#) when the ringing telephone is answered.

Ring Voltage - A 20 [Hz](#) AC voltage higher than 50 Volts [RMS](#) superimposed on the phone line to ring bells, activate ring detectors in phone systems, faxes, modems, etc.

RJ-11, RJ-14, RJ-21X, RJ-25 - Request DOD# 839

RMS - Root Mean Square - This is simply a fancy way of describing the average voltage level of an audio signal or [Ring Voltage](#).

RS232 - An Electronic Industry Association (EIA) standard that defines a computer interface for connecting serial communication devices such as printers and modems.

66 Block - A terminal block where up to 4 sets of up to 25 pairs of wire can be interconnected. The installer uses a special "punch down" tool to connect the wires.

SLT - Single Line Telephone.

SOHO - Small Office/Home Office - An acronym for a new class of employment where the employee may be performing part or all of their work at home in a small office set up.

Subscriber Line - The telephone line connecting the local [Telco](#) Central Office to the customer's telephone instrument or telephone system.

T1 - 24 channel high speed digital line.

Talk Battery - DC voltage supplied by the [C.O.](#) to the subscriber's loop to operate the telephone equipment.

Telco - Local Telephone Company

Terminal Device - Telephone, phone system, fax, modem, etc. capable of terminating an analog phone line.

Trunk - A telephone communication path or channel between two points, one usually being a Central Office.

Trunk Port - An input on a [PABX](#) or [KSU](#) that is used to interface the system with [C.O.](#) lines.

UCD - Uniform Call Distribution - A device for distributing many calls uniformly among a group of agents or operators, following simple logic like "top down" or "round robin". It will not pay attention to real time traffic load or any other factors like which agent has been the busiest or idle the longest [see [ACD](#)].

UPS - Uninterruptible Power Supply - Provides power to your phone equipment, computers, etc., in the event of a commercial power failure.

USB - Universal Serial Bus - A serial bus standard to interface devices to a host computer.

VoIP Gateway - A digital-to-analog converter. Some multi-function gateway units combine several functions in one device, such as a built-in cable/[DSL](#) modem, Ethernet ports and router capabilities, and [FXS](#) ports. A single function gateway, also known as an analog telephone Adapter [[ATA](#)], contains an [RJ-45](#) port to connect to the internet, and an [RJ-11](#) port to connect to analog devices.

VoIP - Voice over Internet Protocol - The technology used to send voice over a data network using internet protocol. There are many potential benefits to this new technology; less cost (no local/long distance charges), voice and data handled by the same network, and many new integrated services become available.

VOX - Voice Operated eXchange - The feature of some Terminal devices that provides automatic switching or activation when sound or voice energy is detected. Sometimes used to eliminate the need for push-to-talk operation.

WAV File (or WAVE File) - is short for Waveform audio format, and is a Microsoft and IBM file format standard for storing an audio bitstream on PCs.

When you buy a Viking Product everything you need to install it is included in the box!

Viking provides all the following items if required...power supply, paging horn, T-adapter, allen wrench, screws, audio and remote cables, double backed tape, rubber feet, a technical practice and warranty information.



Cecilia Ann Hanson

Baby priceless, not included.

P.C. to Phone Line Interface/Controller

- **Windows 95, 98, NT 4.0 2000 & XP compatible software**
- **Emergency Phone Polling** (Page 4-7)
- **Remote Programming of AES-2000 Entry System** (Page 39)



The **PB-100** connects to a serial or USB port on your P.C. and also to an analog phone line. The **PB-100** accepts ASCII commands to seize the phone line, watch for busy, and to send and receive Touch Tones or data. If the P.C. is equipped with a sound card, the audio input and output can be coupled to the phone line. CD ROM is included with programs, to do emergency phone polling, **AES-2000** (Page 39) programming hotel/motel wake up dialer or design your own voice announcer, message center, etc.

Power Supply Included.

Model	DOD #
PB-100	232

Digital Voice Announcer with 7.5 Minutes of Record Time

Applications: Promotion-On-Hold, Airports, Message Repeater, Museum/Information Displays, Moving Sidewalks

- 2 watt amplifier for use with paging speakers and horns
- **AGC** for recording from handset, tape, CD, PC soundcard, etc.
- 4 professional on-hold messages included
- Recording can be on-site or in a professional studio
- **Power supply included**




Model	Description	DOD #
DVA-2WA	Digital Announcer with 2 Watt Amplifier	110

Time and Temperature Announcer

Applications: Stand Alone Time and Temperature, Banks, Hotel/Motel Wake Up, Remote Temperature Monitor

- Select Celsius or Fahrenheit
- **Ring trip** operation
- Local or remote recording
- Record up to 30 seconds of customized messages before or after the time and temperature announcement
- Can provide night message
- **Power supply included**

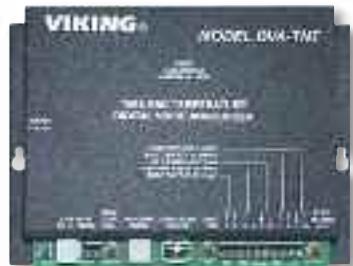

Model	Description	DOD #
DVA-TNT	Time and Temperature Digital Announcer	129

Professional Digital Voice Announcer /Recorders

Applications: **ACD, UCD, Intercept, Hotel/Motel Wake Up, Night Answer, Ski Resorts, Movie Theaters, Work Schedules, School Closings, Out of Service, Etc.**



Model DVA-500A

- Single, up to 1 minute channel
- **Ring trip** or **4 wire E&M**
- Local or remote recording
- **Power supply included**



Model DVA-1003B

- 3 independent 1 minute channels
- **Ring trip** or **4 wire E&M**
- Local or remote recording
- Announcer cycles automatically, adjusts to message length
- **Power supply included**



Model DVA-3003

- 3 independent 1-4 minute channels or a single 12-minute channel
- **Ring trip** or **4 wire E&M**
- Local or remote recording
- **Power supply included**

Expand each channel to 2, 3 or 4 minutes with **ERAM-60** 1 minute kit.....\$26.00
DOD# 813



Standard Carbon Handset for voice recording. Use with: **DVA-2WA, DVA-500A, DVA-1003B, DVA-3003, TMS-6X, TMS-12A**

Model
Q171030


Hotel/Motel Wake Up Application - See PB-100 (Page 25).

Model	Description	DOD#
DVA-500A	Digital Announcer (1 minute)	115
DVA-1003B	3-Channel Digital Announcer (1 minute/channel)	125
DVA-3003	3-Channel Digital Announcer (1-4* minutes/channel)	127

*requires ERAM-60 expansion chips.

Phone Line Powered Inbound Announcer

- **Ring trip** answer
- Single 16 second channel
- Remote record
- Plays 1-99 times (programmable)
- Also disconnects on **CPC**

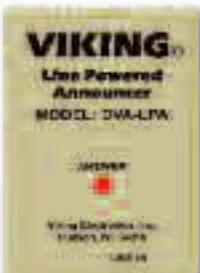

Model	Description	DOD #
DVA-LPA	Phone Line Powered Digital Announcer	128


Phone Line Powered Outbound Announcer

- Installs in series with outbound phone-gives announcement when answered
- Single 10 second channel
- Elevator ID/location identifier
- Record on-site



Model	Description	DOD #
EV-1	Phone Line Powered Digital Announcer	135


Do I need a
Call Sequencer or an Auto
Attendant? DOD# 808

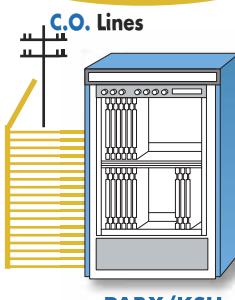

Model DOD #
ACA-1A 005

- Non-Volatile Memory-No Batteries
- 60 Seconds Record Time

Each auto attendant answers 1 analog station line. Program 6 or more CO lines to ring at that station. Stack as many ACA-1A's as your CO lines require. Ring delay is programmable.

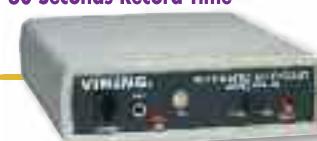

Viking's Automated Attendants provide a cost effective solution to increased call traffic in busy offices. They answer calls with a high-quality digital voice announcement, then allow callers to use their Touch Tone phone to route themselves to departments or specific extensions. *Callers can get to the right person faster without interrupting office personnel.*

Announcement for "Greeting menu" (with up to 10 departments), "Please hold while transferring", and "Busy extension" can be recorded live on site using a **carbon handset**, remotely from a Touch Tone phone or downloaded from tape. Callers may interrupt the announcement at any time by dialing an extension number or single digit department code. A live operator is available by dialing "0" or doing nothing. Callers reaching a busy extension will be advised and allowed to choose again. As soon as a call is transferred, **Viking's Auto Attendants** are free to process new calls. The unit disconnects on CPC.

The automated attendant is compatible with **PABX**, **Centrex**, and many electronic key systems with analog or off-premise extension capabilities making them flexible for most applications. Stack as many units as necessary for larger systems. **Power supply included.**



AL
Product Support Supervisor

Can I Use A VIKING Auto Attendant On My Electronic Key System?

The answer
must be "yes"
to all of these
questions

1. Can you connect a standard "2500" single line phone directly or via an **OPX** station card?
2. Can you program your key system to send incoming calls to the "2500" phone?
3. Can that "2500" phone answer, then **hookswitch flash** and blind transfer* the call to another extension?
4. If that extension is busy, can the "2500" phone get the incoming call back to advise "The extension is busy"?

*A blind transfer means that the "2500" set **hookswitch flashes**, dials an extension, but does not require that extension to answer before releasing the call.

Call Sequencers Answer Calls Promptly and Professionally

Eliminate "ring, no answer" during busy periods without hiring additional staff.

Viking's call sequencers answer incoming calls promptly when your staff is busy using your receptionist's own voice. The calls are held in the **TMS-6X** or **TMS-12A** until a staff member is available. While holding, the caller can listen to music or promotion from an external source. Callers calling in after business hours are given info on office hours then disconnected. Announcements are digitally stored

and can be recorded remotely from a touch tone phone or on site using a standard **carbon handset** or tape player. **Viking's** call sequencers are compatible with loop start lines ahead of the electronic or 1A2 key, and **ground start lines** ahead of Mitel and some Siemens **PABX**'s. Other **PABX**'s using **loop** or **ground start lines** require the **SQRG-12**.



12-Line Call Sequencer

• Link (2) TMS-12A's for 24 line service
The **TMS-12A** answers calls after 1,2,3 or 5 rings and displays the oldest call. The **TMS-RDMA**, **SQRG-12** and **LM-24D** provide added features. Can provide "A-Lead" control for 1A2 key systems. Changes to a day or night answer mode via remote contact timer or switch. **Power supply included.**

Model DOD #
TMS-12A 070

Eliminate Confusion on Which Line to Answer

Only the oldest call is displayed on the ringing line on all phones. Compatible with **loop** and **ground start lines**. **Power supply included.**



Model DOD #
SQRG-12 060



6-Line Call Sequencer

The **TMS-6X** answers calls after 3 or 5 rings and displays the oldest call. The **SQRG-12** and **TMS-RDMA** provide added features. **Power supply included.**

Model DOD #
TMS-6X 065

Remote Status Displays

Easily seen (up to 50'), displays the next line (1-24) to answer. The **TMS-RDMA** has a volume-adjustable audible ring. The **LM-24D** (Page 28) indicates the line to answer next and also displays all lines held in queue on the **TMS-12A**.

Model DOD #
TMS-RDMA 075



Call Sequencer for 2-line Phones Includes Music on Hold Input

The **TMS-2** answers the calls you can't because you are on the other line, plays a message in your voice, then provides music or promotion on hold until you can answer. **Power supply included.**

Model DOD #
TMS-2 062



See if Lines are in Use or Ringing

- Viking's 24 Line Status Monitor** is compatible with analog **PABX** Station, **FXS** ports or **Centrex Loop and Ground Start Lines**
- In-use lines show a steady LED, ringing lines flash**
- Volume adjustable common audible tone
- Ringing can be delayed up to 7 rings on a per line basis
- Non-volatile memory**
- Desk or wall mounting display requires only 1 cable pair - Up to 3 displays can be connected to the scanner.
- Power supply included**



Model	Description	DOD #
LM-24S	Display and Scanner	670
LM-24D	Additional Display	670



911 Strobe Controller

Nursing Homes, Office Buildings, Strobes for Rural Houses - When you need to know where a 911 call originated.

- Activates on 911, 9-911, and 8-911 calls and 555 (test) or "custom number"
- Bright flashing **¾" LED** visible over 100ft
- Resets by Contact Closure or Touch Tones
- Can provide 12VDC or relay contact to operate an external strobe or visual indicator

Model	DOD #
SC-911	236



Strobe Light

- 1,000,000 Candle Power
- Requires 12VDC Power

Model	DOD #
SL-1	240

Handset Interfaced DTMF Dialer



- Add Touch Tone Capability to Your **PABX** Console

Permits access via **DTMF** signaling to beepers, voice mail, banking services, etc., from consoles or other equipment which cannot provide Touch Tones. The **HD-1** easily installs in series with modular hand/head sets.

Model	DOD #
HD-1	405

Blue Strobe Light Kit

- 1,000,000 Candle power**
- Model **BLK-3-EWP** monitors analog lines for ringing and/or off hook. Switch selection allows strobe to be on steady or follow ring cadence. New "info" switch input allows strobe to activate only on emergency calls. It will not flash on incoming call (selectable) or "info" calls (**E-1600-20A** page 6). The kit includes 4" diameter waterproof strobe, hardware, **LDB-3** control module and **12V power supply**. For use with **Viking** emergency phone or any analog phone. **Enhanced Weather Protection (EWP) standard**.



Model	DOD #
BLK-3-EWP	653

Visual Telephone Status Indicator

- Bright **¾" LED** visible over 100 feet**
- APPLICATIONS:**
 - Telemarketing
 - Office cubicles
 - Tech Support
 - Customer Service
 - Message Waiting
 - Sales offices
- Power supply included**



HEADSETS: Flashing **LED** ends interruptions by indicating that you are "On the Phone". (Special T adapter provided.)

ELECTRONIC PHONES: Flashing **LED** eliminates guessing whose phone is ringing. Connect to electronic phone's speaker.

ANALOG PHONES: Flashing **LED** indicates "Ringing", steady **LED** indicates "On the Phone" and "stutter" flash indicates message waiting. Stutter dial tone is detected. Will also follow the cadence of 90 to 125v message waiting voltage.

Model	DOD #
VR-1B	697

LM-1A Message Waiting Light Retrofit Kit

- Operates on standard 70-180V DC message waiting voltage
- Fully modular for quick plug-in installation
- Blinks on message waiting or ringing
- 100% solid state for highest reliability
- LED** visible for 50 feet
- Replaces LM-1 and LM1-LV**



Model	DOD #
LM-1A	662

Add Silent Service Observation to Any Phone System



- Allows supervisors to silently monitor their employee's phones
- New station wiring not required for analog key or single line phones
- Higher volume levels (adjustable)
- 24 station capacity can be expanded to 240 stations. Each SO-24A added, provides an additional 24 stations.
- Dial up code can be programmed to match the phone system's station or extension numbers.
- Call progress tones for observing supervisor

Important Features

- Connect one to ten **SO-24A**s to an unused phone system line input or to a dedicated single line phone
- **Built-in "Talk Assist" feature**
- Cables provided for external cassette recorder
- Can be configured for digital phones with **SO-24AK**
- **Automatic gain control** equalizes in and outbound conversation levels
- Additional supervisors each require a parallel system

For remote access use
Viking Model RAD-AMP (Page 22)



What is a beta site?

A beta site is where a customer allows our products to be tested in the field prior to being released for production. **VIKING** makes a practice of using beta sites to seek input on improvements in operations, installation or other design parameters. They are useful in ensuring that the product is of the best quality before full production. It allows the customer to be the first to try a new design or concept without waiting the usual pre-production lead-time of eight to twelve weeks. For more information regarding beta sites call the beta site coordinator at 715-386-8861.

Q. How do I qualify to participate as a beta site?

A. Qualifications include being willing to evaluate the product for at least thirty days and communicate with a **VIKING** technician regarding the application and performance of the unit. You must also be willing to accept that **VIKING** may need to make changes in hardware or software.

Q. When would **VIKING** not use a beta site?

A. Occasionally, on custom designs or software, or if the customer time frame is too short to permit a normal beta test. In that case the customer must take financial responsibility for problems or changes.

Q. Can I order beta units directly from **VIKING**?

A. Like all **VIKING** products, beta units must be ordered through our distributors.

Q. What if I decide to keep the product?

A. You are under no obligation to keep the product, but if you decide to do so, your distributor will bill you directly.



Cord set for digital phone systems

Model	DOD #
SO-24 AK	819

Now you can monitor, train, motivate, even assist your personnel or customer service staff without disrupting the activity at their work station.

Each **SO-24A** Service Observation Unit lets you access 24 stations (up to 240 with 10 units) or phone lines by dialing a two to four-digit code from any supervisory phone. Install additional **SO-24A**'s for larger installations.

Station being monitored hears nothing; however, a supervisor can quickly enter the conversation by dialing a *****. A cassette recorder output permits selective recording by simply dialing a **9**. Alternatively, all monitored conversations may be recorded.

The **SO-24A** is a valuable management tool for training new staff and improving performance of current employees. **Power supply included**

Model	DOD #
SO-24A	690

Professional Telecom Recording Kit



The **PTR-1** allows you to record:

- 1) All conversations on a particular phone line.
- 2) Only conversations on your analog or digital telephone set.
- 3) Only selected conversations (using the recorder controls).

The **PTR-1** is designed to work with standard digital or tape recorders with built-in **VOX** and **ACG** circuits.

Model	DOD #
PTR-1	438

Does Your New IP Phone System Need More Power for Ringing Legacy Equipment?

Ring Shape Conditioner / Power Booster

- For applications behind IP and digital phone systems

Often IP phone systems, when used with Legacy phones, loud bells, strobes, etc. do not ring the older equipment loud enough or in some cases, operate them at all.

Designed for applications requiring higher ring voltage, higher ring power (up to 4 REN per line) or a sine wave (vs. square) ring signal. **Need to ring more phones?** The **RG-10A** (page 31) rings 12 or more phones per line.

Viking's 1-24 line ring shaper/boosters put the ring power back into your installation.



1-Line Wall Mounted Ring Shaper/Booster

- Power supply included

Model DOD #
RG-4 416



4-Line Wall Mounted Ring Shaper/Booster

- Power supply included

Model DOD #
RG-204 417



RG-212 and RG-224 Rear View

- RJ-21X "plug and play" install for CISCO VG224
- 19 inch rack mount
- Power supply(s) included

Model	No. Lines	DOD #
RG-212	12	419
RG-224	24	418

Convert Loop Start Equipment to Operate on Ground Start CO Lines

- 12 Circuit Converter
- No Power Supply required

Model **GLS-12** is designed to allow up to 12 standard telephone sets, multi-line key systems and other loop start equipment to be connected to 2 wire ground start **CO** trunk lines. The **GLS-12** provides the **CO** with the signaling required to draw dial tone when the loop start equipment goes off hook. Incoming calls ring directly to the loop start devices.



Model DOD #
GLS-12 570



Receive Incoming Calls During Power or System Failure

- Operates on 24 to 48 Volt systems
- Improved automatic ground start converter for outbound calls.
- Loop or ground start

Continue to receive your calls, even if the phone system is down. **Viking's** bypass unit connects 6 standard single line station phones directly to the **C.O.** lines.




When the system is restored, calls in process will not be interrupted. **Viking's** bypass unit will reconnect the phones to their station circuit only after they become idle. **Power supply included.**

Model **PF-6A** operates when power is lost or on an alarm **contact closure**.

Model DOD #
PF-6A 680

Ring Booster Rings Twelve Additional Analog Phones

- Compatible with Caller ID
- Provides 90V AC Nominal

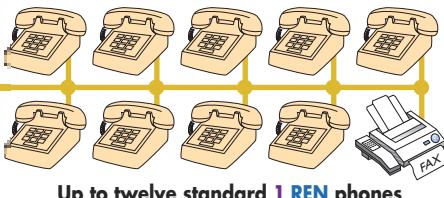

For use with Analog **PABX**, **CO** Line or **FXS** Port, **FAX-1000**, **C-1000B**, **DLE-200B**, **DLE-300**, **W-1000**, **W-2000A**, **W-3000** etc.

Up to twelve standard 1 REN phones

Viking's Ring Booster increases ringing power to 12 **REN**. The **RG-10A** permits installation of up to 12 additional ringing phones or telecom devices on any analog **PABX**, **CO** line or **FXS** port, **FAX-JACK** type line sharing device, **W-1000/2000A/3000** doorboxes, or **DLE-200B** or **DLE-300**

(Page 32) **ringdown circuits**.

The Ring Booster duplicates the incoming ring frequency and cadence. Compatible with **distinctive ringing**.

Power supply included.

Model	DOD #
RG-10A	420

Long Loop Adapter - Extend PABX Station to 30,000 feet!

- Designed to Ring AVAYA IP Office Trunk Input



- Provides additional lightning and surge protection
- Provides 48VDC talk battery
- Provides 20Hz, 10 **REN** sine wave ringing
- DTMF and pulse dialing compatible
- Detects AC and DC ring signals
- Passes Caller ID
- Passes hook flash and **CPC**
- Electronically isolates **PABX** from extended loop
- **Replacement for Proctor 46222**

Model	DOD #
LLA-1	615

Four Channel Long Loop Adapter - 4 Line Version

Direct replacement for Proctor model 46224



Model	DOD #
LLA-4	620

Generate a CPC Disconnect

Applications:

- Voice mail or call sequencers behind **PABX**
- **ISDN**, **VoIP**, **T-1** channel bank lines
- **C.O.** lines that don't provide **CPC**
- **VoIP FXS** ports

CPC-1, **CPC-4** provides a momentary (1 sec) break in the line current to signal telephone equipment the calling party has hung up. The **CPC-1**, **CPC-4** generates the disconnect signal after detecting busy, fast busy, return to dial tone (programmable) and silence (programmable). The status **LED** indicates call progress. The **CPC-1** and **CPC-4** are caller ID compatible. **Phone line powered**.



CPC-1 (1 Line Version)



CPC-4 (4 Line Version)

Model	DOD #
CPC-1	442
CPC-4	444

NEW

Talk Battery Booster

Boost Talk Battery and Loop Current to Line Powered Devices

- Screw terminal connections for easy installation
- Boost talk battery to 48V
- Boost loop current to 26mA.
- Alarm panel compatible.



TBB-1B

Improved Technology!

The **TBB-1B** will boost talk battery and loop current on single analog **PABX**, **CO** line or **VoIP ATA FXS** port. This is helpful for powering line powered devices, such as dialers and emergency phones on low voltage and/or loop current extensions and **X-10** wireless phone jacks.

Power supply included.

Model	DOD #
TBB-1B	630

Talk Battery and Ringing Power Supply

Provide 48V @ 150mA DC **Talk Battery** and 90V 20Hz ringing. 10 **REN**, 120V 60Hz input. Typical applications include **KSUs** that require an external ring generator.



Power supply included.

Model	DOD #
PS-48-RGA	515

Replacement Power Supplies

Model	DOD #
PS-1A (13.8V AC)	510
PS-2 (12V DC)	510
PS-3 (15V AC)	510

Two-Way Ringdown Circuit

Features

- 0.15 or 2 sec **CPC**
- Precise dial tone
- Standard or **distinctive ringing**
- 20 Hz/2 REN ring output
- Prison phone mode
- 4.75" x 2.75" x 1.38
- 32V **talk battery**

Applications

- Demonstrate telecom gear
- Prison Phones
- Program alarm panels
- Test and repair
- Inter system communication
- Dialogic or rhetorex cards interface
- Golf course phones



Power supply included.

The **DLE-200B** Line Simulator produces two-way communication between standard telecom products such as key systems, **PABX**'s, fax machines, modems, dialogic cards and standard single line phones without the requirement for phone lines.

Model	DOD #
DLE-200B	605

Prison Phone Application



K-1500-6A

Ringdown Applications between Phone or Phone Systems. Elevator or Emergency Phones (a UPS is recommended)




E-1600A

Max. loop length per port: 7,000 feet using 24 ga. twisted pair

Using Voice Mail, Dialogic Cards, or Dictaphone Equipment on Electronic Key



Many electronic key systems will not support this equipment because proprietary key phones do not send **DTMF** on station-to-station calls.

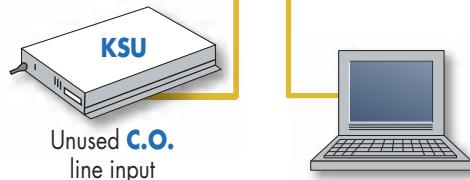

Viking's E-1600A
Series and Models
E-10A, E-20B, E-30,
E-40, E-50, E-60, E-70,
E-75, K-1200,
K-1500-EHFA,
K-1500-6A,
K-1500-7,
K-1500-E or standard phone

Advanced Two Way Ringdown Circuit Supports High Speed Data



Power supply included.

Max. loop length per port: 7,000 feet using
24 ga. twisted pair

Model	DOD #
DLE-300	607

- **911 mode for classroom training**
- Produces precise dial tone, ringback, busy, reorder, and S.I.T. tones
- Touch tone detection or standard **Ringdown**
- Provides name and number caller ID
- Audio input/output jack for amplified speaker or loading voice mail systems.

The **DLE-300** simulates **loop start** phone lines and allows two-way communication between telecom devices or systems. It provides standard or **distinctive ringing** (6 REN) and 40 volts **talk battery**.

The **DLE-300** eliminates leasing phone lines for diagnostics testing or demonstrations. A **CPC** break is provided after hang up.



Line Powered Ringer

This auxiliary electronic ringer operates on any analog line that provides a minimum of 40 volts 20-30 Hz AC ring voltage. Nominal 3 KHz warble provides up to 92 dB SPL @ 1 meter. The **LPR-1** can be connected via screw terminals or modular RJ-11 jack. A volume control and a 6 foot modular cord are provided. No power supply is required.

Model

DOD #

LPR-1**550**

Wireless Synchronized Clocks



For more information
see page 21

Viking's Wireless Clock System provides reliable, accurately synchronized clocks for your entire facility. Eliminating dedicated clock wiring can save you thousands of dollars on installation and also allows for easy retrofitting. The system is comprised of a **CTG-2** master clock, a **CL-RFT** clock RF transmitter and Analog or Digital wireless slave clocks. The clocks will always display the correct time via Atomic clock updates from the **CTG-2**.

Notes

Vandal Resistant Surface Mount Boxes

The VE-Series surface mount boxes are black powder painted or stainless steel. They are designed to surface mount to a single gang electrical box, a gooseneck pedestal or directly to a wall.

Compatible with these Viking products:

VE-3x5:	VE-5x5:	VE-6x7:	VE-5x10:
• E-40	• E-10A	• K-1700-3	• K-1200
• E-50	• E-30 /E-35	• K-1705-3	• K-1205

Model	Description	DOD #
VE-3x5	Black Surface Mount Box	424
VE-5x5	Black Surface Mount Box	424
VE-6x7	Black Surface Mount Box	424
VE-5x10	Black Surface Mount Box	424



• SS Models built with 316 Marine Grade Stainless Steel

Model	Description	DOD #
VE-5x5-SS	Stainless Steel Surface Mount Box	424
VE-6x7-SS	Stainless Steel Surface Mount Box	424
VE-5x10-SS	Stainless Steel Surface Mount Box	424

Surface Mount Boxes with Panels

Viking's **VE-PNL**'s are the perfect solution to the problem of mounting a switch, keypad or card reader to the outside of a building. Built from black powder painted steel or stainless steel, the back box provides a durable enclosure suitable for most outdoor applications. The blank front panel is made from aluminum, making it easy to drill, cut or form for the required mounting arrangement. The panel is straight lined and coated with a tough clear powder coating to resist corrosion. Four screws and a gasket are included to make installation a snap.

• SS Models built with 316 Marine Grade Stainless Steel

Model	Description	DOD #
VE-5x5-PNL	Black Box with Panel	424
VE-6x7-PNL	Black Box with Panel	424
VE-5x10-PNL	Black Box with Panel	424



Model	Description	DOD #
VE-5x5-PNL-SS	Stainless Steel Box with Panel	424
VE-6x7-PNL-SS	Stainless Steel Box with Panel	424
VE-5x10-PNL-SS	Stainless Steel Box with Panel	424

Illuminate Your Door or Emergency Phone

The **VE-Light** kit adds bright **LED** illumination to any doorbox or entry phone that is housed in a **Viking VE-5x5**, **VE-6x7** or **E-1600A-BLT-EWP** surface mount box. The stainless steel bracket is easily mounted using existing holes and hardware.

VE-LIGHT shown alone below and in conjunction with the **E-30** and **VE-5x5** right



Model	DOD #
VE-LIGHT	428

Gooseneck Pedestals

The gooseneck pedestals are designed to be used with select Viking VE-Series surface mount boxes or **VE-PNL** surface mount panels. Ideal for drive up communications, the gooseneck pedestals are constructed of heavy duty black powder painted steel or stainless steel. Pad mount to a floor or concrete with 4 available bolt holes or use the **VE-GNP-IG** to mount in ground or wet cement.


Compatible with the following Viking products:

- VE-5x5
- VE-5x5-SS
- VE-5x5-PNL
- VE-5x5-PNL-SS
- VE-6x7
- VE-6x7-SS
- VE-6x7-PNL
- VE-6x7-PNL-SS
- VE-5x10
- VE-5x10-SS
- VE-5x10-PNL
- VE-5x10-PNL-SS

Model	Description	DOD #
VE-GNP	42" Pad Mount Pedestal	424
VE-GNP-SS	42" Stainless Steel Pedestal	424
VE-GNP-IG	64" In-Ground Pedestal	424
VE-GNP-2	72" Double Pedestal	424



Examples and Definitions

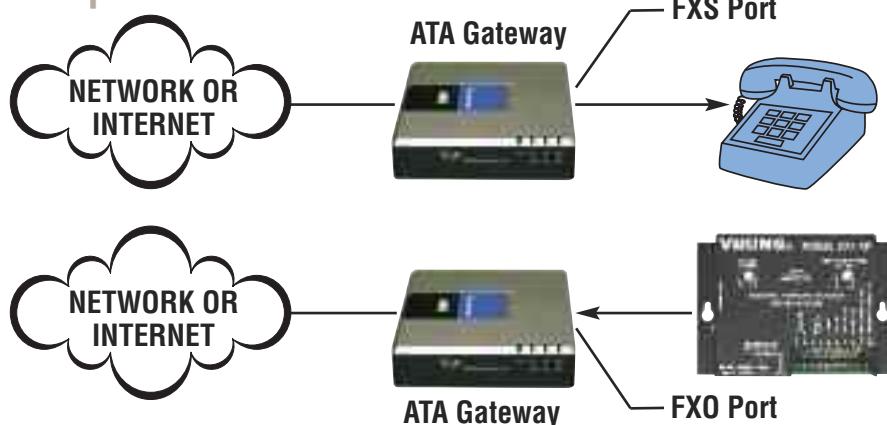

Definitions:

FXS Port: Provides talk battery, dial tone and ring voltage for an analog telecom device, such as a telephone or fax machine.


FXO Port: Receives talk battery, dial tone and ring voltage from an analog telephone line, **PABX** station or **FXS** port.

LinkSys: FXS/FXO Audio Only

LinkSys manufactures audio ATA equipment that operates with analog telephones, fax, voicemail, entry phones and many paging amplifiers. Model **SPA3102** is shown. The unit encodes the audio for transmission across an IP network or the internet where it can be accessed from any location on the network.

For more information, go to www.viopdw.com, www.iphone-warehouse.com, www.amazon.com, www.officedepot.com

Compatible Gateway Equipment

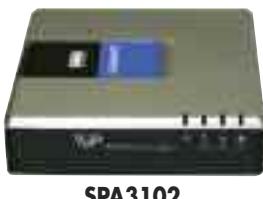

SPA3102

Axis: Video Only

Axis manufactures video servers that encode analog video signal for transmission across an IP network or the internet. The single-channel model **M7001** is shown. Supplied software allows you to access Axis units connected to the network (auto-discovery) and program them via a web page interface. The video can then be monitored from any location on the network.



M7001

How to Connect a Viking Door/Gate Entry System to Existing Phones/Phone System

When line sharing is not required (if connected directly to an FXS, Key or PABX Analog Station or Trunk) us **SRC-1** (page 40) for door strike or gate control.

Analog PABX, CO Line or FXS Port



See pages 36-43 for more info.

Entry Phones / Doorboxes	Use Controller	Maximum # Door Phones	Maximum # Doorstrikes	Entry Phone Caller ID	Keyless Entry	Postal Lock Input	Controller Rings # of 0.5 REN House Phones
E-10A, E-20B, E-30, E-35*, E-40, E-50*, E-60, E-65*, E-70, E-75* (Page 42, 43)	C-200 (Page 41)	1	0	No	No	No	7
E-10A, E-20B, E-30, E-35*, E-40, E-50*, E-60, E-65*, E-70, E-75* (Page 42, 43)	C-250 (Page 41)	1	1	No	No	Yes	10
E-10A, E-20B, E-30, E-35*, E-40, E-50*, E-60, E-65*, E-70, E-75* (Page 42, 43)	C-2000B (Page 41)	4	4	Yes	No	Yes	16
K-1700-3, K-1705* K-1900-8 (Pages 11, 38)	C-2000B (Page 41)	4	4	Yes	Yes	Yes	16
W-1000, W-2000A, W-3000, W-3005* (Page 36)	C-1000B (Page 36)	2**	2**	No	No	Yes	6

* Includes a built-in CCTV color camera, which requires additional wiring.

Up to (4) entry phones and (4) door strikes can be accommodated by using (2) C-1000B controller. For more info: **DOD# 881.

Handsfree Doorboxes

⚠ When installing W Series doorboxes outdoors, always use the EWP version - See page 9

- **Provides 24 volt talk battery and 20 Hz ring generator for phone system unused Trunk input or FXO port applications.**

Provide your business or residential customers with the security and convenience of conversing with visitors from their own phone prior to allowing entry. Ideal for night doors, shipping/receiving departments, warehouses, residential applications or any security-sensitive entry. Designed to install on an unused **Trunk** input or **FXO** port. When the "Call" button is pressed, the unit rings the phones up to 30 times (adjustable) or until answered. Microphone volume adjustment is also provided.

Permits loop lengths of up to 6300 ft., using 24 AWG twisted pair. The **power supply included** can be mounted up to 150 ft. from the unit using 24 AWG twisted pair. The units provide 3 **REN** output (enough to ring six .5 **REN** phones). To ring additional phones use model **RG-10A** Ring Booster. (Page 31)

Model	DOD #
W-1000	170
W-2000A	170
W-3000	180
W-3005	181
VE-5x5	424

These units are compatible with **C-1000B** (below) and **SRC-1** (Page 40) controllers.



VE-5x5 Surface mount box for
W-1000, W-3000 (Page 34)

- These units are now designed to ring **AVAYA IP Office**, **NEC 2000** and **Electra Pro 2, INTERTEL 5000**, and **VODAVI DHS**.

W-3000 is a vandal resistant 5" x 5" brushed 14 Ga. stainless steel flush mount unit. **LED** indicates switch location and call progress. Can generate **distinctive ringing**. An electrical mounting box is supplied. Can provide a push to talk option for noisy locations



W-3000

W-3000 shown in optional **VE-5x5** surface mount box. (Page 34)

Illuminate your **W-1000/W-3000** mounted in a **VE-5x5** -
Model VE-LIGHT (Page 34)
W-3005 Video Doorbox
Now available - see page 37
for camera specifications.



W-2000A

W-2000A is a surface mount unit in a durable plastic case. The 4.5" x 5.5" x 1.5" unit can mount on a single gang electrical box. Provides standard ringing.

Improved sound quality.



W-1000

W-1000 is a 5" x 5" vandal-resistant black powder painted aluminum flush mount unit. Provides standard ringing. An electrical mounting box is supplied.

Improved sound quality.


Universal Door Entry System for Key, PABX, or Single Line Phones

Now Controls Two CCTV Cameras

- Share an existing phone line with two Viking doorboxes
- Operates 2 door strikes or gate openers
- Monitor doors from your phone.

Now you can add **Viking** doorboxes to any system, even Centrex or those with just single line phones! The **C-1000B** shares an existing phone line with 2 door speaker units, but does not interfere with normal phone operation. In-process calls can be placed on hold while using the door speakers. The **C-1000B** has 5 amp contacts for operating 2 door strikes or gate openers from a Touch Tone or rotary phone. Tones confirm relay action. **Power supply included**.

- Auxiliary relay provides maintained or programmable .5 to 10 second relay contacts for activating a doorbell, light, etc.
- Provides power output for up to 2 doorboxes (only one power supply needed per system)
- Provides unique front and back chimes plus whole house paging when used with **SLP-1** (Page 16), **SLP-4** (Page 20)
- Add proximity card or keyless entry with Viking Model **ES-1** and **PROX-1** or **PROX-2** (Page 39)
- Built-in **Talk Battery** for "no C.O. line" applications
- Programmable (.5 to 10 sec) momentary or continuous relay contacts for controlling door strikes or gate openers
- Can provide custom ring from door box
- Postal lock input for activating door strike 1

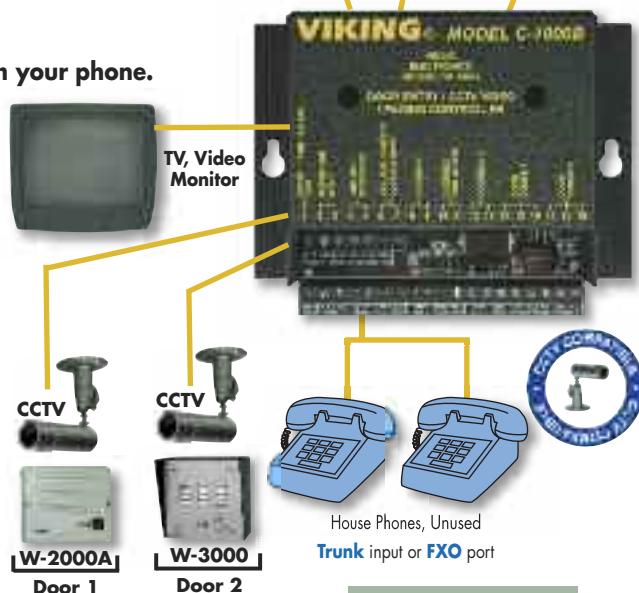

Model	DOD #
C-1000B	168

Handsfree Video Speaker Phone - Model E-35 (Page 7)



- See **E-30** for complete specifications on page 7

⚠ When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
E-35	Video Speaker Phone	178
E-35-EWP	EWP Version	178

Video Entry Phones - Model E-50 (Page 42)



- See **E-40** for complete specifications on page 42

⚠ When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
E-50-SS	Video Speaker Phone	191
E-50-BN, PB, BK, WH	Video Speaker Phone	191
E-50-SS-EWP	EWP Version	191
E-50-BN, PB, BK, WH-EWP	EWP Version	191

Accessible Video Entry System - Model AES-2005 (Page 39)



- See **AES-2000** for complete specifications on page 39
- Available in flush or surface mount styles

Model	Description	DOD #
AES-2005F	Flush mount AES-2005	204
AES-2005S	Surface mount AES-2005	204

12-Button Video Entry Phone - Model K-1205 (Page 38)



- See **K-1200** for complete specifications on page 38
- Shown in optional **VE-5x10-SS** surface mount box (Page 34)

⚠ When installing K Series phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
K-1205	Multi-Button Entry Phone	183
K-1205-EWP	EWP Version	183

Video Entry Phone with Keypad - Model K-1705-3

(Page 38)



- See **K-1700-3** for complete specifications on page 38

⚠ When installing K Series phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
K-1705-3	Video Entry Phone	159
K-1705-3-EWP	EWP Version	159
K-1705-3-BN	Bronze Video Entry Phone	159
K-1705-3-BN-EWP	Bronze EWP Version	159

Handsfree Video Doorbox - Model W-3005 (Page 36)



- See **W-3000** for complete specifications on page 36

⚠ When installing W Series doorboxes outdoors, always use the EWP version - See page 9

Model	Description	DOD #
W-3005	Video Doorbox	181
W-3005-EWP	EWP Version	181

Camera Specifications

Viking video products have a built-in compact color composite video camera, see the complete specifications below. The camera is also available separately, see model **VCAM-1** (below).



Tilt camera
up or down,
swivel camera
left or right,
lock in place!

- Color composite video output for versatility: 1V p-p composite, NTSC, 75 ohms
- Extreme temperature rating: -40° to 185°F
- Wide 70° viewing angle
- Tilt/Swivel adjustment: vertical +/- 20°, horizontal +/- 30°
- Resolution: 420 lines (640 x 480 / 307,200 pixels)
- Sensitivity: 0.26 LUX (20 IRE) F2.0
- Lens: 3.4mm, pinhole 70° FOV
- Maximum wire run length: 150 ft on **CAT5E** for video and power, 1000 ft with RG59/RG6 for video and **CAT5** for power (doubled pairs).

Compact Color Video Camera Kit



- Stainless steel mounting hardware
- Potted circuit board
- 6V DC adapter/wire connections
- Tilt and swivel adjustment

Model	DOD #
VCAM-1	190
VCAM-1IR	190

IR illuminator compatible when using model **VCAM-1IR**.

5 Easy Ways
to integrate your video entry phones with your home TV sets!

Check out DOD# 886



Directories for Apartment Entry Systems

Viking's vandal-resistant directories are an easily installed, high-quality 18 gauge brushed stainless steel display. Designed specifically to complement newly installed or

existing secure building entry systems. All models feature both weather and vandal resistant construction. The visitor looks up the apartment's one to three digit code then dials it on the Touch Tone phone. Name card not included.

Model	DOD #
D6	158
D10	158
D22	158
D32	158
D44	158
D56	158

Apartment/Office Door Entry 250 Number Dialer



- Now provides a different keyless entry code for each apartment or office.
- "Buzz" the visitors in from your phone
- Non-volatile E² memory (no batteries required)
- Output for external data logging.
- Compatible with Viking's vandal-resistant K-1700-3, K-1900-8 or any Touch Tone phone.
- Also provides 5 additional keyless entry codes for management, maintenance, etc.

Model **K-1900-3** allows the visitor to enter 1 to 3 digits on a Touch Tone phone located in the entry way. The **K-1900-3** then dials the associated apartment. After conversing with the visitor, the tenant can "Buzz" them in by dialing a 1 or 2 digit code on their Touch Tone phone. An adjustable timed relay closure is provided for gate openers or door strikes. DPDT 5 amp **contact closures** are provided.

The **K-1900-3** can be programmed remotely or locally using a Touch Tone phone. Each position stores up to 16 digits, except position "000" and "001", which can hold up to 32 digits and pauses for applications such as calling the facility manager's pager. A keyless entry feature using a 4 to 6 digit code can be used. Inputs for a postal lock are provided. The **K-1900-3** will allow 911 and 311 emergency calls. **Power supply included.**

Model	Description	DOD #
K-1900-3	Apartment/Office Door Entry	312

12 Button Apartment Entry Phone with Built in Door Strike Relay



K-1205 shown in optional **VE-5x10-SS** surface mount box (page 34)

- Calling a tenant is as easy as pressing a single button
- 50 Keyless Entry Codes

The **K-1200** Entry Phone is a two way, hands free telephone with 12 buttons for calling individual residences in an apartment building.

The rugged stainless steel faceplate has a printed directory housed in a water proof plastic lens. Each button is beside the tenant's name in the directory, so there are no confusing codes to deal with. The **K-1200** has a built in speed dialer that can handle up to 12 primary phone numbers, each with 22 digits. If there is no answer at the first number, a second number such as a tenant's cell phone, can be called automatically. Once the tenant answers their phone, a single touch tone command can activate the built in door strike relay.

Power supply included. • **K-1205** Video Entry Phone - see page 37 for camera specifications.

 When installing K Series phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
K-1200	Apartment Entry	182
K-1205	Video Entry Phone	183

Vandal Resistant Handsfree Speaker Phone with Keypad

 When installing K Series phones outdoors, always use the EWP version - See page 9

- 14 Gauge Stainless Steel or Oil Rubbed Bronze (BN) Faceplate
- Metal Call Button and Keypad
- Analog PABX, CO Line or FXS Port Powered
- Use with C-2000B for Keyless Door Entry (Page 41)



K-1700-3-BN shown in oil rubbed bronze finish

The **K-1700-3** is an attractive, handsfree telephone designed especially for apartment and door entry applications. When the "Call" button is pressed, the **K-1700-3** returns dial tone. The keypad can then be used to call any number. The unit disconnects on busy, return to dial tone, **CPC**, silence or call timer. Volume adjustments are provided for microphone and speaker ringer. Yellow **LED** indicates an "off hook" condition.

Illuminate your entry phone - **Model VE-LIGHT** (Page 34)



K-1705-3 shown in optional VE-6x7 Surface Mount Box (Page 34)

Handsfree Video Speaker Phone with Keypad

For Camera specifications see page 37. **Power supply included.**

Model	Description	DOD #
K-1700-3	S.S. Entry Phone	157
K-1705-3	S.S. Video Entry Phone	159
K-1700-3-BN	Oil Rubbed Bronze Entry Phone	157
K-1705-3-BN	Oil Rubbed Bronze Video Entry Phone	159

Accessible Entry System

Usable by people with sensory and physical impairments


The **VIKING®** Accessible Entry System is a Hands-Free phone with a built in auto-dialer, which will allow access to apartment/office buildings by using existing public telephone lines. In order to assist people of varying abilities, the "directory" is displayed on a **LCD** as well as an audible announcement. The system is housed behind a stainless steel panel with a keypad and control buttons. An analog telephone line and low voltage wiring must be available for operation. **Data logging via the PB-100** (Page 25). **Power supply included.**

Features:

- Digital announcer set from factory for 75 names. Additional names may be added by using **ERAM-4M** expansion kits. (75 names per kit for up to 525 names).
- Non-Volatile memory
- Door strike contacts
- Postal lock input
- Remote recording and programming
- Designed to help meet **ADA** requirements

Applications:

- Apartment/Office Buildings
- Assisted Living Residences
- Senior Complexes
- Nursing Homes
- Hospitals
- Public Housing

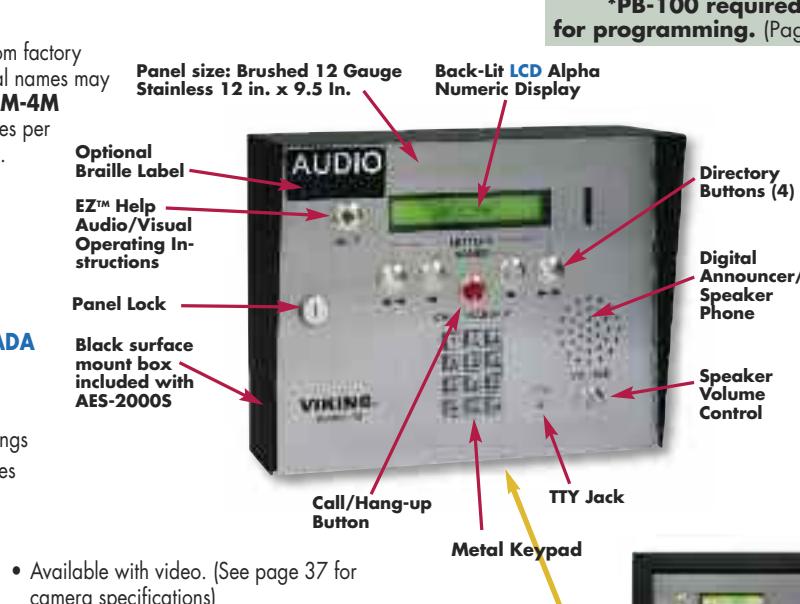

Model	Description	DOD #
AES-2000S	Surface Mount	202
AES-2000F	Flush Mount	202
AES-2005S	Video Phone	204
AES-2005F	Video Phone	204
ERAM-4M	Expansion Memory	854


EZ Help/Access is a trademark of the Wisconsin Alumni Research Foundation. For more information click on www.trace.wisc.edu



AES-2000F Flush Mount
(Mounting bezel and back box included)

Wiegand Keypad

Slender aluminum housing for mullion mounting. Pigtail leads. Beeper and **LEDs** show status. **26 bit** **Wiegand** interface. Potted **pcb**.

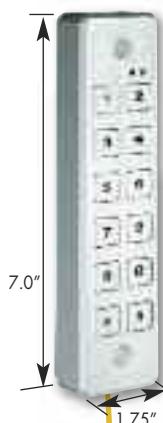

Model **DOD #**
HID-2 **199**



Keypad with Prox Card Reader

Model **PROX-2** is fully potted, has blue back lighting and mounts directly to a standard single gang box. The card reader and keypad transmits **26-bit Wiegand** format. Black and off-white covers provided.

Proximity Card

- No magnetic strip to wear out – no batteries
- Credit card size, slot for neckband.
- Also see **C-4000** (Page 40)
- **No minimum quantities**

Model **DOD #**
PROXCARD **198**



Proximity Card Reader

- Standard **26 bit Wiegand** interface
- Potted **pcb** enclosure with pigtail connection for indoor and outdoor applications. Black & white covers provided.

Model **DOD #**
PROX-1 **221**

Wiegand Card Reader/Keypad Entry System for 1 Door – 250 Users

Stand-alone keyless entry system can be programmed with a touch-tone phone. An output for data logging is provided. **Power supply included.**



Model **DOD #**
ES-1 **193**

Add Up To 32 Access Entry Points To Vikings Accessible Entry System

Up to 32 additional points of entry may be added to Viking's model **AES-2000** Accessible Entry System. One **ES-3**, one Wiegand device and a door strike or magnetic lock of your choice is required for each additional entry point.



Model **DOD #**
ES-3 **195**

Secure Remote DTMF Controller

NEW



- Secure Control of Building Entry Systems
- Provides 32 Keyless Entry Codes

The **SRC-1** enables a standard touch tone phone to

securely operate a set of timed relay contacts to control a door strike or gate controller from a remote location. The **SRC-1** is fully user programmable and uses non-volatile memory. The **SRC-1** eliminates the possibility of dialing the activation code through the entry phone using a hand held touch tone dialer.

The **SRC-1** features switchable 32 volt **talk battery** to allow use with any of Viking's **E** Series, **W** Series or **K** Series entry phones. A postal lock input is provided. **Power supply included.**

Model	Description	DOD #
SRC-1	Secure Remote Control	176

No C.O. Line Entry System for 12 Apartments/Offices



- Functions with or without tenant C.O. lines

- Expands to 96 apartments by adding more C-3000's (each C-3000 adds 12 additional apartments)


Eliminates the monthly expense of an entry phone line and **CO** "call waiting" feature on tenants lines. Connect a front and rear touch tone entry phone. The **C-3000** rings the tenant's phone or provides call waiting tones. The tenant can "Buzz" the visitor in from their touch tone phone via the front and rear door strike contacts. **Power supply included.**

Compatible with:	<ul style="list-style-type: none"> • K-1700-3 • K-1705-3 • K-1900-8 • Any Touch Tone Phone
• AES-2000	
• AES-2005	
• K-1200	
• K-1205	

Model	Description	DOD #
C-3000	No C.O. Line Entry System	162

4 Door Keyless or Prox Card Entry System - For Up To 250 Tenants

- Requires an analog **PABX, CO** line or **FXS** port to call tenants
- Supports 4 Wiegand keypad or card readers
- **RS-232** port for programming
- Output for external logging
- "Buzz" visitors in from tenants phone - **N.O.** & **N.C.** contacts
- **Power Supply Included.**

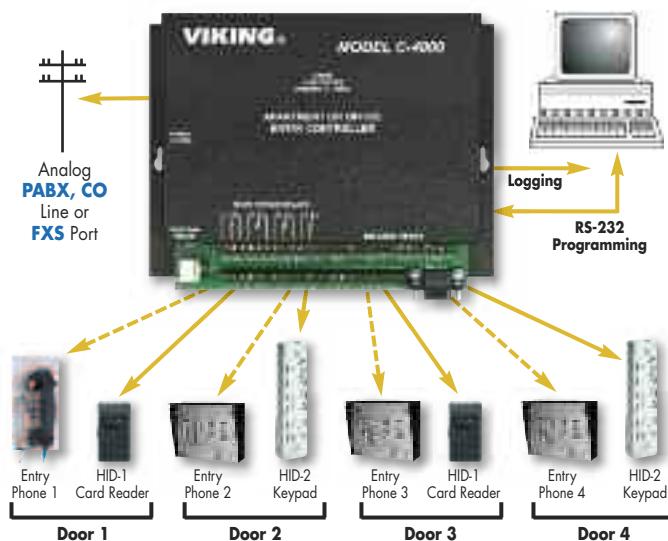

Model	Description	DOD #
C-4000	4 Door Keyless or Prox Card Entry System	164

Remote DTMF Controllers - Controls Door Strikes and Gate Openers From a Touch Tone Phone



Model RC-2A - single output



Model RC-3 - three outputs

Designed for use with **E**, **K** or **W** Series Emergency phones or as a stand-alone "Dial-up" remote Touch Tone controller. These units can operate door strikes, gate openers, or control equipment at a remote location. The **RC-2A** and **RC-3** can answer a ringing line. Three **RC-3**'s can be connected to the same line for 9 outputs. Tones confirm relay action. Either unit can be set up to operate with or without security codes. **Power supply included.**

Model	Description	DOD #
RC-2A	1 Output Unit	160
RC-3	3 Output Unit	165

Add a Viking Entry Phone to Existing Phones or Phone System

- Allows Your House Phones or Phone System to Share a Phone Line with one Viking Entry Phone

The **Model C-200** allows a single line telephone or a telephone system to share a phone line with a single **Viking** Entry phone. When a visitor presses the call button on the entry phone, the resident's phone rings. The resident can now answer and converse with the visitor prior to manually allowing entry. If you are on a call, the **C-200** provides a "Call Waiting" tone. The resident can "hook flash" which puts the call on hold while he converses with the visitor.

Residents may call out to the entry phone for monitoring purposes. Auxiliary contacts are provided to operate a doorbell, or activate a camera, lights, etc.

If additional features (such as door strike, multiple entry phones with caller ID, and keyless entry) are needed, use the **Viking C-2000B** below.

Power supply included.

Compatible with
Viking:

- E Series Entry Phones
- K Series Entry Phones
- Any analog Phone



Model	Description	DOD #
C-200	Entry Phone Interface	169

Single Entry Phone Controller With Call Forwarding and Door Strike Control

- In the event you're not home it will call your cell phone plus 4 other numbers
- 5 amp door strike or gate opener contact
- Immediate call forward to your cell phone mode
- Built in 5 number 1- 20 digit dialer
- No CO mode

The **C-250** allows single line phones or a phone system to share a phone line with a **Viking** E or K Series entry phone. When the entry phone initiates a call, the **C-250** provides a double ring. If you are on a call the controller provides call waiting tones. You can place the existing call on hold, talk to the visitor, then return to the original caller. Buzz the visitor in with a 1 or 2 digit touch tone command. The **C-250** allows tenants to monitor the entry phone and has a postal lock input. **Power supply included.**

Compatible with
Viking:

- E Series Entry Phones
- K Series Entry Phones
- Touch Tone Phones



Model	Description	DOD #
C-250	Entry Controller	172

Advanced Door/Gate and Entry Phone Controller for up to 4 Entrance Locations

- Now with Analog Station Dial-Thru Mode for Apartment/Office Entry Applications
- Provides 6 different keyless entry codes per door and 6 master codes (use at any door). Codes can be set up as permanent or "1 time" use.
- Provides 4 unique CD quality door chimes plus whole house paging when used with the SLP-4 (page 20)

Answer and open up to 4 doors or gates from your nearest phone. The **C-2000B** can provide a double ring and/or caller ID to indicate which entry phone is calling. If you are on a call the controller provides call waiting tones and caller ID. You can place the existing call on hold, talk to the visitor, then return to the original caller.

A lighted Doorbell switch can be located near entry phone #1 to also initiate an entry phone call. The **C-2000B** requires a pair of wires (up to 5000 feet) for voice communications. A second pair of wires is needed to operate the door strike or gate opener. The unit can ring up to 10 existing phones. Programmable "Privacy Number", eliminates prank calls.


The **C-2000B** allows the user to monitor any entry phone with auto answer capability.

Add proximity card entry with Viking Model **ES-1** and **PROX-1** (Page 39).

Power supply included.

Compatible with
Viking:

- E Series Entry Phones
- K Series Entry Phones
- Touch Tone Phones

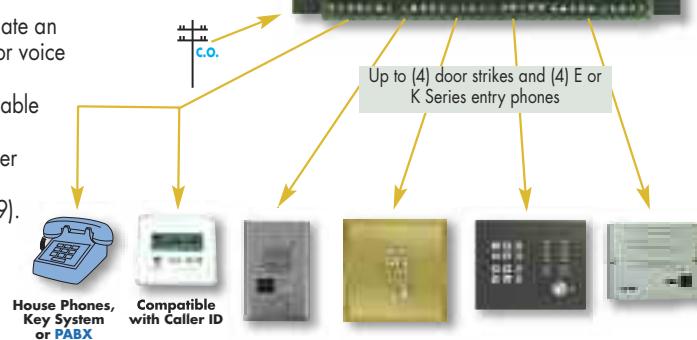

Model	Description	DOD #
C-2000B	Advanced Entry Controller	156

Compact Handsfree Entry Phones Mount in Single Gang Box



⚠ When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
E-40-SS	Stainless Steel Entry Phone	187
E-40-BN	Oil Rubbed Bronze Entry Phone	187
E-40-PB	Polished Brass Entry Phone	187
E-40-WH	Satin White Entry Phone	187
E-40-BK	Satin Black Entry Phone	187

- Analog **PABX, CO** Line or **FXS** Port Powered Door Entry Phones with Consumer Styling - Commercial Quality

2 wire installation - Analog **PABX, CO** or **FXS** powered. Blue **LED** continually provides light for locating the push button in dark locations.

Extended temperature range (-30°F to 150°F) - vandal resistant.

Compact size for flush mounting in a single gang box (with minimum inside dimensions of: 2"W x 2.84"H x 2.25"D)

Dimensions: 3.12"W x 4.87"H x 1.7"D

Auto answer feature for monitoring

Auto disconnect on **CPC**, busy, dial tone, or silence

VE-3x5 surface mount box available (Page 34)

E Series Compatible with these Controllers

- C-200 (Page 41)
- C-250 (Page 41)
- C-2000B (Page 41)
- SRC-1 (Page 40)

Single Gang Handsfree Video Entry Phone

- Built in color composite video camera with 420 lines of resolution wide 70" viewing angle.
- Audio and video transmission on one **CAT5E** cable (150 ft. max video)
- Extended temperature (-30°F to 150°F)
- Same entry phone operating specifications as E-40 (above)
- Surface mount box available for E-50, model **VE-3x5** (see page 34)

⚠ When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Model	Description	DOD #
E-50-SS	Stainless Steel Video Phone	191
E-50-BN	Oil Rubbed Bronze Video Phone	191
E-50-PB	Polished Brass Video Phone	191
E-50-WH	Satin White Video Phone	191
E-50-BK	Satin Black Video Phone	191

E-50 Series available in the same attractive finishes as **E-40** (above).

Tilt and swivel adjustments to achieve the perfect camera angle. [Refer to page 37 for camera specifications.](#)



E-50-PB

Camera power supply included

E Series Compatible with these Controllers

- C-200 (Page 41)
- C-250 (Page 41)
- C-2000B (Page 41)
- SRC-1 (Page 40)



E-10A
5" x 5" flushmount



E-20B
4" x 5.25" surface mount

⚠ When installing E Series door entry phones outdoors, always use the EWP version - See page 9

Hands Free Door Entry Phone

- Intelligent auto disconnect on **CPC**, busy, dial tone, silence.
- **VE-5x5** surface mount box available for the **E-10** (see page 34)

See page 14 for complete specifications

Handsfree models **E-10A** and **E-20B** go off hook on the phone line when the button is pressed, the unit's auto disconnect on **CPC**, busy, dial tone or silence. The **E-10A** and **E-20B** will auto answer on an incoming call.

Model	Description	DOD #
E-10A	Flush Mount Entry Phone	210
E-20B	Surface Mount Entry Phone	210

Handsfree Entry Phones Mount in Double Gang Box

- 2 wire installation – Analog **PABX, CO** Line or **FXS** Port Powered
- E-60's blue **LED** continually provides light for locating the push button in dark locations
- Same operating specifications as **E-40** (see page 42)
- Surface mount box available for **E-60**, model **VE-5x5** (see page 34)
- Dimensions: 4.99" W x 4.87" H x 1.7" D

Model	Description	DOD #
E-60-SS	Stainless Steel Entry Phone	206
E-60-BN	Oil Rubbed Bronze Entry Phone	206
E-60-PB	Polished Brass Entry Phone	206
E-60-WH	Satin White Entry Phone	206
E-60-BK	Satin Black Entry Phone	206



E-60-BN

E-60, 65, 70, 75
Series available in the same attractive finishes as **E-40** (page 42).

⚠ When installing E Series door entry phones outdoors, always use the EWP version – See page 9

Double Gang Handsfree Video Entry Phone

- Built in color composite video camera with 420 lines of resolution wide 70° viewing angle.
- Audio and video transmission on one **CAT5E** cable (150 ft. max video)
- Same entry phone operating specifications as **E-40** (see page 42)
- Surface mount box available for **E-65**, model **VE-5x5** (see page 34)

Model	Description	DOD #
E-65-SS	Stainless Steel Video Phone	203
E-65-BN	Oil Rubbed Bronze Video Phone	203
E-65-PB	Polished Brass Video Phone	203
E-65-WH	Satin White Video Phone	203
E-65-BK	Satin Black Video Phone	203



E-65-WH

⚠ When installing E Series door entry phones outdoors, always use the EWP version – See page 9

Double Gang Entry Phones with Proximity Card Reader

- Built in 125KHz compatible 26-bit Wiegand proximity card reader (see page 35 for other HID compatible products)
- Same entry phone operating specifications as **E-40** (see page 42)
- Surface mount box available for **E-70**, model **VE-5x5** (see page 34)

Model	Description	DOD #
E-70-SS	Stainless Steel Video Phone	207
E-70-BN	Oil Rubbed Bronze Video Phone	207
E-70-PB	Polished Brass Video Phone	207
E-70-WH	Satin White Video Phone	207
E-70-BK	Satin Black Video Phone	207



E-70-SS

⚠ When installing E Series door entry phones outdoors, always use the EWP version – See page 9

Double Gang Video Entry Phones with Proximity Card Reader

- Built in 125KHz compatible 26-bit Wiegand proximity card reader (see page 39 for other HID compatible products)
- Built in color composite video camera with 420 lines of resolution wide 70° viewing angle.
- Surface mount box available for **E-75**, model **VE-5x5** (see page 34)

Model	Description	DOD #
E-75-SS	Stainless Steel Video Phone	208
E-75-BN	Oil Rubbed Bronze Video Phone	208
E-75-PB	Polished Brass Video Phone	208
E-75-WH	Satin White Video Phone	208
E-75-BK	Satin Black Video Phone	208



E-75-PB

⚠ When installing E Series door entry phones outdoors, always use the EWP version – See page 9

VIKING Electronics, Inc.

1531 Industrial Street
Hudson, Wisconsin 54016

Printed in the USA

Address Service Requested

**Neither Snow, nor sleet, nor 2 foot Blizzard
will keep VIKING from delivering the service -
our customers deserve...on time!**



Designed, Manufactured and Supported in the USA

See what's **NEW**
in 2011



CL Series
Wireless Clocks/Accessories
Page 21



SA Series
Self Amplified Paging
Page 17



CTG-2
Clock Tone/Message
Over Page
Page 21



LPR-1
Line Powered Ringer
Page 33

VIKING Products are in stock in the US and CANADA at the distributors below.

ADI
800-233-6261 • www.adilink.com

Graybar
800-825-5517 • www.graybar.com

Jenne Distributing
800-422-6191 • www.jenne.com

Anixter
800-323-8167 • www.anixter.com

TeleDynamics
800-847-5629 • www.teledynamics.com

Target Distributing
800-873-5528 • www.targetdist.com

Communications Supply
800-786-9584 • www.gocsc.com

Capitol Sales
800-467-8255 • www.capitolsales.com

Hall Telecommunications
519-822-5420 • www.halltel.com
800-265-2667 (CANADA)

Goldcom, Inc.
800-788-8848 • www.Gold-com.com

Rexel
800-637-3972
www.rexelusa.com

High Tech Communication
800-256-3010
www.high-techcomm.com

HB Distributors
800-266-3478
www.HBdistributors.com

NTD Distributors
800-426-1024 • www.ShopNTD.com

International Sales – Call:
Viking International
612-331-3823
www.vikingelectronics.com