

SKYVIEW

Order Form and Product Guide

Customer _____
 Address _____

Tel _____
 Mobile _____
 Email _____

Order _____
 Quote _____
 Project Name _____
 Project Location _____
 Date _____

Are any of the blinds on this order to be installed where children under 42 months old are likely to be allowed?

Yes No

1	2	3	4	5	6	7	8	9	10	12	Restraint Options			14	15	16
											ID	Location	Blind Or Recess ¹			
1		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Chrome Dome Nickel Dome Chrome Flush Black Flush Nickel Flush	Type: ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		
2		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Chrome Dome Nickel Dome Chrome Flush Black Flush Nickel Flush	Type: ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		
3		Blind Recess					Manual Powered Motor code Connector reqd Yes (QS Motor only) No	Left Right Cord Tidy (manual only) Chrome - Black White Nickel - Black White	Fix Top Face Covers Yes No	White Beige	Chrome Dome Nickel Dome Chrome Flush Black Flush Nickel Flush	Type: ST6 Colour: White Biege Custom Colour	Yes No If "Yes" sales will contact you	Yes ⁶ No		

- "Blind dimension" is total width (bracket to bracket) "Recess dimension" = "blind dimension" plus 4mm fitting clearance.
- Installation height required for chain operated blinds. EN13120 Standards demand the distance from the floor to the bottom of the chain shall be at least 1500mm [59 1/16"].
- Please see online fabric collection for codes -
For fire retardant treatment please contact Dometic.
- Manual uses chrome chain and is supplied with a Chain Tidy
- Currently only available on powered blinds with QS 64 and Sonesse 30 motors. For "Side Track" option please see diagram on page 3
- Please fill in a Powered Accessories Order Form, download from [here](#).
 - Advisory maximum surface area = 4.5² Meters square
 - As roller is visible when blind is deployed, it is suggested to use a valance.
 - See table and tech sheet for gap size between fabric and recess.
 - Mounting brackets are white.
 - Bottom rail end caps are colour matched.



Motors (Other motors available please contact manufacturer for details)

Voltage	Code	Control Description	Switched (SW) or remote controlled (R)	Torque Nm	Rpm	Min X	Max X	Min Y	Max Y	Fabric to Recess offset Guide
N/A	Manual	Chain drive	-	N/A	N/A	400 mm [15 3/4"]	2000 mm [78 3/4"]	300 mm [11 13/16"]	2000 mm [78 3/4"]	19 mm [3/4"]
12v DC Regulated	38TW11	Atlantic 12R DCT 433MHz	SW or R	1.2	30	480 mm [18 7/8"]	2500 mm [98 7/16"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	TBC
24v DC Regulated	38TW12	Atlantic 24R DCT 433MHz	SW or R	1.2	30	480 mm [18 7/8"]	2500 mm [98 7/16"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	TBC
24vDC Regulated	S30D	Somfy Sonesse 30 DCT	SW	2	28	430 mm [16 15/16"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	23 mm [7/8"]
24vDC Regulated	S30R	Somfy Sonesse 30 RTS	R	2	28	430 mm [16 15/16"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	23 mm [7/8"]
24v DC	LS64	Lutron QS 64 Standard version	**	1.1	42.2	550 mm [21 5/8"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	23 mm [7/8"]
24v DC	LS64S	Lutron QS 64 Short version	**	0.55	42.2	471 mm [18 9/16"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	23 mm [7/8"]
240v AC	40W4	Pacific 230R WT 230v AC	SW	10	16	630 mm [24 13/16"]	2500 mm [98 7/16"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	29 mm [1 1/8"]
240v AC	S40W	Somfy Sonesse 40 WT 240v *	SW	9	12	580 mm [22 13/16"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	29 mm [1 1/8"]
240v AC	S40R	Somfy Sonesse 40 RTS 240v	R	9	12	610 mm [24"]	3000 mm [118 1/8"]	300 mm [11 13/16"]	2500 mm [98 7/16"]	29 mm [1 1/8"]


* The Sonesse 40 WT does not have a secondary tilt function, closure of the vanes can only be achieved manually.

** Specialist motors please contact Dometic for more details.





SKYVIEW

Order Form and Product Guide

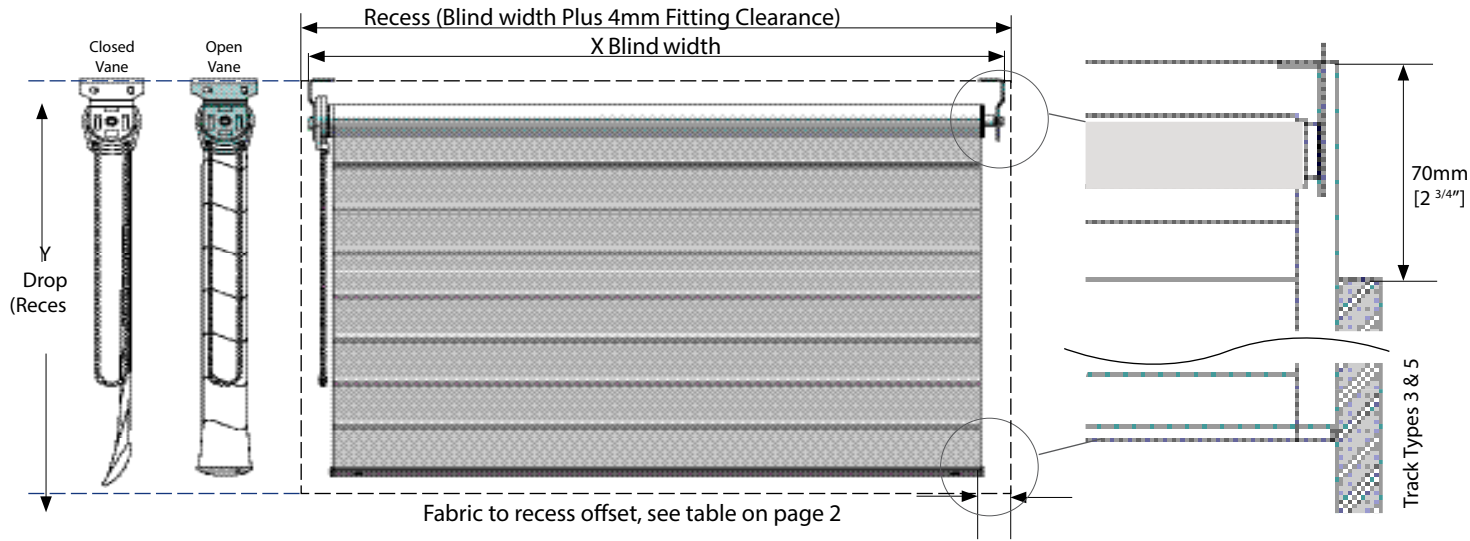


Side Track Options

ST6

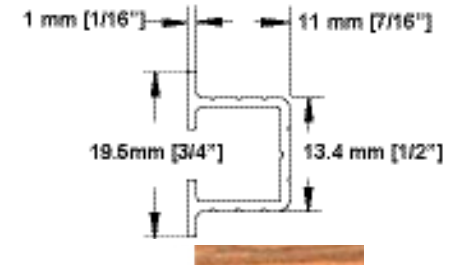


Guide wire with Chrome Dome Hold Down



Guide Wire with NEW Flush Mounted Chrome Hold Down



New Cord Tidy



Lutron™ QS Motor Connector

