



www.DaystarWeb.com
 Tech Support Contact Info
Tech@DaystarWeb.com
 Phone: 623.907.0081
 Fax: 623.907.0088
 841 South 71st Avenue
 Phoenix, AZ 85043

KJ09145BK HOOD WRANGLER 07-08 JEEP WRANGLER JK





Bill of Materials

M03921 X 2 Hood wrangler
 BU76104 X 1 Hardware
 S11138 X 4 Bolt
 S11139 X 4 Nut

TOOLS

Screw driver X 2
 Vise grips X 2

1. Open the hood latches and remove the lower hood catch. (1)
2. The rubber portion of the latch is secured to the hood latch pieces by two plastic pins. With the hood latch removed from the JEEP use 2 vise grips and clamp to the 2 ends of the plastic pin and twist them until they break. Remove and discard the pins and rubber pieces.(2,3)
3. Install the Hood Wrangler with the flat side towards the lower portion of the latch (the part that attaches to the fender) using the supplied bolt and nut with thread lock on the bolt. (4)
4. Attach the upper portion of the latch to the opposite end of the Hood Wrangler using the supplied bolt and nut using Loctite on the bolt.
5. Reinstall the hood latch.(5)

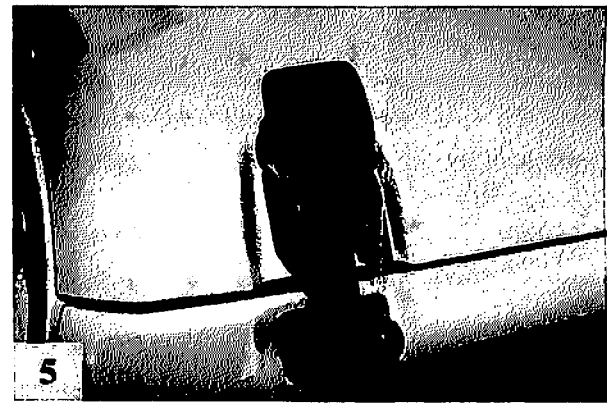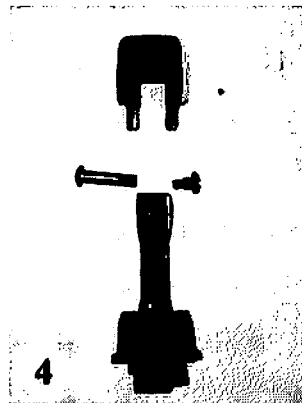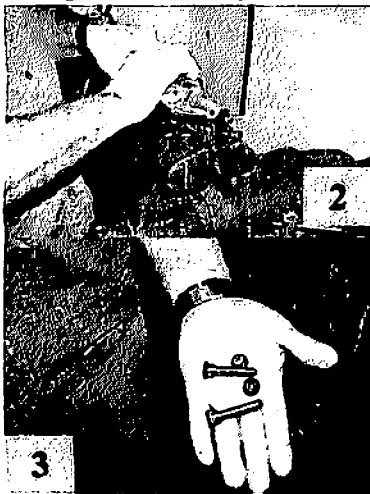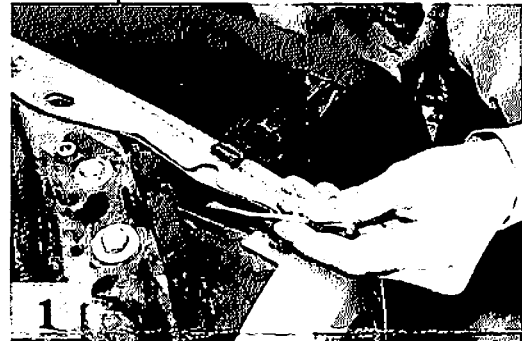

Warranty:

Four Real Steel Products carry a limited warranty: This Limited Warranty does not include normal wear and tear and is void if product shows any evidence of misuse, abuse, accident/collision, road hazard, improper installation and or maintenance or modification. This warranty does not cover cost of removal, installation, shipping or other incidental charges. This warranty is limited to the repair and/or replacement of the Four Real Steel Product only at the discretion of Four Real Steel Products, Inc. ALL WARRANTY ISSUES MUST BE ACCOMPANIED BY A SALES RECEIPT WITH TRANSPORTATION OR SHIPPING CHARGES PREPAID. This warranty extends only to the original purchaser of the Four Real Steel Products



Instruction Sheet P11419
 2008 Daystar Products International Inc.