

LTC4020EUHF High Voltage Buck-Boost Multi-Chemistry Battery Charger

DESCRIPTION

Demonstration circuit 2044A is a 55V buck-boost multi-chemistry battery charger featuring the [LTC®4020](#). The board will accept an input voltage between 15V and 55V. The float voltage of the battery output (BAT) is 25.2V, with 3.3A maximum charge current. The converter output (VOUT) has a voltage range of 21V to 28V, with 3A maximum load current. The LTC4020 contains a high efficiency synchronous buck-boost DC/DC controller and uses a proprietary average current mode architecture.

The LTC4020 battery charger can provide a constant-current/constant-voltage charge algorithm (CC/CV, with MODE pin grounded), constant-current charging (CC,

with MODE pin floated), or charging with an optimized 4-step, 3-stage lead-acid battery charge profile (connect MODE pin to INTV_{CC}, with a 0Ω jumper at the optional R29 position).

The LTC4020 data sheet gives a complete description of the IC operation and application information. The data sheet must be read in conjunction with this quick start guide.

Design files for this circuit board are available at [Design files for this circuit board are available](#).

All registered trademarks and trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

SYMBOL	CONDITIONS	VALUE
Input Voltage Range		15V to 55V
Battery Float Voltage (BAT) (Nominal)	I _{BAT} = 0A to 3.3A	25.2V
Converter Output Voltage (VOUT)	I _{OUT} = 0A to 3A	21V to 28V
Maximum Battery Charge Current, I _{BAT}	I _{OUT} = 0A	3.3A
Maximum Converter Output Current, I _{OUT}	I _{BAT} = 0A	3A
Typical Efficiency	V _{IN} = 24V, V _{OUT} = 25.2V, I _{OUT} = 3A	97%
Typical Converter Output Ripple	V _{IN} = 55V, V _{OUT} = 25.2V, I _{OUT} = 3A (20MHz BW)	56mV _{P-P}

QUICK START PROCEDURE

Demonstration circuit 2044A is easy to set up to evaluate the performance of the LTC4020. Refer to Figure 1 for the proper measurement equipment setup and follow the procedure below:

1. With power off, connect the input power supply (set for 0V) to V_{IN} and GND (input return).
2. Connect the converter output load between V_{OUT} and GND (Initial load: no load).
3. Connect the DVMs to the input and outputs.
4. Turn on the input power supply and slowly increase to 24V. Check for the proper output voltages, V_{OUT} of 25.2V and BAT of 25.2V.
5. Once the proper output voltages are established, adjust the converter output load within the operating range (3A maximum) and/or adjust input voltage (15V to 55V) and observe the output voltage regulation, ripple voltage, efficiency and other parameters.

NOTE: When measuring the output or input voltage ripple, do not use the long ground lead on the oscilloscope probe. See Figure 2 for the proper scope probe technique. Short, stiff leads need to be soldered to the (+) and (–) terminals of an output capacitor. The probe's ground ring needs to touch the (–) lead and the probe tip needs to touch the (+) lead.

Additional Notes:

1. **CAUTION: Be careful when testing with high voltage. High voltage can result in an electric shock if care is not taken.**
2. **CAUTION: Batteries are potentially dangerous high energy sources. Improper connection, overcharge, or rapid discharge could result in explosion and/or fire. Please read the specification/manual of the battery before test.**
3. **The combined converter output load current and battery charging current should not exceed 3.3A.**
4. Without a proper battery, BAT output can be open or connected with other suitable loads for test purposes. It may be a good practice to add low ESR electrolytic capacitors to the BAT output ($\geq 1000\mu\text{F}$ at $\geq 35\text{V}$, for 25.2V float voltage).

NOTE: These capacitors help simulate the low impedance of a battery and maintain stability of the charge current loop. It's only needed for test purposes with electronic or resistive loads, and not needed in the actual battery application/test (where the BAT load is a battery).
5. BAT float voltage can be easily adjusted with the resistor divider R8/R10. Converter output voltage V_{OUT} can be adjusted with the resistor divider R9/R11. Adjust/optimize the loop compensations if necessary.

QUICK START PROCEDURE

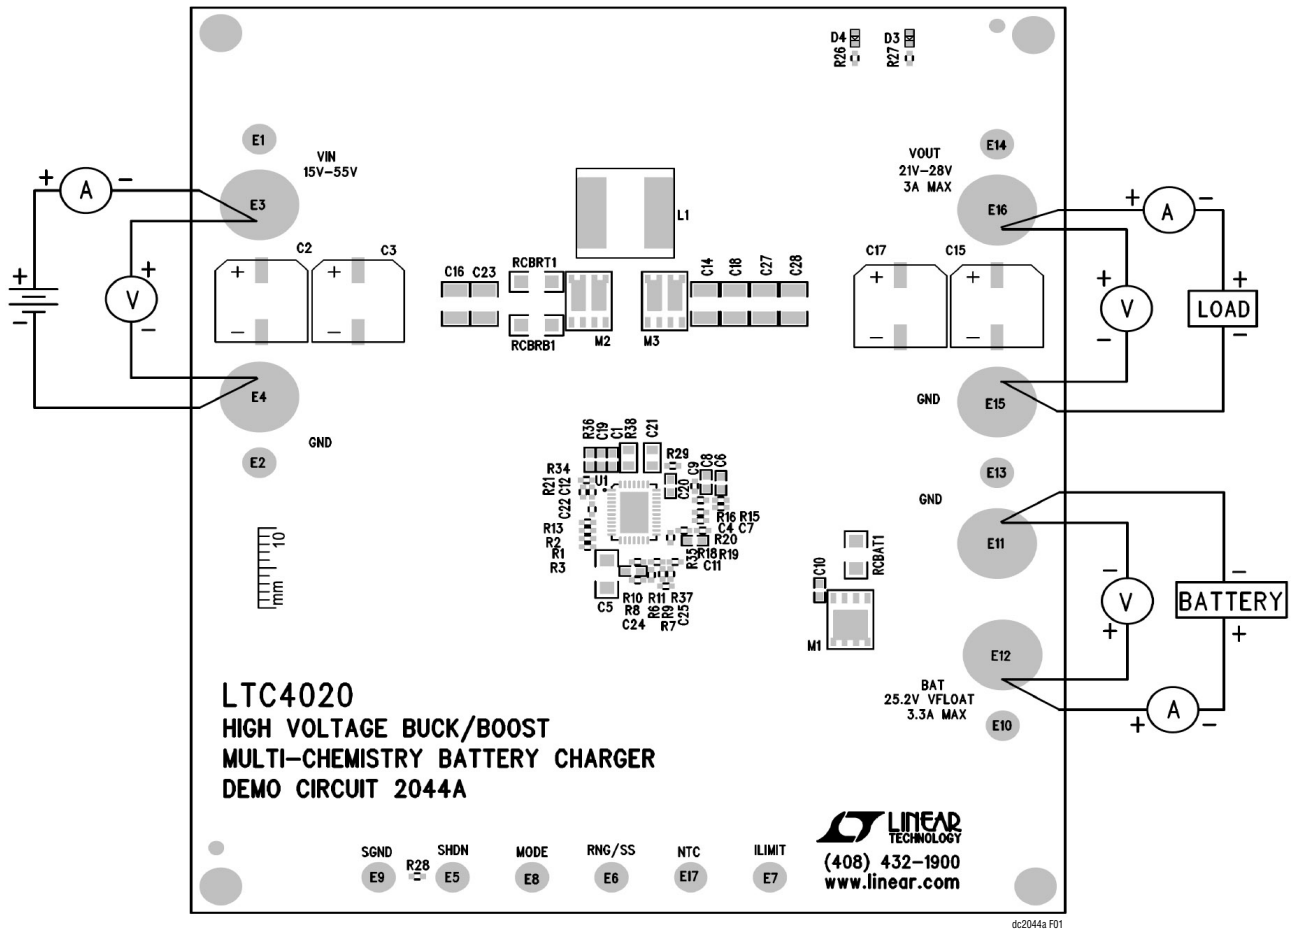


Figure 1. Proper Measurement Equipment Setup

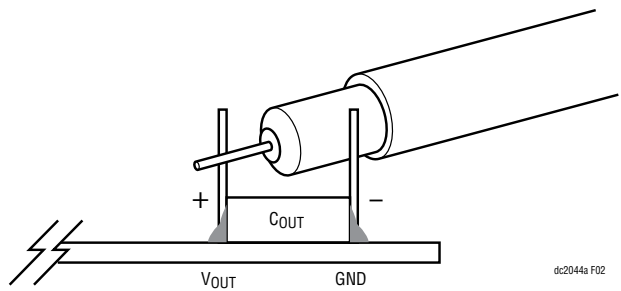


Figure 2. Measuring Output Voltage Ripple

QUICK START PROCEDURE

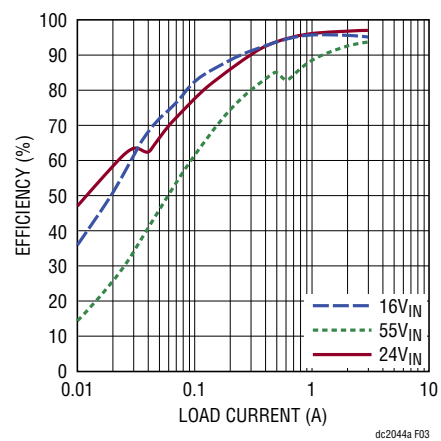


Figure 3. Efficiency vs Load Current ($V_{OUT} = 25.2V$)

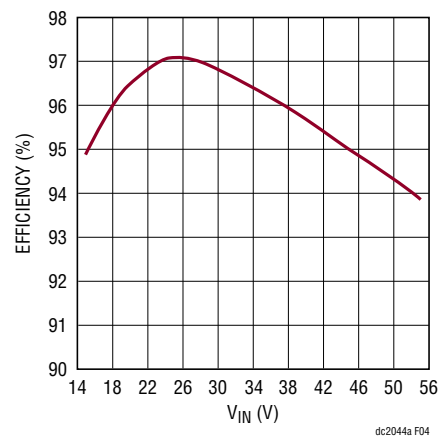


Figure 4. Efficiency vs Input Voltage ($V_{OUT} = 25.2V$, $I_{OUT} = 3A$)


PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Required Circuit Components				
1	1	C1	CAP, CHIP, X7S, 0.1 μ F, 10%, 100V, 0603	TDK, C1608X7S2A104K
2	4	C2, C3, C15, C17	CAP, ELEC., 56 μ F, 20%, 63V, 10.3mm $\times$ 10.3mm	SUNCON, 63HVVH56M
3	1	C4	CAP, CHIP, C0G, 100pF, 10%, 16V, 0402	AVX, 0402YA101KAT9A
4	1	C5	CAP, CHIP, C0G, 0.1 μ F, 10%, 16V, 1206	KEMET, C1206H104J3GACTU
5	1	C6	CAP, CHIP, X7R 10nF, 10%, 50V, 0603	AVX., 06035C103KAT
6	1	C8	CAP, CHIP, C0G, 680pF, 10%, 50V, 0603	AVX., 06035A681KAT2A
7	1	C9	CAP, CHIP, C0G, 68pF, 5%, 16V, 0402	AVX., 0402YA680JAT4A
8	2	C19, C20	CAP, CHIP, X5R, 0.22 μ F, 10%, 25V, 0603	AVX., 06033D224KAT2A
9	1	C10	CAP, CHIP, X7R, 0.001 μ F, 10%, 25V, 0603	AVX., 06033C102KAT2A
10	1	C11	CAP, CHIP, X5R, 2.2 μ F, 10%, 16V, 0603	TDK, C1608X5R1C225K
11	1	C12	CAP, CHIP, X7R, 0.033 μ F, 10%, 25V, 0402	TDK, C1005X7R1E333K
12	6	C14, C16, C18, C23, C27, C28	CAP, CHIP, X7S, 4.7 μ F, 20%, 100V, 1210	TDK, C3225X7S2A475M
13	1	C21	CAP, CHIP, X5R, 10 μ F, 20%, 6.3V, 0805	AVX., 08056D106KAT2A
14	2	D1, D2	DIODE, SMT, SUPERBARRIER, 60V, 0.5A, SOD123	DIODES INC., SBR0560S1
15	1	D3	DIODE, LED, RED, SMT, 0603	PANASONIC, LNJ208R8ARA
16	1	D4	DIODE, LED, GREEN, 0603	LITE-ON, LTST-C190KGKT
17	1	D6	DIODE., SMT SCHOTTKY BARRIER RECTIFIER, SMA	VISHAY., B360A-E3
18	1	L1	IND, SMT, 15 μ H, 10A, 20%, 10mm $\times$ 11.3mm	COILCRAFT, XAL1010-153MEB
19	1	M1	P-CHANNEL MOSFET, -60V, -14.4A, PowerPAKS08	VISHAY, Si7461DP-T1-E3
20	2	M2, M3	DUAL N-CHANNEL MOSFET, 60V, 20.4m Ω , S08FL	ON SEMI NTMFD5C674NL
21	1	R2	RES, CHIP, 510k, 5%, 0402	VISHAY, CRCW0402510KFKED
22	5	R1, R4, R5, R12, R13	RES, CHIP, 100k, 5%, 0402	VISHAY, CRCW0402100KJNED
23	2	R6, R7	RES, CHIP, 20 Ω , 5%, 0402	VISHAY, CRCW040220R0JNED
24	1	R8	RES, CHIP, 226k, 0.1%, 0603	VISHAY, TNPW06030F226BEEA
25	1	R9	RES, CHIP, 226k, 1%, 0402	VISHAY, CRCW0402226KFKED
26	1	R10	RES, CHIP, 24.9k, 0.1%, 0402	VISHAY, TNPW04020F24K9BEED
27	1	R11	RES, CHIP, 24.9k, 1%, 0402	VISHAY, CRCW040224K9FKED
28	1	R14	RES, CHIP, 10k, 1%, 0402	VISHAY, CRCW040210K0FKED
29	1	R15	RES, CHIP, 56k, 1%, 0402	VISHAY, CRCW040256K0FKED
30	1	R16	RES, CHIP, 47k, 1%, 0402	VISHAY, CRCW040247K0FKED
31	8	R21-25, R34, R35, R37	RES, CHIP, 0 Ω JUMPER, 0402	VISHAY, CRCW04020000Z0ED
32	1	R36	RES, CHIP, 0 Ω JUMPER, 0603	VISHAY, CRCW06030000Z0EA
33	2	R18, R20	RES, CHIP, 100 Ω , 5%, 0402	VISHAY, CRCW0402100RJNED
34	1	R19	RES, CHIP, 4.7 Ω , 5%, 0402	VISHAY, CRCW04024R70JNED
35	2	R26, R27	RES, CHIP, 3k, 5%, 0402	VISHAY, CRCW04023K00JNED
37	1	R28	RES, CHIP, 51k, 5%, 0402	VISHAY, CRCW040251K00JNED
38	1	R38	RES, CHIP, 5.1 Ω , 5%, 0805	VISHAY, CRCW08055R10JNEA
39	2	RCBRB1, RCBRT1	RES, CHIP, 0.008 Ω , 1%, 0.5W, 1206	VISHAY, WSL12068L000FEA18
40	1	RCBAT1	RES, CHIP, 0.015 Ω , 1%, 0.5W, 1206	TT ELEC LRC-LRF1206F-01-F
41	1	U1	IC, LTC4020EUHF, 5mm $\times$ 7mm QFN38	ANALOG DEVICES, LTC4020EUHF

DEMO MANUAL DC2044A

PARTS LIST

ITEM	QTY	REFERENCE	PART DESCRIPTION	MANUFACTURER/PART NUMBER
Additional Demo Board Circuit Components				
1	0	C7,C13,C22 , C24,C25, C26,C30,C31 (OPT)	CAP, CHIP, OPTIONAL	
2	0	D7 (OPT)	DIODE, SMT SOD123	
3	0	D5(OPT)	DIODE., SMT SCHOTTKY BARRIER RECTIFIER, SMA	
4	0	R3, R17, R29, R31, R32 OPT	RES, OPTIONAL	
Hardware for Demo Board Only				
1	11	E1, E2, E5–E10,E13, E14, E17	TURRET, 0.09-INCH DIA	MILL-MAX, 2501-2-00-80-00-00-07-0
2	6	E3, E4, E11, E12, E15, E16	VERTICAL BANANA JACK, 575-4	KEYSTONE, 575-4
3	4		STAND-OFF, NYLON (SNAP ON), 0.375-INCH TALL	KEYSTONE, 8832 (SNAP ON)
4	1		FAB, PRINTED CIRCUIT BOARD	ANALOG DEVICES, DC2044A



DEMO MANUAL DC2044A



ESD Caution

ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

Legal Terms and Conditions

By using the evaluation board discussed herein (together with any tools, components documentation or support materials, the "Evaluation Board"), you are agreeing to be bound by the terms and conditions set forth below ("Agreement") unless you have purchased the Evaluation Board, in which case the Analog Devices Standard Terms and Conditions of Sale shall govern. Do not use the Evaluation Board until you have read and agreed to the Agreement. Your use of the Evaluation Board shall signify your acceptance of the Agreement. This Agreement is made by and between you ("Customer") and Analog Devices, Inc. ("ADI"), with its principal place of business at One Technology Way, Norwood, MA 02062, USA. Subject to the terms and conditions of the Agreement, ADI hereby grants to Customer a free, limited, personal, temporary, non-exclusive, non-sublicensable, non-transferable license to use the Evaluation Board FOR EVALUATION PURPOSES ONLY. Customer understands and agrees that the Evaluation Board is provided for the sole and exclusive purpose referenced above, and agrees not to use the Evaluation Board for any other purpose. Furthermore, the license granted is expressly made subject to the following additional limitations: Customer shall not (i) rent, lease, display, sell, transfer, assign, sublicense, or distribute the Evaluation Board; and (ii) permit any Third Party to access the Evaluation Board. As used herein, the term "Third Party" includes any entity other than ADI, Customer, their employees, affiliates and in-house consultants. The Evaluation Board is NOT sold to Customer; all rights not expressly granted herein, including ownership of the Evaluation Board, are reserved by ADI. CONFIDENTIALITY. This Agreement and the Evaluation Board shall all be considered the confidential and proprietary information of ADI. Customer may not disclose or transfer any portion of the Evaluation Board to any other party for any reason. Upon discontinuation of use of the Evaluation Board or termination of this Agreement, Customer agrees to promptly return the Evaluation Board to ADI. ADDITIONAL RESTRICTIONS. Customer may not disassemble, decompile or reverse engineer chips on the Evaluation Board. Customer shall inform ADI of any occurred damages or any modifications or alterations it makes to the Evaluation Board, including but not limited to soldering or any other activity that affects the material content of the Evaluation Board. Modifications to the Evaluation Board must comply with applicable law, including but not limited to the RoHS Directive. TERMINATION. ADI may terminate this Agreement at any time upon giving written notice to Customer. Customer agrees to return to ADI the Evaluation Board at that time. LIMITATION OF LIABILITY. THE EVALUATION BOARD PROVIDED HEREUNDER IS PROVIDED "AS IS" AND ADI MAKES NO WARRANTIES OR REPRESENTATIONS OF ANY KIND WITH RESPECT TO IT. ADI SPECIFICALLY DISCLAIMS ANY REPRESENTATIONS, ENDORSEMENTS, GUARANTEES, OR WARRANTIES, EXPRESS OR IMPLIED, RELATED TO THE EVALUATION BOARD INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, TITLE, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF INTELLECTUAL PROPERTY RIGHTS. IN NO EVENT WILL ADI AND ITS LICENSORS BE LIABLE FOR ANY INCIDENTAL, SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES RESULTING FROM CUSTOMER'S POSSESSION OR USE OF THE EVALUATION BOARD, INCLUDING BUT NOT LIMITED TO LOST PROFITS, DELAY COSTS, LABOR COSTS OR LOSS OF GOODWILL. ADI'S TOTAL LIABILITY FROM ANY AND ALL CAUSES SHALL BE LIMITED TO THE AMOUNT OF ONE HUNDRED US DOLLARS (\$100.00). EXPORT. Customer agrees that it will not directly or indirectly export the Evaluation Board to another country, and that it will comply with all applicable United States federal laws and regulations relating to exports. GOVERNING LAW. This Agreement shall be governed by and construed in accordance with the substantive laws of the Commonwealth of Massachusetts (excluding conflict of law rules). Any legal action regarding this Agreement will be heard in the state or federal courts having jurisdiction in Suffolk County, Massachusetts, and Customer hereby submits to the personal jurisdiction and venue of such courts. The United Nations Convention on Contracts for the International Sale of Goods shall not apply to this Agreement and is expressly disclaimed.