




**i3-TECHNOLOGIES**



**i3SYNC USB-C TX**

**USER MANUAL**


## 1 Description of functions

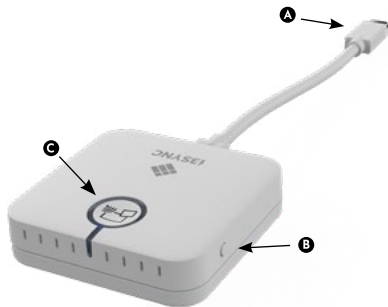

- A** USB-C
- B** F1 button: Hold down to reboot the device.
- C** Main button: pairing / start mirroring / stop mirroring

- A** HDMI OUT
- B** Micro USB
- C** Slide switch: overwrite on / off

- D** Main button: for pairing with transmitter
- E** F1 button: for firmware update
- F** Micro SD Card slot: for firmware update

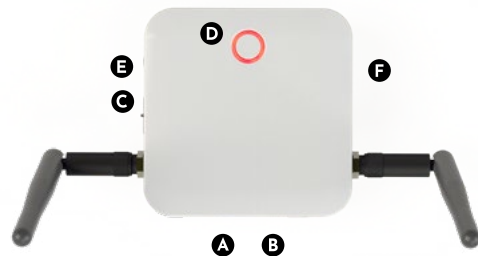

| Status           | Color | LED Action           |
|------------------|-------|----------------------|
| Standby          | Red   | Lights up constantly |
| Pairing          | Green | Blink                |
| Paired and Ready | Green | Lights up constantly |
| Mirroring        | Blue  | Lights up constantly |
| Error            | Red   | Blink                |
| FW update        | White | Blink                |


## 2 How to install

### A Receiver

- 1 Connect a HDMI cable from a display to the HDMI OUT port of the Receiver.
- 2 Connect the micro USB cable for power supply.
- 3 The device will automatically start up after inserting the Power Supply.

### B Transmitter

- 1 Connect the USB-C cable into your laptop or other device.

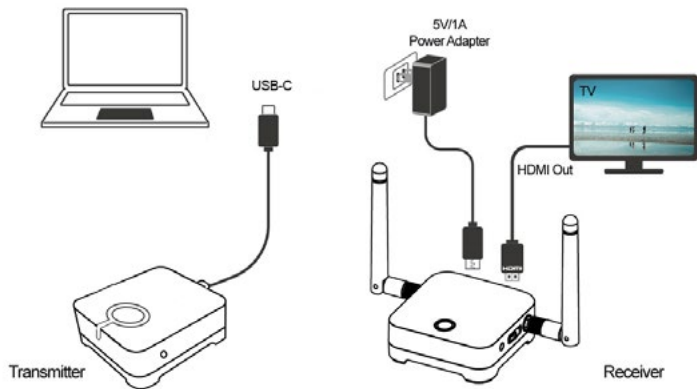

## 3 How to pair

- 1 Press the main button of the receiver and transmitter simultaneously.
- 2 Transmitter and receiver are blinking green during the pairing process.
- 3 When the pairing is successful, the receiver and transmitter will have a constant green light.

## 4 How to use

- 1 Connect the i3SYNC receiver to your display.
- 2 Connect the i3SYNC transmitter to your laptop.
- 3 Wait for a constant green light of the main button from the transmitter.
- 4 Press the main button to mirror, the main button will change into blue.



**i3-TECHNOLOGIES**

[www.i3-technologies.com](http://www.i3-technologies.com)