

# HALO RECESSED DOWNLIGHT



Direct Mount  
p. 7-13



Surface Mount  
p. 14-15



Downlight/Adjustable  
p. 16-17



Undercabinet  
p. 20-21



Housing/Trim  
p. 21-23

# HLB LED Direct Mount Downlight

## HALO

- Ultra-thin downlight in 3, 4, 6, 8 and 12-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in as little as 3-1/2-inch plenum height
- Remote driver/junction box; Insulated ceiling (IC) and non-IC rated
- 120V or Universal 120-277V models available



HLB3059FS1EMWR



HLB4S069FS1EMWR



HLB8LS9FSE010MWR



HLB6099FS1EMWR



HLB4069FS1EMWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB3059FS1EMWR	3" Module, Round	White	40W INC	2700K-5000K	120V	500	9	720	080083151301	N/A
HLB3S059FS1EMWR	3" Module, Square	White	40W INC	2700K-5000K	120V	500	9	720	080083151325	2336938
HLB4069FS1EMWR	4" Module, Round	White	65W INC	2700K-5000K	120V	752	12	864	080083848140	2322243
HLB4069FSE010MWR	4" Module, Round, UNV	White	60W INC	2700K-5000K	120-277V	750	11	756	080083912261	2351376
HLB4S069FS1EMWR	4" Module, Square	White	65W INC	2700K-5000K	120V	752	12	756	080083863303	2331662
HLB4S069FSE010MWR	4" Module, Square, UNV	White	60W INC	2700K-5000K	120-277V	725	11	432	080083912308	2351374
HLB6099FS1EMWR	6" Module, Round	White	65W INC	2700K-5000K	120V	1,103	16	648	080083848164	2322242
HLB6S099FS1EMWR	6" Module, Square	White	65W INC	2700K-5000K	120V	1,103	12	540	080083863389	2331663
HLB6099FSE010MWR	6" Module, Round, UNV	White	75W INC	2700K-5000K	120-277V	1061	15	450	080083912285	2351377
HLB6S099FSE010MWR	6" Module, Square, UNV	White	75W INC	2700K-5000K	120-277V	1050	15	360	080083912322	2351375
HLB8169FS1EMWR	8" Module, Round	White	90W INC	2700K-5000K	120V	1600	21	144	080083150601	2358047
HLB8LS9FSE010MWR	8" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	31	144	080083083367	2358045
HLB12LS9FSE010MWR	12" Module, Round	White	150W INC	2700K-5000K	120-277V	2400	32	144	080083088782	N/A

# HLB LED Lite Direct Mount Downlight

- Ultra-thin LED lens downlight in 4 and 6-inch sizes with remote driver / junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Features a round polymer trim and smooth lens
- Field-selectable CCT: 2700K - 5000K; 90 CRI
- Install from below the ceiling in 3/8-inch to 5/8-inch thick ceilings



HLBSL6099FS231EMWR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLBSL4069FS231EMWR	4" Module, Round	White	60W INC	2700K - 3500K	120V	753	10	576	080083912346	2349484
HLBSL4069FS351EMWR	4" Module, Round	White	60W INC	3000K - 5000K	120V	716	10	576	080083916368	2349485
HLBSL6099FS231EMWR	6" Module, Round, UNV	White	75W INC	2700K - 3500K	120V	954	13	600	080083912360	2349475, 2349476, 2349477
HLBSL6099FS351EMWR	6" Module, Round, UNV	White	75W INC	3000K - 5000K	120V	940	13	600	080083916382	2349478, 2349479, 2349480



## RL LED Baffle Trim Direct Mount

HALO

- 4 and 6-inch regressed LED lens downlights with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Can be installed in ½-inch to 1 ¼-inch thick ceilings
- Insulated ceiling (IC) and non-IC rated; Dimmable to 5% (120V dimmers); Airtight



RL4069S1EWHDM



RL6069S1EWHDM

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHDM	4" Retrofit Baffle-Trim, Remote Driver J-Box	White	65W INC	2700K-5000K	120V	652	9	300	080083858101	2325604
RL6069S1EWHDM	6" Retrofit Baffle-Trim, Remote Driver J-Box	White	65W INC	2700K-5000K	120V	719	9	240	080083858125	2325603

## RA LED Baffle Trim Direct Mount Adjustable Gimbal

HALO

- 4 and 6-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 35° tilt; Dimmable to 5% (120V dimmers)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Insulated ceiling (IC) and non-IC rated; Airtight



RA4069S1EWHDMR



RA6069S1EWHDMR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHDMR	4" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	768	9	392	080083911325	2351865
RA6069S1EWHDMR	6" Adjustable Direct Mount	White	60W INC	2700K - 5000K	120V	770	9	160	080083911349	2351876

# SMD LED Direct Mount Module

HALO

- Ultra-low profile downlight in 4 and 6-inch sizes with integral junction box
- High performance and wide distribution for general areas
- Direct Mount with spring clips into drywall/suspended ceiling (no j-box or housing required)
- Modern look suitable for residential and commercial installations; 90 CRI
- Insulated ceiling (IC) and non-IC rated



SMD4R6930WHDM



SMD6R6930WHDM

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R6930WHDM	4" RD Direct Mount	White	65W INC	3000K	120V	700	10	300	080083766390	2281593
SMD6R6930WHDM	6" RD Direct Mount	White	65W INC	3000K	120V	750	10	192	080083767090	2281592

# HLA LED Direct Mount Adjustable Gimbal

HALO

- 4-inch adjustable gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 30° tilt; Distributions: 40° flood, 80° very wide flood
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Remote driver/junction box installs through the ceiling cutout and positioned remotely
- Insulated ceiling (IC) and non-IC rated; Dimmable down to 5% (120V dimmers); Airtight



HLA406FL9FS1EMWR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLA406FL9FS1EMWR	4" Round Adjustable Direct Mount	White	65W INC	2700K-5000K	120V	660	11	504	080083882960	2341271



# LCR Light Commercial LED Direct Mount Downlight

## HALO

- Light commercial downlight in 2, 4, 6 and 8-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Regressed lens and smooth baffle provide high optical cutoff
- Wide distribution pattern is ideal for general area illumination; Airtight



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LCR2089FS1EMW	2" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083130061	2357903
LCR2089FSE010MW	2" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	480	080083889969	2351780
LCR4089FSE010MW	4" LCR RD Retrofit Module	White	65W INC	2700K - 5000K	120-227V	800	9	360	080083889983	2351828
LCR4129FSE010MW	4" LCR RD Retrofit Module	White	75W INC	2700K - 5000K	120-227V	1200	15	360	080083890002	2351827
LCR6159FSE010MW	6" LCR RD Direct Mount	White	72W INC	2700K - 5000K	120-277V	1604	16	120	080083890026	2351826
LCR6219FSE010MW	6" LCR RD Direct Mount	White	72W INC	2700K - 5000K	120-277V	2329	25	120	080083890040	2351825
LCR6309FSE010MW	6" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	2981	30	96	080083890064	2351824
LCR8309FSE010MW	8" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	3153	35	128	080083890088	2351823
LCR8509FSE010MW	8" LCR RD Direct Mount	White	130W INC	2700K - 5000K	120-277V	4841	47	128	080083890101	2351822

## Direct Mount Mounting Frame

### HALO

- 4, 6 and 8-inch new construction frames for round and square products; Knock-outs allow square fittings
- Accepts fixtures including remodel housings and direct-mount downlights
- Use to reserve the ceiling location or install products that need bar hangers
- Provides routing guidance for the drywall contractor
- Bar hangers adjust up to 24-inches wide and can be shortened without removal
- Compatible with the HLB, RL, RA, HLA and LCR direct mount series



Catalog Number	Product Description	Pallet Quantity	UPC
HL4RSMF	4" Round/Square Mounting Frame	180	080083876167
HL6RSMF	6" Round/Square Mounting Frame	240	080083876181
HL8RSMF	8" Round/Square Mounting Frame	240	080083890460

# Direct Mount Product Selection Guide




		HLB	RL-DM & RA-DM	SMD-DM	HLA	LCR
APPLICATION	Flush Lens	✓		✓		
	General Area Illumination	✓	✓	✓	✓	✓
	Wet Location	✓	✓	✓	✓	✓
	New Construction	✓	✓	✓	✓	✓
	Remodel	✓	✓	✓	✓	✓
	Adjustable		✓		✓	

		3" & 4" & 6" Round & Square	4" & 6" Round	4" & 6" Round & Square	4" Round & Square	2", 4", 6" & 8" Round
FEATURES / PERFORMANCE	Size / Shape	3" & 4" & 6" Round & Square	4" & 6" Round	4" & 6" Round & Square	4" Round & Square	2", 4", 6" & 8" Round
	Lumens (Max)	1000	600	800	600	8 inch = 8000 6 inch = 5000 MAX
	Lite (L70B50)	50K hours	50K hours	50K hours	50K hours	50K hours
	CRI	90 (min)	90 (min)	90 (min)	90 (min)	90 (min)
	CCT (K)	27/30/35/40/50	27/30/35/40	27/30/35/40/50	27/30/35/40/50	27/30/35/40/50
	Spacing Criteria	1.4	1.2	1.4	1.2	1.2
	Input Voltage	120	120	120	120	120-277

		HLB	RL-DM & RA-DM	SMD-DM	HLA	LCR
CONTROL	Field Select (5) CCT	✓	✓		✓	✓
	LE/TE Phase Cut	✓	✓	✓	✓	

Visit [Cooperlighting.com/MarketPro](https://www.cooperlighting.com/MarketPro) to download the Recessed Selection Guide.

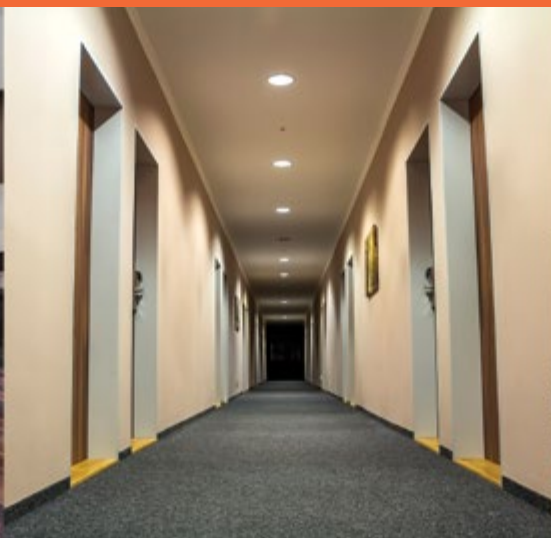

SURFACE MOUNT

## SMD

### Surface Mount Downlight

- Sizes 4, 6, 8, 12 with 1-1/4" profile
- SMD4 and SMD6 are transitioning from dedicated CCT to selectable CCT
- SMD4, SMD6, SMD12 have selectable CCT: 2700K-5000K
- Up to 2200 lumens
- Designed for new construction or retrofit and ideal for commercial and residential applications
- Universal voltage 120V – 277V options available



SMD4



SMD6



SMD12

## THE HALO MINUTE

### Video-Podcast Series

Join our resident **HALO** experts in the newly launched **HALO MINUTE** series to learn about new products, install tips, sales tools and more.

Visit [halolighting.com](http://halolighting.com) to watch the latest episodes.



# HLB

## Ultra-thin Downlight

- Ultra-thin downlight in 3, 4, 6, 8 and 12-inch sizes
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- Selectable lumens: up to 2400 lumens
- No housing required
- Installs in 1-1/2" plenum space
- New construction or retrofit
- Commercial and residential applications



HLB3



HLB4



HLB6



HLB8



HLB12



# LCR

## Light Commercial Downlight

- Ultra-thin downlight in 2, 4, 6, 8-inch sizes
- Selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K
- High lumen levels (up to 8,000 lumens)
- No housing required
- Installs in 1-1/2" plenum space
- New construction or retrofit
- Commercial and residential applications



LCR2



LCR4



LCR6



LCR8

See product configurations for details.



## SLD LED Surface Mount Module

HALO

- Ultra-low profile 4 and 6-inch surface luminaire with downlighting distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CR
- Ceiling or wall mounting in standard and fire-rated compatible junction boxes
- SLD6 retrofits in 5-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Suitable for residential or commercial installations



SLDSL4069S1EMWR



SLD606830WH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SLDSL4069S1EMWR	4" Surface LED Downlight	White	N/A	Selectable 2700K-5000K	120V	600	9	700	080083153107	2366149
SLDSL6069S1EMWR	6" Surface LED Downlight	White	N/A	Selectable 2700K-5000K	120V	600	9	400	080083153121	2366163
SLD606930WH	6" Surface Downlight	White	65W INC	3000K	120V	735	13	300	080083697625	2271068
SLD606930WHJB	6" Surface Downlight, J-Box	White	65W INC	3000K	120V	735	13	360	080083706037	2271068

See Pages 42-43 for California T20 Certified SKU's

## HLC LED Surface Mount Closet Light

HALO

- 6-inch low-profile, lens surface-mount luminaire; Ceiling/wall mounting
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Supply wire adapter with LED quick wiring connector included; Sold as bulk packs only
- Meets NFPA requirements for use in closets



HLC6099301EWH-6BP

Catalog Number	Product Description	Finish	Replaces up to	CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLC6099301EWH-6BP	6" Closet Light (6-Pack)	White	65W INC	3000K	120V	925	16	100	080083896448	2338422
HLC6099301EWH-12BP	6" Closet Light (12-Pack)	White	65W INC	3000K	120V	900	16	60	080083884728	2338422

# SMD LED Surface Mount Module

## HALO

- 4, 6, and 12-inch high-performance, ½-inch low-profile, lens luminaire with wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch
- Ceiling/Wall mounting in many 3½- and 4-inch square, octagon or round junction boxes
- Retrofits 4-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Dimmable to 5% (120V dimmers); 90 CRI



SMD6R12927WH



SMD4R6930WH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R69SWH	4" RD Surface Mount	White	N/A	Selectable 2700K-5000K	120V	738	9	320	080083020904	2365919
SMD6R69SWH	6" RD Surface Mount	White	N/A	Selectable 2700K-5000K	120V	777	9	320	080083020942	2365923
SMD4R6930WH	4" RD Surface Mount	White	60W INC	3000K	120V	700	10	630	080083766352	2281593
SMD6R6930WH	6" RD Surface Mount	White	65W INC	3000K	120V	758	10	432	080083767052	2281592
SMD6R12930WH	6" RD Surface Mount	White	80W INC	3000K	120V	1,242	15	360	080083825424	2308976
SMD12R209SWHE	12" RD Surface Mount	White	N/A	Selectable 2700K - 5000K	120V	2,232	27	144	080083138005	N/A

See Pages 42-43 for California T20 Certified SKU's

# BLD LED Surface Mount Module

## HALO

- 4 and 6-inch low-profile, high-performance, backlit surface-mount luminaire
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Retrofits in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings



BLD4089SWH



BLD6089SWHR

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089SWH	4" RD Surface, Direct Mount	White	65W INC	2700K-5000K	120V	802	10	560	080083826766	2319361
BLD6089SWHR	6" RD Surface, Direct Mount	White	65W INC	2700K-5000K	120V	812	10	320	080083826803	2319364

See Pages 42-43 for California T20 Certified SKU's

# RL LED Baffle Trim Downlight

HALO

- LED baffle-trim module for 3, 4, 5 or 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed lens; Convex form and lamp-like appearance; Uniform illumination
- Field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RL3059FS1EWHR



RL56099S1EWHR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL3059FS1EWHR	3" Retrofit Downlight	White	60W INC	2700K-5000K	120V	587	8	504	080083130047	2353426
RL4069S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	621	9	768	080083818488	2354585
RL4099S1EWHR	4" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	576	080083818501	2321466
RL56069S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	712	8	300	080083818525	2356074
RL56099S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1006	12	360	080083818549	2354587
RL56129S1EWHR	5/6" Retrofit Baffle-Trim	White	65W INC	2700K-5000K	120V	1272	14	240	080083818563	2321465

See Pages 42-43 for California T20 Certified SKU's

# RA LED Adjustable Gimbal

HALO

- Adjustable gimbal LED module for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- 360° rotation and 35° tilt; Wide distribution
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers
- Suitable for new construction, remodel and retrofit installation



RA4069S1EWHR



RA56069S1EWHR



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR	4" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	615	7	420	080083817849	2319905
RA56069S1EWHR	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K-5000K	120V	630	7	240	080083817863	2319904

See Pages 42-43 for California T20 Certified SKU's

## LT LED Retrofit Baffle Trim Downlight

HALO

- Baffle downlight trim retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- For use with HALO 4, 5 and 6-inch new construction and remodel housings
- Torsion springs or friction blades secure trim tightly
- Shallow, diffuse lens provides shielding to the source and a wet location listing; 90 CRI
- Suitable for use in showers or in outdoor covered ceiling applications; Airtight



LT460WH6927R



LT560WH6927R

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6927R	4" Retrofit Baffle-Trim	White	60W INC	2700K	120V	544	8	576	080083762958	2309296
LT460WH6930R	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	554	8	576	080083746163	2309297
LT560WH6927R	5/6" Retrofit Baffle-Trim	White	60W INC	2700K	120V	700	10	240	080083763016	2309299
LT560WH6930R	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	683	10	240	080083746187	2309300
LT560WH6940R	5/6" Retrofit Baffle-Trim	White	60W INC	4000K	120V	737	10	240	080083763054	2294390
LT560WH12930	5/6" Retrofit Baffle-Trim	White	90W INC	3000K	120V	1140	12	240	080083798681	2333089

See Pages 42-43 for California T20 Certified SKU's

## LA LED Adjustable Gimbal

HALO

- Adjustable LED retrofit modules for 4-inch and 5/6-inch aperture recessed housings
- Regressed lens; 360° rotation and 35° tilt; Dimmable to 10%
- Retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Torsion springs or friction blades secure trim tightly
- Precision construction and uniform illumination, 90 CRI; Airtight



LA4069301EWH



LA56069301EWH

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LA4069301EWH	4" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	613	9	504	080083818143	2325616
LA56069301EWH	5/6" Retrofit Adjustable, Plastic, Wide	White	40W INC	3000K	120V	637	9	180	080083818242	2325606

See Pages 42-43 for California T20 Certified SKU's

## RSQ All-Purpose Square LED Downlight

HALO

- Offered in 3 sizes for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed flat lens with step baffle provides visual comfort and glare control
- Wide distribution patterns work well in low to high ceilings for general
- Field-selectable CCT: 2700K - 5000K via a switch; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



RSQ5089FS1EMWWB



RSQ4089FS1EMWWB

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB	4" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	800	10	672	080083824496	2333094
RSQ5089FS1EMWWB	5" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	360	080083824595	2333267
RSQ6089FS1EMWWB	6" Retrofit Square Baffle-trim	White	60W INC	2700K-5000K	120V	900	10	240	080083824694	2333093

See Pages 42-43 for California T20 Certified SKU's

# HALO Title 20 California Certified Products

## Downlight • Surface Mount • Adjustable Downlight

We offer a range of Title-20 recessed downlighting fixtures suitable for sale and installation in California. Code-compliance is our foundation. Rest assured we've got the products you need to get the job done on time and on budget.



### RL LED Baffle Trim Downlight (For details, see pg. 8)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	570	7	768	080083888108	2326218
RL4099S1EWHR-CA	4" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	941	10	576	080083888122	2321466
RL56069S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	665	8	300	080083888146	2326217
RL56099S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	900	10	360	080083888160	2326219
RL56129S1EWHR-CA	5/6" Retrofit Baffle-Trim	White	65W INC	2700K - 5000K	120V	1221	14	240	080083888184	2321465



### RA LED Adjustable Gimbal (For details, see pg. 8)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RA4069S1EWHR-CA	4" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	615	7	480	080083888504	2319905
RA56069S1EWHR-CA	5/6" Retrofit Adjustable, Wide	White	65W INC	2700K - 5000K	120V	630	7	240	080083888481	2319904



### LT LED Retrofit Baffle Trim Downlight (For details, see pg. 17)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
LT460WH6927R-CA	4" Retrofit Baffle-Trim	White	60W INC	2700K	120V	651	7	504	080083888320	2277226
LT460WH6930R-CA	4" Retrofit Baffle-Trim	White	60W INC	3000K	120V	650	7	576	080083900893	2257770, 2277227
LT560WH6927R-CA	5/6" Retrofit Baffle-Trim	White	60W INC	2700K	120V	715	8	300	080083888368	2277231
LT560WH6930R-CA	5/6" Retrofit Baffle-Trim	White	60W INC	3000K	120V	729	8	240	080083900954	2252183, 2277232



## RSQ All-Purpose Square LED Downlight (For details, see pg. 17)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RSQ4089FS1EMWWB-CA	4" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	672	080083886425	2362695
RSQ5089FS1EMWWB-CA	5" Retrofit Square Baffle-trim	White	60W INC	2700K - 5000K	120V	830	10	360	080083886487	2333267
RSQ6089FS1EMWWB-CA	6" Retrofit Square Baffle-trim	White	N/A	2700K - 5000K	120V	800	10	240	080083886548	2362697



## SLD LED Surface Mount Module (For details, see pg. 14)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SLD606930WH-CA	6" Surface Downlight	White	65W INC	3000K	120V	780	13	300	080083833023	2271068



## SMD LED Surface Mount Module (For details, see pg. 15)

Catalog Number	Product Description	Finish	Replaces Up To	CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
SMD4R6930WH-CA	4" RD Surface Mount	White	60W INC	3000K	120V	700	10	360	080083886821	2281593
SMD6R6930WH-CA	6" RD Surface Mount	White	65W INC	3000K	120V	758	10	240	080083886906	2281592
SMD6R12930WH-CA	6" RD Surface Mount	White	80W INC	3000K	120V	1203	16	360	080083886982	2308976



## BLD LED Surface Mount Module (For details, see pg. 15)

Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD6089SWHR-CA	6" RD Surface, Direct Mount	White	65W INC	2700K - 5000K	120V	812	10	320	080083888443	2319364




## HU11 LED Undercabinet

# Sleek and Seamless

Ideal undercabinet lighting for commercial and residential applications. The HALO Undercabinet low-profile design delivers maximum energy savings with easy installation.



## HU11 LED undercabinet



PLUG-IN/DIRECT WIRE



LINKABLE



DIMMABLE



LOW GLARE OPTICS

- SeleCCTable™ color temperature for flexible lighting effects and applications (2700K, 3000K or 4000K)
- Sleek and seamless <1" profile
- Delivers up to 60 Lumens per Watt
- Dimmable down to 5% with select 120V dimmers

- Multiple wiring options including flexible conduit, romex or plugin
- 120V input
- Lasts for 50,000 hours
- 5-year warranty
- Damp location listed

# HU11 LED Undercabinet

## HALO

- Low-profile design delivers maximum energy savings and long life
- Ideal for task, accent, office, cove, utility and display lighting
- Field SeleCCTable™ CCT: 2700K, 3000K or 4000K
- Plug-in, direct-wire, easy-access mounts and linkable install features for easy installation



Catalog Number	Product Description	Finish	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HU1109D9SP	9" Dimming, Cord/Plug or Direct Wire	White	17W INC	2700K-4000K	120V	300	5	768	080083875788	2341224
HU1118D9SP	18" Dimming, Cord/Plug or Direct Wire	White	33W INC	2700K-4000K	120V	560	8	704	080083875863	2341217
HU1124D9SP	24" Dimming, Cord/Plug or Direct Wire	White	44W INC	2700K-4000K	120V	785	11	648	080083875948	2341218
HU1136D9SP	36" Dimming, Cord/Plug or Direct Wire	White	56W INC	2700K-4000K	120V	1125	16	320	080083876020	2341219
HU1148D9SP	48" Dimming, Cord/Plug or Direct Wire	White	84W INC	2700K-4000K	120V	1540	21	396	080083876105	2341216
HU115P	Individual 48" Power Cable	White	N/A	N/A	120V	N/A	N/A	3200	080083907083	2341216
HU1011P	Individual 48" Power Cable	White	N/A	N/A	N/A	N/A	N/A	4200	080083694396	2341224
HU101P	Individual 3" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	625	080083641659	2272162
HU102P	Individual 6" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	20000	080083641673	2289580
HU103P	Individual 24" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	480	080083641697	2272163
HU104P	Individual 120" Daisy Chain Connector	White	N/A	N/A	N/A	N/A	N/A	960	080083641710	2272164
HU107P	Small Male-to-Male Connector	White	N/A	N/A	N/A	N/A	N/A	18000	080083641734	2341224
HU109P	Splice Box Bi-Directional Low Profile	White	N/A	N/A	N/A	N/A	N/A	1440	080083694358	2341224
HU10MSP	Master Switch Accessory	White	N/A	N/A	N/A	N/A	N/A	2700	080083694334	2341224

## HALO Housings

### HL3 New Construction Housings

#### HALO

- Suitable for 2x6 residential or shallow plenum commercial
- Broad range of trims; Distribution can easily be changed in the field
- Field-interchangeable optics: 15°, 25°, 40° and 55°
- Locking 365° rotation and 45° tilt holds any aiming position
- Got Nail!™ bar hangers; Insulated Ceiling (IC) rated




Catalog Number	Product Description	Socket	Lamp Source	Voltage	Pallet Quantity	UPC	ENERGY STAR Unique ID
HL36A20927ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185214	2332452
HL36A20930ED010ICAT	3" shallow new construction directional housing	LED	LED	120-277V	72	080083185207	2332452



## Fire Rated Housings

HALO

- New construction housings preventing the passage of flames and toxic gases into ceiling plenums
- Fire rated for up to 2 hours in accordance to UL 263
- Suitable for use in multi-family and mixed-use applications
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight

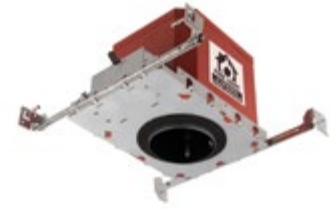

H450FR2ICAT

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H450FR2ICAT	4" Fire Rated Housing	LED	LED	120V	80	080083134007
H450FR2ICATD010	4" Fire Rated Housing, 0-10V	LED	LED	120V	80	080083130504
H550FR2ICATD010	5" Fire Rated Housing, 0-10V	LED	LED	120V	40	080083130528
H750FR2ICAT	6" Fire Rated Housing	LED	LED	120V	80	080083134021

## H Series Housings

HALO

- The standard in the industry for both commercial and residential applications
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings with airtight code compliant construction
- Use with a variety of trims and finishes for different lighting effects or match any decor
- Wide variety of trims available for desired lighting effect



H27RICAT



H27ICAT

Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
H245ICAT	4" New Construction Ultra Shallow	Quick Connect (No Socket)	LED Modules	120/277V	180	080083770717
H245RICAT	4" Remodel Ultra Shallow	Quick Connect (No Socket)	LED Modules	120-277V	540	080083756520
H2750ICAT	6" New Construction, Shallow, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083618163
H27ICAT	6" New Construction, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400605898
H27RICAT	6" Remodel, Shallow Ceiling, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	180	080083609253
H550ICAT	5" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	080083626533
H550RICAT	5" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	080083626557
H5ICAT	5" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609413
H5ICATNB	5" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	080083756063
H5RICAT	5" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	080083609444
H750ICAT	6" New Construction, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	120	623961872655
H750RICAT	6" Remodel, IC Air-Tite	Quick Connect (No Socket)	LED Modules	120/277V	144	623961052248
H7ICAT	6" New Construction, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	120	080083609628
H7ICATNB	6" New Construction, IC Air-Tite, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400612032
H7ICT	6" New Construction, IC	E26	HAL., INC., LED, CFL	120V	120	080083609680
H7ICTNB	6" New Construction, IC, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	120	662400608523
H7RICAT	6" Remodel, IC Air-Tite	E26	HAL., INC., LED, CFL	120V	144	662400610588
H7RICT	6" Remodel, IC	E26	HAL., INC., LED, CFL	120V	144	662400600718
H995ICAT	4" New Construction, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	144	080083616930
H995RICAT	4" Remodel, IC Air-Tite, Shallow	Quick Connect (No Socket)	LED Modules	120/277V	162	080083616947
H99ICAT	4" New Construction, IC Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	144	080083582259
H99RTAT	4" Remodel, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	252	080083584369
H99TAT	4" New Construction, Non-IC, Air-Tite, Shallow	E26	HAL., INC., LED, CFL	120V	192	080083584260

# E Series Housings

## HALO

- Compact and efficient housings for new or retrofit residential or light commercial construction
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings; Airtight code compliant
- Includes ultra-shallow housings for application with limited plenum space
- Use with a variety of trims and finishes for different lighting effects or match any decor



Catalog Number	Product Description	Socket	Lamp Source*	Voltage	Pallet Quantity	UPC
E27ICAT	6", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	192	080083737604
E27RICAT	6", IC, Shallow, Remodel	E26	HAL., INC., LED, CFL	120V	192	080083737482
E4ICATSB	4", IC, Shallow, New Construction	E26	HAL., INC., LED, CFL	120V	108	080083751525
E4RTATSB	4" NON-IC Air-Tite, Remodel, w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	168	080083751501
E4TATSB	4" NON-IC, Air-Tite, New Construction w/Socket Bracket	E26	HAL., INC., LED, CFL	120V	192	080083751488
E5ICAT	5" IC, Air-Tite, New Construction	E26	HAL., INC., LED, CFL	120V	144	080083737420
E5ICATNB	5" IC, Air-Tite, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737390
E5RICAT	5" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	180	080083737307
E750ICAT	6" IC, Air-Tite, LED New Construction	Quick Connect (No Socket)	LED Modules	120-277V	144	080083775040
E750RICAT	6" IC, Air-Tite, LED Remodel	Quick Connect (No Socket)	LED Modules	120-277V	144	080083778584
E7ICAT	6" IC, Air-Tite, New Construction Housing	E26	HAL., INC., LED, CFL	120V	144	080083737727
E7ICATNB	6" IC, AIRTITE, New Construction, No Socket Bracket	E26	HAL., INC., LED, CFL	120V	144	080083737697
E7RICAT	6" IC, Air-Tite, Remodel	E26	HAL., INC., LED, CFL	120V	144	080083737543

Note: Lamps not included.

# 4", 5" and 6" Trims

## HALO

- Trims shape light to minimize aperture glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction and remodel housings
- Offered in a variety of styles and accept different lamp types



Catalog Number	Product Description	Finish	Lamp Source*	Pallet Quantity	UPC
4001WB	4" Step Baffle - Plastic	White	Halogen, INC, LED, CFL	576	080083745869
993W	4" Coilex Baffle	White	Halogen, INC, LED, CFL	840	080083628483
5001P	5" Metal Splay Baffle	White	Halogen, INC, LED, CFL	360	662400602729
5125WB	5" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083743162
300P	6" Open - Socket Supporting	White	Halogen, INC, LED, CFL	288	662400302421
30WAT	6" Air-Tite Baffle	White	Halogen, INC, LED, CFL	540	662400603320
310W	6" Coilex Baffle	White	Halogen, INC, LED, CFL	360	080083515882
456W	6" Baffle for Slope Ceiling	White	Halogen, INC, LED, CFL	360	662400676287
6100WB	6" Tapered Metal Baffle, 2-Rings Narrow & Wide	White	Halogen, INC, LED, CFL	900	080083743452
6125WB	6" Full Cone Baffle	White	Halogen, INC, LED, CFL	288	080083742912

# HALO HOME SMART LIGHTING SYSTEM



Downlight  
p. 26-27



Outdoor  
p. 27



Lamp  
p. 27



Control/Accessory  
p. 28-29



# HALOHOME™

WHOLE HOME SMART LIGHTING SYSTEM



Grow your business with affordable smart lighting, controls and accessories.




Simple. Smart. Secure.

Learn more at

[cooperlighting.com/halohome](https://cooperlighting.com/halohome)

The HALO Home Smart Lighting System offers a convenient way to control your home's lights with the flexibility of one light, individual room or whole house control from anywhere in the world.

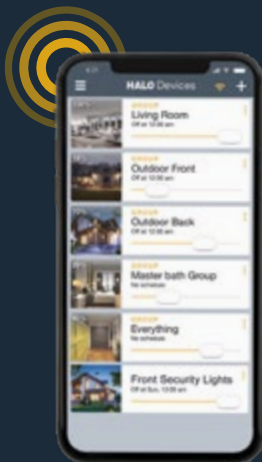

 NO BRIDGE OR HUB REQUIRED

 Bluetooth®

# HALO Home Smart HLB Downlight

HALO Home

- Ultra-thin smart downlight that can install virtually anywhere; No housing needed
- Easy to install from below the ceiling in as little as 1 ½-inch plenum; Remote driver/junction box
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app
- No internet or bridge needed
- White tuning 2700K – 5000K via the HALO Home app; 90 CRI; Dimmable to 5%



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
HLB4069BLE40AWH	4" Round LED Module, Remote Driver J-Box	60W INC	2700K-5000K	120V	Matte White	697	10	320	080083153022	2308008
HLB6099BLE40AWH	6" Round LED Module, Remote Driver J-Box	65W INC	2700K-5000K	120V	White	951	14	600	080083153008	2308006

# HALO Home Smart Recessed Downlight

HALO Home

- Integrated LED modules with Bluetooth mesh connectivity for 4- and 5/6-inch recessed housings
- Pair with the HALO Home mobile app for wireless control and customization
- ON/OFF, grouping, color tuning, dimming, scheduling, scenes and more
- Add HALO Home wall controllers for expanded smart functionality
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4069BLE40AWH	4" LED Module, Bluetooth	60W INC	2700K-5000K	120V	White	600	8	504	080083809257	2308008
RL5609BLE40AWH	5/6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	600	10	300	080083809233	2308006

# HALO Home Lumen Select Smart Recessed Downlight

HALO Home

- Adjust lumen output for optimal lighting in any room and ceiling height
- 4-inch module: Choose 600 or 900 lumens for mounting heights up to 12 feet
- 5/6-inch module: Choose 600, 900 or 1200 lumens for mounting heights up to 15 feet
- Bluetooth-enabled; No internet or bridge needed
- Ready to pair with other HALO Home products via the Halo Home app



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
RL4099BLE40AWH	4" LED Module, Bluetooth	75W INC	2700K-5000K	120V	White	600 or 900	11	576	080083887415	2341226
RL56129BLE40AWH	5/6" LED Module, Bluetooth	100W INC	2700K-5000K	120V	White	600, 900, or 1,200	15	240	080083887439	2341270

# HALO Home Smart Surface Mount Downlight

HALO Home

- Sleek, versatile smart downlight; Surface mounting, no housing required
- Simple solution to replace existing light fixtures with smart, energy-saving LED
- Easy to install; Mounts to most junction boxes including pancake boxes
- Bluetooth-enabled; No internet or bridge needed
- ON/OFF, grouping, color tuning, dimming, scheduling,
- Bluetooth-enabled and ready to pair with other HALO Home products via the HALO Home app



4-inch



6-inch



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
BLD4089BLE40AWH	4" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	600	080083897162	2346591
BLD6089BLE40AWH	6" LED Module, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	400	080083897186	2346688

# HALO Home Smart Outdoor Security Flood and Motion Flood

HALO Home

- Motion-activated smart floodlight with 180° detection and 50-foot range
- Enhances security around the home; Bluetooth-enabled; No internet or bridge needed
- Adjust motion sensitivity, duration and standby light settings via HALO Home app
- Control one or multiple lights with grouping, scheduling, dimming and color tuning capabilities
- White tuning 3000K-5000K; Dimming down to 5%



FTS20CW



MST20C18W



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC
MST20C18W	Twin LED Motion Flood, Bluetooth	2-Head PAR 38, 90W INC.	3000K-5000K	120-277V	White	2,034	23	150	080083810499
FTS20CW	Twin LED Flood, Bluetooth	2-Head PAR 38, 90W INC.	3000K-5000K	120-277V	White	2,034	23	180	080083810451

# HALO Home Smart Bulb

HALO Home

- Enjoy smart lighting benefits in any fixture that accepts a standard light bulb (E26 base)
- Instantly transforms vanities, porch lights and more to smart, wireless-enabled fixtures
- Suitable for indoors and outdoors (damp location listed)
- Bluetooth-enabled; No internet or bridge needed
- White tuning 2700K – 5000K via the HALO Home app; 90 CRI; Dimmable to 5%



Catalog Number	Product Description	Replaces Up To	Selectable CCT	Voltage	Finish	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique Code ID
HHA19089BLE40A	A19 Smart Lamp, Bluetooth	65W INC	2700K-5000K	120V	White	800	10	1,536	080083885268	2344307

# HALO Home Controllers and Accessories

These controls and accessories expand the convenience, reach and features of HALO Home. Add "Smart" devices to standard lights to bring them into the wireless network, enabling grouping and scheduling. Install HALO Home controls like the Scene Keypad, Anyplace and Accessory Dimmers to control HALO Home lights and lights connected to HALO Home "Smart" devices. Finally, extend the system's reach with the optional Bridge to enable voice control and secure lighting control from anywhere.

## In-Wall Accessory Dimmer

- Remote control dimmer wirelessly commands any HALO Home device or group
- Use multiple Accessory Dimmers for multi-way control of HALO Home "Smart" Lights
- Bluetooth enabled; No internet or bridge needed
- Provides constant power for up to 300W HALO Home Smart Lights
- Neutral wire required; Includes an airgap switch to easily disconnect power



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWAC1BLE40AWH	In-Wall Accessory Dimmer, Bluetooth	120V	White	5	2,220	080083826544

\*Wallplates not included

## Anyplace Dimmer

- Battery operated, no wiring necessary; ON/OFF and dimming
- Place the remote dimmer anywhere in the home to control any HALO Home device or group
- Bluetooth-enabled; No internet or bridge needed
- Easy setup, re-wire without wires
- Wirelessly control a single or entire group such as a floor lamp or entire kitchen



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWAS1BLE40AWH	Anyplace Dimmer, Bluetooth	N/A	White	N/A	672	080083811182

## Multi-Room Scene Keypad

- Commission each of the 4 buttons to control a device/group/scene
- Tap once to turn ON, twice for OFF along with dimming
- Bluetooth-enabled; No internet or bridge needed
- Available in either battery-powered or hardwired to be installed in existing bank of switches or placed in-wall wherever centralized lighting control is desired



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWSKB1BLE40AWH	Multi-Room Scene Keypad, Battery Powered, Bluetooth	N/A	White	N/A	1,728	080083859986
HIWSKA1BLE40AWH	Multi-Room Scene Keypad, Hardwired, Bluetooth	120V	White	5	1,920	080083859962

\*Wallplates not included

## In-Wall Smart Dimmer

- Add wireless control of standard non-smart lights
- Enable three or four-way control and wirelessly command using a Scene Keypad, Accessory or Anyplace Dimmer
- Bluetooth enabled; No internet or bridge needed
- LED Max Load: 300W; Inc./ELV/FLR/Halogen/MVL/CFL: 600W
- Neutral wire required; Includes an airgap switch to easily disconnect power



Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HIWMA1BLE40AWH	In-Wall Smart Dimmer, Bluetooth	120V	White	5	1920	080083826520

\*Wallplates not included

## Smart Plug-In Lamp Dimmer

- Conveniently control dimming and ON/OFF of standard floor and table
- Add to groups or scenes and apply schedules using the HALO Home app
- Bluetooth-enabled; No internet or bridge needed
- Side button allows for manual ON/OFF and dimming control
- For use with 110/120V compatible sockets; Grounded 3-wire power connection



Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWP1BLE40AWH	Smart Plug-In Lamp Dimmer, Bluetooth	110/120V	White	N/A	1,920	080083826506

## Smart Light Adapter

- Enable smart wireless Bluetooth control of LED recessed downlights; No rewiring
- Turn standard/non-smart recessed LED downlights into smart lights (15W max.)
- Enables mobile ON/OFF, dimming, groups, scenes and schedules via Bluetooth, even when switched
- 120V input
- Bluetooth-enabled; No internet or bridge needed



Only use with non-smart lights



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWAD1BLE40AWH	Smart Light Adapter, Bluetooth	N/A	White	N/A	1,920	080083826568

## Smart Internet Access Bridge

- Access HALO Home lighting from anywhere by simply connecting the bridge to user's Wi-Fi
- Works with Amazon Alexa and Google Assistant for voice control
- Requires a router, internet connection and HALO Home compatible products
- Plugs into outlet receptacle between 5- and 45-feet from wireless router
- Wireless range up to 50 feet line-of-sight from first HALO Home device



### Works With:



Catalog Number	Product Description	Voltage	Finish	Watts	Pallet Quantity	UPC
HWB1BLE40AWH	Smart Internet Access Bridge, Bluetooth	110/120V	White	N/A	576	080083811168



# HALO COMMERCIAL RECESSED COMMERCIAL DOWNLIGHT




Downlight  
p.31



# PR4 LED SeleCCTable™ Downlight Series

HALO Commercial

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Exclusive medium / wide beam distribution reversible flip lens



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR4FS12D010	4" Housing	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	11	90	080083131839	2353549
PR4M12MD8FSMW	4" LED Module	Matte White	26W-32W	3000K/3500K/4000K	120-277V	1000/1500 /2000	22	144	080083060795	2353549
PR4RFS12D010	4" Retrofit Frame	Raw Finish	26W-32W	N/A	120-277V	1000/1500 /2000	22	72	080083132683	2353549
PR4SFS12D010MW	4" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120-277V	1000/1500 /2000	22	108	080083133581	2353549


Specify two parts: LED module and housing, retrofit or surface mount cylinder

Downlight

# PR6 LED SeleCCTable™ Downlight Series

HALO Commercial

- 6-inch LED self-flanged, lensed LED recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable lumens: 1000, 1500, 2000
- Field selectable CCT: 3000K, 3500K, 4000K
- Medium and wide interchangeable lens option included
- Specify two parts: LED module and housing or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Selectable Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR6FS12D010	6" Housing	Raw Finish	26W-32W	N/A	120/277V 50/60 Hz	1000/1500/2000	21	72	080083892174	2328770
PR6M12MD8FSMW	6" LED Module	Matte White	26W-32W	3000K/3500K /4000K	N/A	1000/1500/2000	N/A	72	080083891122	2345484
PR6RFS12D010	6" Retrofit Kit	Raw Finish	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	22	72	080083891726	2345457, 2345484
PR6SFS12D010MW	6" Cylinder, Surface Mount	Matte White	26W-32W	N/A	120V-277V 50/60 Hz	1000/1500/2000	21	72	080083891276	2328770

# PR8 LED SeleCCTable™ Downlight Series

HALO Commercial

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction, retrofit and surface-mount cylinder
- Field selectable CCT: 3000K, 3500K, 4000K
- Universal input 120V-277V with 0-10V 1% dimming
- Specify two parts: LED module and housing, retrofit or surface mount cylinder



Catalog Number	Product Description	Finish	Replaces up to	Selectable CCT	Voltage	Lumens (up to)	Watts	Pallet Quantity	UPC	ENERGY STAR Unique ID
PR830D010	8" Housing	Raw Finish	65W	N/A	120V-277V	3000	28	36	080083771790	2289674
PR8M34MDMW	8" LED Module	Matte Finish	65W-85W	3000K/3500K/4000K	Low Voltage	3000-4000		240	080083772940	2289767
PR8R30D010	8" Retrofit Kit	Raw Finish	65W	N/A	120V-277V	3000	28	480	080083772193	2289686
PR8S30D010MW	8" Cylinder, Surface Mount	Matte White	65W	N/A	120V-277V	3000	28	108	080083772599	2289685