


PowerTech


6081T Diesel Engine

Industrial Engine Specifications



6081T shown

Dimensions

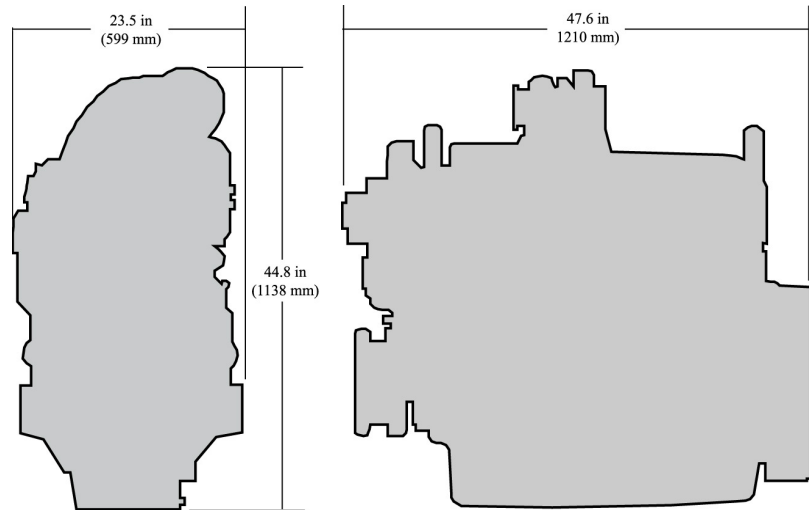

Certifications

- CARB
- EPA Tier 1
- EU Stage I

General data

Model	6081TF001	Aspiration	Turbocharged
Number of cylinders	6	Length - mm (in)	1210 (47.6)
Displacement - L (cu in)	8.1 (494)	Width - mm (in)	599 (23.6)
Bore and Stroke-- mm (in)	116 x 129 (4.57 x 5.08)	Height-- mm (in)	1138 (44.8)
Compression Ratio	16.5:1	Weight, dry-- kg (lb)	735 (1620)
Engine Type	In-line, 4-Cycle		


Intermittent BHP is the power rating for variable speed and load applications where full power is required intermittently.

Heavy duty - see application ratings/definitions, engine performance curves.

Continuous BHP is the power rating for applications operating under a constant load and speed for long periods of time.

Power output is within + or - 5% at standard SAE J 1995 and ISO 3046.

Performance curve

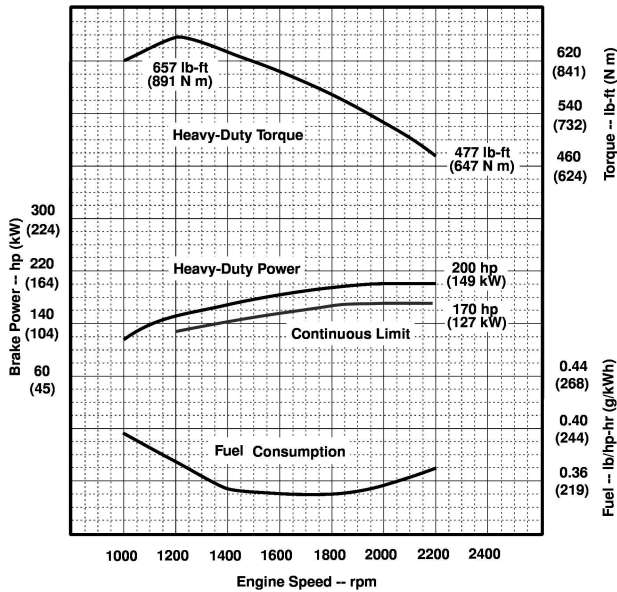

Performance data

Intermittent rated speed	149 kW (200 hp) @ 2200 rpm
Peak power	149 kW (200 hp) @ 2200 rpm
Peak torque	891 N.m (657 ft-lb) @ 1200 rpm
Torque rise %	38% @ 1200 rpm

Features and benefits

Replaceable, Directed Top-Liner Cooling

- Reduces upper liner temperature by as much as 100 degrees Fahrenheit or 54 degrees Celsius
- Durable and reliable power cylinder components
- Hardened and precision machined for long life
- Rebuild to original specifications

Rugged Cast Iron Engine Block

- Deep skirted design provides added strength and reduced noise

Easy to Apply, Easy to Install

- Front and rear engine mounting pads on the side of the block facilitates installation
- Either side service for filters and service points facilitates packaging
- All connection points in common locations make it easy to install or package
- Adjustable fan drive with multiple fan ratios with automatic belt tensioner

Compact Size

- Narrow design and low profile arrangement contribute to compact packaging
- High mount or low mount turbocharger position to meet packaging requirements

World-class performance

- Excellent fuel economy and low oil consumption

Fuel System Controls

- Proven and Reliable Mechanical Governor
- 3-5% Droop Governing
- 12V or 24V Electric Shutoff

John Deere Power Systems
3801 W. Ridgeway Ave.
PO Box 5100
Waterloo, IA 50704-5100
Phone: 1-800-533-6446
Fax: 319.292.5075

John Deere Power Systems
Usine de Saran
La Foulonnerie - B.P. 11.13
45401 Fleury les Aubrais Cedex
France
Phone: 33.2.38.82.61.19
Fax: 33.2.38.82.60.00

All values at rated speed and power with standard options unless otherwise noted. Specifications and design subject to change without notice.