


ENERGY STAR Qualification Criteria for Residential Doors

DOORS			
GLAZING LEVEL	U-FACTOR ¹	SHGC ²	
Opaque	≤ 0.17	No Rating	
$\leq \frac{1}{2}$ -Lite	≤ 0.25	≤ 0.25	
$> \frac{1}{2}$ -Lite	≤ 0.30	Northern	≤ 0.40
		North-Central	
		South-Central	≤ 0.25
		Southern	

Air Leakage for Sliding Doors ≤ 0.3 cfm/ft²
Air Leakage for Swinging Doors ≤ 0.5 cfm/ft²

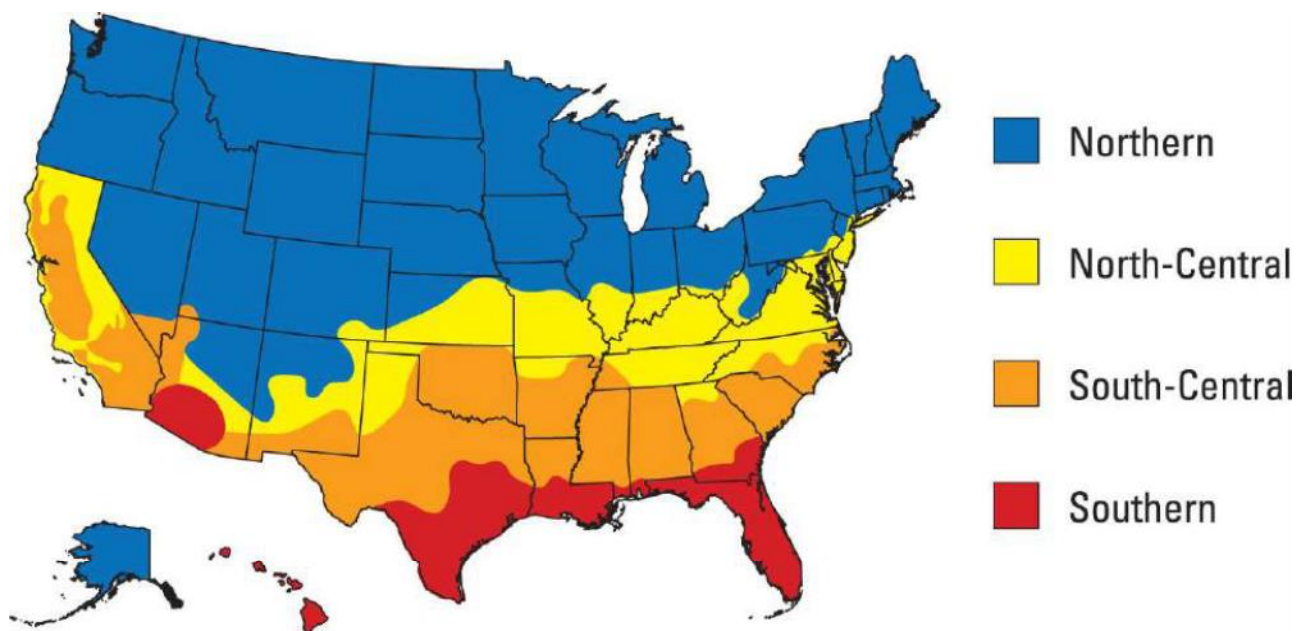

Note: A complete list of ENERGY STAR Climate Zones by state and county or, where applicable, zip code is available at https://www.energystar.gov/index.cfm?fuseaction=windows_doors.search_climate.



Understanding the NFRC Label

This image mirrors the four sections of the certified NFRC Label, providing the consumer with visual illustrations of what the label ratings mean. More in-depth information on the NFRC Label and purchasing the best possible windows, visit

www.WindowRatings.org



U-factor measures the heat from INSIDE a room that can escape. The lower the number the lower the potential for wasted heating expenses.

Visible Transmittance measures how much natural light can come into a room -- a HIGH number means more natural light.

Solar Heat Gain Coefficient measures the amount of OUTDOOR heat that can enter a room. The lower the number, the lower the potential for wasted cooling expenses.

Air Leakage measures how much air will enter a room through the product. The lower the number, the lower the potential for draft through the product.

The NFRC Label

The label on a product presents the results of Independent ratings from NFRC-certified laboratories. Without the NFRC label, the product is not certified.

ENERGY STAR Certified
in all 50 States

Exterior Doors Fiberglass Door MLM-M-4 Clear

ENERGY PERFORMANCE RATINGS

Product Description*
Default Frame**
Wood

U-Factor¹/Solar Heat Gain Coefficient (SHGC)

Individual Option Number

1/4 Lite
≤410[†]

1/2 Lite
≤900[†]

3/4 Lite
≤1100[†]

Full Lite
>1100[†]

Dual/Clear/Air/.75

0.23
0.10

0.28
0.19

0.31
0.26

0.35
0.34

09571-00001

09572-00001

09573-00001

09574-00001

Flush
07941-00001

U-Factor¹

0.16

SHGC

0.01

Embossed
07942-00001

U-Factor¹

0.17

SHGC

0.01

Air Leakage = ≤0.30 cfm/ft²

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

* #glazing layers / spacer type / low-e emissivity (surface) / gap fill / gap width (na=not applicable)
** per NFRC 100 square inches 'btu/hr' ft²°F

*** Numbers below the performance ratings are referenced in the NFRC Certified Products Directory (e.g., ABC-X-1-00001-00001 or 123-X-1-00001-00001)

www.nfrc.org

Air Leakage (AL) measures how much outside air comes into a home or building through a product. AL rates may be reported as ≤ 0.3 for windows, doors, and skylights, and ≤ 0.3 or ≤ 0.5 for swinging doors and sidelites. AL is an optional rating, and manufacturers can choose not to include it on their labels. This label displays AL in U.S. units. Labels on products sold in markets outside the United States may display AL in metric units.

U-factor measures how well a product prevents heat from escaping a home or building. U-factor ratings generally fall between 0.20 and 1.20. The lower the U-factor, the better a product is at keeping heat in. U-factor is particularly important during the winter heating season. This label displays U-factor in U.S. units. Labels on products sold in markets outside the United States may display U-factor in metric units.

Solar Heat Gain Coefficient (SHGC) measures how well a product blocks heat from the sun. SHGC is expressed as a number between 0 and 1. The lower the SHGC, the better a product is at blocking unwanted heat gain. Blocking solar heat gain is particularly important during the summer cooling season.



ENERGY STAR® Certified
In all 50 States



Exterior Doors Fiberglass Door MLM-M-4 Clear

ENERGY PERFORMANCE RATINGS

Product Description* Default Frame** Wood	U-Factor ¹ /Solar Heat Gain Coefficient (SHGC)			
	Individual Option Number			
	1/4 Lite ≤410†	1/2 Lite ≤900†	3/4 Lite ≤1100†	Full Lite >1100†
Dual/Clear/Air/.75	0.23 0.10 09571-00001	0.28 0.19 09572-00001	0.31 0.26 09573-00001	0.35 0.34 09574-00001
Dual/Clear/Air/.75 With Grids	0.23 0.09 09579-00001	0.28 0.17 09580-00001	0.31 0.23 09581-00001	0.35 0.30 09582-00001
Dual/Clear/Air/.29	0.24 0.10 09555-00001	0.29 0.19 09556-00001	0.32 0.26 09557-00001	0.37 0.34 09558-00001
Dual/Clear/Air/.29 With Grids	0.24 0.09 09563-00001	0.29 0.17 09564-00001	0.32 0.23 09565-00001	0.37 0.30 09566-00001
Dual/Clear/Air/.625	— — —	— — —	0.31 0.26 09709-00001	— — —
Dual/Clear/Air/.50 SDL	— — —	— — —	0.31 0.20 09723-00001	0.35 0.26 09724-00001
Triple/Clear/Air/.31/.31 Deco	0.21 0.09 09729-00001	0.25 0.15 09730-00001	0.27 0.20 09731-00001	0.31 0.27 09738-00001
Triple/Clear/Air/.25/.25 Deco	0.21 0.08 10177-00001	0.24 0.15 10178-00001	0.27 0.20 10179-00001	0.30 0.27 10180-00001
Triple/Clear/Air/.24/.24 Deco	— — —	— — —	0.28 0.20 09747-00001	— — —
Dual/Clear/Air/.81 With Blinds	— — —	0.28 0.17 09793-00001	0.32 0.22 09794-00001	0.36 0.30 09795-00001
Triple/Clear/Air/.50/.31 With Blinds/Grids	— — —	0.23 0.12 09803-00001	— — —	0.27 0.22 09804-00001

Flush 07941-00001 U-Factor¹ 0.16 SHGC 0.01

Embossed 07942-00001 U-Factor¹ 0.17 SHGC 0.01

Air Leakage - <0.30 cfm/ft²

Manufacturer stipulates that these ratings conform to applicable NFRC procedures for determining whole product performance. NFRC ratings are determined for a fixed set of environmental conditions and a specific product size. NFRC does not recommend any product and does not warrant the suitability of any product for any specific use. Consult manufacturer's literature for other product performance information.

* glazing layers / spacer type / low-e emissivity (surface) / gap fill / gap width (na=not applicable)

** per NFRC 100

† square inches

‡ btu/hr·ft²·°F

*** Numbers below the performance ratings are referenced in the NFRC Certified Products Directory (e.g., ABC-X-1-00001-00001 or 123-X-1-00001-00001)

www.nfrc.org

04/2017