




# XC625 STANDBY UPS SYSTEM

Offers significant energy savings, battery backup and surge protection.

The CyberPower XC625 uninterruptible power supply (UPS) system provides battery backup and surge protection for lightning-induced surges and other power events that can damage electronic equipment. This unit delivers battery backup to power connected electronics during a utility power failure and enough runtime to perform a graceful shutdown to protect against the loss of data and damage to valuable electronics during longer outages.

Including a sleek design, this UPS is perfect for all your home office and entertainment needs, including computers, gaming consoles, and broadband routers.

With a \$100,000 lifetime connected equipment guarantee and a three-year warranty, you can trust CyberPower's commitment to the quality of the XC625.

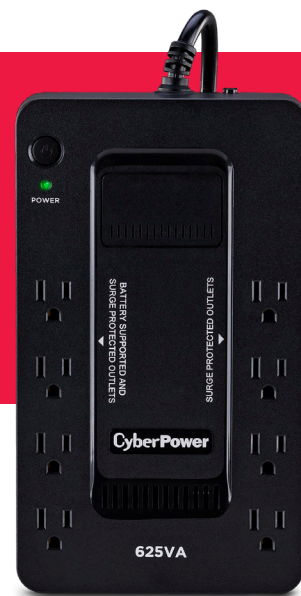

## TYPICAL APPLICATIONS

- Desktop Computers
- Personal Electronics

## FEATURES

- 625 VA / 375 W
- 8 Standard Outlets
- Standby Topology
- Full-time Surge Protection and Battery Backup
- Three-Year Warranty

## SPECIFICATIONS

GENERAL	
UPS Topology	Standby
Energy Saving	Yes
ENERGY STAR® Qualified	Yes
INPUT	
Nominal Input Voltage	120 VAC
Frequency Range	47 - 63 Hz
Circuit Breaker	15 A
Plug Type	NEMA 5-15P
Cord Length	5 ft

OUTPUT	
VA	625 VA
Watts	375 W
On Battery Voltage	120 VAC $\pm$ 5%
On Battery Frequency	50/60 Hz $\pm$ 1%
On Battery Waveform	Simulated Sine Wave
Outlet Type	NEMA 5-15R
Outlets - Total	8
Outlets - Battery & Surge Protected	4
Outlets - Surge-Only Protected	4
Outlets - Widely Spaced	4
Overload Protection	Internal Circuitry Limiting Circuit Breaker

## XC625 STANDBY UPS SYSTEM



### SPECIFICATIONS CONT.

#### BATTERY

Runtime at Half Load (min)	9
Runtime at Full Load (min)	2
Battery Type	Sealed Lead-Acid
Battery Quantity	1
Typical Recharge Time	8 Hours

#### SURGE PROTECTION & FILTERING

Surge Suppression	890 J
EMI/RFI Filtration	Yes

#### MANAGEMENT & COMMUNICATIONS

HID Compliant USB Port	Yes
LED Indicators	Power On
Audible Alarms	On Battery, Low Battery, Overload, Fault
Software	PowerPanel® Personal

#### PHYSICAL

Keyhole Mounting Slots	Yes, 2 x 2-direction slots
Dimensions (WxHxD) (in.)	9.8 x 5.8 x 3.2
Weight (lbs.)	5.0

#### ENVIRONMENTAL

Operating Humidity	0 - 95% (non-condensing)
Operating Temperature	32°F to 104°F (0°C to 40°C)

#### CERTIFICATIONS

Safety	UL1778, cUL, FCC DOC Class B, CEC
Environmental	RoHS Compliant

#### WARRANTY

Product Warranty	Three-Year Limited
Connected Equipment Guarantee	Lifetime
CEG Amount	\$100,000