

Life Is On


Schneider
Electric



 Price List

Final Distribution, Wiring Devices and Lighting Control Products

With effect from November 1st, 2018*

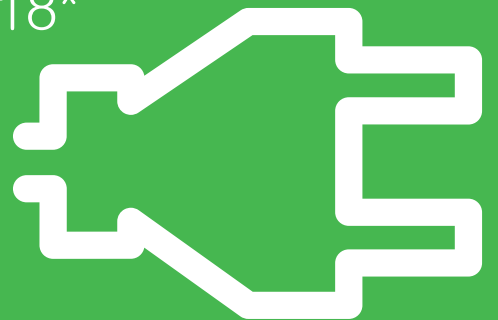

*Final Distribution, Wiring Devices prices only effective from November 1st, 2018

schneider-electric.co.in

Acti 9 Distribution System

- > Miniature Circuit Breakers (MCBs) 08
- > Residual Current Devices (RCDs) 11
- > Auxiliaries and Accessories for MCBs/RCDs 14
- > Surge Protection Devices (SPDs) 16
- > Control and Command Products 18
- > ComReady Control and Command Products 20

Enclosures and Plugs & Sockets

- > Modular Distribution Boards - Metallic 26
- > Kaedra Enclosures - Weather Proof 30
- > PratiKa Plugs & Sockets - IP44 / IP67 32
- > Electra Metal Clad Plugs & Sockets 36
- > 56 Series Plugs & Sockets - IP56 / IP66 37

Wiring Devices

- > Wiser Odace™ LIGHTING 41
- > LIVIA 42
- > Opale 43
- > ZENcelo India 46
- > ZENcelo BS 48
- > NEO 50
- > ULTI Impress 52
- > Kavacha 54
- > Metal Boxes 55

Control System

- > EzInstall3 - ULTIZIGBEE 56
- > WISER Home 57
- > Sympholux - KNX, C-Bus, DALI 58
- > Hotel Series 59
- > Argus 61
- > Control and Command Products 62
- > Analog Timers 63

Structured Cabeling Solutions

- > Datacomms 64

Acti 9 | Advanced Communication Technology that Inspires

> Protection devices

- Miniature circuit breakers
- Residual current circuit breakers
- Vigi™ residual current devices
- Surge Protection Devices

> Protection monitoring and supervision

- Indication and tripping auxiliaries
- Remote control auxiliaries
- Automatic reclosure auxiliaries



Innovative
Protection monitoring Total control and
Metering @ DB level



Efficient
Manage loads, reduce operating and project
costs, and accurately plan maintenance

> Control and monitoring

- Contactors
- Impulse relays
- Integrated control circuit breakers
- Light indicators
- Push-buttons and selector switches
- Kilowatt hour meters
- Communicating architecture

> Installation system

- IP20B terminals
- Splitter blocks
- Full range of mounting and wiring accessories



Reliable

Dual certifications for one product, 100 percent MCB and RCD coordination, easy ordering and design, error free fast connections

Acti 9 | Advanced Communication Technology that Inspires.....

> Innovative

- Centralized control system including energy metering
- Large and variable data reading and computing through universal Modbus protocol

> Efficient


- One-click, prefabricated wiring for comprehensive communication between your distribution board or panel and any facility management system

> Reliable

- Error proof connection leading to reduction in downtime
- EMC tested for immunity, radiated and conducted safety

NEW

Email Notification upon Event (Devices Status Change, Alarm threshold reached etc.)

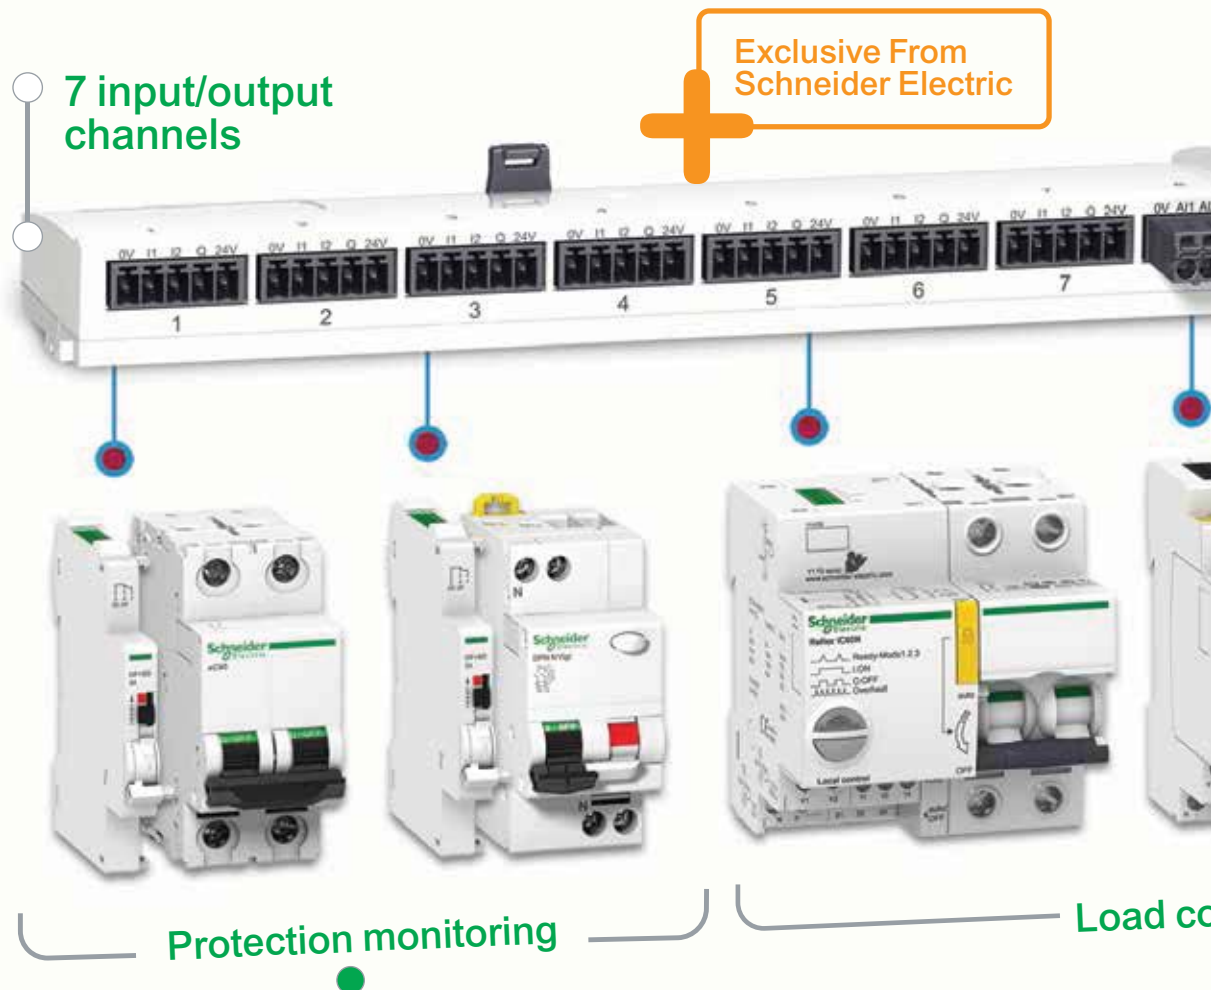


- > Status Monitoring - ON / OFF / TRIP
- > Trip Alarm Indication
- > Load Monitoring - No. of tripping cycles, Running Hours

- > Switching Action - ON / OFF
- > Monitoring - No. of Switching running hours



Meets the challenge of all your applications
Detailed load control, reduced downtime and accurately planned maintenance

Ready to connect to any facility management solution

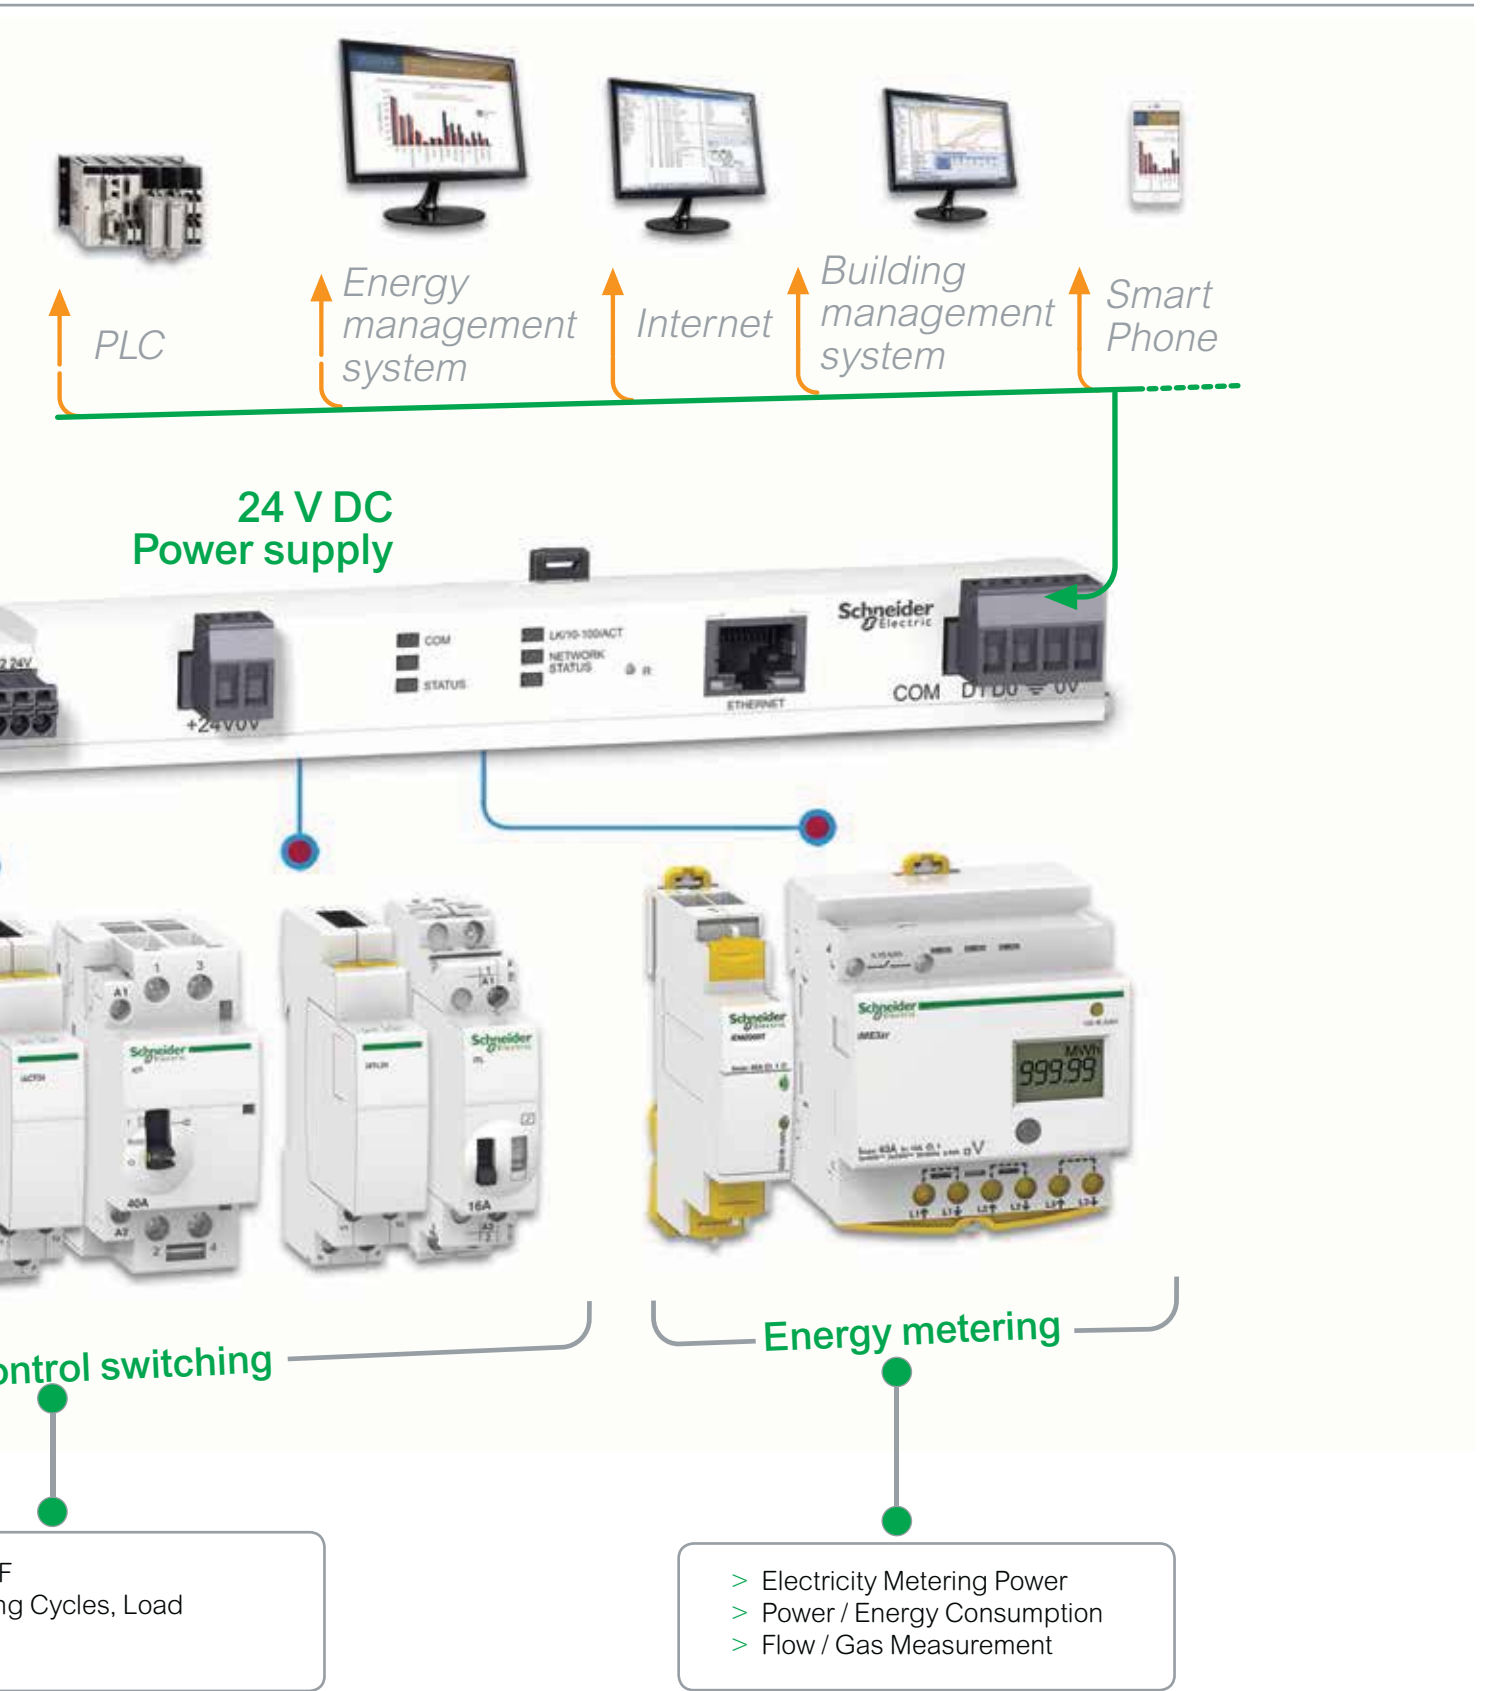

Green Premium Products

100% Recyclable and Recoverable
REACH, RoHS, PEP, EOL compliant

AC Miniature Circuit Breakers - xC60



- Breaking Capacity as per IEC 60898 and IS/IEC 60898-1, Icn = 10kA
- Breaking Capacity as per IEC 60947-2, Icn = 15kA, upto 40A
- Can be used for DC application upto 60V per pole
- Higher system performance with optimized cost: Cascading*
- Increased System Continuity: Discrimination*
- Higher Installation Life: Energy Limitation Class 3, Fast Closure Mechanism
- Ease, Speed and Flexibility of installation - Biconnect, Line-Load Reversible
- Field-fittable auxiliaries for advance protection and monitoring
- Positive Contact Indication for assurance of disconnection

[In] Rated Current (A)	1 Pole Reference	Unit LP [₹]	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width**	1 mod		2 mod		3 mod		4 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	

B curve

6	A9N1P06B ✓	314	A9N2P06B ✓	948	A9N3P06B ✓	1550	A9N4P06B ✓	2090
10	A9N1P10B ✓	314	A9N2P10B ✓	948	A9N3P10B ✓	1550	A9N4P10B ✓	2090
16	A9N1P16B ✓	314	A9N2P16B ✓	948	A9N3P16B ✓	1550	A9N4P16B ✓	2090
20	A9N1P20B ✓	314	A9N2P20B ✓	948	A9N3P20B ✓	1550	A9N4P20B ✓	2090
25	A9N1P25B ✓	314	A9N2P25B ✓	948	A9N3P25B ✓	1550	A9N4P25B ✓	2090
32	A9N1P32B ✓	314	A9N2P32B ✓	948	A9N3P32B ✓	1550	A9N4P32B ✓	2090
40	A9N1P40B ✓	694	A9N2P40B ✓	1530	A9N3P40B ✓	2365	A9N4P40B ✓	3010
50	A9N1P50B ✓	694	A9N2P50B ✓	1530	A9N3P50B ✓	2365	A9N4P50B ✓	3010
63	A9N1P63B ✓	700	A9N2P63B ✓	1545	A9N3P63B ✓	2385	A9N4P63B ✓	3040

C curve

1	A9N1P01C ✓	488	A9N2P01C ✓	1320	A9N3P01C ✓	2040	A9N4P01C ✓	2575
2	A9N1P02C ✓	488	A9N2P02C ✓	1320	A9N3P02C ✓	2040	A9N4P02C ✓	2575
3	A9N1P03C ✓	488	A9N2P03C ✓	1320	A9N3P03C ✓	2040	A9N4P03C ✓	2575
4	A9N1P04C ✓	488	A9N2P04C ✓	1320	A9N3P04C ✓	2040	A9N4P04C ✓	2575
6	A9N1P06C ✓	314	A9N2P06C ✓	948	A9N3P06C ✓	1550	A9N4P06C ✓	2090
10	A9N1P10C ✓	314	A9N2P10C ✓	948	A9N3P10C ✓	1550	A9N4P10C ✓	2090
16	A9N1P16C ✓	314	A9N2P16C ✓	948	A9N3P16C ✓	1550	A9N4P16C ✓	2090
20	A9N1P20C ✓	314	A9N2P20C ✓	948	A9N3P20C ✓	1550	A9N4P20C ✓	2090
25	A9N1P25C ✓	314	A9N2P25C ✓	948	A9N3P25C ✓	1550	A9N4P25C ✓	2090
32	A9N1P32C ✓	314	A9N2P32C ✓	948	A9N3P32C ✓	1550	A9N4P32C ✓	2090
40	A9N1P40C ✓	694	A9N2P40C ✓	1530	A9N3P40C ✓	2365	A9N4P40C ✓	3010
50	A9N1P50C ✓	694	A9N2P50C ✓	1530	A9N3P50C ✓	2365	A9N4P50C ✓	3040
63	A9N1P63C ✓	700	A9N2P63C ✓	1545	A9N3P63C ✓	2385	A9N4P63C ✓	3040

D curve

1	A9N1P01D ✓	492	A9N2P01D	1330	A9N3P01D ✓	2080	---	---
2	A9N1P02D ✓	492	A9N2P02D ✓	1330	A9N3P02D ✓	2080	A9N4P02D	2590
3	A9N1P03D ✓	492	A9N2P03D ✓	1330	A9N3P03D ✓	2080	A9N4P03D	2590
4	A9N1P04D ✓	492	A9N2P04D ✓	1330	A9N3P04D ✓	2080	A9N4P04D	2590
6	A9N1P06D ✓	414	A9N2P06D ✓	994	A9N3P06D ✓	1630	A9N4P06D ✓	2170
10	A9N1P10D ✓	414	A9N2P10D ✓	994	A9N3P10D ✓	1630	A9N4P10D ✓	2170
16	A9N1P16D ✓	414	A9N2P16D ✓	994	A9N3P16D ✓	1630	A9N4P16D ✓	2170
20	A9N1P20D ✓	414	A9N2P20D ✓	994	A9N3P20D ✓	1630	A9N4P20D ✓	2170
25	A9N1P25D ✓	414	A9N2P25D ✓	994	A9N3P25D ✓	1630	A9N4P25D ✓	2170
32	A9N1P32D ✓	414	A9N2P32D ✓	994	A9N3P32D ✓	1630	A9N4P32D ✓	2170
40	A9N1P40D ✓	748	A9N2P40D ✓	1620	A9N3P40D ✓	2505	A9N4P40D ✓	3145
50	A9N1P50D ✓	748	A9N2P50D ✓	1620	A9N3P50D ✓	2505	A9N4P50D ✓	3145
63	A9N1P63D	756	A9N2P63D ✓	1635	A9N3P63D ✓	2530	A9N4P63D ✓	3175

Note: * Please contact nearest Schneider Electric Sales Office or Customer Care Center for coordination chart
**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

AC Miniature Circuit Breakers - C120



- Breaking capacity as per IEC 60898, Icn = 10kA/15kA
- Positive Contact Indication for assurance of disconnection
- Degree of pollution: 3 (suitable for industrial environment)
- Operating Temperature: -30 to 70°C
- Terminal connections: Flexible cables up to 35 sq.mm; Rigid cables up to 50 sq.mm

[In] Rated Current (A)	1 Pole Reference	Unit LP [₹]	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	
MOQ	12 Nos.		6 Nos.		4 Nos.		3 Nos.	
C120N (10kA)								
80	A9N18357 ✓	2520	A9N18361 ✓	5595	A9N18365 ✓	8810	A9N18372 ✓	11480
100	A9N18358 ✓	2830	A9N18362 ✓	5965	A9N18367 ✓	9390	A9N18374 ✓	11965
125	A9N18359 ✓	3055	A9N18363 ✓	6560	A9N18369 ✓	10415	A9N18376 ✓	13535
C120H (15kA)								
80	A9N18446	3025	A9N18457	6800	A9N18468	10355	A9N18479	13295
100	A9N18447	3335	A9N18458	6970	A9N18469	11280	A9N18480	14330
125	A9N18448	3645	A9N18459	7910	A9N18470	12170	A9N18481	15570

DC Miniature Circuit Breakers - C60H



- Specially designed MCB for enhanced protection in DC installation
- Magnetic Arc Chutes to quick break DC current in event of fault
- Breaking capacity 6kA as per IEC 60947-2
- Voltage Rating: 1P - 250 V DC & 2P - 500 V DC
- Impulse Voltage: 6 kV
- Higher Installation Life: Energy Limiting Class: 3

[In] Rated Current (A)	Module Width 18mm/ module	1 Pole Reference	Unit LP [₹]	Module Width 18mm/ module	2 Pole Reference	Unit LP [₹]
MOQ		12 Nos.			6 Nos.	
C60H-DC						
0.5	1	A9N61500	938	2	A9N61520	1980
1	1	A9N61501 ✓	830	2	A9N61521 ✓	1720
2	1	A9N61502 ✓	830	2	A9N61522 ✓	1720
3	1	A9N61503 ✓	830	2	A9N61523 ✓	1720
4	1	A9N61504 ✓	830	2	A9N61524 ✓	1720
5	1	A9N61505	830	2	A9N61525	1720
6	1	A9N61506 ✓	682	2	A9N61526 ✓	1455
10	1	A9N61508 ✓	682	2	A9N61528 ✓	1455
16	1	A9N61511 ✓	682	2	A9N61531 ✓	1455
20	1	A9N61512 ✓	682	2	A9N61532 ✓	1455
25	1	A9N61513 ✓	682	2	A9N61533 ✓	1455
32	1	A9N61515 ✓	682	2	A9N61535 ✓	1455
40	1	A9N61517 ✓	934	2	A9N61537 ✓	2065
50	1	A9N61518 ✓	934	2	A9N61538 ✓	2065
63	1	A9N61519 ✓	934	2	A9N61539 ✓	2065

Special application MCBs



Solar Application – PV DC

- DC MCB for multi string PV installations
- Operating Voltage: 800V DC
- Current Rating up to 25A
- Complies to IEC / EN 60947-2



Rail Application* (including Rolling Stock)

- Fire & smoke Resistant – Level 2 (NF F 16-101, NF F 16-102)
- Shock & vibration resistant (IEC 61373) – Cat 1, Class B
- Breaking Capacity: up to 25kA
- Complies to IEC / EN 60947-2



UL MCB

- Type: UL1077, UL489
- Breaking Capacity of 10kA
- Complies to IEC 60947-2 / UL1077 / UL489 / CSA

Note:

Please contact nearest Schneider Electric sales office or Customer Care for Reference and prices of Application Specific MCBs

*Rail Application RCDs are also available on demand

**18mm/module

Please contact Customer Care Center for Stockable and Non stockable status of references.

✓ NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

AC Miniature Circuit Breakers - NG125



- Compliance to IEC / EN 60947-2
- High Breaking Capacity MCBs – up to 50kA
- Current Rating up to 125A
- Trip on fault indication on front face of MCB
- Suitability for isolation in the industrial sector to IEC/EN 60947-2
- Available in B, C, D Curves

[In] Rated Current (A)	1 Pole Reference	Unit LP [₹]	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width**	1.5 mod		3 mod		4.5 mod		6 mod	
NG125N – 25kA Breaking Capacity								
10	18610	*	18621	*	18632	*	18649	*
16	18611	*	18622	*	18633	*	18650	*
20	18612	*	18623	*	18634	*	18651	*
25	18613	*	18624	*	18635	*	18652	*
32	18614	*	18625	*	18636	*	18653	*
40	18615	*	18626	*	18637	*	18654	*
50	18616	*	18627	*	18638	*	18655	*
63	18617	*	18628	*	18639	*	18656	*
80	18618	*	18629	*	18640	*	18658	*
NG125H – 36kA Breaking Capacity								
10	18705	*	18714	*	18723	*	18732	*
16	18706	*	18715	*	18724	*	18733	*
20	18707	*	18716	*	18725	*	18734	*
25	18708	*	18717	*	18726	*	18735	*
32	18709	*	18718	*	18727	*	18736	*
40	18710	*	18719	*	18728	*	18737	*
50	18711	*	18720	*	18729	*	18738	*
63	18712	*	18721	*	18730	*	18739	*
80	18713	*	18722	*	18731	*	18740	*
NG125H – 50kA Breaking Capacity								
10	18777	*	18788	*	18799	*	18810	*
16	18778	*	18789	*	18800	*	18811	*
20	18779	*	18790	*	18801	*	18812	*
25	18780	*	18791	*	18802	*	18813	*
32	18781	*	18792	*	18803	*	18814	*
40	18782	*	18793	*	18804	*	18815	*
50	18783	*	18794	*	18805	*	18816	*
63	18784	*	18795	*	18806	*	18817	*
80	18785	*	18796	*	18807	*	18818	*

*Price on Request – Please contact Schneider Electric Customer Care Center for Prices

**18mm/module

Note: Reference provided above are for C Curve MCBs – B and D Curve details available on request

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Residual Current Devices (RCDs) - For Human and Fire Protection



**30
mA**

Use of **30mA RCDs** is now **mandatory** for all **domestic intallations** in India {CEA Amendment regulation 2015*}



Schneider Electric provides voltage independent RCDs which work on current sensing technology and provide protection from residual current even at extra low voltages (down to zero volts) and in case of break of neutral.

**SI
Type**

Schneider Electric offers SI RCD built to operate in electrically polluted or installation in aggressive environments:

- Flourescent / Variable lighting with Electronic ballast
- Powerful IT / Telecom equipment / Air conditioning
- Severe Atmosphere - High lighting risk / Swimming pools

* for Measures relating to Safety and Electric supply

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

AC Residual Current Circuit Breakers - xID



- Complies to standards IEC/EN 61008-1 and IS 12640
- AC Class protection
- Selective range available for time based discrimination
- Easy Monitoring: Earth fault indication and Test Button on front face
- Operating temperature up to +70°C
- Mandatory to use OF-S auxiliary to add any indication or tripping auxiliary

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit LP [₹]	Module Width 18mm/module	4 Pole Reference	Unit LP [₹]
25	30	2	A9N16201	3385	4	A9N16251	4665
	100	2	A9N16203	3620	4	A9N16253	4865
	300	2	A9N16202	3730	4	A9N16252	5010
40	30	2	A9N16204	3985	4	A9N16254	4680
	100	2	A9N16205	4220	4	A9N16255	4895
	300	2	A9N16206	4340	4	A9N16256	5085
63	30	2	A9N16208	4710	4	A9N16258	5425
	100	2	A9N16209	4975	4	A9N16259	5785
	300	2	A9N16210	5075	4	A9N16260	5810
80	30	2	A9N16212	7925	4	A9N16261	9385
	100	2	A9N16213	7910	4	A9N16262	9360
	300	2	A9N16214	8055	4	A9N16263	9415

AC Residual Current Circuit Breakers (RCCBs) - ID



- Complies to standards IEC 61008-1 and VDE 0664
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Electrical ON/OFF indication by using OFSP auxiliary

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
4P	100	30	4	**A9R11491	11275
		100	4	**A9R12491	11670
	125	30	4	16905	34530
		100	4	16906	35220
		300	4	16907	35385

Note: **For 100A RCCB Auxiliary kindly contact Customer Care

AC Residual Current Breaker Overload (RCBO) - DPN N Vigi



- Complies to standards IEC/EN 61009
- AC Class Protection; Tripping characteristics - C curve
- Overvoltage category (IEC 60364): IV
- Suitable for indication & tripping auxiliaries

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9N19661	4905
		300	2	A9N19681	5075
	10	30	2	A9N19663	4905
		300	2	A9N19683	5075
	16	30	2	A9N19665	4905
		300	2	A9N19685	5075
	20	30	2	A9N19666	4905
		300	2	A9N19686	5075
	25	30	2	A9N19667	4905
		300	2	A9N19687	5075
	32	30	2	A9N19668	5145
		300	2	A9N19688	5330
	40	30	2	A9N19669	6325
		300	2	A9N19689	6490

Note: Application specific RCDs also available with 10mA, 500mA and 1000mA sensitivities | Please contact nearest Schneider Electric Sales Office or Customer Care Center for Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

SI Type Residual Current Circuit Breakers (RCCBs) - xID SI



- Complies to standard IEC/EN 61008-1
- SI RCDs offer enhanced immunity against Electrical Disturbances; Polluted and Corrosive environments - Guaranteed performance in harsh operating conditions
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with:
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit LP [₹]	Module Width 18mm/module	4 Pole Reference	Unit LP [₹]
25	30	2	A9N16234	7320	4	A9N16321	8160
40	30	2	A9N16237	7690	4	A9N16324	8420
63	30	2	A9N16240	7910	4	A9N16327	8640
	300	2	A9N16246	7970	4	A9N16334	8995

Vigi Block for xC60 (Add-on RCD Module, 2 & 4 Pole)



- Flexibility to use MCB of any tripping curve to suit applications, ensuring best 3 in 1 protection
- No auxiliary supply required
- AC Class protection
- Degree of pollution: 3 (suitable for industrial environment)
- Immune to nuisance tripping due to transient over voltages

[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	2 Pole Reference	Unit LP [₹]	Module Width 18mm/module	4 Pole Reference	Unit LP [₹]
25	30	1.5	A9N26581	4645	3	A9N26595	5580
	100	1.5	A9N26582	5805	3	A9N26596	6020
	300	1.5	A9N26583	5980	3	A9N26597	6195
63	30	2	A9N26611	6500	3.5	A9N26643	6835
	100	2	A9N26612	6760	3.5	A9N26644	6970
	300	2	A9N26613	6895	3.5	A9N26645	7105

Note: Vigi Block for High Rating up to 125A (C120) and High Breaking Capacity (NG125) available on demand

SI Type Residual Current Breaker Overload (RCBO) - DPN N Vigi SI




- Complies to standard IEC/EN 61009
- Ensures continuity of supply in networks with:
 - Transient overvoltages
 - Loads generating HF leakage current i.e. harmonics
 - Loads generating continuous leakage current
- Ensures tripping on genuine earth fault in networks with :
 - Pulsating DC components
 - HF applications which "Blinds" (non-tripping) the conventional RCDs

Poles Description	[In] Rated Current (A)	Earth-Leakage Sensitivity (mA)	Module Width 18mm/module	Reference	Unit LP [₹]
1P+N	6	30	2	A9N19631	9400
		300	2	A9N19641	9950
	10	30	2	A9N19632	9400
		300	2	A9N19642	9950
	16	30	2	A9N19634	9400
		300	2	A9N19644	9950
	20	30	2	A9N19635	9400
		300	2	A9N19645	9950
	25	30	2	A9N19636	9400
		300	2	A9N19646	9950
	32	30	2	A9N19637	9930
		300	2	A9N19647	12125
	40	30	2	A9N19638	11785
		300	2	A9N19648	13110

*For Prices, please contact nearest Schneider Electric Sales Office or Customer Care Center are Center for Reference and Prices

Common Auxiliaries for xC60 / C120 / RCDs Range

- Field-fittable auxiliaries (clip fitted) mounted on left side with maximum width of 54mm
- Order: Tripping Auxiliaries (MN first) followed by Indication Auxiliaries (SD first)

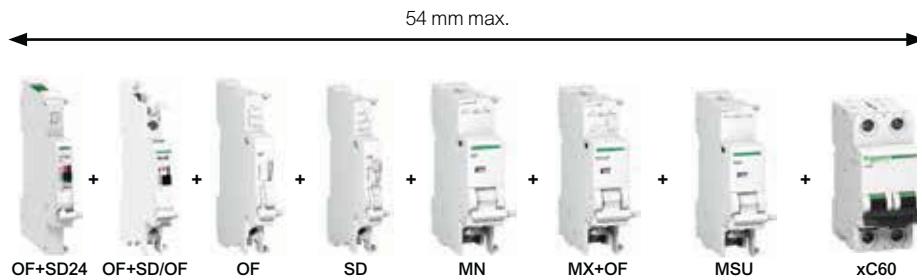

Type	Module Width 18mm/module	Reference	Unit LP [₹]
Indication Auxiliaries			
OF Auxiliary Switch: for ON/OFF indications	0.5	A9N26924	958
SD Alarm Switch: for Trip on fault indications	0.5	A9N26927	1125
OF + SD/OF Auxiliary switch	0.5	A9N26929	2995
OF+SD24 auxiliary contact (ComReady)	0.5	A9N26899	2510
Protection Auxiliaries – Trip Indication on front face			
MN Under-voltage Release 220-240V AC	1	A9N26960	3255
MSU Over-voltage Release 275V AC	1	A9N26500	4775
Tripping Auxiliaries – Trip Indication on front face			
MX + OF Shunt Release 110-415V AC: for Remote tripping of Circuit Breaker	1	A9N26946	2620
MX + OF Shunt Release 12-24V AC/DC: for Remote tripping of Circuit Breaker	1	A9N26948	2620
Auxiliary Switch for RCCBs – Mandatory for use of Auxiliaries with RCCBs			
Auxiliary switch for RCCB up to 80A (OF-S)	0.5	A9N26923	1280
Auxiliary switch for RCCBs 125A (OFSP)	0.5	16940	1945

Accessories



Type	Description	Reference	Unit LP [₹]
Rotary Handle*	Breaker Switching Sub-Assembly	27046	3580
	Extended, Disconnectable handle	27047	2215
Padlock** (bag of 2)		26970	860
Aluminum cable terminal**		27060	522
Spacer		A9N27062	220

* for xC60, C120, DPN N Vigi, C60H-DC, xSW - Multi poles only

**for xC60, xID, DPN N Vigi, C60H-DC, xSW, C60PV-DC

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Protection Against Lightning Strikes And Switching Surges



For all low voltage switchboards and electrical enclosures:

Comprehensive range

- To ensure the protection of equipment connected to:
- Low voltage networks,
- Telecommunications networks,
- Computer networks.
- Easy to implement and use.
- Compatibility with all earthing systems (TT, TNS, TNC, IT).
- Technical and aesthetic consistency

Continuity of service and certified safety

Schneider Electric certified coordination between the surge arrester and its disconnection circuit breaker.

Compliance with standards: IEC/EN 61643-11.



More and more electrical equipment today is sensitive to overvoltages caused by lightning.



90%

of power outlets supply equipment incorporating electronic devices.



iQuick PRD “built-in” technology surge arresters, a Schneider Electric innovation, incorporate their own disconnection circuit breaker: easy to choose and simple to install for greater effectiveness.



Up to **30%** of installation time saved.

Surge Arresters - Type 1+ 2



- Complies to IEC 61643-1 and EN 61643-11
- Withdrawable type: Easy Replacement
- Inbuilt SPD health Indicator: Also available with remote signaling
- For protection against Direct lightning surge, Indirect lightning surge, Switching surge
- Iimp up to 25kA & Imax upto 40kA
- **Always use a Back-up MCB with your SPD**
- Maximum Operating Voltage [Uc]: 350V

Type	Pole Description	Module Width 18mm/module	Reference	Unit LP [₹]
PRD1 25r	1P	2	16329	13005
	1P + N	4	16330	28610
	3P	6	16331	42905
	3P + N	8	16332	53305

Surge Arresters iPRD- Type 2 (Withdrawable type) (TT, TN-S, TN-C Systems)



- In conformance with standards IEC 61643-11/2011 T2 and EN 61643-11 Type 2
- For protection against Indirect lightning surge and Switching surge
- Inbuilt health Indicator
- Response time < 25ns
- Imax (8/20 s): 65/40/15/8kA
- Maximum Operating Voltage [Uc]: 340V
- Level of protection, Up: 1.0 - 2.0 kV
- Remote indication contact with 8r/20r/40r/65r
- **Always use a Back-up MCB with your SPD**

Type	Rated Voltage (V)	Pole Description	Module Width 18mm/module	Reference	Unit LP [₹]
iPRD8	230	1P	1	A9L08100	3900
	230	1P+N	2	A9L08500	7295
	230/400	3P	3	A9L08300	9850
iPRD8r	230/400	3P+N	4	A9L08600	14870
	230	1P+N	2	A9L08501	8745
iPRD20	230/400	3P+N	4	A9L08601	17845
	230	1P	1	A9L20100	4310
	230	1P+N	2	A9L20500	9175
iPRD20r	230/400	3P	3	A9L20300	11745
	230/400	3P+N	4	A9L20600	16930
	230	1P+N	2	A9L20501	10910
iPRD40	230/400	3P+N	4	A9L20601	20310
	230	1P	1	A9L40100	5170
	230	1P+N	2	A9L40500	10565
iPRD40r	230/400	3P	3	A9L40300	15170
	230/400	3P+N	4	A9L40600	21160
	230	1P	1	A9L40101	6200
iPRD65r	230	1P+N	2	A9L40501	13625
	230/400	3P	3	A9L40301	20120
	230/400	3P+N	4	A9L40601	25390
iPRD65r	230	1P	1	A9L65101	8290
	230	1P+N	2	A9L65501	17365
	230/400	3P	3	A9L65301	22660
	230/400	3P+N	4	A9L65601	29405

Spare Cartridges for iPRD



- Spare Cartridges for iPRD8r, iPRD20r, iPRD40r and iPRD65r
- End of life indication available on front face
- These Cartridges are not compatible with Old SPD range (A9L16...)**

Type	Spare Cartridges for	Reference	Unit LP [₹]
iPRD 65-350	iPRD65r	A9L65102	5190
iPRD 40-350	iPRD40, iPRD40r	A9L40102	3930
iPRD 20-350	iPRD20, iPRD20r	A9L20102	3195
iPRD 8-350	iPRD8, iPRD8r	A9L08102	2800
iPRD Neutral	All products (1P+N, 3P+N)	A9L00002	4200

**Spare Cartridges for Old SPD Range (A9L16...) are available on demand - please contact nearest Schneider Electric Sales Office or Customer Care for Reference and prices

Note: Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

iQuick PRD - Type 2 with inbuilt MCB



- Compact SPD with in-built back up MCB - saving on space, MCB selection, wiring time
- Compliance to EN 61643-11
- Withdrawable Type - Cost Efficient - Allows damaged Cartridges to be replaced without having to replace entire SPD
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available
- Incoming Protection: iQuick PRD 40r (High Risk level) and iQuick PRD 20r (Moderate Risk level)
- Secondary Protection: iQuick PRD 8r is cascade mounted with incoming surge arresters

Type	Pole Description	Module Width 18mm/module	Reference	Unit LP [₹]
iQuick PRD 8r	1P+N	4	A9L16298	10900
	3P	6.5	A9L16299	16015
	3P+N	7.5	A9L16300	19930
iQuick PRD 20r	1P+N	4	A9L16295	13075
	3P	6.5	A9L16296	19225
	3P+N	7.5	A9L16297	23915
Quick PRD 40r	1P+N	4	A9L16292	15270
	3P	6.5	A9L16293	22880
	3P+N	7.5	A9L16294	28435

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Photovoltaic surge arresters



- Protection for photovoltaic panels and the DC input to the inverter from overvoltages due to a lightning strike
- Type 2 surge arresters
- Should be installed in switchboard inside the building. If switchboard is located outside, it must be weatherproof
- Withdrawable surge arrester allows damaged Cartridges to be replaced quickly
- Inbuilt SPD Health Indicator on front face of device; Remote signaling functionality also available

Type	U (cpv) Maximum Operating Voltage (V)	Module Width 18mm/module	Reference	Unit LP [₹]
iPRD 40r	800	3	A9L40271	8695
	1000	3	A9L40281	9935

Note: Spare / Replacement Cartridges available - For Reference and prices contact nearest sales office or customer care

Surge Arresters for Communication Networks



- Analogue telephone line protection: iPRC surge arrester wired in series to the private installation input, protects the telephones, the modems (including ADSL) etc
- Protection for 2 low-current lines without common potential or 4 lines with common reference potential
- iPRI protects measuring instrument and PLC sensor inputs and the DC power supply inputs up to 53 V and AC power supply inputs up to 37 V

Type	[Ue] Operational Voltage (V)	Module Width 18mm/module	Reference	Unit LP [₹]
PRI	48 V DC	1	A9L16339	15510
PRC	130 V AC	1	A9L16337	9035

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Isolator - xSW



- Complies to IEC/EN 60947-3
- Switching duty: AC-22
- Impulse voltage: 6kV
- DC application: 48V (110V with 2 poles in series)
- Short circuit withstand 20 In for 1 second
- Upto 80A Bi connect terminals & 100A to 125A with mono connect terminals

Poles Description	[In] Rated Current (A)	Module Width 18mm/module	MOQ	Reference	Unit LP [₹]
2	40	2	6	A9S2P040	582
	63	2	6	A9S2P063	770
	80	2	6	A9S2P080	924
	100	2	6	A9S2P100	1340
	125	2	6	A9S2P125	1385
3	40	3	4	A9S3P040	1025
	63	3	4	A9S3P063	1200
4	40	4	3	A9S4P040	1295
	63	4	3	A9S4P063	1415
	80	4	3	A9S4P080	1875
	100	4	3	A9S4P100	2110
	125	4	3	A9S4P125	2280

Selector Switch - iSSW



- Complies to IEC 60947-5-1 and IEC 60669-1
- Rating 20A, 250V AC
- Electrical life (AC22): 30,000 cycles
- Connection: tunnel terminals cables up to 10 sq. mm

No. of positions	Poles Description	Contacts	Module Width 18mm/module	MOQ	Reference	Unit LP [₹]
2	1	1 C/O	1	12	A9E18070	1205
	2	2 C/O	2	6	A9E18071	1660
		1NO + 1NC	1	12	A9E18072	964
3	1	1 C/O	1	12	A9E18073	1185
	2	2 C/O	2	6	A9E18074	2005

iRO Buzzers



- Audible indication in housing and the tertiary sector
- Sound level of 70dBA at a distance of 60cm

Voltage	Module Width 18mm/module	Reference	Unit LP [₹]
230V AC	1	A9A15322	1025
8..12V AC	1	A9A15323	814

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

iCT Contactors



- Complies with standards IEC 1095, E N 61095
- 4 operating modes switch on front face :
 - Automatic mode
 - Temporary "ON" mode
 - Permanent "ON" mode
 - Shutdown
- Mechanical contact position Indicator
- Safe installation maintenance: lock the contactor in ON position
- Silent operation (20dB) for entire range

Type	Rating (A)	No. of Contacts	Module Width 18mm/module	Reference	Unit LP (₹)
1P	25	1NO	1	A9C20731	1865
	16	2NO	1	A9C22712	1920
2P	25	2NO	1	A9C20732	2295
	40	2NO	2	A9C20842	3930
3P	63	2NO	2	A9C20862	5020
	25	3NO	2	A9C20833	2910
	40	3NO	2	A9C20843	6570
4P	63	3NO	3	A9C20863	7140
	25	4NO	2	A9C20834	3095
	40	4NO	2	A9C20844	6700
4P	63	4NO	3	A9C20864	8075
	63	2NO + 2NC	3	A9C20868	8075

Note: 100A Contactor in 2P / 4P - available on request

iTL Impulse Relays



- Complies with standards IEC/EN 60669-2-2
- Safe maintenance: disconnection of remote control by selector switch
- Manual Controls on front face: 0-I toggle
- Mechanical contact position Indicator
- Maximum 5 operations/min. and 100 switching operations/day
- Degree of pollution: 3 (suitable for industrial environment)

Type	Rating (A)	Control Voltage	No. of Contacts	Module Width	Reference	Unit LP (₹)
1P	16	230-240 VAC	1NO	1	A9C30811	1205
	32	230-240 VAC	1NO	1	A9C30831	1515
2P	16	230-240 VAC	2NO	1	A9C30812	1980
	32	230-240 VAC	2NO	1	A9C30831 + A9C32836	4470
3P	16	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30811 + A9C32816	3575
	32	230-240 VAC	1NO+1NO/NC+1NO	2	A9C30831 + 2 x A9C32836	4470
4P	16	230-240 VAC	4NO	2	A9C30814	4110
	32	230-240 VAC	4NO	2	A9C30831 + 3 x A9C32836	4470

iIL Indicator Lights



- Complies with standard IEC 60947-5-1
- Indicator light with LED technology
- Service life 100,000 hours with constant luminous efficiency

Type	Colour	Module Width 18mm/module	Reference	Unit LP (₹)
Single Indicator light	Red	1	A9E18320	1130
	Green	1	A9E18321	1130
	Blue	1	A9E18323	1130
	Orange	1	A9E18324	1130
3 phase voltage presence light	Red/Red/Red	1	A9E18327	2830
Single Push Button (1 NO+ 1NC)	Grey	1	A9E18033	1680

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

PowerTag - World's smallest energy sensor



Monitor Your Energy

- Real time U, V, I, P, PF
- Active energy metering (Class 1 EN 61557-12) partial and total
- Load balance overview for 3P

Improve your Maintenance

- Pre Alarm on overload
- Specific "alarms" for U, I, P
- Alarm on feeder voltage loss

Description	Part no.	Unit LP [₹]
PowerTag 1P	A9MEM1520	7145
PowerTag 1P+N Up	A9MEM1521	7145
PowerTag 1P+N Down	A9MEM1522	7145
PowerTag 3P	A9MEM1540	14285
PowerTag 3P+N Up	A9MEM1541	14285
PowerTag 3P+N Down	A9MEM1542	14285
PowerTag Flexi 1P	A9MEM1560	7850
PowerTag Flexi 3P+N	A9MEM1570	15570

Smartlink



- Compliance to IEC/EN 61131-2
- Protection Monitoring – Device Status and alarm notifications
- Load Control / Switching through Contactors and Impulse Relays
- Energy Monitoring through pulse meters
- Alarm over email and analog sensors (temperature / humidity) with Smartlink Ethernet
- Plug & Play – Pre fabricated cables and in built web pages
- Rated Voltage: 24V DC

Description	Reference	Unit LP [₹]
Smartlink Modbus	A9XMSB11	34830
Smartlink SI-D	A9XMWA20	19950
Smartlink SI-B	A9XMZA08	38805
Smartlink EL-D	A9XELC10	21000
Wiser Energy Module IP	EER31800	21000

Communication Auxiliaries



Auxiliary for Protection Devices (OF+SD24)

Auxiliary for Contactors (iACT24)

Auxiliary for Impulse Relays (iATL24)

Description	Module Width	Reference	Unit LP [₹]
OF+SD24	0.5	A9N26899	2390
iACT24	1	A9C15924	12495
iATL24	1	A9C15424	13160

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018



Description	Set of	Reference	Unit LP [₹]
Prefabricated Cables:			
With 2 Connectors			
Short: 100mm	6	A9XCAS06	5085
Medium: 160mm	6	A9XCAM06	5135
Long: 870mm	6	A9XCAL06	5840
With 1 Connector			
Long:870mm	6	A9XCAU06	3510
Connectors			
5-pin connectors (Ti24)	12	A9XC2412	7075
Mounting Kit			
Din Rail (4 feet, 4 Straps, 4 Adapters)	1	A9XMFA04	1390
Multiclip			
Multiclip 80A	1	4000	8100
Spare Parts			
Lock for Multiclip 80A (2 clips)	1	A9XMLA02	424
Distribloc 63A			
Distribution from the top (4 Module)	1	4040	9225
Distribution through the bottom (4 Module)	1	4041	9225
Power Logic EGX300 - Ethernet port (4 Module)	1	30002885	28213
ABL Power Supply - 1.2A 24VDC	1	ABL8MEM24012	6400
ABL Power Supply - 0.6A 24VDC	1	ABL8MEM24006	4700
Double DIN rail	1	LSL58801A	725

Reflex iC60 - Integrated Control & Overcurrent Protection Device



- All in One Solution: MCB + Contactor + Impulse Relay + Auxiliary
- 10kA Breaking capacity as per IEC/EN 60947-2,
- Ti24 interface: Connection to PLC, Smartlink
- 3 operating modes to cater to a variety of applications
- Safe lock down with Integrated Padlocking
- Simplified maintenance: Front face Indicator allows better reliability

[In] Rated Current (A)	2 Pole Reference	Unit LP [₹]	3 Pole Reference	Unit LP [₹]	4 Pole Reference	Unit LP [₹]
Module Width **	4.5 mod		5.5 mod		6.5 mod	2275
B Curve						
10	A9C61210	34380	A9C61310	35235	A9C61410	38490
16	A9C61216	32760	A9C61316	35265	A9C61416	36705
25	A9C61225	32795	A9C61325	35335	A9C61425	36775
40	A9C61240	34855	A9C61340	38400	A9C61440	40875
63	A9C61263	36060	A9C61363	39150	A9C61463	43195
C Curve						
10	A9C62210	34385	A9C62310	37005	A9C62410	36670
16	A9C62216	34400	A9C62316	37030	A9C62416	38545
25	A9C62225	34435	A9C62325	37090	A9C62425	36780
40	A9C62240	36610	A9C62340	38420	A9C62440	40900
63	A9C62263	37860	A9C62363	39150	A9C62463	43200
D Curve						
10	A9C63210	32745	A9C63310	35240	A9C63410	36670
16	A9C63216	32760	A9C63316	35260	A9C63416	36705
25	A9C63225	32795	A9C63325	35335	A9C63425	36780

Note: **18mm/module

LP: List Price

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Energy Meters



- Digital Kilowatt-hour meters designed for sub-metering of active energy (rms) consumed by a single-phase or three-phase electric circuit with or without distributed neutral
- ComReady DB mountable version
- Accuracy class-1
- No External CT required

Description	Reference	Unit LP [₹]
iEM 2000T 1Ph Energy Meter upto 40A, POP w/o Display	A9MEM2000T	4487
iEM3110 3 Phase Energy Meter Energy Meter with POP Accuracy CL 1.0	A9MEM3110	10817
iEM3150 3 Phase Energy Meter Energy Meter with V,I,Power, Accuracy CL 1.0, with Modbus	A9MEM3150	11816
iEM3155 Multifunction 3 Phase Energy Meter with V,I,F,PF,Power, Energy,1DI/1DO, Multi Tariff, with Modbus Accuracy CL 1.0	A9MEM3155	12519

Note: For Higher Currents /Loads , Select iEM32 Series , CT Operated , Accuracy CL 0.5S

Acti 9

Distribution Boards

Spectacular Design

Blends seamlessly with interiors



Unique Rounded Corners | Color - RAL 9003 white | Designer Rotary Knob

Maximized Wiring Space

Convenient and Safe wiring



15% more wiring area | Reduced U-box Collar | Removable Frame, Centre plate & Gland plate

Adaptable

Total Flexibility for ease of installation and usage



Surface and Flush installation | Field fittable key lock provision | Reversible Door

Inspiring the **S.M.A.R.T.** choice!!!

Robust Architecture

Perfect blend of Strength & Weight



High Strength-to-Weight ratio | RoHS and REACH Compliance – ideal solution for GREEN Buildings

Technically Proven

Safety Guaranteed





Designed and Manufactured as per IS 8623 - 1&3 | IP and IK test by ERDA & CPRI | Glow wire tested



Acti 9

Distribution Boards

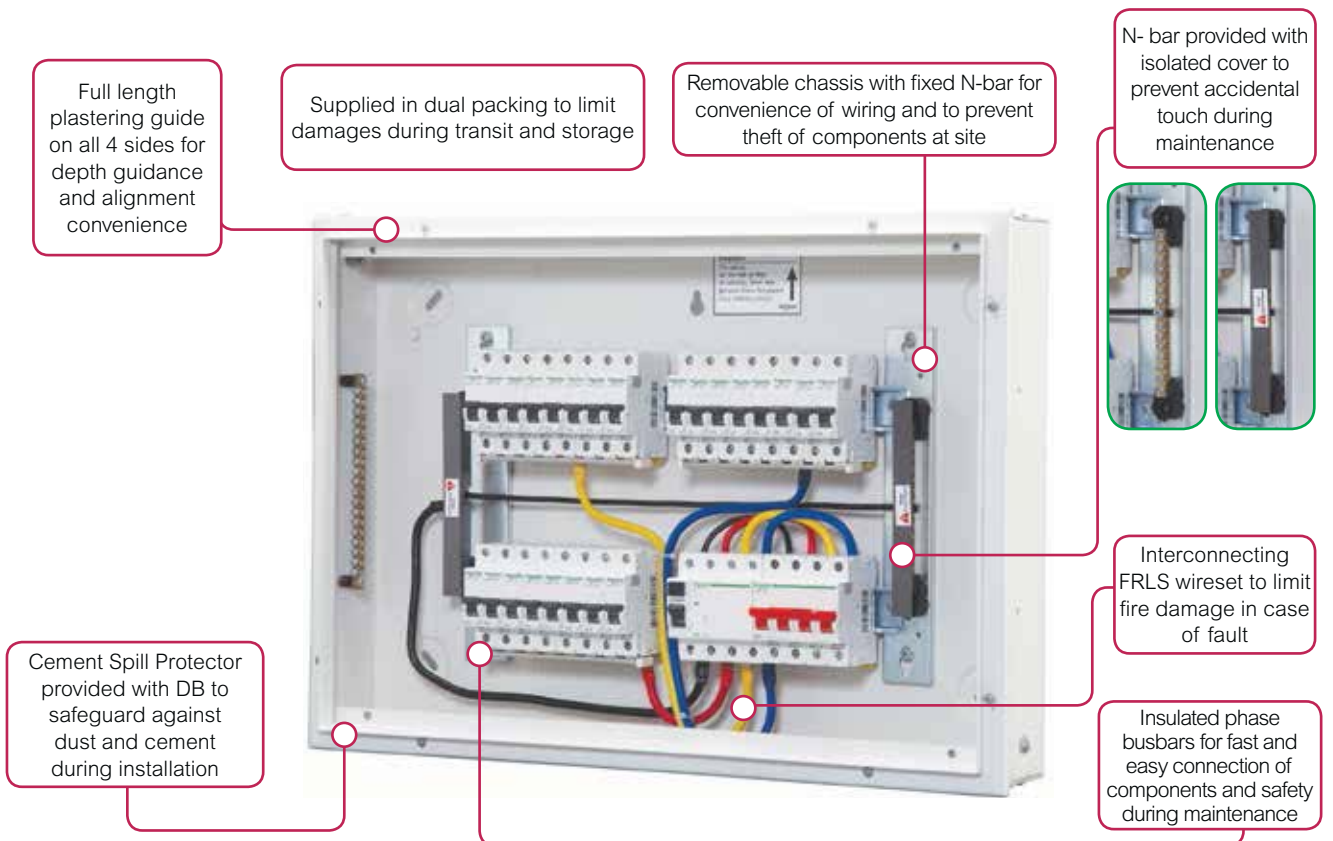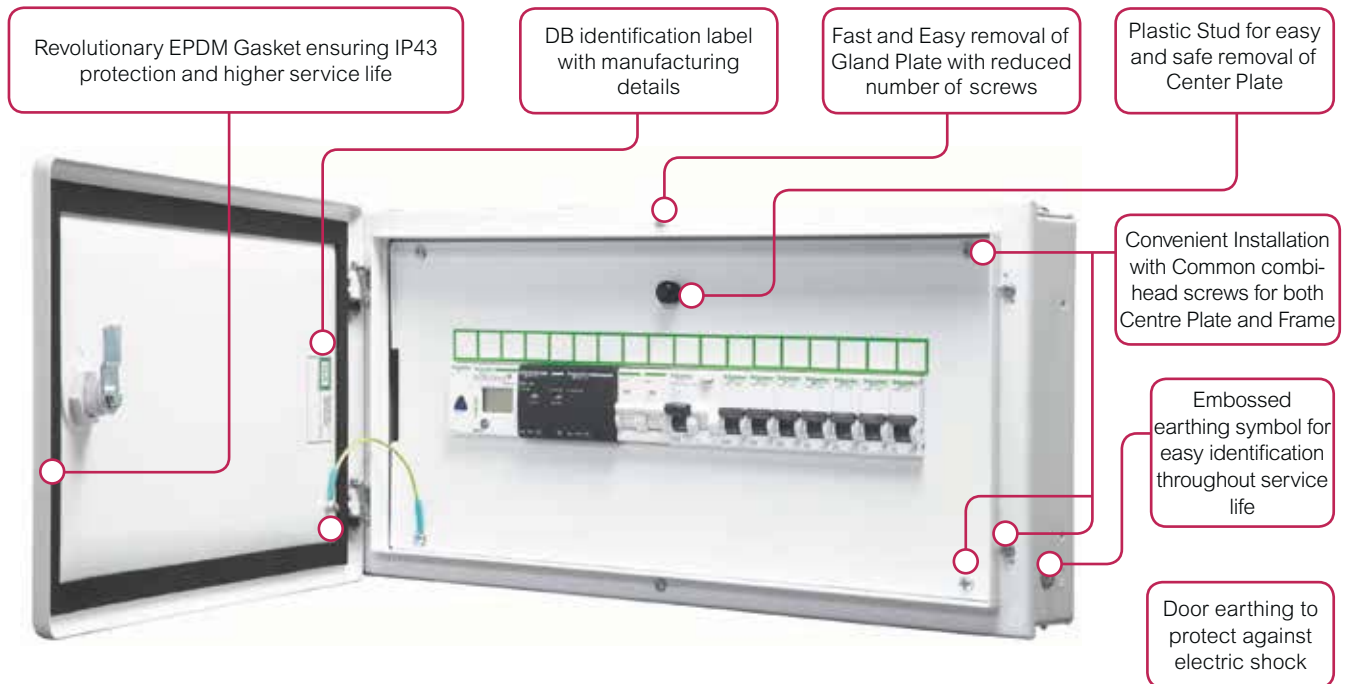

Metal Enclosures



- Metal Enclosure to mount individual Modular Device feeding directly to the load or final distribution board

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
2 way	1 / 2	A9HMES02 <input checked="" type="checkbox"/>	720	-	-
4 way	3 / 4	A9HMES04 <input checked="" type="checkbox"/>	720	-	-

SPN DBs



- SPN DB for distribution of Single Phase Neutral supply to respective load MCBs
- Incomer - DP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
6 way	6	A9HSNS06	1400	A9HSND06 <input checked="" type="checkbox"/>	2010
8 way	8	A9HSNS08 <input checked="" type="checkbox"/>	1735	A9HSND08 <input checked="" type="checkbox"/>	2295
12 way	12	A9HSNS12	2055	A9HSND12 <input checked="" type="checkbox"/>	2760
18 way	18	A9HSNS18	2705	A9HSND18 <input checked="" type="checkbox"/>	3535

TPN DBs



- Standard TPN DBs for distribution of Three Phase and Neutral supply
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs
- TPN DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit MRP [₹]
4 way eco	4 + 12	-	-	A9HTND04E <input checked="" type="checkbox"/>	4350
4 way	8 + 12	A9HTNS04	3850	A9HTND04 <input checked="" type="checkbox"/>	4565
6 way	8 + 18	A9HTNS06	4745	A9HTND06 <input checked="" type="checkbox"/>	5625
8 way	8 + 24	A9HTNS08	5580	A9HTND08 <input checked="" type="checkbox"/>	6755
12 way	8 + 36	A9HTNS12	8265	A9HTND12 <input checked="" type="checkbox"/>	10130

Flexi Tier DBs



- Flexi DBs give total flexibility to mount any type and size of Modular devices as per load requirement
- Provided with N-Bar and E-Bar
- Flexi Tier DBs can be converted to PPI DB using 'PPI Kit' provided on next page

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
2 Tier 24 Modules	2 x 12	-	-	A9HFD224	5680
3 Tier 36 Modules	3 x 12	-	-	A9HFD336	6820
4 Tier 40 Modules	4 x 10	-	-	A9HFD440 <input checked="" type="checkbox"/>	7210
4 Tier 56 Modules	4 x 14	-	-	A9HFD456 <input checked="" type="checkbox"/>	7535

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Per Phase Isolation DBs

- PPI DBs to mount DP Residual Current Device (RCD) at an individual phase level to isolate the faulty phase in case of earth leakage and ensure continuity of supply to other healthy phases
- Incomer - Modular (FP MCB/Isolator) using PPI Kit / MCCB100A (TP/FP Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
12 way	100A MCCB + 6 + 36	-	-	A9HPID12M	15030

PPI Kit (to convert TPN and Flexi Tier DBs to PPI DB)



- Set of accessories to convert TPN DBs and 4 tier Flexi DBs to PPI DB
- Kit is provided with additional required quantity of N-Bar, wire set, Busbars (only for Flexi Tier) and Mounting Kit (only for TPN)

Description	Reference	Unit LP [₹]
PPI Kit for 6way TPN DB (2+4w PPI DB)	A9HKIT04 <input checked="" type="checkbox"/>	2950
PPI Kit for 8way TPN DB (2+6w PPI DB)	A9HKIT06 <input checked="" type="checkbox"/>	3455
PPI Kit for 12way TPN DB (2+10w PPI DB)	A9HKIT10 <input checked="" type="checkbox"/>	3810
PPI Kit for 4T40M Flexi DB (2+8w PPI DB)	A9HKIT08 <input checked="" type="checkbox"/>	6115
PPI Kit for 4T56M Flx DB (2+12w PPI DB)	A9HKIT12 <input checked="" type="checkbox"/>	6765

Phase Segregated DBs



- Phase Segregated DBs to provide total safety for installer and maintenance personnel, by compartmentalizing each Phase and separating Incomer, Sub-Incomer and Outgoing
- Offers better continuity of supply in case of faults during maintenance at DB level.
- Incomer - Modular (FP MCB/Isolator) / MCCB 100A (TP/FP during maintenance Compact NSX or EasyPact CVS)
- Sub-Incomer - DP RCCB/RCBO
- Outgoing - SP MCBs

Description	Total Module Cutout (Incomer + Sub-incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
6 way	8 + 12 + 18	-	-	A9HPGD06 <input checked="" type="checkbox"/>	13350
8 way	8 + 12 + 24	-	-	A9HPGD08 <input checked="" type="checkbox"/>	14905
12 way	8 + 12 + 36	-	-	A9HPGD12	18715
12 way with MCCB I/c	100A MCCB + 12 + 36	-	-	A9HPGD12M	25255

VTPN DBs for Modular Incomer



- Ideal solution to distribute power supply to both 3 Phase and 1 Phase loads in the same DB
- Incomer - FP RCCB/RCBO/Isolator/MCB
- Outgoing - SP MCBs / TP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
4 way	8 + 12	-	-	A9HVTD04 <input checked="" type="checkbox"/>	11295
8 way	8 + 24	-	-	A9HVTD08 <input checked="" type="checkbox"/>	14370
12 way	8 + 36	-	-	A9HVTD12 <input checked="" type="checkbox"/>	19235

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

VTPN DBs for MCCB Incomer



- DBs for higher incoming current distribution up to 250A
- Incomer - TP/FP Compact NSX or EasyPact CVS MCCB up to 250A
- Outgoing - SP MCBs / TP MCBs

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
4 way	100A MCCB + 12	-	-	A9HVD04L	12375
8 way	100A MCCB + 24	-	-	A9HVD08L	15680
12 way	100A MCCB + 36	-	-	A9HVD12L	20855
4 way	160A MCCB + 12	-	-	A9HVD04M	13620
8 way	160A MCCB + 24	-	-	A9HVD08M	16970
12 way	160A MCCB + 36	-	-	A9HVD12M	22650
8 way	250A MCCB + 24	-	-	A9HVD08H	29325
12 way	250A MCCB + 36	-	-	A9HVD12H	30915

ComReady DBs



- Designed to house Acti 9 communication system
- Supplied with Double DIN rail, E-Bar and Wire channel.
- Accessories to convert Flexi Tier DB into ComReady DB available on request

Description	Total Module Cutout (Incomer + Outgoing)	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
1 Tier 24 Modules	24	-	-	A9HCRD124	7600
2 Tier 48 Modules	48	-	-	A9HCRD248	12315

Metal Clad P&S Units



- Plug & Socket Unit with Electra Plug & Socket and provision to mount modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
10A 1P+N+E P&S	2	A9HMS210	1840	-	-
20A 1P+N+E P&S	2	A9HMS220	1970	-	-
30A 3P+E P&S	3	A9HMS330	4315	-	-

Industrial P&S Units (provision to mount PratiKa Sockets)



- Plug & Socket Unit with provision to mount PratiKa straight / angled* socket and modular protection devices to feed the end load directly

Description	Total Module Cutout	Single Door (IP30) Reference	Unit MRP [₹]	Double Door Metal (IP43) Reference	Unit LP [₹]
16A 3P PK P&S	2	A9HKS316	1700	-	-
32A 3P PK P&S	2	A9HKS332	2810	-	-
32A 5P PK P&S	4	A9HKS532	3330	-	-
63A 5P PK P&S	4	A9HKS563	6730	-	-

*upto 32A socket only

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Locks for Acti 9 DBs



Key Lock

Description	Reference	Unit LP [₹]
Rotary lock	A9HRL801	460
Key Lock	A9HRL802	550

Accessories for Distribution Boards

Description	Reference	Unit LP [₹]
Busbars		
Fork Busbar 1P 12MOD. 63A	R9XFH112	598
Fork Busbar 1P 57MOD. 63A	R9XFH157	1360
Fork Busbar 2P 12MOD. 63A	R9XFH212	702
Fork Busbar 2P 57MOD. 63A	R9XFH257	2610
Fork Busbar 3P 12MOD. 63A	R9XFH312	1050
Fork Busbar 3P 57MOD. 63A	R9XFH357	5710
Fork Busbar 4P 12MOD. 63A	R9XFH412	1360
Fork Busbar 4P 57MOD. 63A	R9XFH457	5980
Busbar Accessories		
Set of 10 End Caps 1P	R9XE110	516
Set of 10 End Caps 2P	R9XE210	516
Set of 10 End Caps 3P	R9XE310	624
Set of 10 End Caps 4P	R9XE410	648
Set of 4 Connector Fork 63A	R9XFC04	496
Set of 20 Tooth Caps	R9XT20	798
Blanking Plate	13229B	30

Note: Blanking Plate MOQ = 10, All other MOQ = 1

Customized Distribution Boards to Suit Your Need -
Available on Request*

- TV/Telephone DBs
- Pre-Wired DBs
- 8 Segment DBs
- Acrylic Door DBs
- IP54 DBs
- DBs with Phase Indication Lamps

Acti 9K **NEW**

- Superior finish to blend with common wall shades
- Ergonomic door knob
- Tested as per IEC 61439 at NABL Accredited Labs
- Flexible installation and reversible door
- Comprehensive offer

Product Ref No. (Min 3, Max 18 characters) (Mandatory)	Short Product Description (Max 40 characters) (Mandatory)	Unit LP [₹]
A9KESNS04	Acti 9K DB 4 way SPN Single Door	962
A9KESNS06	Acti 9K DB 6 way SPN Single Door	1190
A9KESNS08	Acti 9K DB 8 way SPN Single Door	1285
A9KESNS12	Acti 9K DB 12 way SPN Single Door	1590
A9KESND04	Acti 9K DB 4 way SPN Double Door	1565
A9KESND06	Acti 9K DB 6 way SPN Double Door	1665
A9KESND08	Acti 9K DB 8 way SPN Double Door	1900
A9KESND12	Acti 9K DB 12 way SPN Double Door	2285
A9KESND16	Acti 9K DB 16 way SPN Double Door	2925
A9KETNS04	Acti 9K DB 4 way TPN Single Door	2970
A9KETNS06	Acti 9K DB 6 way TPN Single Door	3660
A9KETNS08	Acti 9K DB 8 way TPN Single Door	4300
A9KETND04E	Acti 9K DB TPN 4 way Double Door 4-mod I/C	3370
A9KETND04	Acti 9K DB TPN 4 way Double Door	3745
A9KETND06	Acti 9K DB TPN 6 way Double Door	4610
A9KETND08	Acti 9K DB TPN 8 way Double Door	5530
A9KETND12	Acti 9K DB TPN 12 way Double Door	8300

*Please contact nearest Schneider Electric Sales Office for Drawings, Reference and Prices

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Kaedra enclosures for PratiKa industrial sockets are part of a complete system of Watertight enclosures from 16A to 125A providing solutions for protection, control and electrical distribution for tertiary and industrial applications



- Degree of protection - IP65
- Impact strength - IK09
- Resistant to chemical and atmospheric agents, UVs etc.
- Self extinguishing class 2 insulating material
- Flame and abnormal heat resistance: 650°C
- Reversible front face for opening of door to left/right
- Combining of enclosures horizontally/vertically while still maintaining IP
- DIN channel can be positioned in 2 depths & 2 heights for cabling purpose

Mini Enclosures for modular devices



Description	Reference	Unit LP [₹]
4 module	13441 <input checked="" type="checkbox"/>	2400
6 module	13442	2730
8 module	13443	3220
12 module	13444	5175

Enclosures for modular devices (with terminal blocks)



Description	Reference	Unit LP [₹]
1 row 12 module	13431	5710
1 row 18 module	13432	7525
2 row 24 module	13433	8550
2 row 36 module	13434	10825
3 row 36 module	13435	11285
4 row 72 module	13437	21545

Mini Enclosure (suitable to mount modular devices and PratiKa 16A socket)



Description	Reference	Unit LP [₹]
4 module 1 vertical opening	13175 <input checked="" type="checkbox"/>	1140
4 module 2 horizontal opening	13176	1410
4 module 3 horizontal opening	13177	1775

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Enclosure (suitable to mount modular devices and PratiKa 16A / 32A sockets)



Description	Reference	Unit LP [₹]
5 module 2 opening	13178 <input checked="" type="checkbox"/>	2755
8 module 4 horizontal opening	13179	3760
13 module 3 opening	13180	4975
13 module 6 opening	13181	5470
19 module 8 opening	13182	7050

Functional Plaques



Description	Reference	Unit LP [₹]
Blank - marked for 1 socket 50x50	13135	350
Blank - marked for 1 socket 65x65 or 75x75	13137	354
Intermediate with 65x85 opening	13136	430
Intermediate with one opening for 65x85 & 90x100	13142	714

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Wander Plugs



- Conforms to IEC 60309-1 & IEC 60309-2
- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKE16M423 <input checked="" type="checkbox"/>	414
	380...415	3P + E	PKE16M434 <input checked="" type="checkbox"/>	526
		3P + N + E	PKE16M435 <input checked="" type="checkbox"/>	548
32	200...250	2P + E	PKE32M423 <input checked="" type="checkbox"/>	654
	380...415	3P + E	PKE32M434 <input checked="" type="checkbox"/>	758
		3P + N + E	PKE32M435 <input checked="" type="checkbox"/>	762
IP67				
16	200...250	2P + E	PKE16M723 <input checked="" type="checkbox"/>	908
	380...415	3P + E	PKE16M734 <input checked="" type="checkbox"/>	1025
		3P + N + E	PKE16M735 <input checked="" type="checkbox"/>	1095
32	200...250	2P + E	PKE32M723 <input checked="" type="checkbox"/>	1285
	380...415	3P + E	PKE32M734 <input checked="" type="checkbox"/>	1385
		3P + N + E	PKE32M735 <input checked="" type="checkbox"/>	1395
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81378	3640
	380...415	3P + E	81382 <input checked="" type="checkbox"/>	3470
		3P + N + E	81383 <input checked="" type="checkbox"/>	3475
125	200...250	2P + E	81390	9295
	380...415	3P + E	81394	10615
		3P + N + E	81395	10615

Small Wall Mounted Sockets



- Conforms to IEC 60309-1 & IEC 60309-2
- External impact strength: IK08
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
IP44				
16	200...250	2P + E	PKF16W423	728
	380...415	3P + E	PKF16W434	844
		3P + N + E	PKF16W435	922
32	200...250	2P + E	PKF32W423	950
	380...415	3P + E	PKF32W434	1140
		3P + N + E	PKF32W435	1205
IP67				
16	200...250	2P + E	PKF16W723	1155
	380...415	3P + E	PKF16W734	1450
		3P + N + E	PKF16W735	1500
32	200...250	2P + E	PKF32W723	1445
	380...415	3P + E	PKF32W734	2110
		3P + N + E	PKF32W735	2800

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Wall Mounted Sockets



- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 125A
- External impact strength: IK08
- Glow wire test: 850°C
- Available only in IP67

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
63	200...250	2P + E	81178	4485
	380...415	3P + E	81182	4615
		3P + N + E	81183	4680
125	200...250	2P + E	81190	16025
	380...415	3P + E	81194	16170
		3P + N + E	81195	16250

Wander Sockets



- PK PratiKa Screw Connect: same orientation of clamp's screws.
- PK PratiKa: 16A & 32A; IP44 & IP67
- External impact strength: IK08
- Glow wire test: 850 °C
- Conforms to IEC 60309-1 & IEC 60309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16M423 <input checked="" type="checkbox"/>	576
	380...415	3P + E	PKF16M434	664
		3P + N + E	PKF16M435	724
32	200...250	2P + E	PKF32M423 <input checked="" type="checkbox"/>	790
	380...415	3P + E	PKF32M434	960
		3P + N + E	PKF32M435 <input checked="" type="checkbox"/>	966
IP67				
16	200...250	2P + E	PKF16M723	1065
	380...415	3P + E	PKF16M734	1335
		3P + N + E	PKF16M735	1395
32	200...250	2P + E	PKF32M723	1465
	380...415	3P + E	PKF32M734	1620
		3P + N + E	PKF32M735	1635
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81478	3965
	380...415	3P + E	81482	4000
		3P + N + E	81483	4065
125	200...250	2P + E	81490	12495
	380...415	3P + E	81494	12515
		3P + N + E	81495	12760

Also Available on Request:

- Patented FAST connect Plugs & Sockets - innovative cabling system that enables connection without stripping the conductor and with absolutely no screws required
- Extra Low Voltage Plugs & Sockets down to 50V

Please contact nearest Schneider Electric Sales Office or Customer Care for Reference and Prices

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Panel Mounted Sockets - Angled



- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16F423 <input checked="" type="checkbox"/>	446
	380...415	3P + E	PKF16F434	664
		3P + N + E	PKF16F435 <input checked="" type="checkbox"/>	708
32	200...250	2P + E	PKF32F423 <input checked="" type="checkbox"/>	790
	380...415	3P + E	PKF32F434	918
		3P + N + E	PKF32F435 <input checked="" type="checkbox"/>	932
IP67				
16	200...250	2P + E	PKF16F723 <input checked="" type="checkbox"/>	838
	380...415	3P + E	PKF16F734	954
		3P + N + E	PKF16F735	966
32	200...250	2P + E	PKF32F723	1090
	380...415	3P + E	PKF32F734	1275
		3P + N + E	PKF32F735 <input checked="" type="checkbox"/>	1295
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81278	3580
	380...415	3P + E	81282 <input checked="" type="checkbox"/>	3585
		3P + N + E	81283 <input checked="" type="checkbox"/>	3655
125	200...250	2P + E	81290	11770
	380...415	3P + E	81294	12075
		3P + N + E	81295	12135

Panel Mounted Sockets - Straight



- PK PratiKa Screw Connect: same orientation of clamp's screws
- External impact strength: IK08
- Glow wire test: 850°C
- Conforms to IEC 60309-1 & IEC309-2

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
PratiKa Screw				
IP44				
16	200...250	2P + E	PKF16G423	504
	380...415	3P + E	PKF16G434	724
		3P + N + E	PKF16G435	758
32	200...250	2P + E	PKF32G423	800
	380...415	3P + E	PKF32G434	922
		3P + N + E	PKF32G435	998
IP67				
16	200...250	2P + E	PKF16G723 <input checked="" type="checkbox"/>	844
	380...415	3P + E	PKF16G734	954
		3P + N + E	PKF16G735	966
32	200...250	2P + E	PKF32G723	1075
	380...415	3P + E	PKF32G734	1210
		3P + N + E	PKF32G735	1255
PK (63A & 125A available in IP67 only)				
63	200...250	2P + E	81678	3565
	380...415	3P + E	81682	3620
		3P + N + E	81683	3620
125	200...250	2P + E	81690	12000
	380...415	3P + E	81694	11610
		3P + N + E	81695	12135

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Sockets with Interlock Switches - for guaranteed safety of operation

- Allows closure of main switch only when the plug is fully inserted in socket - when complete mechanical & electrical connection has occurred
- Plug removal is possible only when the switch is in "off" position

Wall Mounted Sockets with Interlock Switch Unika (w/o protection)



- Switch designed for use in AC 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Rated operational voltage upto 415V
- Rated operational current upto 32A
- External impact strength: IK08
- Available in IP44 / IP65 versions
- Glow wire test: 750°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
IP44				
16	200...250	2P + E	83031	6050
	380...415	3P + E	83035	8375
32		3P + N + E	83036	8540
	200...250	2P + E	83042 <input checked="" type="checkbox"/>	7855
	380...415	3P + E	83046	9155
		3P + N + E	83047	9255
IP65				
16	200...250	2P + E	83081	6260
	380...415	3P + E	83085	8620
		3P + N + E	83086	8795
32	200...250	2P + E	83092	8205
	380...415	3P + E	83096	9850
		3P + N + E	83097	9850

Socket with Interlock Switch & DIN Rail Isoblock (4.5 modules)



- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 4.5 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
16	200...250	2P + E	82754 <input checked="" type="checkbox"/>	7500
	380...415	3P + E	82758	9135
		3P + N + E	82759	9440
32	200...250	2P + E	83791 <input checked="" type="checkbox"/>	8880
	380...415	3P + E	83795	10510
		3P + N + E	83796	10580

Socket with Interlock Switch & DIN Rail Isoblock (6 modules)



- Switch designed for use in AC- 22A class applications
- Conforms to IEC 60309-1 & IEC 60309-2
- Provision to DIN mount 6 module device
- External impact strength: IK10
- Available in IP65 version
- Glow wire test: 850°C

[In] Rated Current (A)	[Ue] Rated Operational Voltage (V)	Poles Description	Reference	Unit MRP [₹]
32	200...250	2P + E	82766	11265
	380...415	3P + E	82770	13735
		3P + N + E	82771	14150
63		3P + E	82782	15785
	380...415	3P + N + E	82783	15835

Note: For all above Reference MOQ = 1

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

ELECTRA Metal Clad Plugs & Sockets are specially designed incorporating the latest safety, quality and user friendly features.

Construction

- The casting is made from non-corroding die-cast aluminum alloy combining exceptional compactness with high strength
- The design/construction eliminates the possibility of mismatch in fitting of plugs in corresponding sockets
- The floating contacts in the sockets are self aligning and facilitates smooth plugging in without undue pressure (These can be easily removed for wiring)
- A provision for pilot pin facilitates mechanical interlocking in case of 63A ratings

Human Safety

Specially designed shroud to avoid accidental finger contact with plug-pins while inserting/removing the plug
Similarly, the contact tubes in sockets are deeply recessed to avoid human contact

- The earthing pins ensure that earth connection is made first and broken last, being longer than conducting pins
- The visible earth terminals facilitate easy checking of earth connection
- The cable grip to the plug is made very strong by providing a compression gland and by protecting it at the point of entry by a strong rubber guard

Applications

Industrial, Commercial & Domestic portable equipments like Hand/Power Tools, Industrial Ovens, Welding Sets, Mobile Generators, Furnaces, Ships, Office Machines, Refrigerators, Coolers, Air-Conditioners, Overhead Cranes, Chilling Cabinets, Tile Polishers and Sewing Machines

Plug



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AP10 <input checked="" type="checkbox"/>	198
20	2P	250	30	AP20 <input checked="" type="checkbox"/>	208
20	3P	440	30	BP20 <input checked="" type="checkbox"/>	276
30	3P	440	20	BP30 <input checked="" type="checkbox"/>	504
63	3P+N+E	440	4	CP63 <input checked="" type="checkbox"/>	2280

Socket



Rating (A)	Poles Description	Voltage (V)	MOQ	Reference	Unit MRP [₹]
10	2P	250	30	AS10 <input checked="" type="checkbox"/>	208
20	2P	250	30	AS20 <input checked="" type="checkbox"/>	244
20	3P	440	30	BS20 <input checked="" type="checkbox"/>	310
30	3P	440	20	BS30 <input checked="" type="checkbox"/>	534
63	3P+N+E	440	4	CS63 <input checked="" type="checkbox"/>	2415

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

Complete range of switches & sockets suitable for both indoor & outdoor applications like Kitchens, Swimming Pools, Landscape Gardens, Exterior Walls and Other Environmentally Challenged Locations.



56SW110LE-GY

Description	IP Rating	Reference	Unit LP (₹)
Surface Switches			
Single Pole Switches Less Enclosure			
1 Pole 250V 10A	IP66	56SW110LE-GY	2545
1 Pole 250V 16A	IP66	56SW116LE-GY	2385
1 Pole 250V 20A	IP66	56SW120LE-GY	3610
1 Pole 250V 32A	IP66	56SW132LE-GY	4265
Double Pole Switches Less Enclosure			
2 Pole 500V 16A	IP66	56SW216LE-GY	4120
2 Pole 500V 20A	IP66	56SW220LE-GY	4120
2 Pole 500V 32A	IP66	56SW232LE-GY	4785
2 Pole 500V 50A	IP66	56SW250LE-GY	4905
2 Pole 500V 63A	IP66	56SW263LE-GY	5610
Triple Pole Switches Less Enclosure			
3 Pole 500V 10A	IP66	56SW310LE-GY	3810
3 Pole 500V 16A	IP66	56SW316LE-GY	3975
3 Pole 500V 20A	IP66	56SW320LE-GY	4185
3 Pole 500V 32A	IP66	56SW332LE-GY	4880
3 Pole 500V 50A	IP66	56SW350LE-GY	5630
3 Pole 500V 63A	IP66	56SW363LE-GY	6535
Four Pole Switches Less Enclosure			
4 Pole 500V 20A	IP66	56SW420LE-GY	5525



66CV563-RG

Description	IP Rating	Reference	Unit LP (₹)
IP66 Industrial Combination Switch Sockets with Enclosure			
Single Pole Switches Less Enclosure			
500V, 63A with 4 pole switch and 63A 5 Pin Socket	IP66	66CV563-RG	74065
Plug Top 5 Pin 500V 63A	IP66	66P563-EO	22230
Plug Top 5 Pin 500V 63A	IP66	66P763-EO	23910

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018



56SO532LE-GY



56SO320LE-RO

Description	IP Rating	Reference	Unit LP [₹]
Surface Socket Outlets			
3 Pin Sockets Less Enclosure			
3 Pin 250V 16A Indian Standard	IP66	56SO316RP-LE-GY-EX	2290
3 Pin 250V 20A Round Pin	IP66	56SO320LE-GY	3485
3 Pin 250V 32A Round Pin	IP66	56SO332LE-GY	3845
4 Pin Sockets Less Enclosure			
4 Pin 500V 20A Round Pin	IP66	56SO420LE-GY	5155
4 Pin 500V 32A Round Pin	IP66	56SO432LE-GY	6165
4 Pin 500V 40A Round Pin	IP66	56SO440LE-GY	7165
4 Pin 500V 50A Round Pin	IP66	56SO450LE-GY	9485
5 Pin Sockets Less Enclosure			
5 Pin 500V 10A Round Pin	IP66	56SO510LE-GY	5570
5 Pin 500V 20A Round Pin	IP66	56SO520LE-GY	5570
5 Pin 500V 32A Round Pin	IP66	56SO532LE-GY	6615
5 Pin 500V 40A Round Pin	IP66	56SO540LE-GY	9545
5 Pin 500V 50A Round Pin	IP66	56SO550LE-GY	9800



56PA420-EO

Description	IP Rating	Reference	Unit LP [₹]
Plugs			
3 Pin Angle Plugs			
3 Pin 250V 16A Indian Standard	IP66	56PA316RP-GY-EX	1805
3 Pin 250V 20A Round Pin	IP66	56PA320-EO	3610
3 Pin 250V 32A Round Pin	IP66	56PA332-EO	4130
4 Pin Angle Plugs			
4 Pin 500V 20A Round Pin	IP66	56PA420-EO	4400
4 Pin 500V 32A Round Pin	IP66	56PA432-EO	4580
4 Pin 500V 40A Round Pin	IP66	56PA440-EO	5385
4 Pin 500V 50A Round Pin	IP66	56PA450-EO	5435
5 Pin Angle Plugs			
5 Pin 500V 10A Round Pin	IP66	56PA510-EO	4325
5 Pin 500V 20A Round Pin	IP66	56PA520-EO	4325
5 Pin 500V 32A Round Pin	IP66	56PA532-EO	4995
5 Pin 500V 40A Round Pin	IP66	56PA540-EO	5285
5 Pin 500V 50A Round Pin	IP66	56PA550-EO	5410
Combination Switch Socket Outlet			
IP66 Interlocked Switch Socket with Enclosure			
4 Pin 500V 20A Round Pin	IP66	56CVI420-GY	13360
4 Pin 500V 32A Round Pin	IP66	56CVI432-GY	14320
5 Pin 500V 20A Round Pin	IP66	56CVI520-GY	16325
5 Pin 500V 32A Round Pin	IP66	56CVI532-GY	16475
5 Pin 500V 40A Round Pin	IP66	56CVI540-GY	17205

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018



56DB2-GY



56DB4-GY

Description	IP Rating	Reference	Unit LP [₹]
Adaptable Enclosures with Gear Tray			
2 Gangpoints, 198X101X140mm	IP66	56DB2-GY	4505
3 Gangpoints, 294X101X140mm	IP66	56DB3-GY	6000
6 Gangpoints, 294X198X140mm	IP66	56DB6-GY	9915
9 Gangpoints, 294X294X180mm	IP66	56DB9-GY	14065
Junction Boxes			
1 Gangpoint, 107X101X90mm	IP66	56JB1-GY	1995
2 Gangpoints, 204X101X90mm	IP66	56JB2-GY	3300
3 Gangpoints, 300X101X90mm	IP66	56JB3-GY	4950
4 Gangpoints, 204X198X90mm	IP66	56JB4-GY	6385

Description	Module Width	Reference	Unit LP [₹]
Switchgear Cover Assembly			
For 1,2,3 Pole MCB with 4 Pole RCD (max. 4M Width)	4	56CB4N-GY	3920

Description	No. of Gangs	Reference	Unit LP [₹]
Flush Surrounds			
Flush Surround	1	56FA1-GY	1340
Flush Surround	2	56FA2-GY	1930
Flush Surround	3	56FA3-GY	3040
Flush Surround	4	56FA4-GY	3040
Mounting Enclosures (Back Boxes)			
101X101X63mm	1	56E1-GY-EX	898
198X101X63mm	2	56E2-GY	2095
294X101X63mm	3	56E3-GY	3420
198X198X63mm	4	56E4-GY	4400
294X198X63mm	6	56E6-GY	7035
391X198X63mm	8	56E8-GY	9230
294X294X63mm	9	56E9-GY	9870
391X391X63mm	16	56E16-GY	16725

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

SWITCH TO STYLE

Perfect solutions for the perfect you

ULTi



NEO



ZENcelo



Opale



LIVIA





Switch more than just lights. #Switch The Mood

ON / OFF

DIMMING

ALUMINIUM

ANTHRACITE

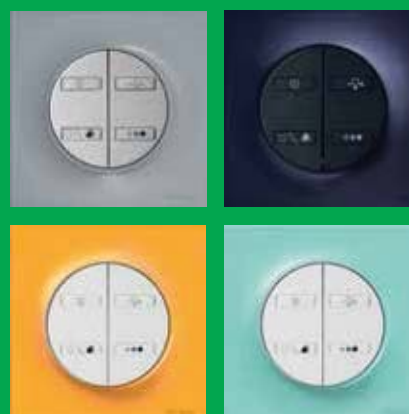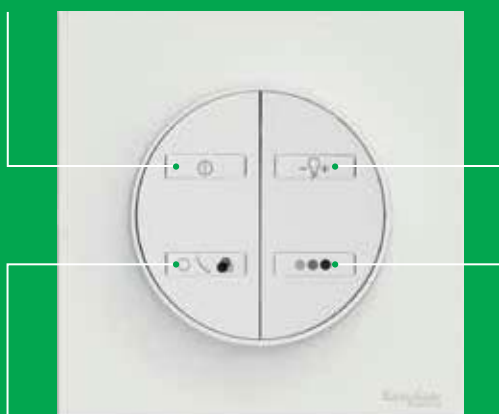


MY FAVORITE


WHITE SHADES OR
COLOR CHANGES

Wiser Odace™ LIGHTING. One Light, Many Moods!


White kit
Smart LED

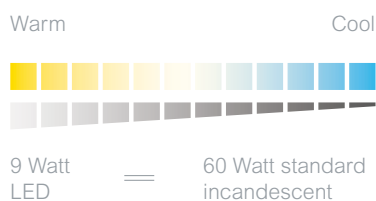

Color kit
Smart LED
colors

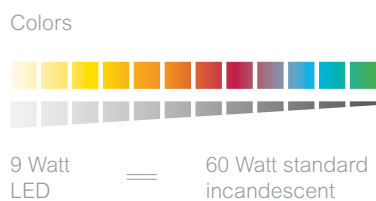

Aroma kit
Sensorial
light

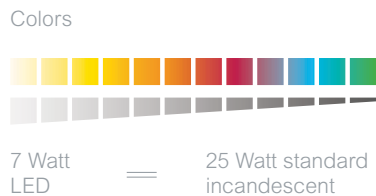

Change the mood?
There's also an app for that!

Your mood is now at your fingertips, with the 'Wiser Lighting' app.

Bluetooth connectivity:
Take control of the mood, wirelessly

Schedules: Set a wake-up light or a night light or presence simulator

Unlimited Colour Options:
Choose from up to 16 million colours

Disco mode: Let your lights flash and flicker to music

Aroma diffuser: Soak in the energy of therapeutic scents

Light grouping: Several lights can be group-activated by the same preset




Wiser Odace™ LIGHTING Product	Reference	Unit MRP [₹]
White Kit	S527578W	6500
Colour Kit	S527578C	7500
Aroma Kit	S527578A	9500
White Switch	S520578	5000
Aluminium Switch	S530578	5500
Anthracite Switch	S540578	5500


*Contact Schneider Electric Sales Representative for more details

W.E.F. November 1st, 2018

LIVIA - Switch to the extra-ordinary

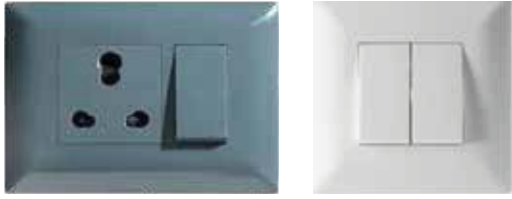

- **Sleek Design** - 2.7mm thin plate with curved body to minimize dust accumulation
- **Stylish Looks** - Soft white texture with glossy finish
- **Robust & Strong** - Innovative honeycomb designed grid plate for extra rigidity
- **Reliable** - High grade heat-resistant polycarbonate and laser marked wiring diagrams
- **Easy to Install** - Snap-In / Snap-Out front loading modules and Bigger terminal holes
- **Green & Eco Friendly** - RoHS compliant range



P1001

P1081



P1002

P1025



P2005

P2106



P3012

P3200



P6005

P5001



P0703

P0704

Description	Reference for White	Unit MRP [₹]	Reference for Pebble Grey	Unit MRP [₹]
Switches				
10AX 1 way switch	P1001	110	P1001_DG	140
10AX 1 way switch with Indicator lamp	P1081	192	P1081_DG	222
10AX 2 way switch	P1002	156	P1002_DG	184
16AX 1 way switch	P1101	172	P1101_DG	202
16AX 1 way switch with Indicator lamp	P1181	236	P1181_DG	274
16AX 1 way switch (2M)	P1121	242	P1121_DG	282
16AX 2 way switch (1M) NEW	P1102	222	P1102_DG	260
20A 1 way switch (1M) NEW	P11201	188	P11201_DG	206
20A DP switch with Indicator lamp	P1120	378	P1120_DG	444
32A DP switch with Indicator lamp	P1132	562	P1132_DG	660
Motor Starter Switch NEW				
25A Motor Starter switch	P1186MS	894	P1186MS_DG	1046
Bell Push				
10A Bell Push switch	P1005	174	P1005_DG	202
10A Bell Push switch (2M)	P1025	226	P1025_DG	264
10A bell push switch with Indicator	P1085	204	P1085_DG	238
10A bell push switch with Indicator (2M)	P1086	264	P1086_DG	308
Sockets				
10A, 2/3pin Socket Outlet with Shutter	P2005	192	P2005_DG	224
10A/16A 3-pin Socket Outlet with Shutter	P2106	286	P2106_DG	334
10A/25A 3 Pin Socket Outlet with Shutter	P2207	386	P2207_DG	452
13A Multi Pin Socket Outlet with Shutter	P2010	298	P2010_DG	356
Fan Regulators & Dimmers				
Step type fan regulator (1M)	P3100	530	P3100_DG	622
Step type fan regulator (2M)	P3200	640	P3200_DG	750
Dimmer 400W (1M)	P3004	916	P3004_DG	1105
Dimmer 1000W (2M)	P3012	1200	P3012_DG	1405
Accessories				
RJ 11 Telephone outlet with shutter	P4011	154	P4011_DG	184
RJ 45 Cat 5e Data outlet with shutter	P4045	526	P4045_DG	616
RJ 45 Cat6 Data outlet with shutter	P4046	564	P4046_DG	680
TV socket	P4500	148	P4500_DG	176
Blank off unit (1M)	P0001	42	P0001_DG	50
Foot Lamp with LED NEW	P7001	610	P7001_DG	714
Cord Outlet NEW	P4550	158	P4550_DG	186
LED Phase Indicator NEW	P5001	252	-	-
Hotel Series NEW				
DND Switch	P6002	180	P6002_DG	198
MMR Switch	P6004	180	P6004_DG	198
DND & MMR Indicator	P6013	578	P6013_DG	644
Key Card Switch - Electronic	P6005	3310	P6005_DG	3875
Cover Plates				
1-2 M Grid & 1 M Cover Frame	P0701	104	P0701_DG	118
1-2 M Grid & 2 M Cover Frame	P0702	104	P0702_DG	122
3 M Grid & 3 M Cover Frame	P0703	132	P0703_DG	152
4 M Grid & 4 M Cover Frame	P0704	152	P0704_DG	178
6 M Grid & 6 M Cover Frame	P0706	192	P0706_DG	234
8 M Grid & 8 M Cover Frame - Horizontal	P0708	252	P0708_DG	306
8 M Grid & 8 M Cover Frame - Square	P0709	292	P0709_DG	344
12 M Grid & 12 M Cover Frame	P0712	354	P0712_DG	416
18 M Grid & 18 M Cover Frame	P0718	510	P0718_DG	600

Opale - Switches with Satin Finish



- **Patented Smooth Satin Finish** - Scratch Resistant, Easy to Clean & Prevents light reflection off surface
- **Safe to Use** - High grade flame retardant polycarbonate material & Child Proof sockets with unique shutter design
- **Hassle Free Operation** - 'Soft sound' switches with Gold plated Data Socket contacts for better connection
- **Easy to Install** - Snap-In / Snap-Out front loading modules and terminals with indented screws
- **Green & Eco Friendly** - RoHS compliant range



X1001WH



X1286WH



X1186WH



X1005WH



X1085WH



X2005WH



X2106WH



X2010WH



X3200WH



X3104WH



X4010WH



X7003WH



X5001



X5002

Description	Reference for White	Unit MRP [₹]	Reference for Coke Grey	Unit MRP [₹]
Switches				
6A 1 way switch	X1001WH	134	AAKY1001	166
6A 1 way switch with Indicator lamp	X1081WH	208	AAKY1081	248
6A 2 way switch	X1002WH	184	AAKY1002	224
16A 1 way switch	X1101WH	214	AAKY1101	264
16A 1 way switch with Indicator lamp	X1181WH	294	AAKY1181	348
16A 2 way switch	X1102WH	284	AAKY1102	336
6A 1 way switch (2M)	X1021WH	234	AAKY1021	278
16A 1 way switch (2M)	X1121WH	300	AAKY1121	358
6A 1 way switch with Indicator (2M)	X1028WH	282	AAKY1028	322
16A 1 way switch with Indicator (2M)	X1128WH	346	AAKY1128	410
20A DP switch with Indicator (2M)	X1286WH	498	AAKY1286	580
32A DP switch (2M)	AAKX1232	726	-	-
Motor Starter Switch				
25A Motor Starter switch	X1186WH	1270	AAKY1186	1525
Bell Push				
6A Bell Push	X1005WH	208	AAKY1005	250
6A Bell Push (2M)	X1025WH	292	AAKY1025	354
6A Bell Push with Indicator	X1085WH	276	AAKY1085	330
6A Bell Push with Indicator (2M)	X1086WH	314	AAKY1086	374
Sockets				
6A 2/3 Pin Socket Outlet with Shutter	X2005WH	226	AAKY2005	268
6A "Uni Socket" Outlet with Shutter	X2007WH	280	AAKY2007	320
6A/16A 3-Pin Socket Outlet with Shutter	X2106WH	346	AAKY2106	404
13A Multi Pin Socket Outlet with Shutter	X2010WH	340	AAKY2010	406
16A 3-Pin Socket Outlet with Shutter	X2103WH	382	AAKY2103	458
13A BS flat Pin Socket Outlet with Shutter	X2403WH	478	AAKY2403	572
20A 3 Pin Socket Outlet with Shutter	X2206WH	428	AAKY2206	514
25A 3 Pin Socket Outlet with Shutter	X2207WH	462	AAKY2207	554
Fan Regulators & Dimmers				
Step type fan regulator (2M)	X3200WH	796	AAKY3200	952
Dimmer 400W (1M)	X3104WH	714	AAKY3104	856
Dimmer 400W (2M)	X3004WH	1110	AAKY3004	1330
Dimmer 1200W	X3012WH	1430	AAKY3012	1715
USB Chargers NEW				
2 Gang USB Charger - 2.1A (2M)	X7003WH	2245	AAKY7003	2625
Accessories				
RJ11 Telephone outlet (no shutter)	X4010WH	184	AAKY4010	224
RJ11 Telephone outlet with shutter	X4011WH	186	AAKY4011	224
Twin RJ11 Telephone outlets (no shutter) (1M)	X4020WH	278	AAKY4020	340
RJ45 Data Outlet with shutter	X4045WH	640	AAKY4045	752
TV Socket	X4500WH	174	AAKY4500	214
RJ45 Cover for Key Stone Type	X4050WH	210	AAKY4050	256
Gripped Cord Outlet	X4550WH	190	AAKY4550	228
Buzzer	X3300WH	780	AAKY3300	862
Blank off unit (1M)	X0001WH	48	AAKY0001	64
Neon Phase Indicator (Red)	X5001	294	-	-
Neon Phase Indicator (Green)	X5002	294	-	-
Neon Phase Indicator (Yellow)	X5003	294	-	-

Opale - Switches with Satin Finish



AAKX6002 + AAKX6004 + X0702



AAKX6006 + X0703

Description	Reference	Unit MRP [₹]
Hotel Series*		
DND Panel	AAKX6001	458
DND Switch	AAKX6002	358
MMR Panel	AAKX6003	434
MMR Switch	AAKX6004	358
Key Tag Switch (Mechanical Type 20 A)	AAKX6005	934
Shaver Socket	AAKX6006	4120

*Available in white colour only



X0733WH



AAKX0744



AAKX0754

Description	Reference for White	Unit MRP [₹]	Reference for Coke Grey	Unit MRP [₹]	Reference for Matt Silver	Unit MRP [₹]	Reference for Matt Gold	Unit MRP [₹]
Cover Plates								
1-2 M Grid & 1 M Cover Frame	X0701	120	AAKY0801	146	AAKX0741	282	AAKX0751	282
1-2 M Grid & 2 M Cover Frame	X0702	126	AAKY0802	152	AAKX0742	304	AAKX0752	304
3 M Grid & 3 M Cover Frame	X0703	150	AAKY0803	182	AAKX0743	364	AAKX0753	364
3 M Universal Grid & 3 M Cover Frame	X0733WH	198	AAKY0833	236	AAKX0744	364	AAKX0754	364
4 M Grid & 4 M Cover Frame	X0704	176	AAKY0804	216	AAKX0745	434	AAKX0755	434
6 M Grid & 6 M Cover Frame	X0706	244	AAKY0806	290	AAKX0746	536	AAKX0756	536
8 M Grid & 8 M Cover Frame - Horizontal	X0708	318	AAKY0808	378	AAKX0747	700	AAKX0757	700
8 M Grid & 8 M Cover Frame - Square	X0709	376	AAKY0809	450	AAKX0748	700	AAKX0758	700
12 M Grid & 12 M Cover Frame	X0712	442	AAKY0812	528	AAKX0749	956	AAKX0759	956
18 M Grid & 18 M Cover Frame	AAKX0718	576	-	-	-	-	-	-

Opale - Exclusive Range of Colour Plates NEW



Description	Reference for Rustic Bronze	Reference for Mulberry Red	Reference for Lavender Passion	Unit MRP [₹]
1-2M Grid & 1M Cover Frame	X0701_RB	X0701_MR	X0701_LP	282
1-2M Grid & 2M Cover Frame	X0702_RB	X0702_MR	X0702_LP	304
3M Grid & 3M Cover Frame	X0703_RB	X0703_MR	X0703_LP	364
3M Uni Grid & 3M Cover Frame	X0733_RB	X0733_MR	X0733_LP	364
4M Grid & 4M Cover Frame	X0704_RB	X0704_MR	X0704_LP	434
6M Grid & 6M Cover Frame	X0706_RB	X0706_MR	X0706_LP	536
8M Grid & 8M Cover Frame - Linear	X0708_RB	X0708_MR	X0708_LP	700
8M Grid & 8M Cover Frame - Square	X0709_RB	X0709_MR	X0709_LP	700
12M Grid & 12M Cover Frame	X0712_RB	X0712_MR	X0712_LP	956



Description	Reference for Champagne Gold	Reference for Solid Black	Reference for Green Oak	Reference for Gleaming Grey	Reference for Misty Grey	Reference for Black Graphite	Unit MRP [₹]
1-2M Grid & 1M Cover Frame	X0701_CHG	X0701_SB	X0701_GO	X0701_GG	X0701_MG	X0701_BG	282
1-2M Grid & 2M Cover Frame	X0702_CHG	X0702_SB	X0702_GO	X0702_GG	X0702_MG	X0702_BG	304
3M Grid & 3M Cover Frame	X0703_CHG	X0703_SB	X0703_GO	X0703_GG	X0703_MG	X0703_BG	364
3M Uni Grid & 3M Cover Frame	X0733_CHG	X0733_SB	X0733_GO	X0733_GG	X0733_MG	X0733_BG	364
4M Grid & 4M Cover Frame	X0704_CHG	X0704_SB	X0704_GO	X0704_GG	X0704_MG	X0704_BG	434
6M Grid & 6M Cover Frame	X0706_CHG	X0706_SB	X0706_GO	X0706_GG	X0706_MG	X0706_BG	536
8M Grid & 8M Cover Frame - Linear	X0708_CHG	X0708_SB	X0708_GO	X0708_GG	X0708_MG	X0708_BG	700
8M Grid & 8M Cover Frame - Square	X0709_CHG	X0709_SB	X0709_GO	X0709_GG	X0709_MG	X0709_BG	700
12M Grid & 12M Cover Frame	X0712_CHG	X0712_SB	X0712_GO	X0712_GG	X0712_MG	X0712_BG	956

You Choose a colour, we get it done!



Choose the cover plate colour of your choice from the 100+ options available in the shade card*

*Contact Schneider Electric Sales Representative for details

Please contact Customer Care Center for Stockable and Non stockable status of references.

NORMAL STOCK ITEMS

W.E.F. November 1st, 2018

ZENcelo India - The Revolutionary Full-Flat Switch



- **World's First and only Full-Flat Mechanical Switch**
- **Patented Iso-Motion Technology** - Ensures switch stays in the same position whether On or Off
- **Robust & Strong** - Made of corrosion-resistant, heat-resistant and impact-resistant polycarbonate
- **Safe to Use** - Electric arc encapsulated switches and Data Sockets with patented integrated shutter
- **Designed to Last** - Switches tested to 80,000 times; Sockets tested to 15,000 cycles.
- **Green & Eco Friendly** - RoHS compliant range



IN8401



IN8401/16




IN8411



IN8486/20



IN8405




IN8425



IN84SFR



IN8404D



IN8426U



IN8426/16



IN8431RJS4



IN8432USB_WE



INH8451



INH8454

Description	Reference for White	Unit MRP [₹]	Reference for Dark Grey	Unit MRP [₹]
Switches				
6A 1 Way switch	IN8401	298	IN8401(BZ)	374
6A 1 Way switch (2M)	IN8421	462	IN8421(BZ)	556
6A 2 Way switch	IN8402	364	IN8402(BZ)	436
6A 1 Way switch with Neon	IN8481	452	IN8481(BZ)	542
16AX~20A 1 Way switch	IN8401/16	438	IN8401/16(BZ)	534
16AX~20A 1 Way switch (2M)	IN8421/16	616	IN8421/16(BZ)	728
16AX~20A 1 Way switch with Neon	IN8481/16	618	IN8481/16(BZ)	732
16AX~20A 1 Way switch with Neon (2M)	IN8482/16	728	IN8482/16(BZ)	856
16AX~20A 2 Way switch	IN8402/16	612	IN8402/16(BZ)	722
16AX~20A 2 Way switch (2M)	IN8422/16	732	IN8422/16(BZ)	860
16AX~20A 1 Way 2G switch (1M)	IN8444/16	710	IN8444/16(BZ)	856
10AX Intermediate switch	IN8430/IM	1026	IN8430/IM(BZ)	1160
20A DP Switch with Neon (2M)	IN8486/20	952	IN8486/20(BZ)	1125
32A DP Switch with Neon (2M)	IN8486/32	1495	IN8486/32(BZ)	1780
Motor Starter Switch				
25A Motor Starter switch (2M)	IN8425MS	2425	IN8425MS(BZ)	2580
Bell Push				
6A Bell Push switch	IN8405	412	IN8405(BZ)	498
6A Bell Push switch (2M)	IN8425	602	IN8425(BZ)	712
6A Bell Push switch with Neon	IN8485	536	IN8485(BZ)	632
6A Bell Push switch with Neon (2M)	IN8486	666	IN8486(BZ)	784
Sockets				
2~3 Pin Universal Socket with Shutter	IN8426U	474	IN8426U(BZ)	574
6A/16A 3 Pin Socket with Shutter	IN8426/16	708	IN8426/16(BZ)	866
13A Flat Pin Socket with Shutter	IN84213	968	IN84213(BZ)	1145
International Socket with Shutter	IN84213IS	834	IN84213IS(BZ)	1044
Universal 2 Pin Socket with Shutter	IN84226U	498	IN84226U(BZ)	584
20A 3 Pin Socket with Shutter	IN84220	902	IN84220(BZ)	1060
25A 3 Pin Socket with Shutter	IN84225	964	IN84225(BZ)	1135
Fan Regulators & Dimmers				
Fan Control (5 Speeds)	IN84SFR	1680	IN84SFR(BZ)	2015
Full Flat 400W Dimmer Module (1 Gang)	IN8404D	1440	IN8404D(BZ)	1705
USB Chargers - NEW				
1 Gang USB Charger - 2.1A (1M)	IN8431USB_WE	2725	IN8431USB_BZ	3125
2 Gang USB Charger - 2.1A (2M)	IN8432USB_WE	3985	IN8432USB_BZ	4585
Accessories				
RJ11 Telephone Outlet with shutter (1 Gang)	IN8431RJS4	454	IN8431RJS4(BZ)	554
RJ45 Cat6 Data Outlet with shutter	IN8431RJ6	1580	IN8431RJ6(BZ)	1930
Data Outlet Wall Plate (for RJ45 key stone jack)	IN8431RJC	448	IN8431RJC(BZ)	528
TV Socket	IN8431TV	344	IN8431TV(BZ)	414
Cord Outlet	IN8445CO	394	IN8445CO(BZ)	480
Foot Lamp with White LED (2M)	IN8490FLW	3175	-	-
Foot Lamp with Yellow LED (2M)	IN8490FLY	3095	-	-
Blank off unit (1M)	IN8430X	106	IN8430X(BZ)	130
Hotel Series				
Do Not Disturb Panel	INH8451	2195	INH8451(BZ)	2600
Make My Room Panel	INH8454	1995	INH8454(BZ)	2355
Do Not Disturb Switch	INH8452	1090	INH8452(BZ)	1285
Do Not Disturb Switch (2M)	INH8453	1110	INH8453(BZ)	1310
Make My Room Switch	INH8455	1065	INH8455(BZ)	1255

ZENcelo India - The Revolutionary Full-Flat Switch




IN8403C



IN8406C



IN8402C(BZ)



IN8404C(SZ)



IN84012C(SA)

Description	Reference for White	Unit MRP [₹]	Reference for Dark Grey	Unit MRP [₹]	Reference for Silver Bronze	Unit MRP [₹]	Reference for Satin Silver	Unit MRP [₹]
Cover Plates								
1M Grid & 1M Cover Frame	IN8401C	260	IN8401C(BZ)	308	IN8401C(SZ)	716	IN8401C(SA)	716
2M Grid & 2M Cover Frame	IN8402C	270	IN8402C(BZ)	322	IN8402C(SZ)	708	IN8402C(SA)	708
3M Grid & 3M Cover Frame	IN8403C	318	IN8403C(BZ)	380	IN8403C(SZ)	870	IN8403C(SA)	870
4M Grid & 4M Cover Frame	IN8404C	346	IN8404C(BZ)	446	IN8404C(SZ)	1045	IN8404C(SA)	1045
6M Grid & 6M Cover Frame	IN8406C	528	IN8406C(BZ)	628	IN8406C(SZ)	1435	IN8406C(SA)	1435
8M Grid & 8M Cover Frame - Horizontal	IN8408HC	628	IN8408HC(BZ)	752	IN8408HC(SZ)	1940	IN8408HC(SA)	1940
8M Grid & 8M Cover Frame - Square	IN8408SC	830	IN8408SC(BZ)	1045	IN8408SC(SZ)	2355	IN8408SC(SA)	2355
9M Grid & 9M Cover Frame	IN8409C	1032	IN8409C(BZ)	1290	IN8409C(SZ)	3110	IN8409C(SA)	3110
12M Grid & 12M Cover Frame	IN84012C	1365	IN84012C(BZ)	1680	IN84012C(SZ)	4340	IN84012C(SA)	4340
18M Grid & 18M Cover Frame	IN84018C	1925	IN84018C(BZ)	2265	IN84018C(SZ)	5745	IN84018C(SA)	5745

ZENcelo BS - The Revolutionary Full-Flat Switch



- **British Standard** - Consistent Plate Size across functions
- World's First and only **Full-Flat Mechanical Switch**
- **Patented Iso-Motion Technology** - Ensures switch stays in the same position whether On or Off
- **Robust & Strong** - Made of corrosion-resistant, heat-resistant and impact-resistant polycarbonate
- **Designed to Last** - Switches tested to 80,000 times; Sockets tested to 15,000 cycles.
- **Green & Eco Friendly** - RoHS compliant range



E8432/1>SZ-OS



E8433/1-OS



E8415_10_WE



E8431D20-OS



E431RJS4-OS

Description	Reference for White	Unit MRP [₹]	Reference For Silver Brozne	Unit MRP [₹]
-------------	---------------------	--------------	-----------------------------	--------------

Switches

16AX/20A 1 Gang 1 Way switch with Ondicator	E8431/1-OS	362	E8431/1>SZ-OS	450
16AX/20A 2 Gang 1 Way switch with Ondicator	E8432/1-OS	560	E8432/1>SZ-OS	700
16AX/20A 3 Gang 1 Way switch with Ondicator	E8433/1-OS	916	E8433/1>SZ-OS	1145
16AX/20A 4 Gang 1 Way switch with Ondicator	E8434/1-OS	1320	E8434/1>SZ-OS	1650
16AX/20A 1 Gang 2 Way switch	E8431/2-OS	388	E8431/2>SZ-OS	482
16AX/20A 2 Gang 2 Way switch	E8432/2-OS	680	E8432/2>SZ-OS	848
16AX/20A 3 Gang 2 Way switch	E8433/2-OS	986	E8433/2>SZ-OS	1240
16AX 1 Gang Intermediate Switch	E8431/I-OS	1075	E8431/I>SZ-OS	1345

Double Pole Switches

20A 1 Gang Double Pole switch with Neon	E8431D20-OS	1028	E8431D20>SZ-OS	1345
32A 1 Gang Double Pole switch with Neon	E8431D32-OS	1365	E8431D32>SZ-OS	1795

Bell Push

10A Full-Flat Bell Switch	E8431BP1-OS	394	E8431BP1>SZ-OS	486
---------------------------	-------------	-----	----------------	-----

Sockets

5A 1 Gang 3 Round Pin Switched Socket with Shutter and Ondicator	E8415/5-OS	714	E8415/5>SZ-OS	890
5A 1 Gang 3 Round Pin Switched Socket with Neon and Shutter	E8415/5N-OS	1004	E8415/5N>SZ-OS	1260
15A 1 Gang 3 Round Pin Switched Socket with Shutter and Ondicator	E8415/15-OS	844	E8415/15>SZ-OS	1055
15A 1 Gang 3 Round Pin Switched Socket with Shutter and Neon	E8415/15N-OS	1240	E8415/15N>SZ-OS	1535
16A 1 Gang International Socket with Shutter	E84426/16IS-OS	898	E84426/16IS>SZ-OS	1120
13A 1 Gang Switched Socket with Ondicator	E8415-OS	1055	E8415>SZ-OS	1320
13A 1 Gang Switched Socket with Neon	E8415N-OS	846	E8415N>SZ-OS	1056
10/16A Switched Socket Outlet - Shuttered	E8415_16_10_WE	940	E8415_16_10_SZ	1100
10A 2-3 pin Switched Socket Outlet - Shuttered	E8415_10_WE	748	E8415_10_SZ	932

Fan Regulators & Dimmers

350VA 50Hz 1 Gang Full-Flat Universal Dimmer with LED	E8431EPD4-OS	2335	E8431EPD4>SZ-OS	2915
---	--------------	------	-----------------	------

Accessories

1 Gang TV Socket Master	E8431TVM-OS	452	E8431TVM>SZ-OS	564
1 Gang Telephone Socket on Shuttered Wallplate	E8431RJS4-OS	576	E8431RJS4>SZ-OS	722
2 Gang Telephone Socket on Shuttered Wallplate	E8432RJS4-OS	1345	E8432RJS4>SZ-OS	1670
1 Gang Data Outlet Category 5E with Integrated Shutter	E8431RJ/5-OS	898	E8431RJ/5>SZ-OS	1120
1 Gang Data Outlet Category 6 with Integrated Shutter	E8431RJ/6-OS	1075	E8431RJ/6>SZ-OS	1345
1 Gang Data Outlet Category 5E on Shuttered Wallplate	E8431RJS/5-OS	1120	E8431RJS/5>SZ-OS	1405
1 Gang Data Outlet Category 6 on Shuttered Wallplate	E8431RJS/6-OS	1345	E8431RJS/6>SZ-OS	1675
2 Gang Data Outlet Category 5E with Integrated Shutter	E8432RJ/5-OS	1570	E8432RJ/5>SZ-OS	1955
2 Gang Data Outlet Category 6 with Integrated Shutter	E8432RJ/6-OS	2015	E8432RJ/6>SZ-OS	2505
2 Gang Data Outlet Category 5E on Shuttered Wallplate	E8432RJS/5-OS	1570	E8432RJS/5>SZ-OS	1955
2 Gang Data Outlet Category 6 on Shuttered Wallplate	E8432RJS/6-OS	2015	E8432RJS/6>SZ-OS	2505
2 Gang Telephone + Data Outlet Category 5E with Integrated Shutter	E8432TDRJ/5-OS	1345	E8432TDRJ/5>SZ-OS	1675
2 Gang Telephone + Data Outlet Category 5E on Shuttered Wallplate	E8432TDRJS/5-OS	1670	E8432TDRJS/5>SZ-OS	2085
2 Gang Telephone + Data Outlet Category 6 on Shuttered Wallplate	E8432TDRJS/6-OS	1900	E8432TDRJS/6>SZ-OS	2370
TV + Cat 6 shutter outlet	E8432TVRJ6_WE_G1	1670	E8432TVRJ6_SZ_G1	1825
Blank off unit (1M)	E8430X-OS	240	E8430X>SZ-OS	300

ZENcelo BS - The Revolutionary Full-Flat Switch



E8431USB_WE



E8431USB_SZ



E8431USB_SA

Description	Reference For White	Unit MRP [₹]	Reference For Silver Bronze	Unit MRP [₹]	Reference For Satin Silver	Unit MRP [₹]
USB Chargers						
1 Gang 2.1A USB Charger	E8431USB_WE	3725	E8431USB_SZ	4155	E8431USB_SA	4155



E8431EKT-OS



E8432DMS>SZ-OS



E84T727H-OS



E84T727V>SZ-OS

Description	Reference for White	Unit MRP [₹]	Reference For Silver Bronze	Unit MRP [₹]
Hotel Series				
Illuminated "Do Not Disturb" & "Please Clean Up" Symbols	E8432DM-OS	2965	E8432DM>SZ-OS	3705
Illuminated "Do not Disturb" Symbol	E8431D-OS	822	E8431D>SZ-OS	1075
1 Gang Full-Flat Switch with Illuminated "Do not Disturb" Symbol	E8431DS-OS	442	E8431DS>SZ-OS	552
2 Gang Full-Flat Switch with Illuminated "Do not Disturb" & "Please Clean Up" Symbols	E8432DMS-OS	3265	E8432DMS>SZ-OS	4075
1 Gang Full-Flat Bell Switch with Illuminated "Do Not Disturb" Symbol	E8431BPD-OS	2485	E8431BPD>SZ-OS	3015
1 Gang Full-Flat Bell Switch with Illuminated "Do Not Disturb" & "Please Clean Up" Symbols	E8431BPDM-OS	3170	E8431BPDM>SZ-OS	3955
Electronic Key Card Time Delay Switch	E8431EKT-OS	6335	E8431EKT>SZ-OS	7920
Universal Shaver Unit, Vertical	E84T727V-OS	3585	E84T727V>SZ-OS	4465
Universal Shaver Unit, Horizontal	E84T727H-OS	3585	E84T727H>SZ-OS	4465

NEO - Face the Future



- **Unique** - Horizontal Switches available for Horizontal Decor
- **Stylish** - Ingenious combination of matt and gloss finish along with a fresh look through use of LED technology
- **Convenient** - Switches with soft, luminiscent “locators” to locate the switch in dark
- **Dual Tone Colours** - Standard colours include Grey and White incorporating Blue and White LED respectively



E3033H1EBGS



E3032H1EWWW



E3032H1FWWW



E3032V1EBGS



E3031V1EWWW



E3032V1FWWW

Description	Horizontal Dolly Reference	Unit MRP [₹]	Vertical Dolly Reference	Unit MRP [₹]
Grey Switches with Blue LED Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1EBGS	700	E3031V1EBGS	700
10AX 250V 1 Gang 2 Way Switch	E3031H2EBGS	818	E3031V2EBGS	818
10AX 250V 2 Gang 1 Way Switch	E3032H1EBGS	1095	E3032V1EBGS	1095
10AX 250V 2 Gang 2 Way Switch	E3032H2EBGS	1290	E3032V2EBGS	1290
10AX 250V 3 Gang 1 Way Switch	E3033H1EBGS	1605	E3033V1EBGS	1605
10AX 250V 3 Gang 2 Way Switch	E3033H2EBGS	1890	E3033V2EBGS	1890
10AX 250V 4 Gang 1 Way Switch	E3034H1EBGS	1995	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2EBGS	2360	-	-
White Switches with White LED Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1EWWW	680	E3031V1EWWW	680
10AX 250V 1 Gang 2 Way Switch	E3031H2EWWW	784	E3031V2EWWW	784
10AX 250V 2 Gang 1 Way Switch	E3032H1EWWW	1085	E3032V1EWWW	1085
10AX 250V 2 Gang 2 Way Switch	E3032H2EWWW	1255	E3032V2EWWW	1265
10AX 250V 3 Gang 1 Way Switch	E3033H1EWWW	1535	E3033V1EWWW	1535
10AX 250V 3 Gang 2 Way Switch	E3033H2EWWW	1780	E3033V2EWWW	1780
10AX 250V 4 Gang 1 Way Switch	E3034H1EWWW	1950	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2EWWW	2310	-	-
White Switches with White Fluorescent Indicator				
10AX 250V 1 Gang 1 Way Switch	E3031H1FWWW	636	E3031V1FWWW	676
10AX 250V 1 Gang 2 Way Switch	E3031H2FWWW	718	E3031V2FWWW	718
10AX 250V 2 Gang 1 Way Switch	E3032H1FWWW	1016	E3032V1FWWW	1080
10AX 250V 2 Gang 2 Way Switch	E3032H2FWWW	1185	E3032V2FWWW	1260
10AX 250V 3 Gang 1 Way Switch	E3033H1FWWW	1530	E3033V1FWWW	1530
10AX 250V 3 Gang 2 Way Switch	E3033H2FWWW	1805	E3033V2FWWW	1805
10AX 250V 4 Gang 1 Way Switch	E3034H1FWWW	1975	-	-
10AX 250V 4 Gang 2 Way Switch	E3034H2FWWW	2195	-	-

NEO - Face the Future



E3031VBP>GS-OS



E3031VD20>EWWW-OS



E3426/10IS>GS-OS



EH3015/6>GS-OS



E3031TV>GS-OS



E3031RJ5E>WW-OS



E3031USB_GS



E3031USB_WW



E3032HDM>GS-OS



E3031EKTH>WW-OS

Description	Horizontal Dolly Reference	Unit MRP [₹]	Vertical Dolly Reference	Unit MRP [₹]
Bell Push				
4A 1 Way Horizontal Bell Push Switch	E3031HBP>GS-OS	1460	E3031HBP>WW-OS	1430
4A 1 Way Vertical Bell Push Switch	E3031VBP>GS-OS	1435	E3031VBP>WW-OS	1410
DP Switches				
1 Gang Horizontal 20A DP Switch with Blue LED for Grey Switch and White LED for White Switch	E3031HD20EBGS	1215	E3031HD20EWWW	1185
1 Gang Vertical 20A DP Switch with Blue LED for Grey Switch and White LED for White Switch	E3031VD20>EBGS-OS	1185	E3031VD20>EWWW-OS	1145
1 Gang 32A DP Rocker Switch with Blue LED for Grey Switch and White LED for White Switch	E3031DR32EBGS	1780	E3031DR32EWWW	1715
Intermediate Switch				
16AX Intermediate Switch with Blue LED for Grey Switch and White LED for White Switch	E3031VIA>EBGS-OS	1920	E3031VIA>EWWW-OS	1845
Socket				
15A 1 Gang Switch Socket Outlet Grey with Blue LED for Grey Socket and White LED for White Socket	E3015/15-EBGS-EX	2085	E3015/15-EWWW-EX	2025
10A International Socket	E3426/10IS>GS-OS	1630	E3426/10IS>WW-OS	1560
6A 1 Gang Switch Socket Outlet	EH3015/6>GS-OS	1205	EH3015/6>WW-OS	1160
6/16A 1 Gang Switch Socket Outlet	EH3015/16/6>GS-OS	1685	EH3015/16/6>WW-OS	1645
Fan Regulators & Dimmers				
1 Gang Fan Control	E3031FRGS	1950	E3031FRWW	1765
1 Gang Dimmer with Blue LED for Grey Dimmer and White LED for White Dimmer	E3031HD>EBGS-OS	11685	E3031HD>EWWW-OS	11570
2 Gang Horizontal Dimmer with Blue LED for Grey Dimmer and White LED for White Dimmer	E3032HD>EBGS-OS	20490	E3032HD>EWWW-OS	19920
Accessories				
1 Gang TV Socket Outlet	E3031TV>GS-OS	1085	E3031TV>WW-OS	1058
2 Gang TV Socket Outlet	E3032VTV>GS-OS	2115	E3032VTV>WW-OS	1090
4 Pin 1 Gang Telephone Outlet (CAT 3)	E3031RJ>GS-OS	1260	E3031RJ>WW-OS	1195
4 Pin 1 Gang 8 Pin Data Outlet (CAT 5E)	E3031RJ5E>GS-OS	3330	E3031RJ5E>WW-OS	3210
4 Pin 2 Gang Telephone Outlet (CAT 3)	E3032RJ>GS-OS	2250	E3032RJ>WW-OS	2115
4 Pin Telephone Outlet (CAT 3) + 8 Pin Data Outlet (CAT 5E)	E3032TD>GS-OS	4105	E3032TD>WW-OS	3970
1G Keystone Plate Shuttered	E3031RJK>GS-OS	680	E3031RJK>WW-OS	656
2G Keystone Plate Shuttered	E3032RJK>GS-OS	710	E3032RJK>WW-OS	698
1 x 2.1A USB Charger	E3031USB_GS	5090	E3031USB_WW	4870
25A Connection Unit	E3031TB>GS-OS	954	E3031TB>WW-OS	914
1 Gang Blank Plate	E3030X>GS-OS	616	E3030X>WW-OS	588
2 Gang Blank Plate	ET3030X>GS-OS	1375	ET3030X>WW-OS	1325
Hotel Series				
2 Gang "Do Not Disturb" & "Please Clean Up" Combined (Horizontal)	E3032HDM>GS-OS	6335	E3032HDM>WW-OS	6140
1 Gang "Do Not Disturb" & "Please Clean Up" Combined (Vertical)	E3030VDM>GS-OS	5900	E3030VDM>WW-OS	5580
1 Gang Bell Push with "Please Clean Up" Combined (Vertical)	E3031VBP>GS-OS	4840	E3031VBP>WW-OS	4400
1 Gang Bell Push with "Do not Disturb" Combined (Vertical)	E3031VBPD>GS-OS	4840	E3031VBPD>WW-OS	4665
1 Gang Bell Push with "Do Not Disturb" & "Please Clean Up" Combined (Vertical)	E3031VBPDM>GS-OS	4840	E3031VBPDM>WW-OS	4665
Electronic Key Card Switch (Horizontal)	E3031EKTH>GS-OS	13420	E3031EKTH>WW-OS	13065
115/240V Shaver Outlet (Vertical)	ET3727V>GS-OS	6965	ET3727V>WW-OS	6830

ULTI Impress - The Ultimate Switch



- **Super Stylish** - Single piece face plate with maximized space for plate along with soft radiant blue/amber backlight for switches
- **Multiple Finish Options** - Crystal Glass, Champagne Gold, Brushed Silver, Pearl White
- **Technological Marvel** - Mechanical switch with touch and feel of electronic switch with patented impress mechanism
- **Strength & Durability** - Ionized metal grid for back housing plate
- **Automation Alignment** - Lighting Control & Automation available in same finish



1 Gang Switch with Crystal Glass Plate



2 Gang Switch with Pearl White Plate



4 Gang Switch with Brushed Silver Plate



Bell Push with Champagne Gold Plate



6-16A Switched Socket with Crystal Glass Plate

Description	Colour	Reference	Unit MRP [₹]
Switches			
1 Gang 250V 16AX 1 Way Switch module with Blue LED	Module	U201SPM/1>B00-OS	4575
1 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U201SPM/2>B00-OS	4955
Cover Plate for 1 Gang Switch	Brushed Silver	UC21SW/P>XBS-OS	1375
	Champagne Gold	UC21SW/P>XCG-OS	1375
	Crystal Glass	UC21SW/P>XGL-OS	5905
	Pearl White	UC21SW/P>XPW-OS	1375
2 Gang 250V 16AX 1 Way Switch module with Blue LED	Module	U202SPM/1>B00-OS	6100
2 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U202SPM/2>B00-OS	6850
Cover Plate for 2 Gang Switch	Brushed Silver	UC22SW/P>XBS-OS	1960
	Champagne Gold	UC22SW/P>XCG-OS	1960
	Crystal Glass	UC22SW/P>XGL-OS	6755
	Pearl White	UC22SW/P>XPW-OS	1960
4 Gang 250V 16AX, 1 Way Switch module with Blue LED	Module	U204SPM/1>B00-OS	10370
4 Gang 250V 16AX 2 Way Switch module with Blue LED	Module	U204SPM/2>B00-OS	11685
Cover Plate for 4 Gang Switch	Brushed Silver	UC24SW/P>XBS-OS	3110
	Champagne Gold	UC24SW/P>XCG-OS	3110
	Crystal Glass	UC24SW/P>XGL-OS	8190
	Pearl White	UC24SW/P>XPW-OS	3110
Double Pole Switch			
1 Gang 250V 20A Double Pole Switch module with Blue LED	Module	U201SPM/DP>B00-OS	6100
Cover Plate for 1 Gang DP Switch	Brushed Silver	UC21DP/P>XBS-OS	1905
	Champagne Gold	UC21DP/P>XCG-OS	1905
	Crystal Glass	UC21DP/P>XGL-OS	5720
	Pearl White	UC21DP/P>XPW-OS	1905
Bell Push			
Bell Push Switch Module with Blue LED	Module	US31BPB00	2335
Cover Plate for Bell Press Switch	Brushed Silver	UC31BPXBBS	1865
	Champagne Gold	UC31BPXCG	1865
	Crystal Glass	UC31BPXGL	6100
	Pearl White	UC31BPXPW	1865
Sockets			
6-16A Switched Socket	Module	US15/616000	5420
Cover Plate for 6-16A Switched Socket	Brushed Silver	UC15/616XBS	2920
	Champagne Gold	UC15/616XCG	2920
	Crystal Glass	UC15/616XGL	7620
	Pearl White	UC15/616XPW	2920
6A 2/3 Pin Switched Socket	Module	US15/6U000	4585
Cover Plate for 6A 2/3 Pin Switched Socket	Brushed Silver	UC15/6UXBS	2500
	Champagne Gold	UC15/6UXCG	2500
	Crystal Glass	UC15/6UXGL	6470
	Pearl White	UC15/6UXPW	2500
International Socket	Module	US426/16IS000	2775
Cover Plate for International Socket	Brushed Silver	UC426/16ISXBS	1950
	Champagne Gold	UC426/16ISXCG	1950
	Crystal Glass	UC426/16ISXGL	5525
	Pearl White	UC426/16ISXPW	1950

ULTI Impress - The Ultimate Switch



Data Socket with Brushed Silver Cover Plate



Twin Data Socket with Crystal Glass Cover Plate



Keycard switch with Brushed Silver Cover Plate



Shaver Socket with Champagne Gold Cover Plate

Description	Colour	Reference	Unit MRP [₹]	
Accessories				
TV Socket Module	Module	US31TV000	2335	
	Brushed Silver	UC31TVXBS	2240	
	Champagne Gold	UC31TVXCG	2240	
	Crystal Glass	UC31TVXGL	7425	
Cover Plate for TV Socket	Pearl White	UC31TVXPW	2240	
	Data Socket Module	Module	UD31RJ000	2920
		Brushed Silver	UDC31RJXBS	2240
		Champagne Gold	UDC31RJXCG	2240
Crystal Glass		UDC31RJXGL	7420	
Cover Plate for Data Socket	Pearl White	UDC31RJXPW	2240	
	Twin Data Socket Module	Module	UD32TD000	4465
		Brushed Silver	UDC32TDXBS	2240
		Champagne Gold	UDC32TDXCG	2240
Crystal Glass		UDC32TDXGL	7520	
Cover Plate for Twin Data Socket	Pearl White	UDC32TDXPW	2240	
	Blank Module	Module	US31X000	2675
		Brushed Silver	UC31XXBS	2435
		Champagne Gold	UC31XXCG	2435
Crystal Glass		UC31XXGL	4965	
Cover Plate for Blank Module	Pearl White	UC31XXPW	2435	
	USB Chargers			
	1 Gang 2.1A USB Charger Module	White	US31USB_WE	3595
		Grey	US31USB_GY	3595
Brushed Silver		UC31USB_XBS	2400	
Champagne Gold		UC31USB_XCG	2400	
Cover Plate for 1 Gang 2.1A USB Charger	Crystal Glass	UC31USB_XGL	7165	
	Pearl White	UC31USB_XPW	2400	
	Hotel Series			
	Keycard Switch with Cover Plate	Brushed Silver	U31EKTHBBS	10565
Champagne Gold		U31EKTHACG	10565	
Crystal Glass		U31EKTHBGL	13910	
Pearl White		U31EKTHBPW	10565	
Shaver Socket with Cover Plate	Brushed Silver	US727HXBS	8920	
	Champagne Gold	US727HXCG	8920	
	Crystal Glass	US727HXGL	12995	
	Pearl White	US727HXPW	8920	

Kavacha - Weather Protected Series



WHT20-GY-EX



CSW110-GY-EX



A3031WBP_WE

- Pleasing looks with **IP56 protection**
- Large press switch
- Co-moulded sealing with no risk of gasket damage
- Chemical resistant & UV stabilised

Description	Reference	Unit MRP [₹]
Kavacha IP56 Surface Mount Switches		
Switches with Looping Terminal		
10A 1 Gang 2 Way Switch	CSW110-GY-EX	1905
20A/16A 1 Gang 2 Way Switch	CSW120-GY-EX	2185
10 A 2 Gang 2 Way Switch	CSW110/2-GY-EX	2590
20A/16A 1 Gang 2 Way Switch	CSW120/2-GY-EX	2905
10A 1 Gang 2 Way Bell Press Return Switch	CSW110BPR-GY-EX	2205
Switches with Looping Terminal with Neon		
10 A 1 Gang 2 Way surface switch with Looping Terminal with Neon	CSW110N-GY-EX	2185
10A 2 Gang 2 Way with Looping Terminal and Neon	CSW110/2N-GY-EX	2755
20A 1 Gang 2 Way with Looping Terminal with Neon	CSW120N-GY-EX	2350
20A/16A 2 Gang 2 Way with Looping Terminal with Neon	CSW120/2N-GY-EX	3070
Double Pole Switches		
20A 1 Gang Double Pole Switch	CSW220-GY-EX	2990
20A 2 Gang Double Pole Switch	CSW220/2-GY-EX	3150
Kavacha Heavy Duty Isolator Switches		
20A Double Pole	WHB220-RG	3300
20A Triple Pole	WHT20-GY-EX	3675
35A Triple Pole	WHT35-GY-EX	4100
55A Triple Pole	WHT55-GY-EX	4365
63A Triple Pole	WHT63-GY-EX	4670
Kavacha IP56 Surface Mount Combined Switched Socket Outlets		
Combination Switch Socket Outlets		
16A Single Pole Switched Socket Outlet	CSC316RP-GY-EX	3150
16A Single Pole Switched Socket Outlet with Neon	CSC316RPN-GY-EX	3395
Kavacha IP56 Surface Mount Socket Outlets		
16A Socket Outlet	CSO316RP-GY-EX	1865
Kavacha Full-Time Weatherproof Cover		
Full-Time Weatherproof Membrane Switch Cover (Transparent) IP55	E223M_TR	1090
Full-Time Weatherproof Membrane Switch Cover (White)IP56	E223M_WE	982
Full-Time Weatherproof Single Gang Socket Cover (Transparent) IP55	E223R_TR	766
Full-Time Weatherproof Single Gang Socket Cover (White)IP56	E223R_WE	694
Kavacha Weatherproof Door Bell Switch		
Surface Mounted Door Bell with LED Indicator (Grey)IP44	A3031WBP_GY	1160
Surface Mounted Door Bell with LED Indicator (White)IP44	A3031WBP_WE	1014

Metal Boxes



- **Weld free design** to minimize corrosion and rusting without compromising on strength
- Mounting clip and earth pin designed for **easier installation** and to **avoid loss during transportation**
- Removable side plates and optimized knock outs and for **easier wiring**
- Completely tested & validated as per **IS 14772**

Description	Reference	Unit MRP [₹]
Metal Boxes for Indian Format Ranges (Livia, Opale & ZENcelo India) NEW		
0.8 mm thickness		
Metal Box 1 & 2 modules	ME0102	86
Metal Box 3 modules	ME0103	112
Metal Box 4 modules	ME0104	128
1 mm thickness		
Metal Box 1 & 2 modules	MR1102	96
Metal Box 3 modules	MR1103	126
Metal Box 4 modules	MR1104	146
Metal Box 6 modules	MR1106	198
Metal Box 8 modules - Horizontal	MR1108	256
Metal Box 8 modules - Square	MR1109	256
Metal Box 12 module	MR1112	330
Metal Box 18 modules	MR1118	390

Description	Reference	Unit MRP [₹]
Metal Boxes for BS Format Ranges (ZENcelo BS, NEO, ULTI) - New & Improved Design NEW		
1 mm thickness		
2 GANG GI Metal Boxes	MM1102	240
3 GANG GI Metal Boxes	MM1103	340
4 GANG GI Metal Boxes	MM1104	440

- Special Metal Box with Gang Partition to accommodate BS format ranges
- Single Metal Box can accommodate up to 4 units
- Number of Gangs for Metal Box = Number of units that it can accommodate (Eg. 3 GANG Metal Box can accommodate up to 3 BS format Units)

EzInstall 3 - ULTI ZIGBEE

- 2 wire design, True Retrofit
- Intelligent dimmer with Auto Load Detection feature
- Capability to dim or switch on/off different load types (in case of non dimmable loads connected to dimmer)
- Very high network scalability with Peer to Peer Mesh technology
- Each unit (switch, dimmer) is a repeater – no need for any additional repeater
- Moods created at a touch of a button
- ZigBee protocol is based on the IEEE802.15.4 standard and works on 2.4GHz radio frequency



Crystal Glass



Brushed Silver



Champagne Gold



Pearl White

Description	Catalogue No.	Unit MRP [₹]
1 Gang 2000VA Zigbee Switch	U201SRY2KWZB	18155
1 Gang Switch Coverplate - Brushed Silver	UC21SWXBS	1439
1 Gang Switch Coverplate - Pearl White	UC21SWXPW	1439
1 Gang Switch Coverplate - Champagne Gold	UC21SWXCG	1439
1 Gang Switch Coverplate - Crystal Glass	UC21SWXGL	6668
2 Gang 2X1000VA Zigbee Switch	U202SRY2KWZB	20931
2 Gang Switch Coverplate - Brushed Silver	UC22SWXBS	2002
2 Gang Switch Coverplate - Pearl White	UC22SWXPW	2002
2 Gang Switch Coverplate - Champagne Gold	UC22SWXCG	2002
2 Gang Switch Coverplate - Crystal Glass	UC22SWXGL	7037
1 Gang 550W Zigbee Dimming Switch	U201DST600ZB	18746
1 Gang Dimmer Coverplate - Brushed Silver	UC21DMXBS	2304
1 Gang Dimmer Coverplate - Pearl White	UC21DMXPW	2304
1 Gang Dimmer Coverplate - Champagne Gold	UC21DMXCG	2304
1 Gang Dimmer Coverplate - Crystal Glass	UC21DMXGL	6960
2 Gang 2X300W Zigbee Dimming Switch	U202DST600ZB	22514
2 Gang Dimmer Coverplate - Brushed Silver	UC22DMXBS	2304
2 Gang Dimmer Coverplate - Pearl White	UC22DMXPW	2304
2 Gang Dimmer Coverplate - Champagne Gold	UC22DMXCG	2304
2 Gang Dimmer Coverplate - Crystal Glass	UC22DMXGL	8738
1 Gang 300VA Zigbee Curtain Control Switch	U201SCN300ZB	22705
1 Gang Curtain Coverplate - Brushed Silver	UC21CNXBS	2070
1 Gang Curtain Coverplate - Pearl White	UC21CNXPW	2070
1 Gang Curtain Coverplate - Champagne Gold	UC21CNXCG	2070

Description	Catalogue No.	Unit MRP [₹]
1 Gang Curtain Coverplate - Crystal Glass	UC21CNXGL	6221
2 Gang 2X300VA Zigbee Curtain Control Switch	U202SCN600ZB	26016
2 Gang Curtain Coverplate - Brushed Silver	UC22CNXBS	2304
2 Gang Curtain Coverplate - Pearl White	UC22CNXPW	2304
2 Gang Curtain Coverplate - Champagne Gold	UC22CNXCG	2304
2 Gang Curtain Coverplate - Crystal Glass	UC22CNXGL	8738
500W ZigBee IND PlugAdaptor Dimmer Wh	U104ND500ZB_WE	17919
Zigbee Handheld Remote Controller	U105RHH001ZB	12088
2Key Zigbee Freelocate Switch, Brushed Silver	U102RWMZB_XBS	9817
2Key Zigbee Freelocate Switch, Champagne Gold	U102RWMZB_XCG	9817
2Key Zigbee Freelocate Switch, Crystal Glass	U102RWMZB_XGL	13997
2Key Zigbee Freelocate Switch, Pearl White	U102RWMZB_XPW	9817
6Key Zigbee Freelocate Switch, Brushed Silver	U106RWMZB_XBS	11013
6Key Zigbee Freelocate Switch, Champagne Gold	U106RWMZB_XCG	11013
6Key Zigbee Freelocate Switch, Crystal Glass	U106RWMZB_XGL	15882
6Key Zigbee Freelocate Switch, Pearl White	U106RWMZB_XPW	11013
Zigbee to RS232 Interface	UB3Z5	13058
Zigbee IR Gateway	U301RSDMZB	19503
Zigbee IP Gateway	U301IPGWZB	19252
Zigbee Analog Module	U30010V	10751

Description	Reference	Unit MRP [₹]
1 Gang 16A Zigbee Double Pole	U301SDP16AZB	22552
1 Gang DP Cover Plate – Crystal Glass	UC21DPXGL	7155
1 Gang DP Cover Plate – Pearl White	UC21DPXPW	2360
1 Gang DP Cover Plate – Brushed Silver	UC21DPXBS	2360
1 Gang DP Cover Plate – Champagne Gold	UC21DPXCG	2360

W.E.F. March 12, 2018



Once there were smart homes,
now there are Wiser Homes.



For Details and price information please contact our nearest Sales Office

Sympholux enables you to optimally balance light and energy because Schneider Electric remains the only Lighting Control expert who offers you harmonious orchestration via three platforms

KNX

C-Bus

DALI

No matter what your building type, location, budget or unique application and needs, no one is more perfectly placed to provide you with an optimized solution than Schneider Electric



The standard in interoperability



KNX Benefits

- Developed and supported by one organization of manufacturers and users
- Open protocol compatibility with a vast choice of products/ applications
- Full 3rd party integration
- Total multi-functionality of products and media
- Single-system-specific configuration software
- Extensive worldwide trainingradio frequency

C-Bus

The expert in ambience lighting



C-BUS Benefits

- Fully topology independent
- Industry standard CAT5e cable
- Highly reliable and robust, cost effective per-node control
- Simple commissioning and installation
- Easy-to-reconfigure distributed intelligent local programming
- High-power and architectural dimming
- Consistent switch and C-Bus product look and feel



Optimizing individual control and centralized management



DALI Benefits

- Single-system control of lighting and emergency lights from multiple manufacturers
- Delivers full dimming of ballasts, groups and lines
- Comprehensive monitoring and energy saving at each device level
- Simple wiring, configuration, maintenance and reconfiguration
- Ethernet backbone linking multiple DALI networks into a single system

ULTI ELV



- ULTI style, state-of-art lighting control and electrical automation scheme for hotel guest room control, offering sophisticated design
- Light touch buttons equipped with LED backlight enable guest to locate switch in a dark environment
- Comparative with Universal Input/ Output module (Room Logic Gateway -RLG) or third party guestroom control system

Description	MOQ	Reference	Unit MRP [₹]
DND/PCU Control Switch	1	US32DMRJ000	On Request
Cover Plate for DND/PCU Switch	50	UC32HDMSXCG	On Request
Cover Plate for DND/PCU Switch	1	UC32HDMSXBS	On Request
Cover Plate for DND/PCU Switch	50	UC32HDMSXGL	On Request
Cover Plate for DND/PCU Switch	1	UC32HDMSXPW	On Request
DND/PCU Indicator w/Bell Press (Blue)	1	US33DMRJ000	On Request
DND/PCU Indicator w/Bell Press (Amber)	1	US33DMRJA00	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXCG	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXBS	On Request
Cover Plate for DND/PCU with bell push switch	1	UC33HBPDMXGL	On Request
Cover Plate for DND/PCU with bell push switch	50	UC33HBPDMXPW	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBWP	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVACG	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBGL	On Request
Cardkey Switch (Low Voltage)	15	U31EKTHLVBBS	On Request
1 Gang ELV Switch (Amber)	30	U201SPM_RJ_A00	On Request
1 Gang ELV Switch (Blue)	1	U201SPM_RJ_B00	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXCG	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXBS	On Request

Description	MOQ	Reference	Unit MRP [₹]
Coverplate for 1 Gang ELV switch	1	UC21SWXGL	On Request
Coverplate for 1 Gang ELV switch	1	UC21SWXPW	On Request
2 Gang ELV Switch- AMBER	30	U202SPM_RJ_A00	On Request
2 Gang ELV Switch- BLUE	1	U202SPM_RJ_B00	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXCG	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXBS	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXGL	On Request
Coverplate for 2 Gang ELV switch	1	UC22SWXPW	On Request
4 Gang ELV Switch- AMBER	30	U204SPM_RJ_A00	On Request
4 Gang ELV Switch- BLUE	1	U204SPM_RJ_B00	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XCG	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XBS	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XGL	On Request
Coverplate for 4 Gang ELV switch	50	UC24SW_XPW	On Request

Colours Available (suffix as in coverplates above)

BS	Brushed Silver
PW	Pearl White
CG	Champagne Gold
GL	Crystal Glass
GL	Crystal Glass

Neo ELV



Description	MOQ	Reference	Unit MRP [₹]
1 gang ELV switch with Amber LED	1	E3031LV>EAGS-OS	On Request
2 gang ELV switch with Amber LED	1	E3032LV>EAGS-OS	On Request
3 gang ELV switch with Amber LED	1	E3033LVEAGS	On Request
1 Gang Curtain Switch without LED	1	E3031CLV>GS-OS	On Request
2 Gang Curtain Switch without LED	1	E3032CLV>EAGS-OS	On Request
1 gang Dimmer Module with Amber LED	1	E3031DLV_EAGS	On Request
2 gang Dimmer Module with Amber LED	1	E3032DLV_EAGS	On Request
Bell Push with DND and MMR Indicator	1	E3031DMBLVEGGS	On Request
Bell Push with DND, MMR and Butler Indicator	60	E3031DMBWLVEGGS	On Request
DND/MMR Control switch	1	E3032DMLV>EAGS-OS	On Request
DND, MMR and Butler Control switch	1	E3033DMLVEAGS	On Request
Key card switch with Amber LED	60	E3031EKTHLVEAGS	On Request

Zencelo ELV



Description	MOQ	Reference	Unit MRP [₹]
1 Gang Sw W/ LED Indicator	1	E8431LV	On Request
1 Gang Sw W/ LED Indicator, SZ	1	E8431LVSZ	On Request
2 Gang Sw W/ LED Indicator	1	E8432LV	On Request
2 Gang Sw W/ LED Indicator, SZ	1	E8432LV_SZ	On Request
3 Gang Sw W/ LED Indicator	1	E8433LV	On Request
3 Gang Sw W/ LED Indicator, SZ	1	E8433LVSZ	On Request
2 Gang Curtain Sw Open/Close	1	E8432CLV	On Request
2 Gang Curtain Sw Open/Close, SZ	1	E8432CLVSZ	On Request
Elv Keycard Switch	50	E8431EKTLV	On Request
Elv Keycard Switch, SZ	50	E8431EKTLVSZ	On Request
1 Gang Sw W/ DND	1	E8431DSLVSZ	On Request
1 Gang Sw W/ DND, SZ	1	E8431DSLVSZ	On Request
2 Gang Sw W/ DND & PCU	1	E8432DMSLV	On Request
2 Gang Sw W/ DND & PCU, SZ	1	E8432DMSLVSZ	On Request
Bell Press W/ DND & PCU Indicator	1	E8431BDMLV	On Request
Bell Press W/ DND & PCU Indicator,SZ	1	E8431BDMLVSZ	On Request
3 Gang Curtain Sw Open/Half/Close	1	E8433CLV	On Request
3 Gang Curtain Sw Open/Half/Close	1	E8433CLV_SZ	On Request

Colours Available (suffix as above)

SZ	Silver Bronze
No suffix after LV	White Colour

Hotel Room Controller

Description	MOQ	Reference	Unit MRP
Hotel Room Controller 42IO	1	HRCPDG42R	On Request
Hotel Room Controller 28IO	1	HRCBPBG28R	On Request
Hotel Room Controller 14 I/O Expansion Module	1	HRCEP14R	On Request

Note:

- All Hotel Series items are non stockable and lead time is around 10-14 weeks.
- Customised bedside panels will have a MOQ. Pls speak with the product manager in your region for details.
- For Bedside panel, pl take additional items like MCU card and power supply.
- For room logic gateway, power supply is required separately.

Occupancy Sensors



Description	Reference	Unit MRP [₹]
Argus 300 Electronic outdoor movement detector, max. range 16 m with IP55 protection	MTN564319	12026
Argus 360 Electronic movement detector for outdoor ceiling mounting max. range 16 m, IP55 protection	MTN564419	13293
Argus 110 Electronic outdoor movement detector; angle of detection 110 degrees, max. range 12 mtrs, IP55 protection	MTN565119	5820
Argus 220 Electronic movement detector for outdoor ceiling mounting angle of detection 220 degrees, max. range 12 mtrs, IP55 protection	MTN565219	8730
ARGUS Presence Master with IR, DALI	MTN5510-1519	15147
Accessories		
Mounting bracket for Argus 110 and Argus 220 Sensors	MTN565291	734
Extension for Argus 300 Sensor	MTN554399	1226

Ceiling and Wall Mount Sensors

PIR and Ultrasonic Sensors /Surface Mount Sensors



Description	Reference	Unit MRP [₹]
Surface Mount Single-Load 360 degrees PIR	CSS54E_WE	2814
Flush/Surface Mount Single-Load 360 degrees PIR	SAE-UE-MS-CSAWE	3443
Flush Mount Dual load 360 degrees standalone sensor	SAE-UE-MS-CDBWE	6674
ARGUS Presence Dual-Tech PIR & Ultrasonic Sensor - 1ch	CCT551011	14127
ARGUS Presence High Frequency High Bay Sensor - 2ch	CCT551023	14127
Flush/Surface Mount Dual Load 360° PIR, 0-10V Analog Dimmable Sensor with remote	SAE-UE-MS-CDDWE	8078
Remote for PIR and Ultrasonic Motion sensor	SAE-UE-MS-IR10T	1676
Remote for standalone PIR sensor	SAE-UE-MS-1R-WE	2111

Wall Mount Sensors



Description	Reference	Unit MRP [₹]
Neo C-Metro 200 degrees wall mount sensor, grey colour	E3751MS3C_GS	3874
Neo C-Metro 90 degrees wall mount sensor, grey colour	E3751MS3A_GS	3874
Zencelo 110 degrees wall mount sensor, white colour	E84751MS3B_WE	3580
Zencelo 90 degrees wall mount sensor, white colour	E84751MS3A_WE	3580

Control and Command Products

Control Systems

Time Switches



- 7D, 24H Programmable switch .Voltage Rating: 230V AC +10%, -15%
- Consumption: 1 channel - max. 4VA; 2 channels - max. 7VA
- Memory: Upto 56 Switching Operations
- Back up of program & time by lithium battery: Operating reserve: 6 Years
- Overall dimensions: 5 modules
- Cable length: 100m
- Minimum time between two switching operations: 1 min

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IHP - intuitive switch - 1 channel - 7D 24 H	2.5	CCT15720	8721
IHP Plus - intuitive switch - 1 channel - 7D 24 H, pulse programming	2.5	CCT15721	10080
IHP - intuitive switch - 2 channels - 7D 24 H	2.5	CCT15722	10539
IHP+ - intuitive switch - 2 channels - 7D 24 H, pulse programming	2.5	CCT15723	12237

Timers



- Switching capacity 16 A, max
- Delay range from 30 sec to 20 min
- Capacity for lighted pushbutton 150 mA
- Electric distribution busbar compatibility
- Output power capacity CCT15232-2300W
- Output power capacity CCT15223-3600W

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
MINs - electronic timer - 0.5 to 20 min	1	CCT15232	4553
MINs - electronic timer - 0.5 to 20 min with switch Off Warning	1	CCT15233	7367
MINs - electronic timer - 0.5 to 20 min with switch Off Warning and Impulse relay function	1	CCT15234	7417

Light sensitive switch



- Includes wall mounted cell
- Adjustable brightness threshold 2 to 2000 Lux
- 2 LEDs to signal the sensor status and the output status
- Test button: To check the product and load cabling
- Switching capacity: 16Amp
- Screwless Terminals compatible with rigid and flexible wires
- Consumption 6 VA
- Size 45mm

Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IC 2000 - light sensitive switch - 2...2000 lux - with wall-mounted cell	2.5	CCT15368	10489
Wall-mounted cell for IC2000 light sensitive switch		CCT15268	3145
IC 200 - light sensitive switch - 2...200 lux - with wall-mounted cell	2.5	CCT15284	7367
Switchboard cell for IC200 light sensitive switch		15281	2543
IC Astro (Astronomical Time Switches)	2.5	CCT15223	16249

Time Switches (Analog)



Description	Module Width 18mm/module	Reference	Unit MRP [₹]
IH 24H 16 A 15 mts interval 1 channel	1	15336	3801
IH 24H 16 A 30 mts interval 1 channel	1	CCT15365	4269
IH 24H + 7 day 10 A 1 channel- Max 16 On, 16 Off and 7 On + 7 Off cycles	3	15366	6380
IH 7 day 16 A 1 channel- Max 21 On and 21 Off cycles	3	CCT15367	6233
ITM4C6E - multifunctional switch - 4 channels (7 days + dated days)	5	15270	13109
IH 24H 16 A 30 mts 1 channel without reserve	3	CCT16364	3452



Description	Reference	Unit LP [₹]
Actassi Copper Cables		
Cat 6a 10G UTP Cable 305m Blue CM	ACTTG4P6AUCM3RBU	On Request
Cat 6a 10G UTP Cable 305m White LSZH	ACTTG4P6AULS3RBU	On Request
Cat 6a 10G FTP Cable 305m BlueCM	ACTTG4P6ASCM3RBU	On Request
Cat 6a 10G FTP Cable 305m BlueLSZH	ACTTG4P6ASLS3RBU	On Request
Cat.6 4pr UTP Cable 305m Blue CM	ACT4P6UCM3RBBU_E	On Request
Cat.6 4pr UTP Cable 305m white LSZH	ACT4P6ULS3RBWE_E	On Request
Cat.6 4pr FTP Cable 305m Blue CM	ACT4P6SCM3RBBU	On Request
Cat.5e 4pr UTP Cable 305m Grey CM	ACT4P5EUCM3RBGY	On Request
Copper Connectivity		
CAT 6A UTP Keystone White Non Shutter	VDIB1775XUWE_E	384
FTP/UTP 24-port Patch Panel Unloaded	ACTPPS24NSU	2744
Cat.6A 10G FTP 24-port Patch Panel Loaded	ACTPP6ATGS24NSS	17074
Cat.6A 10G UTP 24-port Patch Panel Non-Shutter Loaded	ACTPP6ATGU24NSS_E	12030
Cat 6A UTP PP 24 Port 1UAngled UnLoaded	ACTPP6ATGUXNSA_E	2786
Cat 6A FTP Patchcord 1 mtr Grey	ACTPTG6ASBCM10GY_E	500
Cat 6A FTP Patchcord 1 mtr Blue	ACTPTG6ASBCM10BU_E	500
Cat 6AFTP Patchcord 1 mtr Red	ACTPTG6ASBCM10RD_E	500
Cat 6A FTP Patchcord 2 mtr Grey	ACTPTG6ASBCM20GY_E	599
Cat 6A FTP Patchcord 2 mtr Blue	ACTPTG6ASBCM20BU_E	599
Cat 6AFTP Patchcord 2 mtr Red	ACTPTG6ASBCM20RD_E	599
Cat 6A FTP Patchcord 3 mtr Grey	ACTPTG6ASBCM30GY_E	726
Cat 6A FTP Patchcord 3 mtr Blue	ACTPTG6ASBCM30BU_E	726
Cat 6AFTP Patchcord 3 mtr Red	ACTPTG6ASBCM30RD_E	725
SOCKET RJ45 CAT6 KSTONE BLUE UTP	VDIB17766UBU_E	244
SOCKET RJ45 CAT6 KSTONE RED UTP	VDIB17766URD_E	244
SOCKET RJ45 CAT6 KSTONE YELLOW UTP	VDIB17766UYL_E	244
SOCKET RJ45 CAT6 KSTONE GREEN UTP	VDIB17766UGR_E	244
SOCKET RJ45 CAT6 KSTONE WHITE UTP	VDIB17766UWE_E	244
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Grey	ACTPC6UBCM10GY_E	217
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Yellow	ACTPC6UBCM10YL_E	217
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Green	ACTPC6UBCM10GR_E	217
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Blue	ACTPC6UBCM10BU_E	217
Cat 6 24 AWG UTP stranded Patch cord 1 Meter - Red	ACTPC6UBCM10RD_E	217
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Grey	ACTPC6UBCM20GY_E	237
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Yellow	ACTPC6UBCM20YL_E	237
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Green	ACTPC6UBCM20GR_E	237
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Blue	ACTPC6UBCM20BU_E	237
Cat 6 24 AWG UTP stranded Patch cord 2 Meter - Red	ACTPC6UBCM20RD_E	237
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Grey	ACTPC6UBCM30GY_E	268
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Yellow	ACTPC6UBCM30YL_E	268
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Green	ACTPC6UBCM30GR_E	268
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Blue	ACTPC6UBCM30BU_E	268
Cat 6 24 AWG UTP stranded Patch cord 3 Meter - Red	ACTPC6UBCM30RD_E	268
Cat 6 24 AWG UTP stranded Patch cord 1 Meter LSZH - Grey	ACTPC6UBLS10GY_E	227
Cat 6 24 AWG UTP stranded Patch cord 1 Meter- Yellow LSZH	ACTPC6UBLS10YL_E	227
Cat 6 ,24 AWG UTP stranded Patch cord 1 Meter-Green LSZH	ACTPC6UBLS10GR_E	227
Cat 6 24 AWG UTP stranded Patch cord 1 Meter Blue	ACTPC6UBLS10BU_E	227
Cat 6 24 AWG UTP stranded Patch cord 1 Meter Red	ACTPC6UBLS10RD_E	227
Cat 6 24 AWG UTP stranded Patch cord 2 Meter LSZH Grey	ACTPC6UBLS20GY_E	247

Description	Reference	Unit LP [₹]
Actassi Copper Connectivity		
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Yellow	ACTPC6UBLS20YL_E	247
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Green	ACTPC6UBLS20GR_E	247
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Blue	ACTPC6UBLS20BU_E	247
Cat 6 24 AWG UTP stranded Patch cord 2 Meter Red	ACTPC6UBLS20RD_E	247
Cat 6 24 AWG UTP stranded Patch cord 3 Meter LSZH Grey	ACTPC6UBLS30GY_E	279
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Yellow	ACTPC6UBLS30YL_E	279
Cat 6A 24 AWG UTP stranded Patch cord 3 Meter Green	ACTPC6UBLS30GR_E	279
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Blue	ACTPC6UBLS30BU_E	279
Cat 6 24 AWG UTP stranded Patch cord 3 Meter Red	ACTPC6UBLS30RD_E	279
Cat.5e UTP Keyst Non-Shutter Modular Jack White	ACTRJSM5ENSUWE	170
Cat5e UTP 24-port Non-Shutter Patch Panel Loaded	ACTPP5EU24NSS	4641
Cat.5e Patch Cord UTP 1M CM Grey	ACTPC5EUBCM10GY	200
Cat.5e Patch Cord UTP 2M CM Grey	ACTPC5EUBCM20GY	263
Cat.5e Patch Cord UTP 2M CM Red	ACTPC5EUBCM20RD	263

Life Is 

Schneider
Electric

Schneider Electric India Pvt. Ltd.

Corporate Office: 9th Floor, DLF Building No. 10, Tower C, DLF Cyber City, Phase II, Gurugram 122002 Haryana
Tel.: ++91 124 3940400 Fax: ++91 124 4222036/ 037

Ahmedabad
Schneider Electric India (P) Ltd.
1506-1507, 15th Floor Shapth-5,
SG Highway, Ahmedabad - 380015
Tel.: 079-66826701

Cochin
Schneider Electric India (P) Ltd.
41 / 406- D1,3rd Floor, Beejay
Towers,
Rajaji Road Cochin- 682035
Tel.: 0484-3048401

Ludhiana
Schneider Electric India (P) Ltd.
Office No. - 3, 5th Floor, Novelty Plaza
Bhaiwala Chowk
Ludhiana- 140001
Tel.: 0161- 4656672-75

Secunderabad
D.No. 1-8-271, # 401, Ashoka Bhoopal
Chambers, SP Road,
Secunderabad - 500003
Tel.: 04039404000
Fax.: 040-39131313

Bengaluru
Schneider Electric India (P) Ltd.
No. 3/1, JP Techno Park,
Mezzanine Floor, Millers Tank Bund
Road, Vasanth Nagar,
Bengaluru - 560052. Tel.: 080-71481351

Coimbatore
Schneider Electric India (P) Ltd.
No. -104, Classic Tower, 3rd Floor,
Trichy Road, Coimbatore- 641018
Tel.: 0422-3940400

Mumbai
Schneider Electric India (P) Ltd.
Marwah House, 2nd Floor
Krishanlal Marwah Marg,
Andheri (East), Mumbai - 400072
Tel.: 91-22-30263300

Vadodara
605 & 606, 6th Floor Ocean Building,
Opp.Vadodara Central, Sarabhai Road,
Vadodara-390005
Tel.: 0265-3940400

Bhubaneswar:
Schneider Electric India (P) Ltd.
6th Floor, Block A, JSS Software Technol-
ogy park , E 1/1 , Chandaka Industrial
Estate, Info City , Bhubaneswar -751025
Tel.: 0674-6672000

Jaipur
Schneider Electric India (P) Ltd.
Jaipur Business Centre 309, 3rd
Floor, Sangam Tower 190, Church
Road, Jaipur-302001
Tel.: 0141-3912903

Nagpur
Schneider Electric India (P) Ltd.
Fortune Business Centre, 6,
Basant Vihar, W.H.C Road
Shankar Nagar, Nagpur- 440010
Tel.: 0712-2558581

Vishakhapatnam
Schneider Electric India (P) Ltd.
Ratnam's Business Centre,
D.N.10-1-43, 1st Floor
Siripuram Fort,C.B.M.Compound,
Visakhapatnam- 530016
Tel.: 0891 - 2508990

Chandigarh
Schneider Electric India (P) Ltd.
2nd Floor of Tower A
Bestech Business Tower
Sector-66
Mohali- 160059
Tel.: 0172-3324500

Kolkata
Schneider Electric (I)Pvt.Ltd,
BP-4, Sector-V
Technopolis
3rd floor, Salt Lake City
Kolkata- 700 091
Tel.: 033-333640100-101

Nashik:
Schneider Electric India (P) Ltd.
401, 4th Floor Rishi Raj Towers, Jehan
Circle, Gangapur Road,
Nashik- 422013
Tel: +91-7620498557

Chennai
Schneider Electric India (P) Ltd.
No:29, 2nd floor, Bannari Amman Towers,
B-Block,RK Salai, Mylapore
Chennai - 600 004
Tel.:044- 39404000

Lucknow
Schneider Electric India (P) Ltd.
1st Floor, Asha Bhawan 27 / II -A,
Gokhale Marg, Lucknow- 226001
Tel.: 0522-4006010

Pune
Schneider Electric India (P) Ltd.
1st Floor, R.B. Business Centre
Above Dass Electronics
Sanghvi Nagar, Aundh, Pune- 411007
Tel.: 020-39404000

Customer Care Centre

Monday-Saturday, 9 a.m. to 8 p.m.
Toll-free numbers: 1800 419 4272, 1800 103 0011
Email: customercare.in@schneider-electric.com

For more information, visit our website at: www.schneider-electric.co.in

- All Prices are in Indian Rupees.
- Prices are subject to change without notice.
- Prices charged will be as prevailing on the date of dispatch.
- Maximum Retail Price (MRP) is inclusive of all taxes

- Tax incidence on invoices is basis applicable GST rates. Invoice amount not to exceed MRP.
- Invoice Amount = (MRP – less Applicable discount) + Applicable GST %

Distributor