


# Keysight Technologies

## Millimeter Wave Frequency Extenders

From Virginia Diodes Inc. for the  
Keysight X-Series Signal Analyzers

### Technical Overview

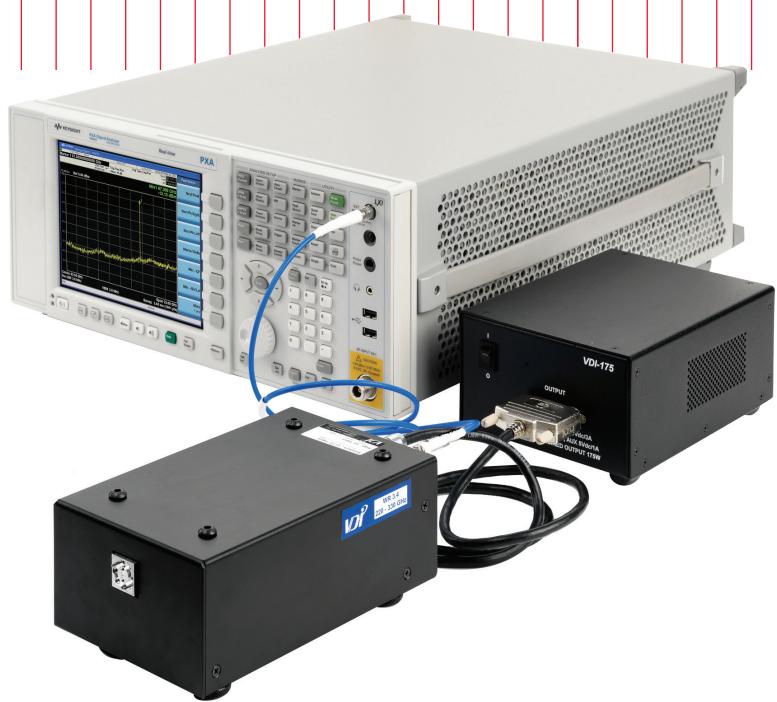

The Keysight Technologies, Inc. X-series signal analyzers provide outstanding performance across a broad set of characteristics, such as dynamic range, displayed average noise level (DANL), distortion performance, phase noise, and measurement speed for frequencies up to 50 GHz. When paired with a new line of frequency extenders from Virginia Diodes Inc. (VDI), many of these capabilities are available up to 1.1 THz to meet the requirements of both established and emerging millimeter wave applications.

The N9029AVxx signal analyzer frequency extension modules expand the measurement range of microwave signal generators up into the millimeter frequency range. They combine low conversion loss with excellent noise figure to provide the best possible sensitivity for measuring low-level signals.



Figure 1. The N9029AV03 frequency extender covers the WR3.4 band from 220 to 330 GHz.

The N9029AVxx modules can be used in two different operating modes, depending on the type of signals to be measured. In standard mode (see Figure 2), the LO signal comes from the signal analyzer, gets multiplied to a much higher frequency, and is mixed with the incoming millimeter signal entering the module from the waveguide input. The resulting 322.5 MHz IF signal is then routed back into the signal analyzer. A built-in diplexer enables both the LO and IF signals to share the same cable, allowing a single coaxial cable to provide the connection between the signal analyzer and the N9029AVxx frequency extender.

In this mode, the signal identification and image suppression features of the Keysight X-series signal analyzers can be used to correctly identify the actual RF frequency and remove spurious signals. Amplitude readings on the signal analyzer can be corrected with the conversion loss table, which is stored on a USB memory stick included with each N9029AVxx module so that it can be easily downloaded into the signal analyzer's memory.

The standard mode is useful for general spectrum analysis and works best with stable CW or narrowband signals.

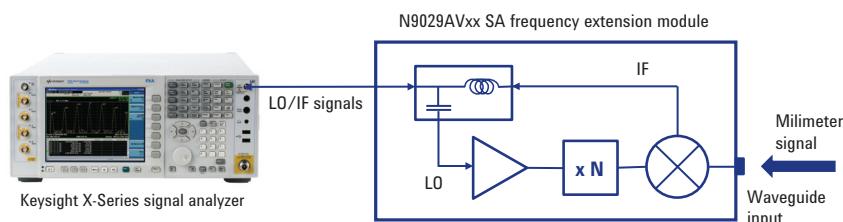


Figure 2. N9029AVxx signal analyzer frequency extension module operating in standard mode.

The N9029AVxx module can also be used as a wideband downconverter (see Figure 3). In this mode, a separate signal generator is used to provide a fixed LO signal, and a block of RF signals (both the upper and lower sidebands) are downconverted to IF and fed into the signal analyzer RF input. This configuration provides an IF bandwidth of up to 20 GHz.

Block downconversion, in which spectral information is preserved, is very useful for signals that drift or for wideband communication signals. Like the standard mode, conversion loss can be applied to determine RF power. Spurious mixing products can be identified by varying the signal generator frequency slightly to determine the mixing order.

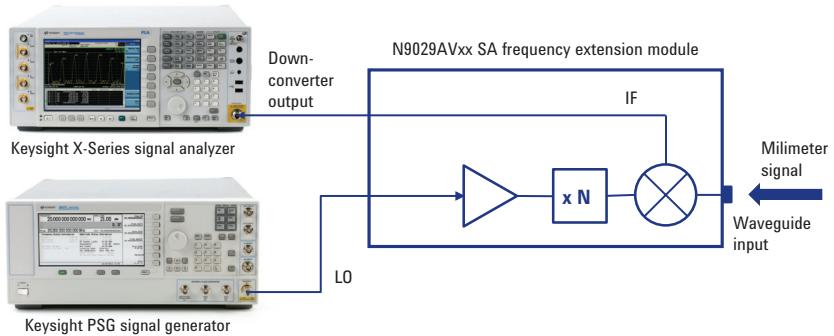


Figure 3. N9029AVxx signal analyzer frequency extension module operating in downconverter mode.

### Power supply requirements

Each N9029AVxx frequency extension module requires an N5262VDI-175 external power supply.



Figure 4. The power supply is connected to the frequency extension module with the included DC power cable.

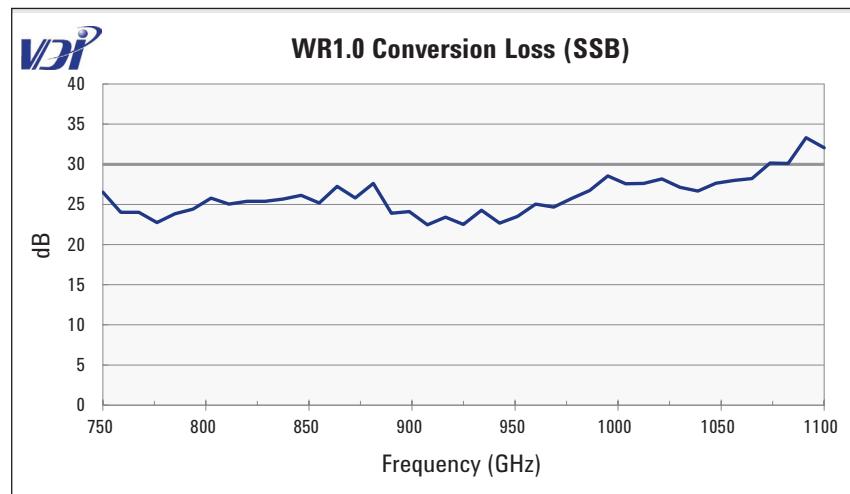


Figure 5. Measured intrinsic mixer conversion loss for the N9029AV01 (750 GHz to 1.1 THz) frequency extension module.

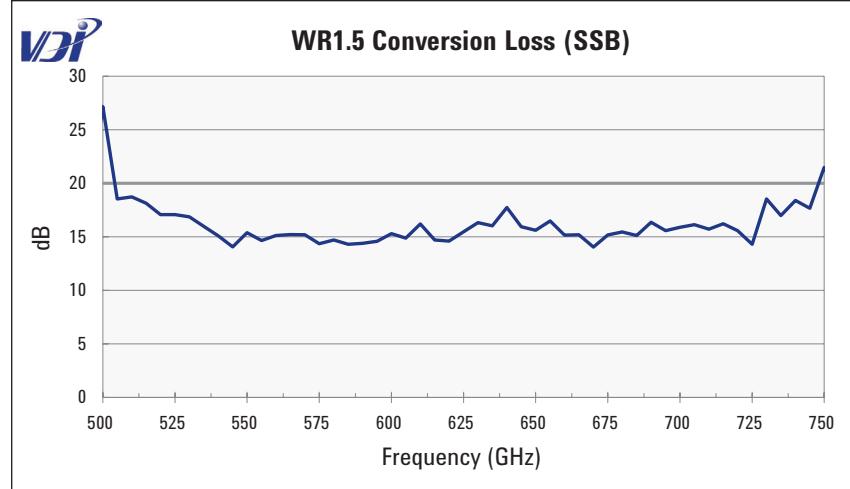


Figure 6. Measured intrinsic mixer conversion loss for the N9029AV1B (500 to 750 GHz) frequency extension module.

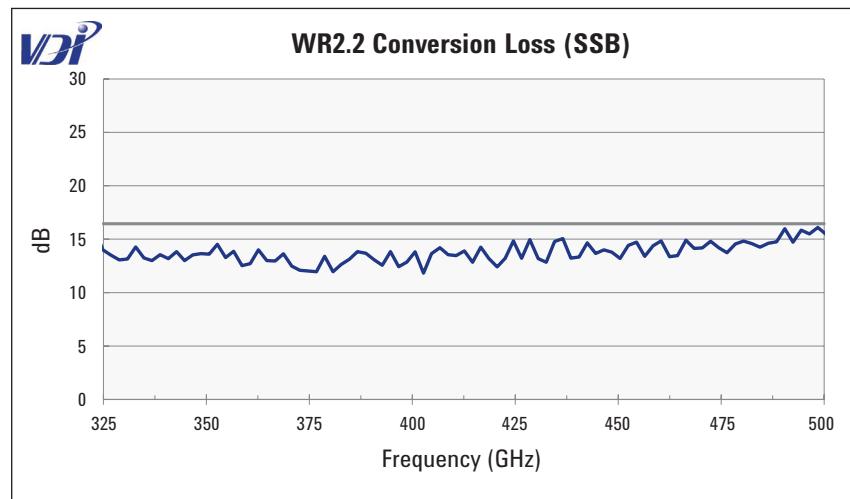


Figure 7. Measured intrinsic mixer conversion loss for the N9029AV02 (325 to 500 GHz) frequency extension module.

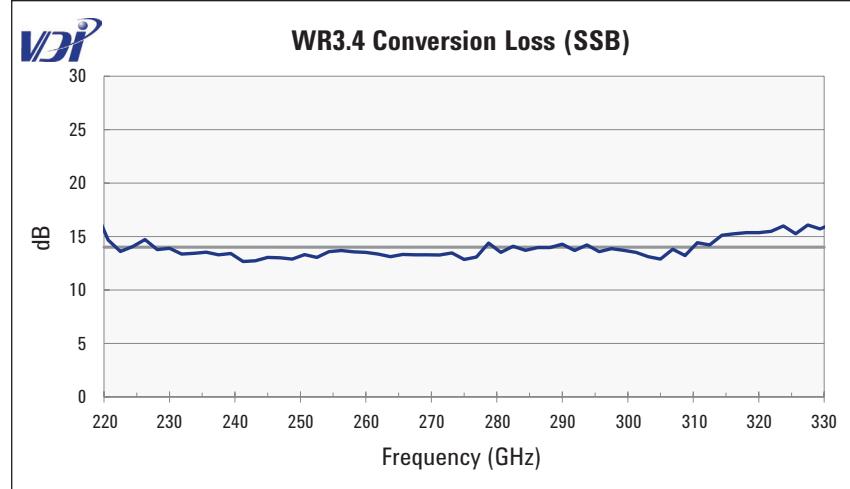


Figure 8. Measured intrinsic mixer conversion loss for the N9029AV03 (220 to 330 GHz) frequency extension module.

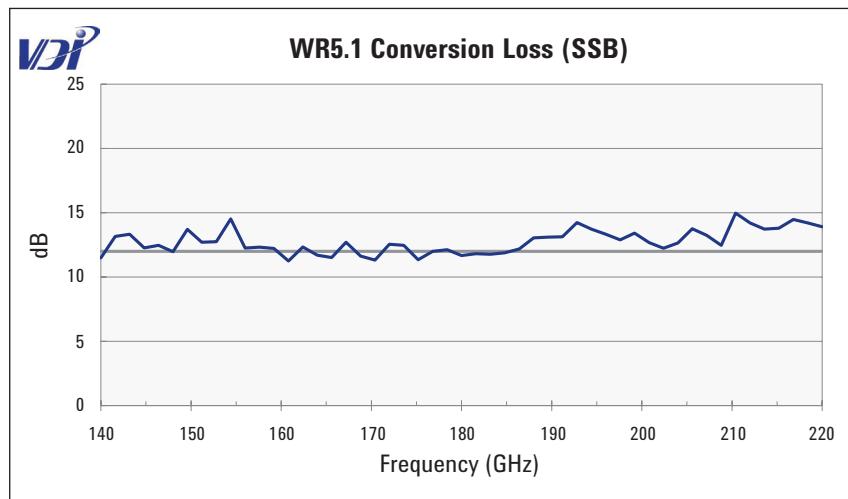


Figure 9. Measured intrinsic mixer conversion loss for the N9029AV05 (140 to 220 GHz) frequency extension module.

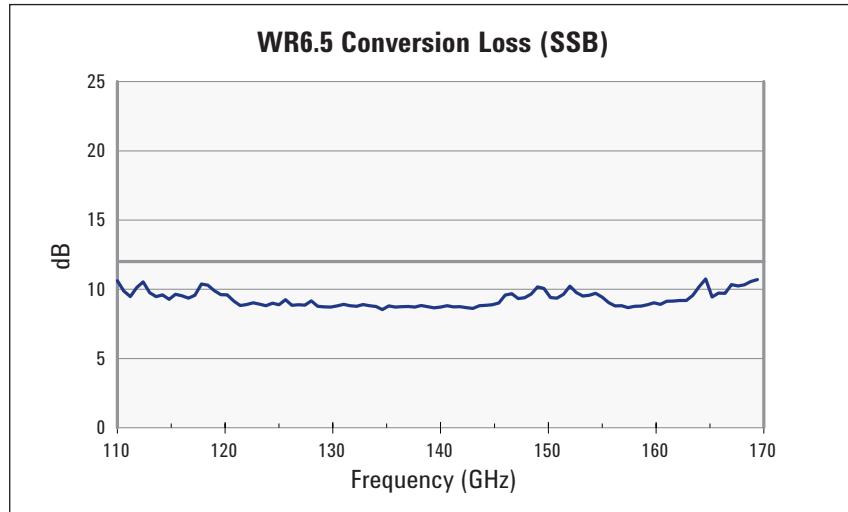


Figure 10. Measured intrinsic mixer conversion loss for the N9029AV06 (110 to 170 GHz) frequency extension module.

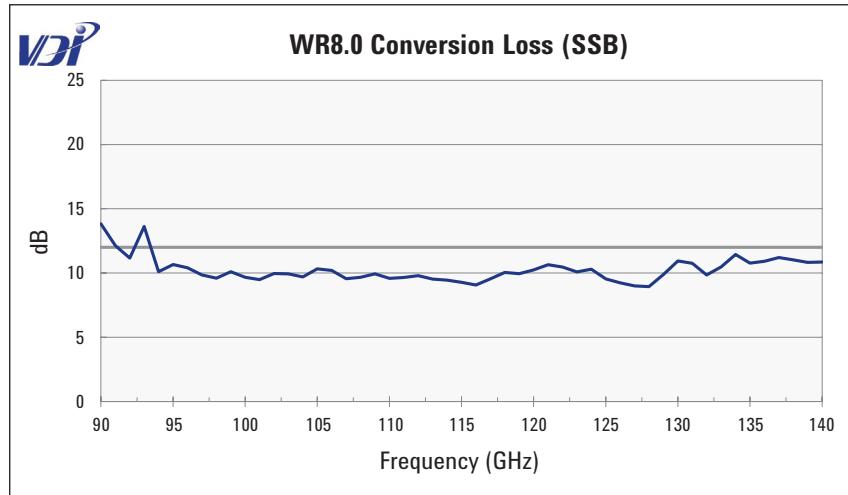


Figure 11. Measured intrinsic mixer conversion loss for the N9029AV08 (90 to 140 GHz) frequency extension module.

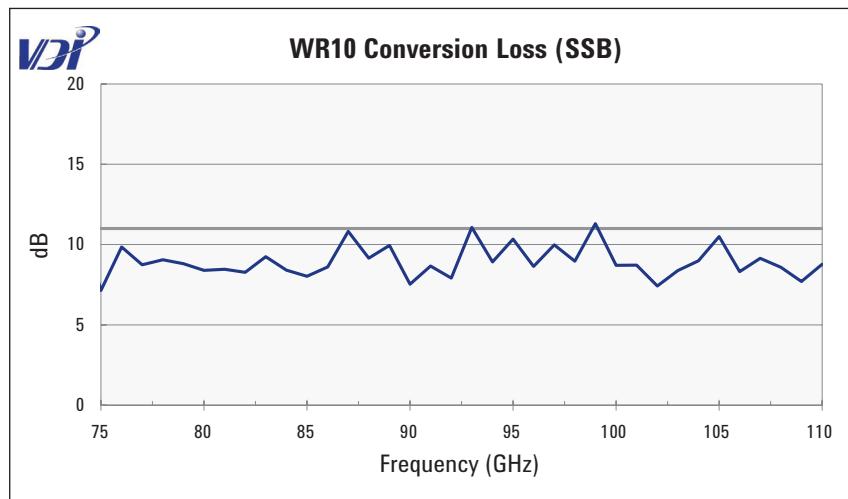


Figure 12. Measured intrinsic mixer conversion loss for the N9029AV10 (75 to 110 GHz) frequency extension module.

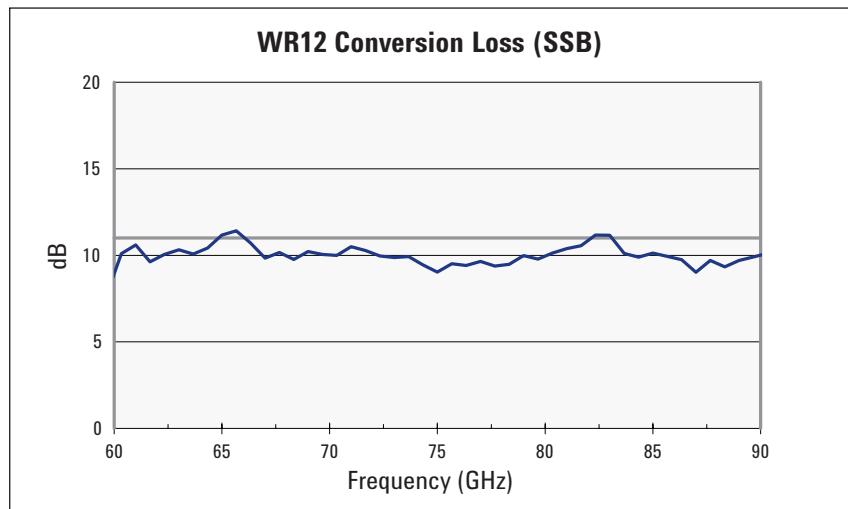


Figure 13. Measured intrinsic mixer conversion loss for the N9029AV12 (60 to 90 GHz) frequency extension.

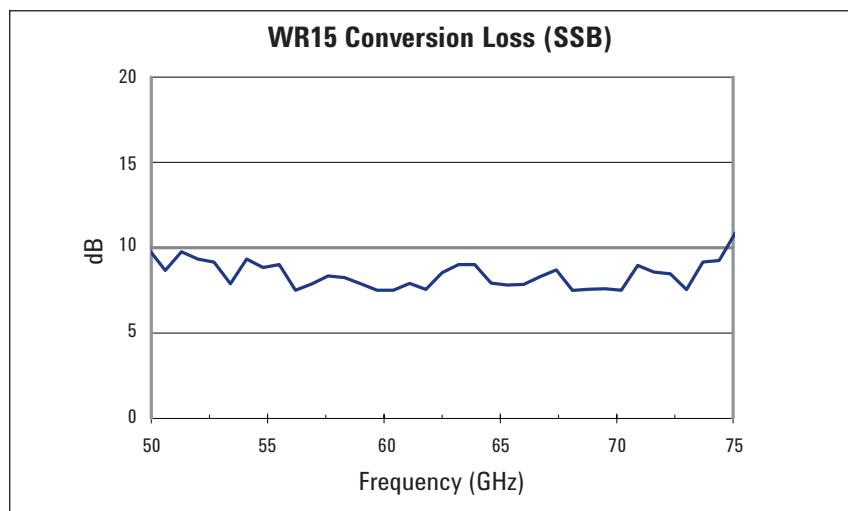


Figure 14. Measured intrinsic mixer conversion loss for the N9029AV15 (50-75 GHz) frequency extension module.

Table 1. Characteristics

Waveguide band	Frequency range (GHz)	LO input mode	Multiplication factors	LO input frequencies (GHz)	Intrinsic mixer conversion loss (dB) (Not including IF amplifier)	RF power limits: compression/damage (dBm)	Displayed average noise level (dBc/Hz)
WR1.0	750 – 1,100	Standard	108	6.9 – 10.2	30	–20/–10	–125
		High	36	20.8 – 30.6			
WR1.5	500 – 750	Standard	54	9.3 – 13.9	20	–20/–10	–135
		High	18	27.8 – 41.7			
WR2.2	325 – 500	Standard	36	9.0 – 13.9	17	–20/–10	–145
		High	12	27.1 – 41.7			
WR3.4	220 – 330	Standard	24	9.2 – 13.8	14	–20/–10	–145
		High	12	18.3 – 27.5			
WR5.1	140 – 220	Standard	18	7.8 – 12.2	12	–10/0	–150
		High	6	23.3 – 36.7			
WR6.5	110 – 170	Standard	24	4.6 – 7.1	12	–10/0	–150
		High	6	18.3 – 28.3			
WR8.0	90 – 140	Standard	12	7.5 – 11.7	12	–10/0	–150
		High	4	22.5 – 35.0			
WR10	75 – 110	Standard	12	6.3 – 9.2	11	–10/0	–150
		High	6	12.5 – 18.3			
WR12	60 – 90	Standard	12	5.0 – 7.5	11	–10/0	–150
		High	6	10.0 – 15.0			
WR15	50 – 75	Standard	6	8.3 – 12.5	9	–10/0	–150

Table 2. Specifications

Description		Specification	Connector
LO input level	Standard frequency	7 to 13 dBm	2.92 mm (f)
	High frequency	–3 to 3 dBm	2.92 mm (f)
IF output frequency	Standard frequency	16 kHz to 2.5 GHz	2.92 mm (f)
	High frequency	16 kHz to 20 GHz	2.92 mm (f)
RF input type	VDI precision flange		UG-387/UM
AC input for N5162VDI-175 power supply		100-240 VAC, 3.5A 50-60 Hz	NEMA 5-15P (U.S. & Canada)

Table 3. Ordering information

Keysight model number	VDI part number	Frequency range (GHz)	Description
N9029AV01	WR1.0SAX	750 – 1,100	WR1.0 signal frequency extender
N9029AV1B	WR1.5SAX	500 – 750	WR1.5 signal analyzer frequency extender
N9029AV02	WR2.2SAX	325 – 500	WR2.2 signal analyzer frequency extender
N9029AV03	WR3.4SAX	220 – 330	WR3.4 signal analyzer frequency extender
N9029AV05	WR5.1SAX	140 – 220	WR5.1 signal analyzer frequency extender
N9029AV06	WR6.5SAX	110 – 170	WR6.5 signal analyzer frequency extender
N9029AV08	WR8.0SAX	90 – 140	WR8.0 signal analyzer frequency extender
N9029AV10	WR10SAX	75 – 110	WR10 signal analyzer frequency extender
N9029AV12	WR12SAX	60 – 90	WR12 signal analyzer frequency extender
N9029AV15	WR15SAX	50 – 75	WR15 signal analyzer frequency extender
Option N5262VDI-175	VDI-175	N/A	"Power supply for N9029AVxx SA extender (required for extender operation)"

Accessories included with each N9029AVxx SA frequency extender:

2.92 mm<sub>(m)</sub> to 2.92 mm<sub>(m)</sub> coaxial cable, 1.2m length  
USB memory stick with documentation and calibration data

Accessories included with each N5262VDI-175 power supply:

DC cable for connection to the N9029AVxx frequency extender

## Related Web Resources

For more information visit:

[www.keysight.com/find/SA\\_mmwave](http://www.keysight.com/find/SA_mmwave)  
[www.keysight.com/find/PXA](http://www.keysight.com/find/PXA)  
[www.keysight.com/find/EXA](http://www.keysight.com/find/EXA)

For more information on VDI's signal analyzer frequency extenders, visit:  
[www.vadiodes.com](http://www.vadiodes.com)

Virginia Diodes Inc. contact info:

979 2nd Street, SE  
Suite 309  
Charlottesville, VA 22902

Phone: (434) 297-3257  
Fax: (434) 297-3258  
Email: [info@vadiodes.com](mailto:info@vadiodes.com)

**myKeysight****myKeysight**[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

**Three-Year Warranty**[www.keysight.com/find/ThreeYearWarranty](http://www.keysight.com/find/ThreeYearWarranty)

Keysight's commitment to superior product quality and lower total cost of ownership. The only test and measurement company with three-year warranty standard on all instruments, worldwide.

**Keysight Assurance Plans**[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to five years of protection and no budgetary surprises to ensure your instruments are operating to specification so you can rely on accurate measurements.

[www.keysight.com/go/quality](http://www.keysight.com/go/quality)

Keysight Technologies, Inc.

DEKRA Certified ISO 9001:2008

Quality Management System

**Keysight Channel Partners**[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

**Americas**

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

**Asia Pacific**

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

**Europe & Middle East**

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	0800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries:  
[www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)  
 (BP-07-10-14)