

# SPECIFY CHART FOR TOP PERFORMANCE IN...

- *storage*
- *distribution*
- *supply*
- *handling of  
cryogenic liquids*

**Bulk Storage Systems** — horizontal or vertical up to 80,000 gallons

**MicroBulk Storage Systems** — Perma-Cyl® up to 3000 liters

**Liquid Cylinders** — 80 liters – 1000 liters

**Helium Dewars** — 60 liters – 500 liters

**Delivery Systems** — Orca® and truck mounted

**Biological** — a wide variety of cryo-biological storage products

**CO<sub>2</sub> Beverage** — 200 – 1000 lbs

**Vacuum Insulated Piping** — MVIP™ Pro, Python®, and Select

**Parts & Accessories** — everything to complement cryogenic equipment

[chartparts.com](http://chartparts.com)



Chart Inc.  
407 7th Street NW  
New Prague, MN 56071-1000  
Web: [www.chartindustries.com](http://www.chartindustries.com)  
E-mail: [chart.sales@chartindustries.com](mailto:chart.sales@chartindustries.com)  
Ph/800-400-4683; 952-758-4484; Fx/952-758-8275



# DATA BOOK

for Cryogenic Gases  
and Equipment

[www.chartindustries.com](http://www.chartindustries.com)

# Common Equivalents & Conversions

## WARNING

### Don't become a casualty!

Beware of confined spaces where there is insufficient oxygen to support life. Types of confined spaces include:

- A. Pits and deep depressions, sewers
- B. Above-ground confined spaces such as air separation cold boxes and similar insulated cavities, silos, furnace boxes, combustion chambers, etc.
- C. Tanks on railroad cars and highway vehicles, storage tanks, mixing tanks
- D. Reaction kettles, stills, receivers, steam drums
- E. Acetylene generators and gas holders

Where atmospheric air is not deliberately provided, or where breathing equipment is not available, [Tank Entry Procedures](#) as published and provided by this company or similarly detailed procedures published by other interested organizations must be rigidly followed.

All data set forth herein is provided for general information only and is based on generally accepted tests and on published data from standard technical reference works. The accuracy or completeness of any such information, test or data is not warranted in any way.

## Approximate Common Equivalents

1 inch	=	25 millimeters
1 foot	=	0.3 meter
1 yard	=	0.9 meter
1 mile	=	1.6 kilometers
1 sq inch	=	6.5 sq cm
1 sq foot	=	0.09 sq meter
1 sq yard	=	0.8 sq meter
1 acre	=	0.4 hectare+
1 cu inch	=	16 cu cm
1 cu foot	=	0.03 cu meter
1 quart (lq)	=	1 liter+
1 gallon	=	0.004 cu meter
1 ounce (avdp)	=	28 grams
1 pound (avdp)	=	0.45 kilogram
1 horsepower	=	0.75 kilowatt
1 millimeter	=	0.04 inch
1 meter	=	3.3 feet
1 meter	=	1.1 yards
1 kilometer	=	0.6 mile
1 sq centimeter	=	0.06 cu inch
1 cu meter	=	35 cu feet
1 cu meter	=	1.3 cu yards
1 cubic meter	=	250 gallons
1 liter+	=	1 quart
1 gram	=	0.035 oz (avdp)
1 kilogram	=	2.2 lbs (avdp)
1 kilowatt	=	1.3 horsepower

## Conversions Accurate to Parts Per Million

inches x 25.4	=	millimeters
feet x 0.3048*	=	meters
yards x 0.9144	=	meters
miles x 1.60934	=	kilometers
sq inches x 6.4516*	=	sq centimeters
sq feet x 0.0929030	=	sq meters
sq yards x 0.836127	=	sq meters
acres x 0.404686	=	hectares
cu inches x 16.3871	=	cu centimeters
cu feet x 0.0283168	=	cu meters
cu yards x 0.764555	=	cu meters
quarts (lq) x 0.946353	=	liters
gallons x 0.00378541	=	cu meters
ounces (avdp) x 28.3495	=	grams
pounds (avdp) x 0.453592	=	kilograms
horsepower x 0.745700	=	kilowatts
millimeters x 0.03937701	=	inches
meters x 3.28084	=	feet
meters x 1.09361	=	yards
kilometers x 0.621371	=	miles
sq centimeters x 0.155000	=	sq inches
sq meters x 10.7639	=	sq feet
sq meters x 1.19499	=	sq yards
hectares x 2.47104	=	acres
cu cm x 0.0610237	=	cu inches
cu meters x 35.3147	=	cu feet
cu meters x 1.30795	=	cu yards
liters x 1.05669	=	quarts (lq)
cu meters x 264.172	=	gallons
grams x 0.0352740	=	ounces (avdp)
kilograms x 2.20462	=	pounds (avdp)
kilowatts x 1.34102	=	horsepower

+ common term not used in S1

\* exact

Source: NBS Special Pub. 304.

## Table of Contents

### Page No.

Common Equivalents and Conversions	1
Table of Contents	2-3
Physical Properties of Selected Gases	4-5
Carbon Dioxide—Chemical and Physical Constants -	
Physical State	6-7
Nitrous Oxide	8
Conversion Data	
Nitrous Oxide and Methane	9
Oxygen and Nitrogen	10
Argon and Neon	11
Helium and Hydrogen	12
Krypton and Xenon	13
Carbon Dioxide	14
Tonnage Conversion Factors	15
Mean Specific Heats	16
Densities at Various Saturation Pressures (Selected Gases)	17-19
Pressure—Density—Temperature Relationships for Liquid Oxygen,	
Nitrogen and Argon	20
Vapor Release from Depressurized:	
Liquid Oxygen	21
Liquid Nitrogen	22
Liquid Argon	23
Liquid Helium	24-25
Liquid Hydrogen	26
Refrigeration Values	27
Net Positive Suction Head Requirements for Cryogenic Pumps	28
Head to PSI Conversion	29
Centrifugal Pump Data	30-31
Air Pressure Drop in Pipe	32-33
Pipe Capacities Flow	34
Combustion Constants of Hydrocarbon Gases	35
Storage Systems	
VS-01 Series	36-37
VS-DSS	38-39
VS-CO <sub>2</sub> Bulk Storage	40-41
ChillZilla CO <sub>2</sub>	42-43
ChillZilla LN <sub>2</sub>	44-45
VS High Pressure Bulk Station	46-47
HP <sup>2</sup>	48-49
VS-Siphon 100	50-51
BulkLite	52-53
VHR Series	54-55
Dura-Cyl	56-57
Cryo-Cyl	58-59
Mega-Cyl	60-61
Laser-Cyl	62-63
Ultra Helium Dewars	64-65

## Table of Contents

Trifecta	66-67
Perma-Cyl	68-69
Orca MicroBulk Delivery System	70-71
Accessories	72-74
<i>Biological Systems</i>	
XC & SC Series	75-77
Lab Series	78-79
CryoShipper QWick Series	80-81
<i>Beverage Systems</i>	
Carbo-Mizer 200	82-83
Carbo-Mite 220	84-85
Carbo-Mizer 300	86-87
Carbo-Mizer 450	88-89
Carbo-Mizer 550	90-91
Carbo-Mizer 750	92-93
Carbo-Max 750HF	94-95
Carbo-Max 1000HF	96-97
VLCD Delivery	98
CO <sub>2</sub> Monitor/VaporMan 125	99
Vacuum Insulated Piping Systems	
LN <sub>2</sub> Dosing Systems	100-101
MVIP Pro	102
MVIP Python	103
MVIP Select	104
C-Flex Transfer Hoses	105
Cryogenic Piping Systems	106-107
Vaporizer Requirements	108
Conversion Factors:	
Length	109
Area	110
Volume	111
Weight	112
Density	113
Pressure	114
Energy	115
Specific Energy	116
Power	117
Refrigeration	118
Velocity, Flow Rate, Thermal Conductivity & Temperature	119
Temperature Conversion	120
Decimal Equivalents	121
Definitions	122-123
Notes	124-126

## Physical Properties of Selected Gases

Name of Gas Chemical Symbol Molecular Weight Color Odor Taste	Oxygen O <sub>2</sub> 31.9988 None None None	Nitrogen N <sub>2</sub> 28.0134 None None None	Argon Ar 39.948 None None None	Helium He 4.0026 None None None	Methane CH <sub>4</sub> 16.043 None None None
Spec. Gravity (Air=1) 70°F, 1 Atm.	1.105	0.9669	1.395	0.13796	.5539
Density lb Per cu ft 70°F 1 Atm.	0.08281	0.07245	0.1034	0.01034	.0415
Spec Vol. cu ft per lb 70°F 1 Atm.	12.076	13.803	9.671	96.71	24.096
Density Sat'd Vapor, lb per cu ft 1 Atm.	0.27876	0.2874	0.35976	1.0434	.1134
Normal Boiling Point °F	-297.33	-320.36	-302.55	-452.1	-258.7
Heat of Vaporization BTU per Pound	91.7	85.6	70.1	9	223.3
Critical Pressure Atmospheres, Abs. lb per sq in, Abs.	50.14 736.9	33.54 492.9	48.34 710.4	2.26 33.2	666.88
Critical Temp. °F	-181.08	-232.40	-188.12	-450.31	-116.67
Triple Point Pressure Atmosphere, Abs. lb per sq in, Abs.	0.00145 0.0213	0.1238 1.189	0.68005 9.994	None	1.7032
Triple Point Temp. °F	-361.83	-346.01	-308.8	None	-296.45
Specific Heat Const. Press	0.2199 @77°F	0.2488 @77°F	0.1244 @77°F	1.2404 @77°F	.5339 @80°F
Ratio Specific Heats	1.396 @80.3°F	1.4014 @70°F	1.6665 @86°F	1.6671 @77°F	1.305 @80°F
Coeff. Viscosity, Micropoise @77°F	206.39	177.96	226.38	198.5	112
Thermal Conductivity, 32°F BTU/(sq ft)(Hr.)(°F/ft)	0.0142	0.0139	0.00980	0.08266 @40°F	.0193 @70°F
Ionization Potential, Volts	13.6	14.5	15.7	24.5	
Excitation Potentials: First Resonance Potential, Volts	9.1	6.3	11.56	20.91	
Metastable			11.66	19.77	

\* Normal sublimation temperature

\*\* Latent heat of sublimation

## Physical Properties of Selected Gases

Acetylene C <sub>2</sub> H <sub>2</sub> 26.0382 None Sweet None	Hydrogen H <sub>2</sub> 2.01594 None None None	Neon Ne 20.183 None None None	Krypton Kr 83.80 None None None	Xenon Xe 131.30 None None None	Air — 28.96 None None None
0.9053	0.0695	0.6958	2.898	4.56	1.0
0.06785	0.005209	0.05215	0.2172	0.3416	0.07493
14.7	192.0	19.175	4.604	2.927	13.3
0.10800	0.083133	0.5963	0.536	0.718	
-118.5*	-423.0	-410.8	-243.8	-162.5	
344.8**	191.7	38.3	46.3	41.4	88.3
60.58	12.98	26.19	54.3	57.64	
890.3	190.8	384.9	798.0	847.1	
+95.32	-399.96	-379.75	-82.8	+61.86	
1.2651	0.071	0.4273	0.7220	0.8064	
18.592	1.04	6.28	10.61	11.85	
-112.99	-434.56	-415.49	-251.28	-169.18	
0.4067 @80°F	3.4202 @77°F	0.2462 @77°F	0.0597 @87°F	0.0382 @77°F	0.2406 @80.3°F
1.234 @77°F	1.405 @77°F	1.642 @68°F	1.701 @87°F	1.666 @68°F	1.4017 @80.3°F
95.5	89.37	313.81 @68°F	251.71	231.02	184.67 @80°F
0.0123 @80°F	0.0973	0.021087	0.00501	0.00293	0.0139
11.6	13.5	21.5	13.9	12.1	
	10.2	16.58	9.98	8.39	
		16.62	10.51	9.4	
		16.53	9.86	8.28	

Chemical Formula	CO <sub>2</sub>
Molecular Weight	44.01
Color-Vapor and Gas	.None
Solid	.translucent white
Odor	.slight-pungent
Taste	.biting
Specific Gravity (Air-1.0)	
Gas at 70°F, atmospheric pressure	.153
Specific Volume at atmospheric pressure	
Gas 60°F	.857 cu ft/lb
Gas 70°F	.874 cu ft/lb
Temperature of Solid at atmospheric pressure	-109.25°F
Density	
Solid: -109.25°F	.97.6 lb/cu ft
Liquid: +1.7°F 300 psi gauge	.63.36 lb/cu ft
Liquid: +70°F 839 psi gauge	.47.35 lb/cu ft
Heat Vaporization	
Solid: -109.25°F	.246.6 BTU/lb
Liquid: +1.7°F 300 psi gauge	.119.2 BTU/lb
Liquid: +70°F 839 psi gauge	.63.9 BTU/lb
Specific Heat — gas—varies	
(At constant pressure of 1 atmosphere) 70°F	.020 BTU/lb
(At constant volume)	.015 BTU/lb
Viscosity— gas at atmosphere pressure & 70°F	.0015 Centipoise
Liquid at 0°F	.014 Centipoise
Critical temperature (highest temperature at which CO <sub>2</sub> can exist as a liquid	.87.82°F
Triple Point (temperature pressure combination at which CO <sub>2</sub> can exist simultaneously as a solid, liquid or gas)	-.69.83°F & 75.13 psia

(Reference: Airco R687 A and data of Plank & Kuprianoff)

Physical State of CO<sub>2</sub> Versus Saturated Vapor Temperature and Pressure

Temperature (°F)	Gauge Pressure (Lb./Sq. In)	Specific Volume Cu Ft/Lb (Liquid or Solid)	Specific Volume Cu Ft/Lb (Gas)	Physical State of CO <sub>2</sub>
+88.41	1057.0	0.03453	0.0345	Gas Only above this point
+60.0	732.7	0.01970	0.0995	Liquid and Gas
+32.0	490.6	0.0173	0.1663	Liquid and Gas
0.0	291.1	0.01571	0.2905	Liquid and Gas
-20	200.4	0.01498	0.4165	Liquid and Gas
-40	131.2	0.01437	0.6113	Liquid and Gas
-69.83 triple	60.4	0.01360	1.1570	Liquid and Gas
-69.83 point	60.4	0.01059	1.1570	Gas and Solid
-90.0	19.4	0.01040	2.52	Gas and Solid
-109.25	0.0	0.01025	5.69	Gas and Solid
-140.0	23.4*	0.01007	24.5	Gas and Solid

\* Inches of mercury vacuum

# Nitrous Oxide

International Symbol	N <sub>2</sub> O
Molecular Weight	44.013
Vapor Pressure, psia	@ -4°F ..... 262 @ 32°F ..... 455 @ 68°F ..... 736 @ 98°F ..... 1055
Density, gas @ 1 atm, lb/cu ft @ 32°F	0.1230
@ 68°F	0.1146
Specific Gravity, gas @ 32°F and 1 atm (air=1)	1.529
Specific Volume, gas @ 1 atm, cu ft/lb @ 32°F	8.130
@ 68°F	8.726
Density, saturated vapor, lb/cu ft @ boiling point	0.194
@ -4°F and 262 psia	2.997
@ 68°F and 736 psia	10.051
Density, liquid @ boiling point and 1 atm	76.6
@ 70°F	48.3
Specific Gravity, liquid @ 68°F and 736 psia	0.785
Boiling Point @ 1 atm	-127.3°F
Melting Point @ 1 atm	-131.5°F
Triple Point	-131.5 @ 12.74 psia
Critical Temperature	97.7°F
Critical Pressure, psia	1054
Critical Density, lb/cu ft	28.15
Latent Heat of Vaporization, BTU/lb @ boiling point	161.8
@ 32°F	107.5
@ 68°F	78.7
Latent Heat of Fusion at triple point, BTU/lb	63.9
Specific Heat, gas, at 1 atm, BTU/(lb)(°F) Cp 77°F to 212°F	0.212
Cp @ 59°F	0.2004
Cv @ 59°F	0.1538
Ratio of Specific Heats, Cp/Cv @ 59°F and 1 atm	1.303
Solubility in Water at 1 atm, vol/1 vol of water @ 32°F	1.3
@ 68°F	0.72
@ 77°F	0.66
Solubility in Alcohol at 68°F and 1 atm, vol/1 vol of alcohol	3.0
Weight/gal, liquid, lb @ boiling point	10.23
@ -4°F and 262 psia	8.35
@ 68°F and 736 psia	6.54
Viscosity, gas, centipoises @ 32°F	0.0135
@ 80°F	0.0149
Thermal Conductivity, gas @ 32°F (BTU)(ft)/(sq ft)(hr)(°F)	0.0083

# Nitrous Oxide and Methane Conversion Data

## Nitrous Oxide

	Pounds	Tons	S.C.F. Gas	S.G. Gas	Gallons/Liquid	Cu Ft/Liquid	Liters/Liquid
1 Pound	1	0.0005	8.711	65.158	0.09782	0.01308	0.37023
1 Ton	2000	1	17.422	130.316	195.64	26.12	740.46
1 S.C.F. Gas							
70°F — 14.7 psia	0.1148	57.4 x 10 <sup>-6</sup>	1	7.4805	0.01124	0.001502	0.04250
1 Gallon Gas							
70°F — 14.7 psia	0.01535	7.675 x 10 <sup>-6</sup>	0.13371	1	0.00150	0.000210	0.00588
1 Gallon Liquid	10.223	0.005111	89.053	666.17	1	0.133680	3.78533
1 cu ft Liquid	76.474	0.039237	666.17	4983.28	7.48052	1	26.3162
1 Liter Liquid	2.701	0.001350	23.528	176.00	0.264178	0.0353154	1

SCF (Standard Cubic Feet) Nitrous Oxide Gas are measured at 70°F and 14.7 psia.

Liquid Nitrous Oxide quantities are measured at -127.2°F and 14.7 psia.

S.G. (Standard Gallons) Nitrous Oxide Gas are measured at 70°F and 14.7 psia.

## Methane

	Weight			Gas			Liquid		
	Pounds (Lb)	Kilograms (Kg)	Cubic Feet (SCF)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)	Gallons (Gal)	Liters (L)
1 Pound	1	0.4536	24.058	24.058	0.67986	0.28366	1.0734	0.28366	1.0734
1 Kilogram	2.205	1	53.048	53.048	1.4991	0.62548	2.3667	0.62548	2.3667
1 Ton	2000	907.2	48116	48116	1359.7	567.33	2146.7	567.33	2146.7
1 SCF Gas	0.0414	0.0188	1	1	0.028259	0.011744	0.044437	0.011744	0.044437
1 Nm <sup>3</sup> Gas	1.465	0.6645	35.386	35.386	1	0.41557	1.5725	0.41557	1.5725
1 Gal Liquid	3.53	1.6	84.925	84.925	2.3999	1	3.7889	1	3.7889
1 L Liquid	0.9329	0.4231	22.444	22.444	0.63425	0.26463	1	0.26463	1

SCF (Standard Cubic Feet) gas measured at 1 atmosphere and 70°F (21.1°C).  
 Nm<sup>3</sup> (normal cubic meter) measured at 1 atmosphere and 0°C.  
 Liquid measured at 1 atmosphere and boiling temperature.  
 All values rounded to nearest .45 significant numbers.

## Oxygen and Nitrogen Conversion Data

### Oxygen

	Weight		Gas		Liquid	
	Pounds (Lb)	Kilograms (Kg)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)
1 Pound	1.0	0.4536	12.076	0.3174	0.1050	0.3977
1 Kilogram	2.205	1.0	26.62	0.6998	0.2316	0.8767
1 SCF Gas	0.08281	0.03756	1.0	0.02628	0.006691	0.0329
1 Nm <sup>3</sup> Gas	3.151	1.4291	38.04	1.0	0.3310	1.2528
1 Gal Liquid	9.527	4.322	115.1	3.025	1.0	3.785
1 L Liquid	2.517	1.1417	30.38	0.7983	0.2642	1.0

### Nitrogen

1 Pound	1.0	0.4536	13.803	0.3627	0.1481	0.5606
1 Kilogram	2.205	1.0	30.42	0.7996	0.3262	1.2349
1 SCF Gas	0.07245	0.03286	1.0	0.02628	0.01074	0.04065
1 Nm <sup>3</sup> Gas	2.757	1.2506	38.04	1.0	0.4080	1.5443
1 Gal Liquid	6.745	3.060	93.11	2.447	1.0	3.785
1 L Liquid	1.782	0.8083	24.60	0.6464	0.2642	1.0

SCF (Standard Cubic Foot) gas measured at 1 atmosphere and 70°F.  
Liquid measured at 1 atmosphere and boiling temperature.

Nm<sup>3</sup> (normal cubic meter) measured at 1 atmosphere and 0°C.  
All values rounded to nearest 4/5 significant numbers.

## Argon and Neon Conversion Data

### Argon

	Weight		Gas		Liquid	
	Pounds (Lb)	Kilograms (Kg)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)
1 Pound	1.0	0.4536	9.671	0.2543	0.08600	0.3255
1 Kilogram	2.205	1.0	21.32	0.5605	0.18957	0.7176
1 SCF Gas	0.1034	0.04690	1.0	0.02628	0.008893	0.03366
1 Nm <sup>3</sup> Gas	3.933	1.7840	38.04	1.0	0.3382	1.2802
1 Gal Liquid	11.630	5.276	112.5	2.957	1.0	3.785
1 L Liquid	3.072	1.3936	29.71	0.7812	0.2642	1.0

### Neon

1 Pound	1.0	0.4536	19.175	0.5040	0.09928	0.3758
1 Kilogram	2.205	1.0	42.27	1.112	0.2191	0.8292
1 SCF Gas	0.05215	0.02366	1.0	0.02628	0.005177	0.019594
1 Nm <sup>3</sup> Gas	1.9840	0.8999	38.04	1.0	0.19714	0.7462
1 Gal Liquid	10.065	4.565	198.2	5.077	1.0	3.785
1 L Liquid	2.661	1.2070	51.03	1.3410	0.2642	1.0

SCF (Standard Cubic Foot) gas measured at 1 atmosphere and 70°F.  
Liquid measured at 1 atmosphere and boiling temperature.

Nm<sup>3</sup> (normal cubic meter) measured at 1 atmosphere and 0°C.  
All values rounded to nearest 4/5 significant numbers.

## Helium and Hydrogen Conversion Data

### Helium

	Weight		Gas		Liquid	
	Pounds (Lb)	Kilograms (kg)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)
1 Pound	1.0	0.4536	96.71	2.542	0.9593	3.631
1 Kilogram	2.205	1.0	213.2	5.603	2.115	8.006
1 SCF Gas	0.01034	0.004690	1.0	0.02628	0.009919	0.03754
1 Nm <sup>3</sup> Gas	0.3935	0.17847	38.04	1.0	0.3775	1.4289
1 Gal Liquid	1.0423	0.4728	100.80	2.649	1.0	3.785
1 L Liquid	0.2754	0.1249	28.63	0.6998	0.2642	1.0

### Hydrogen

1 Pound	1.0	0.4536	192.00	5.047	1.6928	6.408
1 Kilogram	2.205	1.0	423.3	11.126	3.733	14.128
1 SCF Gas	0.005209	0.002363	1.0	0.02628	0.008820	0.03339
1 Nm <sup>3</sup> Gas	0.19815	0.08988	38.04	1.0	0.3355	1.2699
1 Gal Liquid	0.5906	0.2679	113.41	2.981	1.0	3.785
1 L Liquid	0.15604	0.07078	29.99	0.7881	0.2642	1.0

SCF (Standard Cubic Foot) gas measured at 1 atmosphere and 70°F.

Liquid measured at 1 atmosphere and boiling temperature.

Hydrogen gas values expressed in the stable conditions 75% ortho, 25% para.

Nm<sup>3</sup> (normal cubic meter) measured at 1 atmosphere and 0°C.

All values rounded to nearest 4/5 significant numbers.

Hydrogen liquid values expressed in the stable para condition.

## Krypton and Xenon Conversion Data

### Krypton

	Weight		Gas		Liquid	
	Pounds (Lb)	Kilograms (kg)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)
1 Pound	1.0	0.4536	4.604	0.12098	0.04967	0.1880
1 Kilogram	2.205	1.0	10.147	0.2667	0.10939	0.4141
1 SCF Gas	0.2172	0.09852	1.0	0.02628	0.010773	0.04078
1 Nm <sup>3</sup> Gas	8.266	3.749	38.04	1.0	0.4101	1.5525
1 Gal Liquid	20.13	9.131	92.69	2.436	1.0	3.785
1 L Liquid	5.318	2.412	24.51	0.6441	0.2642	1.0

### Xenon

1 Pound	1.0	0.4536	2.927	0.07692	0.03921	0.14840
1 Kilogram	2.205	1.0	6.451	0.16958	0.06642	0.3271
1 SCF Gas	0.3416	0.15495	1.0	0.02628	0.013392	0.05069
1 Nm <sup>3</sup> Gas	13.000	5.897	38.04	1.0	0.5096	1.9291
1 Gal Liquid	25.51	11.572	74.67	1.9623	1.0	3.785
1 L Liquid	6.738	3.056	19.726	0.5185	0.2642	1.0

SCF (Standard Cubic Foot) gas measured at 1 atmosphere and 70°F.

Liquid measured at 1 atmosphere and boiling temperature.

Nm<sup>3</sup> (normal cubic meter) measured at 1 atmosphere and 0°C.

All values rounded to nearest 4/5 significant numbers.



## Carbon Dioxide Conversion Data

### Carbon Dioxide

	Weight		Gas		Liquid		Solid	
	Pounds (Lb)	Tons (T)	Kilograms (Kg)	Cubic Feet (SCF)	Cubic Meters (Nm <sup>3</sup> )	Gallons (Gal)	Liters (L)	Cubic Feet (Cu Ft)
1 Pound	1.0	0.0005	0.4536	8.741	0.2294	0.11806	0.4469	0.010246
1 Ton	2000.0	1.0	907.2	17,483.0	458.8	236.1	893.9	20.49
1 Kilogram	2.205	0.0011023	1.0	19.253	0.5058	0.2603	0.9860	0.2260
1 SCF Gas	0.1144	-	0.05189	1.0	0.02628	0.013506	0.05113	0.0011723
1 Nm <sup>3</sup> Gas	4.359	0.002180	1.9772	38.04	1.0	0.5146	1.9480	0.04488
1 Gal Liquid	8.470	0.004235	3.842	74.04	1.9431	1.0	3.785	0.08678
1 L Liquid	2.238	0.0011185	1.0151	19.562	0.5134	0.2642	1.0	0.02293
1 Cu Ft Solid	97.56	0.04880	44.25	852.8	22.38	11.518	43.60	1.0

SCF (Standard Cubic Foot) gas measured at 1 atmosphere and 70°F.

Liquid measured at 21.42 atmospheres and 1.7°F.

Solid measured at -109.25°F.

Nm<sup>3</sup> (normal cubic meter) gas measured at 1 atmosphere and 0°C.

All values rounded to nearest 4/5 significant numbers.

## Tonnage Conversion Factors\*

### Oxygen

1 lb Gaseous Oxygen = 12.08 scf at 14.7 psia and 70°F.

1 ton Gaseous Oxygen = 24,160 scf at 14.7 psia and 70°F.

scf/mo (millions)	tons/day
1	1.38
2	2.76
3	4.14
4	5.52
5	6.90
6	8.28
7	9.66
8	11.04
9	12.42
10	13.80
20	27.59
30	41.39
40	55.19
50	68.98

tons/day	scf/mo (millions)
10	7.25
12.5	9.06
25	18.12
50	36.24
75	54.36
100	72.5

### Nitrogen

1 lb Gaseous Nitrogen = 13.80 scf at 14.7 psia and 70°F.

1 ton Gaseous Nitrogen = 27,605 scf at 14.7 psia and 70°F.

scf/mo (millions)	tons/day
1	1.21
2	2.42
3	3.62
4	4.83
5	6.04
6	7.25
7	8.45
8	9.66
9	10.87
10	12.08
20	24.15
30	36.23
40	48.30
50	60.38

tons/day	scf/mo (millions)
10	8.28
12.5	10.35
25	20.70
50	41.41
75	62.11
100	82.82

### Hydrogen

1 lb. Gaseous Hydrogen = 192.0 scf at 14.7 psia and 70°F.

1 ton Gaseous Hydrogen = 383,950 scf at 14.7 psia and 70°F.

scf/mo (millions)	tons/day
1	0.087
2	0.174
3	0.26
4	0.35
5	0.43
6	0.52
7	0.61
8	0.69
9	0.78
10	0.87
20	1.74
30	2.60
40	3.47
50	4.34

tons/day	scf/mo (millions)
10	115.2
12.5	144
25	288
50	576
75	864
100	1152

\* Based on 30 day month

## Mean Specific Heats

$\bar{C}_p = H/t - 60$	BTU per lb. per °F					
	t (°F)	O <sub>2</sub>	H <sub>2</sub>	H <sub>2</sub> O	N <sub>2</sub>	CO
100	0.2188	3.420	0.4448	0.2482	0.4285	0.2022
200	0.2203	3.434	0.4472	0.2485	0.2488	0.2086
300	0.2221	3.442	0.4499	0.2488	0.2493	0.2145
400	0.2240	3.448	0.4529	0.2493	0.2501	0.2201
500	0.2259	3.452	0.4562	0.2500	0.2511	0.2253
600	0.2279	3.455	0.4597	0.2509	0.2522	0.2301
700	0.2299	3.458	0.4634	0.2520	0.2535	0.2346
800	0.2318	3.462	0.4674	0.2531	0.2549	0.2388
900	0.2337	3.466	0.4715	0.2544	0.2564	0.2428
1000	0.2355	3.470	0.4757	0.2558	0.2580	0.2465
1100	0.2373	3.475	0.4800	0.2572	0.2596	0.2500
1200	0.2390	3.480	0.4844	0.2586	0.2611	0.2533
1300	0.2406	3.487	0.4888	0.2600	0.2627	0.2564
1400	0.2420	3.494	0.4932	0.2614	0.2642	0.2593
1500	0.2434	3.501	0.4976	0.2628	0.2657	0.2620
1600	0.2448	3.510	0.5021	0.2642	0.2672	0.2646
1700	0.2461	3.519	0.5066	0.2656	0.2686	0.2671
1800	0.2473	3.528	0.5111	0.2669	0.2700	0.2694
1900	0.2484	3.538	0.5156	0.2682	0.2713	0.2716
2000	0.2495	3.549	0.5201	0.2695	0.2726	0.2737
2100	0.2506	3.460	0.5245	0.2707	0.2739	0.2757
2200	0.2517	3.572	0.5289	0.2719	0.2751	0.2776
2300	0.2527	3.584	0.5334	0.2732	0.2763	0.2795
2400	0.2536	3.596	0.5375	0.2742	0.2774	0.2813
2500	0.2545	3.608	0.5415	0.2753	0.2784	0.2830
2600	0.2554	3.620	0.5456	0.2764	0.2794	0.2845
2700	0.2562	3.632	0.5496	0.2774	0.2804	0.2860
2800	0.2570	3.644	0.5536	0.2784	0.2814	0.2875
2900	0.2578	3.656	0.5575	0.2793	0.2823	0.2889
3000	0.2585	3.668	0.5614	0.2802	0.2831	0.2902
3100	0.2593	3.680	0.5652	0.2811	0.2840	0.2915
3200	0.2600	3.692	0.5688	0.2819	0.2848	0.2927

Courtesy of AFS Handbook of Cupola Operation

## Densities At Various Saturation Pressures

Saturation Pressure PSIG	OXYGEN		NITROGEN		ARGON	
	Liquid Density Lbs/Ft <sup>3</sup>	Gas Density SCF/Gal	Liquid Density Lbs/Ft <sup>3</sup>	Gas Density SCF/Gal	Liquid Density Lbs/Ft <sup>3</sup>	Gas Density SCF/Gal
0	71.17	115.10	50.44	93.11	87.51	112.50
5	70.42	113.72	49.62	91.55	85.77	110.89
10	69.80	112.73	49.00	90.40	84.77	109.60
25	67.86	109.59	47.50	87.63	82.46	106.61
50	65.55	105.86	45.69	84.18	79.90	103.31
75	63.76	102.97	44.19	81.53	77.90	100.71
100	62.43	100.82	42.88	79.12	76.15	98.45
150	59.80	96.57	40.70	75.08	73.16	94.59
200	57.62	93.05	38.76	71.51	70.28	90.87
250	55.60	89.79	36.83	67.95	67.79	87.65

Note: Density of water at 60°F = 62.30 lbs/cu ft

## Gas Densities at Liquid Pressures

SCF of GAS / Liter of LIQUID

Pressure psig	Argon	Nitrogen	Oxygen	CO <sub>2</sub>
0	29.69	24.60	30.36	
25	28.24	23.17	28.89	
50	27.32	22.26	27.97	
75	26.60	21.53	27.25	22.40
100	25.98	20.89	26.63	21.96
125	25.43	20.33	26.09	21.57
150	24.93	19.80	25.59	21.23
175	24.46	19.30	25.12	20.91
200	24.01	18.82	24.67	20.61
225	23.58	18.35	24.24	20.34
250	23.17	17.89	23.83	20.07
275	22.77	17.43	23.43	19.82
300	22.37	16.96	23.03	19.58
325	21.98	16.47	22.64	19.34
350	21.43	15.96	22.25	19.11
375	21.19	15.42	21.86	18.88
400	20.79	14.80	21.47	18.66
425	20.39	14.07	21.08	18.44


## Gas Densities at Liquid Pressures

SCF of GAS / Gallon of LIQUID


Pressure psig	Argon	Nitrogen	Oxygen	CO <sub>2</sub>
0	112.38	93.11	114.91	
25	106.89	87.70	109.35	
50	103.41	84.25	105.87	
75	100.68	81.49	103.14	84.78
100	98.33	79.07	100.79	83.12
125	96.25	76.95	98.75	81.64
150	94.36	74.94	96.86	80.36
175	92.58	73.05	95.08	79.14
200	90.87	71.23	93.38	78.01
225	89.25	69.45	91.75	76.99
250	87.70	67.71	90.20	75.96
275	86.18	65.97	88.68	75.02
300	84.67	64.19	87.17	74.11
325	83.19	62.34	85.69	73.20
350	81.11	60.41	84.22	72.33
375	80.20	58.36	82.74	71.46
400	78.69	56.02	81.26	70.63
425	77.18	53.25	79.79	69.80

## Comparison Charts

Pressure over liquid oxygen, nitrogen and argon compared with temperature at which liquids boil

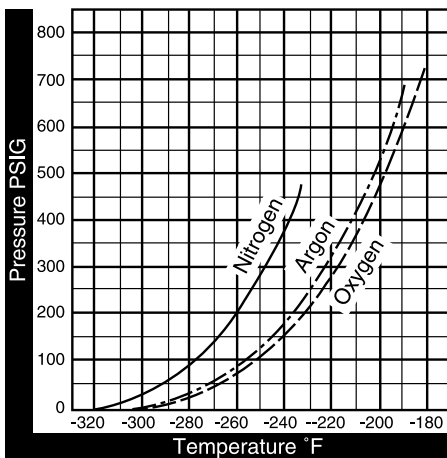


Density-temperature relationships for liquid oxygen, nitrogen and argon

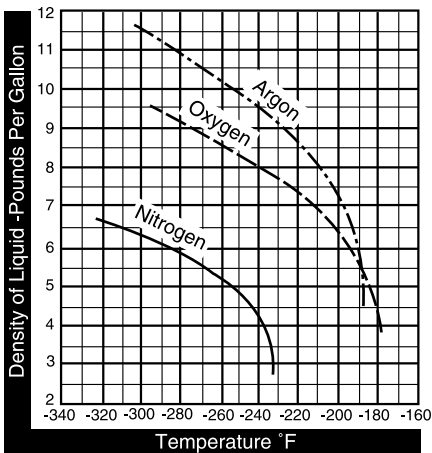


## Vapor Release Charts

Vapor release from depressurized liquid oxygen

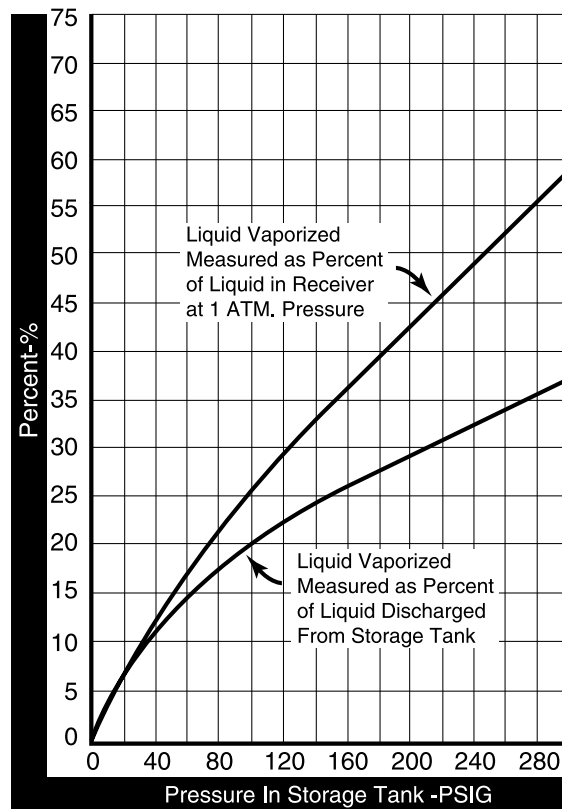


## Vapor Release Charts

Vapor release from depressurized liquid nitrogen

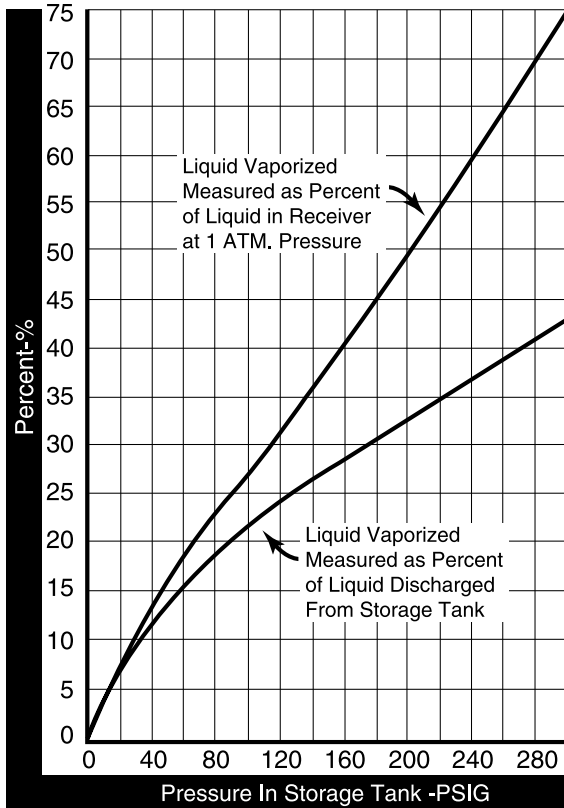

## Vapor Release Charts

Vapor release from depressurized liquid argon

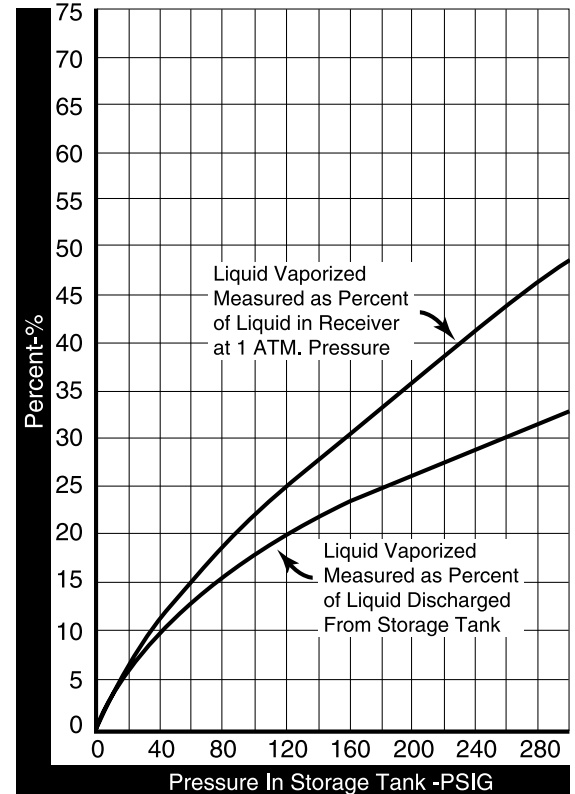



## Vapor release from depressurized liquid helium

In addition to liquid losses due to container and transfer tube normal heat leak, tube and receiving vessel cool down, boil-off in the container resulting from heat input of the pressurizing gas and saturated vapor equalization, there is a flash loss from the pressure drop in a transfer line and a loss from depressurizing a container after making a partial withdrawal.


For best transfer efficiency, the withdrawal should be started and maintained with as low a pressure as practical. Too low a pressure will require a longer time to make a transfer and thus permit heat leak in the transfer system to become excessive. A balance between effects of heat leak and depressurization generally may be attained by operating in a pressure range of 2 to 3 psig.

Flash loss due to pressure drop through the transfer line may be estimated by use of Chart 1 "Helium Flash Rate." Depressurization loss of liquid in the container may be estimated by use of Chart 2 "Helium Depressurization Losses."

For example: Assume a helium container is discharging at a constant pressure of 5 psig. From Chart 1 the flash loss is approximately 13.8% of the liquid entering the transfer tube. From Chart 2 the loss from depressurizing the container is approximately 12.5% of the liquid remaining in the container.

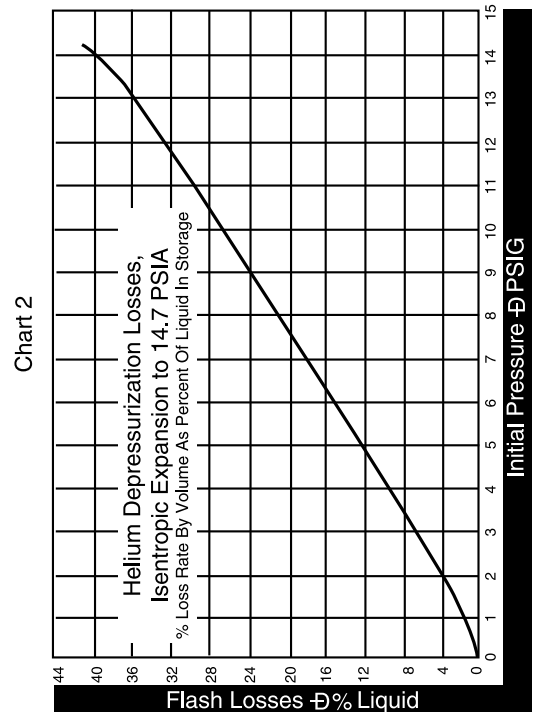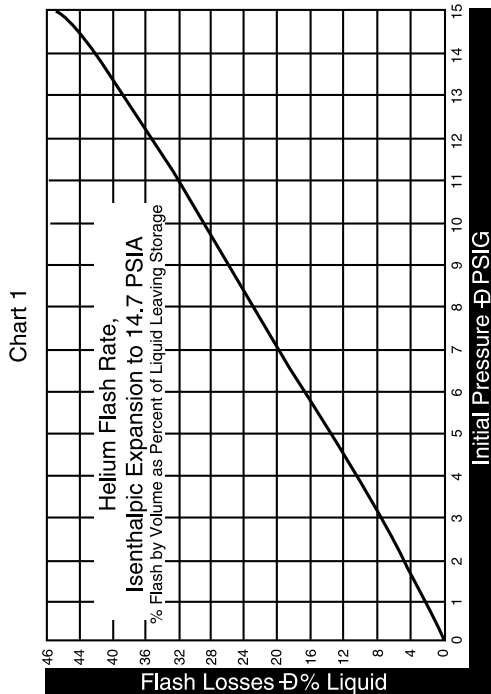

## Vapor release from depressurized liquid hydrogen

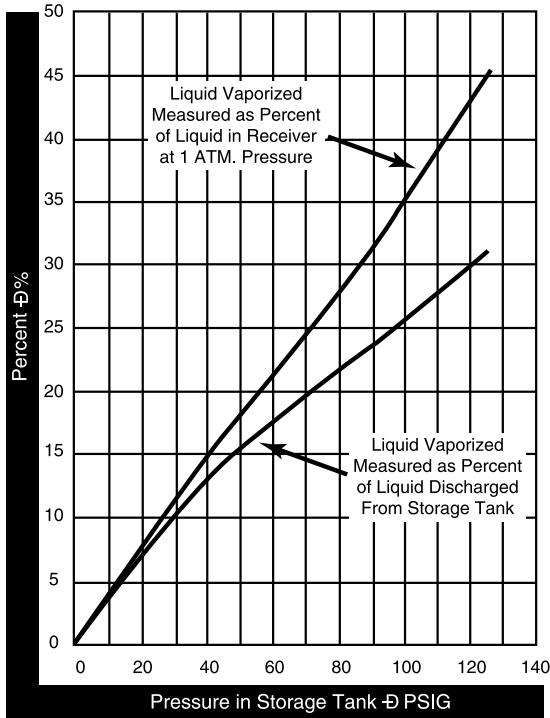

## Refrigeration Values to +40°F for Expendable Refrigerants

Refrigerant	Refrigerant Temp °F	Pressure psia	Latent Heat BTU/lb	Sensible Heat BTU/lb	Total Heat BTU/lb
Water, ice	32°	14.7	144.0	8.0	152.0
Liquid CO <sub>2</sub> (flushed to snow)	-109°	14.7	113.0*	29.8	149.8
Dry Ice					
Blocks	-109°	14.7	246.3	29.8	276.1
Pellets	-109°	14.7	246.3	29.8	276.1
Liquid Nitrogen					
@ 1 atm	-320°	14.7	85.6	94.0	179.6
@ 5 atm	-288°	73.5	61.0	95.0	156.0

$$\text{Effective Refrigerant Cost} = \frac{\text{Refrigerant Cost Per Pound}}{\text{Total Heat Removed Per Pound}}$$

Water ice has a liquid residue while remaining refrigerants are converted to the gas phase. CO<sub>2</sub> snow is flashed from liquid CO<sub>2</sub> at 314.7 psia storage pressure. Snow yield is 46% by weight. Liquid carbon dioxide is stored at zero degrees and maintained at zero degrees by a mechanical refrigerator. This permits storage of liquid carbon dioxide without loss. Dry ice pellets are manufactured by compressing CO<sub>2</sub> snow in an extrusion machine. Liquid nitrogen losses are present during storage.

\* This latent heat value is BTU per pound of liquid CO<sub>2</sub>.

# Net Positive Suction Head Requirements for Cryogenic Pumps

More pump problems result from incorrect determination of Net Positive Suction Head (NPSH) than from any other single cause.

Liquids at any temperature above their freezing have a corresponding vapor pressure which must be taken into account when planning a pumping system. NPSH can be defined as the difference between the actual pressure and the vapor pressure of the liquid at the suction port of the pump. This is also sometimes referred to as "sub-cooling" or "super pressure."


While sitting idle, the liquid in a storage vessel will gradually absorb heat and with all the vents closed, will generate pressures that are directly related to the temperature of the liquid. These pressures are called the "saturated vapor pressures." This saturated condition exists as long as the liquid is at its boiling point for any given pressure in the vessel. The important point to remember is that no matter what the tank pressure is, any reduction in pressure will cause the saturated liquid to boil.

No cryogenic pump can operate on saturated liquid since in order to establish flow into the pump suction, there must be lower pressure in the pump. This pressure drop causes the saturated liquid to boil, and the resultant vapors enter the pump causing it to "cavitate" and lose prime.

To prevent cavitation, some NPSH must be provided to the pump. The amount of minimum NPSH varies with size, type and make of pump, and is generally indicated on the nameplate. The NPSH can be provided by static head, or elevation of liquid above the pump suction and/or by building an artificial pressure in the supply tank with a pressure building coil. This artificial pressure must be maintained throughout the pumping cycle to insure proper and efficient pump operation.

It is easy to lose, or offset, this "artificial" pressure or liquid head by warming the liquid in the suction line to the pump by heat from the atmosphere. It is possible to have a high "super pressure" in the storage tank so that the liquid is highly "subcooled" and still have saturated liquid at the pump suction. To prevent this, pump suction lines should be short and well insulated.

# Head to PSI Conversion

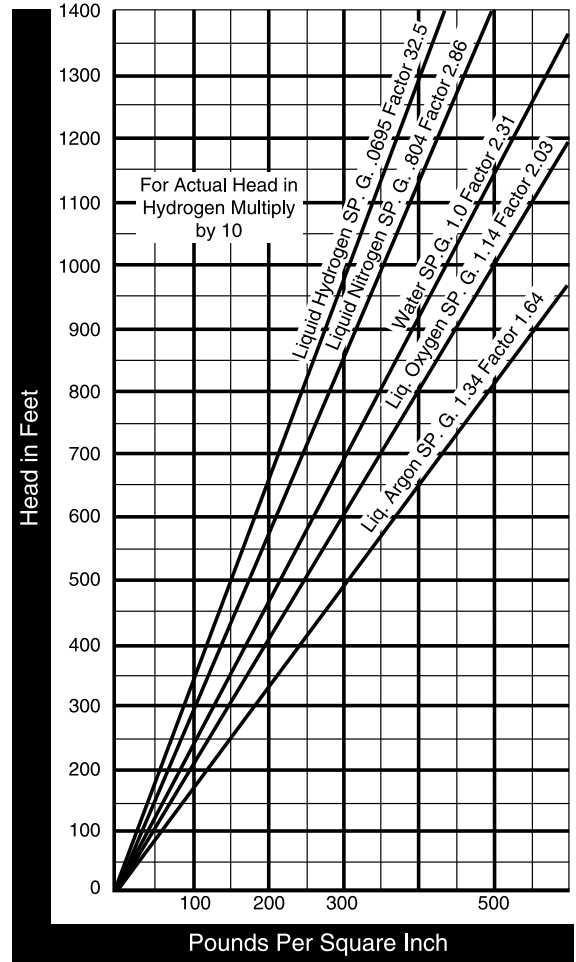

$$\text{PSI} = \frac{\text{Ft} \times \text{SPG}}{2.31}$$

$$\text{FT} = \frac{\text{PSI} \times \text{Water (2.31)}}{\text{Specific Gravity}}$$



# Centrifugal Pump Data

CONVERSION FORMULAS & FACTORS		
Pump Performance with Impeller Diameter &/or Speed Change		
Q <sub>1</sub> , H <sub>1</sub> , bhp <sub>1</sub> , D <sub>1</sub> & N <sub>1</sub> = Initial Capacity, Head, Brake Horsepower, Diameter & Speed		
Q <sub>2</sub> , H <sub>2</sub> , bhp <sub>2</sub> , D <sub>2</sub> & N <sub>2</sub> = New Capacity, Head, Brake Horsepower, Diameter & Speed		
Diameter Change Only	Speed Change Only	Diameter & Speed Change
$Q_2 = Q_1 \left( \frac{D_2}{D_1} \right)$	$Q_2 = Q_1 \left( \frac{N_2}{N_1} \right)$	$Q_2 = Q_1 \left( \frac{D_2}{D_1} \times \frac{N_2}{N_1} \right)$
$H_2 = H_1 \left( \frac{D_2}{D_1} \right)^2$	$H_2 = H_1 \left( \frac{N_2}{N_1} \right)^2$	$H_2 = H_1 \left( \frac{D_2}{D_1} \times \frac{N_2}{N_1} \right)^2$
$bhp_2 = bhp_1 \left( \frac{D_2}{D_1} \right)^3$	$bhp_2 = bhp_1 \left( \frac{N_2}{N_1} \right)^3$	$bhp_2 = bhp_1 \left( \frac{D_2}{D_1} \times \frac{N_2}{N_1} \right)^3$
Temperature		
Degrees Fahrenheit = $\frac{9}{5}$ degrees Centigrade + 32		
Degrees Centigrade = $\frac{5}{9}$ (degrees Fahrenheit - 32)		
Capacity		Head
1 cubic foot per second = 449 gpm		1 lb per sq inch = 2.3 feet head of water
1 million gallons per day = 695 gpm		= 2.04 inches of mercury
1 acre foot per day = 449 gpm		= 0.0703 kg per sq inch
1 liter per second = 15.85 gpm		1 foot of water = 0.433 lb per sq inch
		1 inch of mercury (or vacuum) = 1.132 foot of water
		1 kg per sq cm = 14.22 lb per sq inch
		1 atmosphere = 14.7 lb per sq inch
		= 34.0 feet of water
		= 10.35 meters of water
Volume		Weight
1 U.S. gallon = 231 cubic inches		1 U.S. gallon of water = 8.33 pounds
= 0.1337 cubic ft		1 cubic foot of water = 62.35 pounds
= 3.785 liters		1 kilogram = 2.2 pounds
= 0.833 Imperial gal		1 metric ton = 2204.6 pounds
1 Imperial gallon = 1.2 U.S. gal		
1 cubic foot = 7.48 U.S. gal		
= 0.0283 cubic meter		
1 liter = 0.2642 U.S. gal		
1 cubic meter = 35.314 cubic ft		
= 264.2 U.S. gal		
1 acre foot = 43,560 cubic ft		
= 325,829 U.S. gal		
		Length
		1 mile = 5280 feet
		= 1.61 kilometers
		1 inch = 2.54 centimeters
		1 meter = 3.2808 feet
		= 39.3696 inches

# Centrifugal Pump Data

CONVERSION FORMULAS & FACTORS	
$gpm = \frac{\text{lbs. per hour}}{500 \times \text{Sp. Gr.}}$	$bhp = \frac{Q \times P}{1715 \times e}$
$H = \frac{P \times 2.31}{\text{Sp. Gr.}}$	$T = \frac{bhp \times 5250}{N}$
$V = \frac{Q \times 0.321}{A}$	$N_s = \frac{N \sqrt{Q}}{H^{\frac{3}{4}}} \times \frac{N \sqrt{H} \times \sqrt{Q}}{H}$
$U = \frac{\text{Diameter (inches)} \times N}{229}$	$S = \frac{N \sqrt{Q}}{h_{sv}^{\frac{3}{4}}} \times \frac{N \sqrt{h_{sv}} \times \sqrt{Q}}{h_{sv}}$
$h_v = \frac{V^2}{2g}$	$t_r = \frac{H \left( \frac{1}{e} - 1 \right)}{780 \times C}$
$whp = \frac{Q \times H \times \text{Sp. Gr.}}{3960}$	$gpm = 0.07 \times \text{Boiler HP}$
$bhp = \frac{Q \times H \times \text{Sp. Gr.}}{3960 \times e}$	$gpm = 449 \times \text{cfs}$
	$gpm = 0.0292 \times \text{BBL/day}$
	$gpm = 0.7 \times \text{BBL/hour}$
	$gpm = 4.4 \times \text{cubic meters/hour}$
N = Speed in rpm	cfs = Cubic feet per second
N <sub>s</sub> = Specific speed in rpm	BBL = Barrel (42 gallons)
S <sub>s</sub> = Suction specific speed in rpm	C = Specific heat
Q = Capacity in gpm	Sp. Gr. = Specific gravity
P = Pressure in psi	psi = Pounds per square inch
H = Total head in feet	gpm = Gallons per minute
h <sub>sv</sub> = Net positive suction head in feet	e = Pump efficiency in decimal
h <sub>v</sub> = Velocity head in feet	V = Velocity in feet per second
whp = Water horsepower	D = Impeller diameter in inches
bhp = Brake horsepower	T = Torque in foot pounds
U = Peripheral velocity in feet per sec.	t = Temp. in degrees Fahrenheit
g = 32.16 feet per sec. (acceleration of gravity)	t <sub>r</sub> = Temp. rise in degrees Fahrenheit
mgd = Million gallons per day	A = Area in square inches

## Air Pressure Drop In Pipe

For lengths of pipe other than 100 feet, the pressure drop is proportional to the length. Thus, for 50 feet of pipe, the air pressure drop is approximately one-half the value given in the table. The pressure drop is also inversely proportional to the absolute pressure and directly proportional to the absolute temperature.

To determine the pressure drop for inlet or average air pressures other than 100 psi and at temperatures other than 60°F, multiply the values given in the table by the formula:

$$\left( \frac{100 + 14.7}{P + 14.7} \right) \left( \frac{460 + t}{520} \right)$$

"P" is the inlet or average gauge pressure in pounds per square inch.

"t" is the temperature in degrees Fahrenheit.

The flow of compressed air in cubic feet per minute at any pressure is inversely proportional to the absolute pressure and directly proportional to the absolute temperature.

To determine the cubic feet per minute of compressed air at any temperature and pressure other than standard conditions, multiply the value of cubic feet per minute of free air by the formula:

$$\left( \frac{14.7}{14.7 + P} \right) \left( \frac{460 + t}{520} \right)$$

### Calculations For Pipe Other Than Schedule 40

To determine the velocity of water, or the pressure drop of water or air, through pipe other than Schedule 40 use the following formulas:

$$V_a = v_{40} \left( \frac{d_{40}}{d_a} \right)^2 \quad \Delta P_a = \Delta P_{40} \left( \frac{d_{40}}{d_a} \right)^5$$

"a" refers to velocity or pressure drop through the desired Schedule pipe.

"40" refers to the velocity or pressure drop through Schedule 40 pipe as given in the table on the facing page.

## Air Pressure Drop In Pipe

CFM Free Air at 60°F and 14.7 psia	CFM Comp. Air at 60°F and 100 psig	Air Pressure Drop In Pounds per Sq Inch per 100 ft of Schedule 40 Pipe For Air at 100 PSIG and 60°F									
1	0.128	<b>1/4"</b>	<b>3/8"</b>	<b>1/2"</b>							
2	0.256	0.083	0.018	0.020							
3	0.384	0.285	0.064	0.042							
4	0.513	0.605	0.133	0.042	<b>3/4"</b>						
5	0.641	1.04	0.226	0.071							
		1.58	0.343	0.106	0.027						
						<b>1"</b>					
6	0.769	2.23	0.408	0.148	0.037						
8	1.025	3.89	0.848	0.255	0.062	0.019					
10	1.282	5.96	1.26	0.356	0.094	0.029	<b>1 1/4"</b>				
15	1.922	13.0	2.73	0.334	0.201	0.062					
20	2.563	22.8	4.76	1.43	0.345	0.102	0.026	<b>1 1/2"</b>			
25	3.204		7.34	2.21	0.526	0.156	0.039		0.019		
30	3.845		10.5	3.15	0.748	0.219	0.055		0.026		
35	4.486		14.2	4.24	1.00	0.293	0.073		0.035		
40	5.126		18.4	5.49	1.30	0.379	0.095		0.044		
45	5.767		23.1	6.90	1.62	0.474	0.116		0.055	<b>2"</b>	
50	6.408			8.49	1.99	0.578	0.149	0.066		0.019	
60	7.690	<b>2 1/2"</b>		12.2	2.85	0.819	0.200	0.094	0.027		
70	8.971			16.5	3.83	1.10	0.270	0.126	0.036		
80	10.25	0.019		21.4	4.96	1.43	0.350	0.162	0.046		
90	11.53	0.023		27.0	6.25	1.80	0.437	0.203	0.058		
100	12.82	0.029	<b>3"</b>			7.69	2.21	0.534	0.247	0.070	
125	16.02	0.044				11.9	3.39	0.825	0.380	0.107	
150	19.22	0.062	0.021			17.0	4.87	1.17	0.537	0.151	
175	22.43	0.083	0.028			23.1	6.80	1.58	0.727	0.205	
200	25.63	0.107	0.036			30.0	8.54	2.05	0.937	0.264	
225	28.84	0.134	0.045				10.8	2.59	1.19	0.331	
250	32.04	0.164	0.055				13.3	3.18	1.45	0.404	
275	35.24	0.191	0.066				16.0	3.83	1.75	0.484	
300	38.45	0.232	0.078				19.0	4.56	2.07	0.573	
325	41.65	0.270	0.090				22.3	5.32	2.42	0.673	
350	44.87	0.313	0.104				25.8	6.17	2.80	0.776	
375	48.06	0.356	0.119				29.6	7.05	3.20	0.887	
400	51.26	0.402	0.134				33.6	8.02	3.64	1.00	
425	54.47	0.452	0.151				37.9	9.01	4.09	1.13	
450	57.67	0.507	0.168					10.2	4.59	1.26	
475	60.88	0.562	0.187					11.3	5.09	1.40	
500	64.08	0.623	0.206					12.5	5.61	1.55	
550	70.49	0.749	0.248					15.1	6.79	1.87	
600	76.90	0.887	0.293					18.0	8.04	2.21	
650	83.30	1.04	0.342					21.1	9.43	2.60	
700	89.71	1.19	0.395					24.3	10.9	3.00	
750	96.12	1.36	0.451					27.9	12.6	3.44	
800	102.5	1.55	0.513					31.8	14.2	3.90	
840	108.9	1.74	0.576					35.9	16.0	4.40	
900	115.3	1.95	0.642					40.2	18.0	4.91	
950	121.8	2.18	0.715					20.0	5.47		
1000	128.2	2.40	0.788					22.1	6.06		
1100	141.0	2.89	0.948					26.7	7.29		
1200	153.8	3.44	1.13					31.8	8.63		
1300	166.6	4.01	1.32					37.3	10.1		
1400	179.4	4.65	1.52						11.8		
1500	192.2	5.31	1.74						13.5		
1600	205.1	6.04	1.97						15.3		
1800	203.7	7.65	2.50						19.3		
2000	256.3	9.44	3.06						23.9		

PIPE CAPACITIES FLOW — GALLONS PER MINUTE

Pipe Size Inches	Water		70SSU		100SSU		150SSU		200SSU		300SSU		500SSU	
	Gravity	Pressure	Gravity	Pressure	Gravity	Pressure	Gravity	Pressure	Gravity	Pressure	Gravity	Pressure	Gravity	Pressure
3/4	1.42	4.70	0.68	4.21	0.39	4.01	0.25	3.79	0.18	3.64	0.12	3.45	0.088	3.21
1	2.65	9.20	1.04	8.27	0.692	7.85	0.432	7.43	0.324	7.14	0.216	6.75	0.130	5.66
1 1/4	5.30	18.9	3.24	16.9	2.02	16.1	1.30	15.3	0.943	14.7	0.634	13.9	0.389	12.9
1 1/2	8.10	28.4	5.90	25.5	3.74	24.2	2.38	22.9	1.73	20.9	1.17	19.8	0.706	19.4
2	15.60	54.7	11.95	49.0	10.22	46.7	6.55	44.2	4.86	42.4	3.24	40.1	1.94	37.4
2 1/2	25.10	87.4	23.04	78.3	19.50	77.0	13.32	70.5	9.65	67.8	6.55	64.2	3.92	59.8
3	44.50	154	33.2	138	29.5	131	27.1	124	23.2	119	15.7	113	9.22	105.0
4	91.00	317	80.5	284	77	270	72	256	69.8	246	54	233	32.3	217.0
5	164.0	573	139	514	131	489	123	463	116	445	99.1	421	71	392
6	267	930	212	834	202	794	187	751	176	722	159	683	143	570
8	550	1910	469	1710	436	1630	401	1540	379	1480	350	1400	312	1310
10	1,010	3,480	940	3,120	885	2,970	825	2,810	786	2,700	735	2,550	670	2,380
12	1,610	5,390	1,398	5,010	1,305	4,770	1,220	4,519	1,106	4,340	1,085	4,100	995	3,820
14	2,160	7,250	1,980	6,500	1,780	6,190	1,650	5,850	1,580	5,620	1,470	5,320	1,350	4,960
16	3,020	10,490	2,610	9,410	2,470	8,780	2,300	8,480	2,180	8,150	2,020	7,700	1,840	7,180
18	4,100	14,500	3,580	13,200	3,350	12,400	3,100	13,200	2,920	12,600	2,720	11,000	2,500	10,100
20	5,500	19,180	4,850	17,200	4,600	16,400	4,300	15,500	4,100	14,900	3,860	14,100	3,580	13,100

- The flows are based on a loss of head due to friction of fluids in given pipe size for fairly smooth pipe and is considered reasonably conservative. (C = 100)
- For pitched gravity piping, the loss is one (1) foot per hundred feet of pipe.
- The pressure piping losses are based on a loss of ten (10) feet per hundred feet of pipe. For short runs and few fittings, use next size smaller pipe; for long runs or many fittings, use a size larger.
- This chart is designed for rapid sizing of pipe for central coolant systems only. For large complex piping refer to Cameron Hydraulic Data Book.
- SSU = Standard Sabot Unit (viscosity).

Name of Gas	Heat of Combustion			Pound Per Pound of Combustible Gas									
	Symbol	Mol Weight	BTU per Pound	Required for Combustion				Products of Combustion					
				Gross	Net	O <sub>2</sub> +	N <sub>2</sub> =	Air	CO <sub>2</sub>	H <sub>2</sub> O	N <sub>2</sub>		
Carbon (Solid)	C	12.011	14,093	14,093	2.664	8.863	11.527	3.664	—	8.863	26.407	1.900	13.275
Hydrogen	H <sub>2</sub>	2.016	61,100	51,623	7.937	26.407	34.344	—	8.937	26.407	—	1.900	12.394
Carbon Monoxide	CO	28.010	4347	4347	0.571	1.900	2.471	1.571	—	1.900	—	1.900	12.074
Methane	CH <sub>4</sub>	16.043	23,879	21,520	3.990	12.257	17.265	2.744	2.471	1.900	2.471	1.900	12.074
Ethane	C <sub>2</sub> H <sub>6</sub>	30.070	22,320	20,432	3.725	12.394	16.119	2.927	1.798	1.900	2.927	1.900	12.074
Propane	C <sub>3</sub> H <sub>8</sub>	44.097	21,661	19,994	3.629	12.074	15.703	2.994	1.634	1.900	2.994	1.900	12.074
Ethylene	C <sub>2</sub> H <sub>4</sub>	28.054	21,644	20,295	3.422	11.385	14.807	3.138	1.285	1.900	3.138	1.285	11.385
Propylene	C <sub>3</sub> H <sub>6</sub>	42.081	21,041	19,691	3.422	11.385	14.807	3.138	1.285	1.900	3.138	1.285	11.385
Acetylene	C <sub>2</sub> H <sub>2</sub>	26.038	21,500	20,776	3.073	10.224	13.297	3.381	0.692	1.900	3.381	0.692	10.224

## The Global Measure of Cryogenic Bulk Storage

Chart's VS Series Storage Systems, available in liquid nitrogen, oxygen or argon service are offered in a wide range of sizes for applications requiring Maximum Allowable Working Pressures of 175 and 250 psig (12 and 17 bar) as standard.



### Advanced Insulation Technology Provides Longer Holding Times

Our proprietary composite insulation system gives you the competitive edge with high thermal performance, extended hold times, low life-cycle costs and lightweight to reduce operational and installation costs. Chart leads the industry with an innovative, modular piping system designed for performance, durability and low maintenance.

### Modular Piping System

Chart's innovative modular piping system provides an Industry Standard Piping Configuration. The advantages include:

- Reduces your life-cycle costs by reducing the number of external piping joints, minimizing the risk of external piping leaks and the cost to repair.
- Simple by design yet robust and able to support a broad range of customer applications.
- Combination Pressure Building/Economizer Regulator for easy pressure adjustment and extended Bonnet Bronze Control Valves for ease of operation.
- Piping modules designed for ease-of-access to all operational control valves with stainless steel interconnecting piping for improved durability.

Model	Gross Capacity Gal	Net Capacity Gal	MAWP* psig	Diameter in	Height in	Weight**		NER*** (% / day)
						(175 psi)	(250 psi)	
VS 525SC	570	510	- 250	66	105	-	3,300	.55
VS 900SC	940	850	- 250	66	136	-	4,400	.45
VS 1500SC	1,640	1,580	- 250	66	196	-	6,200	.35
VS 3000SC	3,150	3,030	175 250	86	228	11,100	12,800	.25
VS 6000SC	6,010	5,770	175 250	86	383	19,900	21,500	.15
VS 9000SC	9,360	8,990	175 250	114	348	29,400	32,300	.10
VS 11000SC	11,410	10,960	175 250	114	407	35,200	38,700	.10
VS 13000SC	13,470	13,060	175 250	114	466	41,700	45,700	.10
VS 15000SC	15,520	15,060	175 250	114	525	48,000	52,600	.10

\* MAWP - Maximum Allowable Working Pressure. 400, 500 psig tanks are available upon request.

\*\* Weights are for ASME design.

\*\*\* NER = Nominal Evaporation Rate

Chart's VS-DSS (Distributor Storage System) Series of vertical bulk storage stations are engineered for superior performance, durability and value. Equipped with our proprietary composite Super Insulation (a light-weight system offering better thermal performance than Perlite), VS-DSS Models provide reduced product losses and a slower rate of pressure rise during periods of non-use. Backing up this performance is a competitive 2-year warranty.

The modular piping system on our cryogenic tanks was pioneered by Chart, with user-friendly bronze valve manifolds and separate economizer and pressure building regulators coming standard. This means fewer plumbing joints and lower maintenance costs for you.

Available in the 525, 900, 1500, 3000 and 6000 gallon models, these new VS-DSS Models feature the industry standard thermal performance. The modular plumbing system has been selectively optimized to meet the flow requirements of a complete range of liquid or gas applications. With a comprehensive set of plumbing features, each circuit has been carefully designed to match the demands placed on these vessel sizes. Dual safety-relief devices are now standard along with tank mounted vaporizers on the 525, 900 and 1500 gallon sizes.



**SPECIFICATIONS**

Model	VS-DSS 525	VS-DSS 900	VS-DSS 1500	VS-DSS 3000	VS-6000-DSS
<b>Capacity</b>					
Gross (gal)	570	940	1,640	3,150	6,010
Net (gal)	510	850	1,380	3,030	5,770
<b>MAWP</b> (psig)	250	250	250	250	250
<b>Dimensions</b>					
Diameter (in)	66	66	66	86	86
Height (in)	105	136	196	228	383
Weight* (lbs)	3,300	4,400	6,200	12,800	21,500
<b>NER</b> (% day in O <sub>2</sub> )	.55	.45	.35	.25	.15
<b>Flow Capacity</b>					
(SCFH)	9,000	9,000	9,000	18,000	18,000

\* Weights are for ASME designs  
NER = Nominal Evaporation Rate

Flow capacity rating down to a 20% contents level with a maximum fall off in tank operating pressure of 15 psig.

Our VS-CO<sub>2</sub> Series of Bulk Carbon Dioxide Storage Tanks continues our pioneering of user-friendly engineered products. This design series offers strength and durability in an all-welded outer container, while maintaining lower life-cycle costs. Utilizing our proprietary composite insulation system along with superior vacuum technology, we are able to offer:

- An ultra-low heat leak, eliminating the need for a costly refrigeration system in most applications.
- No costly down time to refurbish water-soaked or deteriorated foam insulation.

Every VS-CO<sub>2</sub> pressure vessel is manufactured, tested and stamped in accordance with the latest edition of the ASME Boiler and Pressure Vessel Code, Section VIII, Division I, using SA612 normalized steel. Our VS-CO<sub>2</sub> Bulk Stations are equipped with an internal cleaning system operated externally, eliminating the need for costly manways.

### Product Highlights

- Stainless steel piping for greater strength and durability
- Stainless steel ball valves standard on all fill & process lines
- Minimum number of piping joints, reducing potential piping leaks and maintenance costs
- CGA fill and return fittings with drain valves standard on all models
- Optimum piping design results in flexible equipment connection
- High performance safety system with dual relief valves and rupture disks supplied as standard
- Pressure Building and Vaporizer options available, inquire with Chart for more details
- Interchangeable gauge systems with a choice of analog or digital telemetry capable systems are available with flexible stainless steel interconnecting lines
- Refrigeration systems including internal coil available as options



## SPECIFICATIONS

Model	6 Ton	14 Ton	30 Ton	50 Ton
<b>Capacity</b>				
Net Tons CO <sub>2</sub>	6.4	12.6	29.6	45.8
Gross Tons CO <sub>2</sub>	6.8	13.2	31.1	48.1
<b>Maximum Allowable Working Pressure</b> (psig)	350	350	350	350
<b>Dimensions</b>				
Height (in)	188	228	287	406
Diameter (in)	68	86	114	114
Weight* (lbs)	9,400	17,400	39,600	56,900

\* Tare Weight

The ChillZilla® bulk CO<sub>2</sub> food freezing and dry ice production system increases the refrigeration capacity of the liquid CO<sub>2</sub> by as much as **24%** over traditional bulk tanks. ChillZilla incorporates a patent pending design to lower the saturation pressure of the liquid output without reducing the delivery pressure. With the aid of an external refrigeration system, an internal heat exchanger coil and an insulating baffle, the temperature of the liquid CO<sub>2</sub> is effectively reduced. This system subcools the saturated liquid CO<sub>2</sub> from 300 psig to 120 psig while the electric pressure builder maintains the high tank vapor pressure necessary for consistent CO<sub>2</sub> delivery to the application. The result is an *increase* in refrigeration capacity in the liquid or an *improved* snow yield from 41 to 51%.



**Product Highlights**

- Reduce liquid CO<sub>2</sub> consumption by as much as 24%
- Reduce bulk tank minimum operating temperature from -40°F to -320°F with stainless steel inner vessel
- T304 stainless steel inner complies with food grade standards
- Improve bulk tank thermal efficiency with vacuum-insulated super insulation system
- Control freezing process more accurately by controlling liquid conditions
- Flexible system control allows lower tank operating pressure to further reduce operating costs
- Reduce deliveries at bulk tank site
- Reduce CO<sub>2</sub> emissions
- Liquid connection: 2" NPS, Python®-Ready

**SPECIFICATIONS**

<b>Model</b>	50 Ton
<b>Capacity</b>	
Net Tons CO <sub>2</sub>	45.8
Gross Tons CO <sub>2</sub>	48.1
<b>Maximum Allowable Working Pressure</b>	350
	(psig)
<b>Dimensions</b>	
Height (in)	406
Diameter (in)	114
Weight* (lbs)	56,900

\* Tare Weight

The ChillZilla® bulk LN<sub>2</sub> supply management system is engineered to provide consistent liquid nitrogen for optimum equipment performance. Ideally suited for Individually Quick Frozen (IQF), LN<sub>2</sub> immersion freezers and cryobiological storage freezers, the ChillZilla LN<sub>2</sub> system features a Dynamic Pressure Builder™ for precise saturated liquid supply to the freezer regardless of the LN<sub>2</sub> liquid level. The ChillZilla incorporates an insulation baffle to inhibit the mixing of fresh liquid from a trailer load delivery with the liquid supply to the freezer for better liquid supply stability during the refill.

With the aid of a patented high performance two-stage ambient pressure building coil, the heat management of this circuit is optimized for fast pressure recovery and reduced heat transfer to the contents. Coupling these unique features with the temperature monitoring of the liquid supply, a Programmable Logic Controller (PLC), VJ feed valve with an extended VJ pod and extended legs, the ChillZilla LN<sub>2</sub> system automatically provides the optimum liquid nitrogen supply to any liquid application.

Ideally suited for other LN<sub>2</sub> applications with the same demand, like cryogenic rubber and tire deflashing. Optional gas use conversion assembly available.

**Product Highlights**

- Dynamic Pressure Builder System™ for precise saturated LN<sub>2</sub> supply regardless of liquid level
- Insulation Baffle with dedicated upper fill port for uninterrupted LN<sub>2</sub> supply during transport refill
- High performance two-stage ambient pressure builder vaporizer for maximum efficiency (20 gpm (4 tph) standard)
- PLC controlled with actual LN<sub>2</sub> storage temperature, pressure and level monitoring for precise tank pressure control (PB and Vent) with automatic desaturation capability
- High flow automatic pressure building valve improves response time and performance after a fill along with a tighter operating pressure dead-band
- Extended legs and vacuum insulated pod for increased head pressure aids in dampening LN<sub>2</sub> saturation pressure fluctuations
- Large 1½" vacuum insulated inner supply line provides 20 gpm flow\*

\* 1½" VIP system of 300' VIP + 5 elbows + 2 valves = 2 psi pressure drop



**SPECIFICATIONS**

Model	VS 9000CZ	VS 11000CZ	VS 13000CZ	VS 15000CZ
<b>Capacity</b>				
Net Gal LN <sub>2</sub>	8,990	10,960	13,060	15,060
Gross Gal LN <sub>2</sub>	9,354	11,410	13,470	15,520
<b>Maximum Allowable Working Pressure</b> (psig)	175	175	175	175
<b>Dimensions</b>				
Height (in)	398	457	516	575
Diameter (in)	114	114	114	114
Weight* (lbs)	32,100	37,900	44,300	50,600

\* Tare Weight



Chart's VS High Pressure Bulk Stations are engineered for superior performance in high pressure applications. To support these demands, the VS High Pressure Bulk Station comes standard with a larger pressure-building regulator and coil. For more demanding applications with higher withdrawal rates, a remote pressure-building system is available.

Advanced insulation technology provides longer holding times, and the continuing development of insulation systems has resulted in unsurpassed performance. Our composite insulation is a lightweight system offering superior performance compared to Perlite or Super-Insulation and is easier to maintain, offering longer product hold times.

The standard 400 psig (27.6 bar) tank is available in 900 - 15,000 gallon (3,218 - 57,008 liter) models, and the standard 500 psig (34.5 bar) tank is available in 900 - 6,000 gallon (3,218 - 21,842 liter) models. Other sizes of both models are available upon request.



## Product Highlights

- All welded stainless steel piping modules
- Heavy duty bronze valves with extended bonnets
- Valve bonnet uniformity to reduce spare parts inventory
- Highest grade components for low to zero maintenance
- Separate pressure building and economizer regulators are standard on all 400 and 500 psig (27.6 and 34.5 bar) units
- High performance safety system with dual relief valves and rupture disks supplied as a standard

## SPECIFICATIONS

Model	VS 900SC	VS 1500SC	VS 3000SC	VS 6000SC	VS 9000SC	VS 11000SC	VS 13000SC	VS 15000SC
Gross Capacity (gal)	940	1,640	3,150	6,010	9,360	11,410	13,470	15,520
Nominal Capacity (gal)	850	1,580	3,030	5,770	8,990	10,960	13,060	15,060
Working Pressure* (psig)	400/500	400/500	400/500	400/500	400	400	400	400
Diameter (in)	66	66	86	86	114	114	114	114
Height (in)	136	196	228	383	348	407	466	525
Weight** (lbs)	5,100/5,800	7,600/8,700	15,100/15,100	27,000/27,100	38,900	46,700	55,100	63,400
Flow Capability* (SCFH)	5,200/3,100	5,900/3,600	6,400/3,800	7,900/4,700	7,500	8,100	8,600	14,400
NER (% day in O <sub>2</sub> )	.45	.35	.25	.15	.10	.10	.10	.10

\* Higher capacity coil available, refer to factory

\*\* Weights are for ASME designs

NER = Nominal Evaporation Rate

An integrated state-of-the-art system, including an HP<sup>2</sup><sup>™</sup> tank, a multi-function vaporizer and advanced control technology for delivering high-pressure high-performance gas flow. With our performance, you get pressure building recovery in 10 minutes or less at 95% full. Pressure is easily adjustable to within 50 psi/3.4 bar of tank MAWP. Flow rates up to 12,500 scfh/328 Nm<sup>3</sup>/H. The rattler valve (attached to the vaporizer) ensures sustained vaporizer performance and the HP<sup>2</sup><sup>™</sup> is available in sizes from 900 gallons/3,406 liters and larger.

**Cut Operating Costs**

- Reduces deliveries by up to 36%
- Reduces delivery time by up to 33%
- Increases actual storage capacity by 27% or reduces needed tank size
- Reduces service calls and maintenance
- Telemetry ready
- Easy to configure and install



**Improve Customer Satisfaction**

- Reduces customer downtime by up to 86%... or to zero with optional fill assist unit
- Cuts blow-down and venting losses and increases holding time
- Builds operating pressure in minutes
- Gives precision pressure control and eliminates regulator pressure creep
- Reduces space required to provide the same gas flow rates
- Easy to adjust pressure settings and contents alarms – truly user-friendly
- Supplies warmer outlet gas

<b>GENERAL</b>	
Pressure Building/Recovery Time	10 min or less at 95% full - 150 psi / 10.3 bar to 450 psi / 31 bar
Net Storage Capacity of Tank <sup>1</sup>	95% of gross tank capacity <sup>1</sup>
Pressure Control (Using Pressure Switch)	Adjustable to within 50 psi of MAWP - 3 alerts
Liquid Level Alarms (Using Tank-Tel <sup>®</sup> Gauge)	Adjustable in 5% increments - 3 alerts
Options	Fill Assist Unit, HP <sup>2</sup> Retrofit Kits, and Dual Vaporizers

HP <sup>2</sup> <sup>™</sup> TANK (See VS High Pressure)	Net Capacity <sup>1</sup> (gal/liters)	MAWP (psi / bar)
VS-900SC	850 / 3,218	400 / 27.6 or 500 / 34.5
VS-1500SC	1,580 / 5,981	400 / 27.6 or 500 / 34.5
VS-3000SC	3,030 / 11,470	400 / 27.6 or 500 / 34.5
VS-6000SC	5,770 / 21,842	400 / 27.6 or 500 / 34.5
Larger High-Pressure Tanks	Contact Chart	Contact Chart

<b>CONTROL / INSTRUMENTATION<sup>2</sup></b>	
Power Requirement	110 VAC x 5 Amp
Pressure and Contents Measurement	Tank-Tel - telemetry ready (see Tank-Tel)

<b>PIPING &amp; CONTROL MODULE<sup>2</sup></b>	
Gas Supply Requirement	Clean Dry Nitrogen or Air (Dew Point -40°F) at 100 psi / 6.9 bar
Ball Valves	2 x Pneumatic Operated
Piping	3/4" Nominal Copper Tubing
Inlet and Outlet Connections	7/8" ODT Compression
Dimensions L x W x H (in / mm)	44 x 26 x 31 / 1,120 x 660 x 790

<b>MULTI-FUNCTION VAPORIZER (Ambient)<sup>2</sup></b>	<b>3.5 K Model</b>	<b>7.5 K Model</b>	<b>12.5 K Model</b>
Rated Flow Capacity (scfh / Nm <sup>3</sup> /H) <sup>3</sup>	3,500 / 92	7,500 / 197	12,500 / 328
Design Pressure (psi / bar)	600 / 41	600 / 41	600 / 41
Overall Height (in / mm)	132 / 3,353	132 / 3,353	156 / 3,962
Length / Width (in / mm)	35 x 27 / 889 x 686	35 x 50 / 889 x 1,270	47 x 50 / 1,194 x 1,270
Rattler Valve for Snow and Ice Removal	Optional	Included	Included

Footnotes: Specifications are subject to change without prior notification. 1 - HP<sup>2</sup> tanks can be filled to 95% of gross capacity. For traditional high-pressure bulk tanks, the recommended fill level is only 75% of gross capacity. 2 - Components used in the HP<sup>2</sup> Retrofit Kit for converting existing high-pressure tanks to HP<sup>2</sup> technology. 3 - Flow rate based on nitrogen under standardized conditions with minimum 1" liquid feed and gas return lines.

## Pumping 100% of the Liquid 100% of the Time

Chart has engineered the VS-Siphon 100 system to provide an economical, reliable and high performance pumping system for high pressure and liquid cylinder filling. Current cryogenic tank and pumping systems have worked for years, but increased efficiencies are now available using the Siphon 100 with:

- Simple and reliable automatic pump start-up in three minutes with 100% product utilization
- Thermal-siphon design manages heat from pump cool down, keeping storage tank pressure down
- Pump priming at tank pressure of 10 psi (0.69 bar) or less without the necessity for pressure building
- Reduce liquid cylinder and Orca filling losses
- Longer life of high-wear pump parts
- Capability to operate two pumps at once (liquid and HP pump)
- Adapters available to match all standard pumps



The VS-Siphon 100 system combines two revolutionary technologies in cryogenic bulk tanks.

- **Thermal-Siphoning** — improved and patented, the system reduces and efficiently reprocesses the heat of pumping.
- **Composite Insulation** — 30% to 70% more efficient than Perlite in reducing the effects of heat from the atmosphere.

### SPECIFICATIONS

Model	3,000	6,000	9,000	11,000	13,000	15,000
<b>Capacity</b>						
Liquid (Gross)	3,150	6,010	9,354	11,410	13,470	15,520
Liquid (Net)	3,030	5,770	8,990	10,960	13,060	15,060
<b>Performance</b>						
NER (O <sub>2</sub> )	% per day	.25%	.15%	.10%	.10%	.10%
<b>Dimensions &amp; Pressure Ratings</b>						
Diameter	inches	86	86	114	114	114
Height	inches	271	425	398	457	516
MAWP	psig	175	175	175	175	175

## Compact Horizontal Bulk Storage



The new BulkLite™ 1400 is a compact horizontal bulk storage tank designed for economical turnkey installations. The tank can be installed on common precast concrete foundations, asphalt or directly on to class 5 gravel. The integrated forklift channels provide for easy mobility without a crane, further reducing the installation costs. The low profile and low cost installation is ideal for accounts that specify a height restriction and/or pad restriction due to property constraints. The BulkLite is also a good solution for temporary installations. The plumbing is conveniently located on one end of the vessel for easy access in tight locations and it can be filled from a standard transport or an Orca delivery system. Note, not designed to be moved with cryogenic product.

## SPECIFICATIONS

Model	1400	
<b>Capacity</b>		
Gross	gallons	1,400
Net	gallons	1,320
<b>MAWP</b>	psig	250
<b>Performance</b>		
NER (O <sub>2</sub> /Ar)	% per day	.28
NER (N <sub>2</sub> )	% per day	.45
<b>Dimensions</b>		
Width	inches	72
Height	inches	69
Length	inches	187
Weight	lbs	4,800

## Product Highlights

- Compact, horizontal low profile: 69" H x 72" W x 187" L
- Integrated large forklift channels provide for easy mobility and secure mounting for an economical installation
- Forklift channels are 48" center to center (38-¾" min x 57-¼" max) and provide a stable and secure mounting base without the need for a concrete pad
- On-board high-efficiency gas use vaporizer provides up to 2000 SCFH
- Integrated high-efficiency pressure builder supports gas use flows up to 8000 SCFH
- Integrated flat fin pressure builder with PCV-1 (combo regulator) with single pressure adjusting screw for easy changes to the pressure builder and economizer settings
- Durable, ergonomic plumbing with isolation valves for long service life, easy operation and field maintenance
- Low NER is ideal for low usage accounts with longer delivery cycles for low distribution costs
- Liquid withdrawal package option available: 1" vacuum insulated female bayonet, vent connected back pressure regulator and low-range PCV-1 spring for low liquid loss and accurate tank pressure control

The VHR Series high-performance storage system creates a competitive advantage with industry-leading hold times and a stainless steel, low maintenance outer shell.

The VHR liquid bulk systems are economical customer stations designed to receive and hold liquid oxygen at a low temperature and pressure. This low-cost storage system is ideal for applications requiring liquid or reserve suppliers, such as hospitals, nursing homes and health care facilities, or as back-up to membrane/PSA systems.



### Product Highlights

- Dual relief and rupture disc vent system with a 3-way diverter valve
- Extended stem and packing valves on all liquid lines
- Liquid level gauge with low level alarm
- Stainless steel inter-connecting piping
- All stainless steel outer vessel eliminates the need for paint and surface maintenance
- Automatic self contained pressure building system maintains pressure for gas withdrawal
- Internal product vaporizer saves pad space and reduces maintenance costs
- Super-insulation system provides industry leading NER performance and extended product hold time
- Optional Certified lab test reports for medical oxygen service available

### SPECIFICATIONS

Model	VHR-120	VHR-260	VHR-400
<b>Capacity - Liquid (gal / liters)</b>			
Net	112 / 424	255 / 964	387 / 1,479
Gross	118 / 447	268 / 1,015	407 / 1,553
<b>Capacity - Gas @ 1 atm of 70°F (SCF / NM<sup>3</sup>)</b>			
Nitrogen	10,500 / 280	23,800 / 630	36,100 / 950
Oxygen	12,900 / 340	29,400 / 780	44,600 / 1,180
Argon	12,600 / 340	28,700 / 760	43,600 / 1,150
<b>Dimensions (in / cm)</b>			
Diameter	30 / 76	42 / 107	48 / 122
Height	80 / 203	94 / 239	100 / 254
<b>Weight (lbs / kg)</b>			
Tare	700 / 320	1,700 / 770	2,100 / 950
Nitrogen	1,400 / 640	3,500 / 1,590	4,800 / 2,180
Oxygen	1,710 / 780	4,200 / 1,910	5,800 / 2,630
Argon	1,950 / 890	4,700 / 2,130	6,600 / 2,990
<b>Maximum Pressure (psig / bar)</b>	250 / 17	250 / 17	250 / 17
<b>Gas Delivery Rate (SCFH O<sub>2</sub> / NM<sup>3</sup>h O<sub>2</sub>)</b>			
Normal*	340 / 10	620 / 18	790 / 22
Peak**	490 / 14	890 / 25	1,140 / 32
<b>Evaporation Rate (% per day of O<sub>2</sub>)</b>	1.1%	0.62%	0.62%

\* Normal flow rate is for eight hours with a minimum exit temperature of 32°F at an ambient temperature of 68°F.

\*\* Peak flow rate is for one hour with a minimum exit temperature of 32°F at an ambient temperature of 68°F.

# A durable, user-friendly performer

The Dura-Cyl® series is a premium transportable liquid cylinder for cryogenic service. The patented internal support system design and quality construction makes the Dura-Cyl series the most efficient yet rugged cylinder on the market today.

- Ideal for liquid nitrogen, oxygen, argon, CO<sub>2</sub> or nitrous oxide
- Different sizes, pressures, and features to better meet your needs
- Stainless steel construction
- Thick, dent-resistant outer shell
- Patented durable, inner-vessel support system
- Large diameter handling ring with four supports
- Optional Micrometer Controlled Regulator (MCR) or Liquid Cylinder Control Manifold (LCCM)
- Roto-Tel Liquid Level Gauge System
- Footring and caster base models with round or square caster bases for safe and easy mobility
- Five-year vacuum warranty



LCCM Models have an integral mounted combination pressure control regulator, isolation valve and a calibrated dome control knob. (MP & HP models only)



MCR Models have a combination pressure control regulator with an exclusive, calibrated micrometer adjusting screw. (MP & HP models only)



## SPECIFICATIONS

Model	FOOTRING										CASTER BASE									
	160MP	160HP	180LP	180HP	200LP	200HP	200LP-RB	200HP-RB	220MP-RB	220HP-RB	201MP-SB	201HP-SB	220MP-SB	220HP-SB	260MP-RB	260HP-RB	260MP-SB	260HP-SB		
<b>Capacity</b>																				
Liquid (Gross)	176	176	185	186	209	209	209	209	240	240	240	240	240	240	240	276	276	276		
Liquid (Net)	165	165	185	185	196	196	196	196	220	220	220	220	220	220	265	265	265	265		
Gas (N <sub>2</sub> )	3,665	3,464	-	4,088	3,864	-	4,375	4,072	-	5,024	4,724	-	5,024	4,724	5,788	5,488	5,788	5,488		
Gas (O <sub>2</sub> )	4,577	4,348	-	5,095	4,843	-	5,426	5,048	-	6,244	5,800	-	6,244	5,800	7,186	6,811	7,186	6,811		
Gas (Ar)	4,448	4,226	-	4,911	4,703	-	5,200	4,932	-	6,073	5,763	-	6,073	5,763	6,684	6,382	6,684	6,382		
Gas (CO <sub>2</sub> )	-	3,382	-	3,768	-	-	4,011	-	-	4,614	-	-	4,614	-	5,305	-	5,305	-		
Gas (N <sub>2</sub> O)	-	3,307	-	3,674	-	-	3,910	-	-	4,378	-	-	4,378	-	5,034	-	5,034	-		
<b>Performance</b>																				
NER (N <sub>2</sub> )	% per day	2.0	2.0	1.5	1.9	1.9	1.85	1.85	1.85	2.0	1.5	1.8	1.8	1.8	1.8	2.0	2.0	2.0		
NER (O <sub>2</sub> -Ar)	% per day	1.4	1.4	1.0	1.3	1.2	1.2	1.2	1.2	1.4	1.0	1.2	1.2	1.0	1.2	1.4	1.4	1.4		
NER (CO <sub>2</sub> -N <sub>2</sub> O)	% per day	-	0.5	-	0.5	-	0.5	-	0.5	-	0.5	-	0.5	-	0.5	-	0.5	-		
Gas Flow (N <sub>2</sub> , O <sub>2</sub> , Ar)	ft <sup>3</sup> /hr	330	330	-	330	330	-	400	400	-	400	400	-	400	400	400	400	400		
Gas Flow (CO <sub>2</sub> or N <sub>2</sub> O)	ft <sup>3</sup> /hr	-	110	-	110	-	110	-	110	-	110	-	110	-	110	-	110	-		
<b>Dimensions &amp; Pressure Ratings</b>																				
Diameter	in	20	20	20	20	20	20	20	20	26	26	26	26	26	26	26	26	26		
Height	in	59.8	59.8	64.3	64.3	66.6	66.6	66.6	66.6	51	57.2	57.2	56.8	56.8	59.9	59.9	59.5	59.5		
Total Weight	lb	230	280	210	260	300	210	280	320	177	296	311	367	326	330	330	330	300		
Roller Valve Setting	psig	230	350	22	200	350	22	230	350	22	22	230	350	22	200	350	230	350		
DOT/CTD Rating		4,300	4,302	4,100	4,200	4,302	4,100	4,200	4,100	4,300	4,100	4,200	4,100	4,300	4,200	4,300	4,200	4,100		

(1) Pressure building regulator optional on LP models. (2) Gas capacities at DOT/UL limits. See manual PN 108-820 for details.  
 (3) Most of the Dura-Cyl models are available with permanently installed COA fittings for medical applications. Contact Customer Service for details.  
 (4) Dura-Cyl 100LP is not IC approved. (5) Dimensions are measured from the top of the sight gauge precursor.  
 RB = Round Caster Base SB = Square Caster Base  
 NCH = Normal Evaporation Rate

## A stable, efficient performer

Like the Dura-Cyl models, the Cryo-Cyl 80HP model is designed and built to meet the rugged demands of the liquid cylinder market. However in contrast, this model is designed specifically for liquid and low to medium gas flow applications. By specifically targeting these applications, we are able to offer this model at an economical value over our premium Dura-Cyl series.

- Ideal for liquid nitrogen, oxygen, argon, CO<sub>2</sub> or nitrous oxide
- Stainless steel construction
- Thicker, dent-resistant outer shell
- Patented durable, inner-vessel support system
- Heavy-duty footing and large diameter handling ring with two supports
- Roto-Tel Liquid Level Gauge System
- Five-year vacuum warranty



The optional pressure building kit includes a regulator and plumbing components.



On the new Cryo-Cyl HP liquid cylinder, the liquid valve is an extended stem globe valve which allows for less ice build-up on the handle and easier operation.

## SPECIFICATIONS

Model	Size / Pressure	80HP
	Part Number	10648610
<b>Capacity<sup>(1)(2)</sup></b>		
Liquid (Gross)	(liters)	85
Liquid (Net)	(liters)	80
Gas (N <sub>2</sub> )	(ft <sup>3</sup> )	1,680
Gas (O <sub>2</sub> )	(ft <sup>3</sup> )	2,108
Gas (Ar)	(ft <sup>3</sup> )	2,049
Gas (CO <sub>2</sub> )	(ft <sup>3</sup> )	1,640
Gas (N <sub>2</sub> O)	(ft <sup>3</sup> )	1,555
<b>Performance</b>		
NER (N <sub>2</sub> )	(% per day)	3.0
NER (O <sub>2</sub> or Ar)	(% per day)	2.0
NER (CO <sub>2</sub> or N <sub>2</sub> O)	(% per day)	0.8
Gas Flow (N, O <sub>2</sub> , Ar) <sup>(3)</sup>	(SCFH)	100
Gas Flow (CO <sub>2</sub> or N <sub>2</sub> O)	(SCFH)	35
<b>Dimensions &amp; Pressure Ratings</b>		
Relief Valve Setting	(psig)	350
Operating Pressure <sup>(4)</sup>	(psig)	125
DOT/CTC Rating		4L292
Diameter (Cylinder)	(in)	20
Height (Cylinder) <sup>(5)</sup>	(in)	39.5
Tare Weight	(lbs)	165

(1) Net gas capacities at DOT 4L limits.

(2) The Cryo-Cyl model is available with permanently installed CGA fittings for medical applications. Contact Customer Service for details.

(3) Gas flows of twice the continuous flow rate can be achieved for 1 hr. over an 8 hr. period.

(4) Pressure building regulator range (50-175 psi).

(5) Height dimensions are measured from the floor to the top of the sight gauge protector.

## Maximum Versatility



The Mega-Cyl® series is Chart's line of palletized cylinders designed for easy transport with capacities from 450 to 1000 liters. Engineered with the volume user in mind, it's ideal for construction sites, remote purging operations and back-up systems. Mega-Cyl cylinders are available at 350 psig (24 barg) and are specifically designed to optimize distribution costs.

Examine the rugged, maneuverable Mega-Cyl series, and you'll find all the quality features you expect from the industry leader, Chart.

### Product Highlights:

- Tough, durable stainless steel construction
- High-performance Super Insulation
- Easily accessible valves and gauges
- Spray header for pump filling on vent tube
- Accurate differential pressure contents gauge (non-electric)

## SPECIFICATIONS

<b>Model</b>		450HP	800HP	1000HP
Size/Pressure		10588979	10671262	10752281
<b>Part Number</b>				
<b>Capacity</b>				
Liquid (Gross)	(liters)	450	880	1,066
Liquid (Net)	(liters)	428	800	950
Gas (N <sub>2</sub> )	(ft <sup>3</sup> )	8,875	19,672	23,563
Gas (O <sub>2</sub> )	(ft <sup>3</sup> )	11,111	24,320	28,843
Gas (Ar)	(ft <sup>3</sup> )	10,812	23,767	28,234
Gas (CO <sub>2</sub> )	(ft <sup>3</sup> )	8,652	16,255	18,580
<b>Performance</b>				
NER (N <sub>2</sub> )	(% per day)	2.1	1.8	1.3
NER (O <sub>2</sub> , Ar)	(% per day)	1.4	1.2	0.9
NER (CO <sub>2</sub> , N <sub>2</sub> O)	(% per day)	0.6	0.5	0.3
Gas Flow (N <sub>2</sub> , Ar)	(SCFH)	575	880	980
Gas Flow (CO <sub>2</sub> or N <sub>2</sub> O)	(SCFH)	195	280	300
<b>Dimensions &amp; Pressure Ratings</b>				
Diameter (cylinder)	(in)	30	42	42
Height (cylinder)	(in)	62	67	76
Base Width (frame)	(in)	34	45	45
Base Depth (frame)	(in)	34	45	45
Height (frame)	(in)	74	95	95
Tare Weight (cyl. + frame)	(lbs)	1,275	2,500	2,650
Relief Valve Setting	(psig/barg)	350	350	350
DOT/CTC Rating		4L292	ASME	ASME

\* Atmospheric gas based on net volume at 0 psig. CO<sub>2</sub> values and 450 liter models based on DOT4L fill density.

\*\* Customized pallets are available upon request.

\*\*\* Weights are approximate and vary with pallet design.



## Maximum Efficiency with High Capacity Performance



Laser-Cyl is designed specifically for laser applications, as a high-performance option to expensive high-pressure cylinder tanks. The Laser-Cyl delivers optimal pressure up to 500 psig (34.5 bar) and continuous flow rates up to 575 SCFH (15.1 Nm<sup>3</sup>/hr).

### Product Highlights:

- Built-in vaporizer coils supply constant pressure gas at continuous flow rates up to 575 SCFH (15.1 Nm<sup>3</sup>)
- Piping controls located on top of the vessel for easy operation and maintenance
- Differential pressure liquid level gauge accurately displays product level
- Insulation system provides low NER for longer holding time
- Available in 200 and 450 liter sizes with an optional pallet frame

## SPECIFICATIONS

Model	Size / Pressure	200VHP	450VHP
	Part Number	10619771	10619659
<b>Capacity</b>			
Liquid (Gross)	(liters)	200	450
Liquid (Net)	(liters)	196	428
Gas (N <sub>2</sub> )	(ft <sup>3</sup> )	3,521	7,922
Gas (O <sub>2</sub> )	(ft <sup>3</sup> )	4,674	10,519
Gas (Ar)	(ft <sup>3</sup> )	4,552	10,241
Gas (CO <sub>2</sub> )	(ft <sup>3</sup> )	3,537	7,960
Gas (N <sub>2</sub> O)	(ft <sup>3</sup> )	3,333	7,516
<b>Performance</b>			
NER (N <sub>2</sub> )	(% per day)	2.0	2.0
NER (O <sub>2</sub> or Ar)	(% per day)	1.4	1.4
NER (CO <sub>2</sub> or N <sub>2</sub> O)	(% per day)	0.5	0.5
Gas Flow (N, O <sub>2</sub> , Ar)	(SCFH)	350	575
Gas Flow (CO <sub>2</sub> or N <sub>2</sub> O)	(SCFH)	110	180
<b>Dimensions &amp; Pressure Ratings</b>			
Diameter (Cylinder)	(in)	20	30
Height (Cylinder)	(in)	65.8	61.3
Base Width (Frame)	(in)	–	34
Base Depth (Frame)	(in)	–	34
Base Height (Frame)	(in)	–	73.8
Tare Weight	(lbs)	375	1,265*
Relief Valve Setting	(psig)	500	500
DOT/CTC Rating		4L412	4L412


\* Weights are approximate and vary with pallet design

## Durability and High Performance

The Ultra Helium Dewars are designed and built for reliable transport. They are light, maneuverable and durable, while providing superior thermal performance. The unique nec tube design provides proven support during transportation. The outboard caster base provides maximum stability in a compact design.



Available in sizes ranging from 60 to 500 liters. The Ultra Helium Dewars are suitable for air transport (IATA conforming) with the optional absolute pressure relief valve. All models are 100% nonmagnetic for Magnetic Resonance Imagery (MRI) service.



The controls are conveniently located on the top of the dewar, with nesting fill couplings to accept various standard transfer line sizes. The optional electric pressure builder can quickly increase pressure for liquid transfer while maintaining low heat leak. It has two pre-set ranges (4 or 8 psig/0.3 or 0.6 barg) for efficient liquid helium withdrawal:

- Maximum durability and lightweight
- Outstanding thermal performance
- Large ball valves for up to 3/4" (19 mm) transfer lines

## SPECIFICATIONS

Model	Size	60	100	250	500
	Part Number	10533409	10533417	9923629	11202581
<b>Capacity</b>					
Liquid (Gross)	(liters)	66	110	275	550
Liquid (Net)	(liters)	60	100	250	500
<b>Performance</b>					
NER	(% per day)	1.75	1.25	1.0	1.0
MAWP	(psig)	10	10	10	10
<b>Dimensions &amp; Pressure Ratings</b>					
Diameter	(in)	24	24	32	42
Height	(in)	49.5	56.5	67.4	67.25
Dip Tube Length	(in)	32.5	39.5	54.4	51.5
Tare Weight	(lbs)	184	212	348	470
Main Relief Valve Setting	(psig)	10	10	10	10
Secondary Relief Valve	(psig)	12	12	12	12

## Laser Assist Gas Supply System



Trifecta® X-Series is the preferred solution for reliable and continuous laser assist gases for pressures up to 550 psig and flow rates up to 15,000 scfh. Drawing liquid from a standard bulk tank, the Trifecta system boosts the liquid pressure by alternately feeding two liquid cylinders equipped with innovative multi-function pressure building vaporizers.

### Product Highlights:


- System utilizes standard low-pressure bulk tank to lower investment and use existing assets.
- No downtime - system maintains pressure and flow when bulk tank is filled and eliminates excessive product losses associated with high-pressure bulk tanks.
- Robust design features streamlined all stainless steel piping with only five control valves and one integrated electronic control system (PLC) for increased durability and reliability.
- Computer-controlled design simplifies installation, start-up and continuous operation.
- Frame assembly features a protective top cover in a compact footprint with an elevated base for improved ventilation.

### System Requirements

- 15 amp, 110 VAC power, dedicated circuit (230 VAC panel is also available)
- Bulk storage tank with 50 psig minimum pressure
- External vaporizer, minimum 600 psig working pressure, sized for maximum flow rate
- Two piping connections to bulk storage tank (liquid withdrawal, low phase instrument line)
- High-flow pressure regulation
- 100 psig nitrogen gas required for actuated valves (600 MAWP only). All other models use electric solenoid valves

### Dimensions

Length	53"	1347 mm
Width	55"	1400 mm
Height	96"	2440 mm
Weight: X5	1700 lbs	770 kg
Weight: X10	1750 lbs	795 kg
Weight: X15	1800 lbs	815 kg

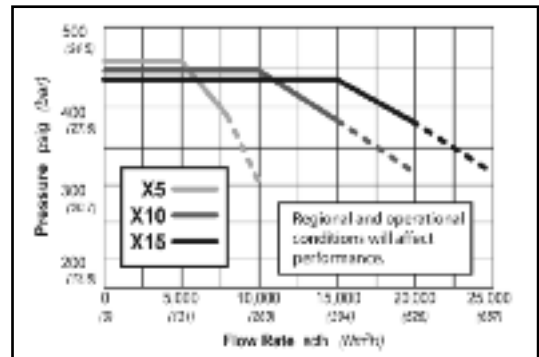

Shown for Inert Service (500 MAWP)

The Perma-Cyl® storage system allows users to enjoy the benefits of on-site gas delivery. What makes the Perma-Cyl design revolutionary is:

- The first fill-at-site solution for packaged or cylinder gas users
- Fast filling capable
- Single hose no-loss/low-loss filling
- Automatic fill shutoff when used with Orca
- Extended holding times
- Telmetry ready with Cyl-Tel® gauge



When filled by an Orca MicroBulk Delivery System, the Perma-Cyl vessel is designed to have an actual fill-time of three minutes or less with little or no loss under normal conditions. The vessel will allow liquid to be held for long periods without venting, limiting product losses during periods of nonuse.

**Features**

- Very low NER/product loss
- Designed for very fast, automatic fills utilizing the Orca delivery system
- Unique auto shut-off feature allows remote filling with optional wall box and hose
- Heavy gauge, stainless steel outer shell
- Cyl-Tel gauge standard on 300L and larger, optional on 230L

DESCRIPTION	230L		300L		450L		600L		900L		1350L		1800L		2300L		3000L	
	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM	MP/LCCM	HP/LCCM
<b>CAPACITY (Liters)</b>	240	240	300	300	450	450	600	600	900	900	1350	1350	1800	1800	2300	2300	3000	3000
<b>MAWP</b>	230	230	280	280	420	420	560	560	840	840	1260	1260	1680	1680	2100	2100	2700	2700
<b>MAXIMUM PRE-SET OPERATING PRESSURE (psig)</b>	230	230	350	350	500	500	650	650	950	950	1400	1400	1850	1850	2350	2350	3000	3000
<b>MAXIMUM PRE-SET OPERATING PRESSURE (bar)</b>	15.9	15.9	24.1	24.1	34.5	34.5	45.0	45.0	66.0	66.0	96.8	96.8	129.3	129.3	163.3	163.3	207.0	207.0
<b>DESIGN SPEC DOT</b>	DOT	DOT	DOT	DOT	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME	DOT/ASME
<b>STORAGE CAPACITY</b>	5024	4704	5769	5769	8640	8640	11520	11520	17280	17280	25920	25920	34560	34560	45000	45000	58320	58320
<b>Nitrogen</b>	142	134	182	182	272	272	362	362	542	542	812	812	1082	1082	1412	1412	1812	1812
<b>Oxygen</b>	6,244	5,830	7,186	7,186	10,302	10,302	13,718	13,718	20,718	20,718	31,074	31,074	40,938	40,938	52,824	52,824	67,932	67,932
<b>Acetylene</b>	177	168	189	189	284	284	378	378	562	562	846	846	1130	1130	1464	1464	1908	1908
<b>Argon</b>	6,073	5,763	6,982	6,982	10,478	10,478	13,978	13,978	20,978	20,978	31,478	31,478	41,978	41,978	54,478	54,478	70,478	70,478
<b>Carbon Dioxide</b>	N/A	4,500	N/A	N/A	N/A	N/A	8,500	8,500	12,500	12,500	18,500	18,500	26,500	26,500	34,500	34,500	44,500	44,500
<b>Thermal Performance (NER/DAY)</b>	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
<b>N<sub>2</sub></b>	1.8%	1.8%	2.0%	2.0%	1.2%	1.6%	1.9%	1.6%	1.9%	1.6%	1.9%	1.6%	1.9%	1.6%	1.9%	1.6%	1.9%	1.6%
<b>O<sub>2</sub>-Ar</b>	1.12%	1.12%	1.4%	1.4%	1.0%	1.2%	1.4%	1.0%	1.2%	1.4%	1.0%	1.2%	1.4%	1.0%	1.2%	1.4%	1.0%	1.2%
<b>CO<sub>2</sub></b>	6%	6%	4%	4%	5%	5%	6%	5%	6%	5%	6%	5%	6%	5%	6%	5%	6%	5%
<b>GAS DELIVERY RATE (L/NL/ARLOX)</b>	10.5	10.5	10.5	10.5	14.1	14.1	15.1	15.1	18.6	18.6	25.2	25.2	33.4	33.4	43.4	43.4	56.4	56.4
<b>GAS DELIVERY RATE (CO<sub>2</sub>)</b>	N/A	133	N/A	N/A	192	192	220	220	320	320	450	450	600	600	800	800	1050	1050
<b>Dimensions</b>	26	26	26	26	30	30	30	30	42	42	42	42	48	48	48	48	59	59
<b>Height</b>	660	660	660	660	660	660	660	660	762	762	762	762	1,067	1,067	1,219	1,219	1,469	1,469
<b>In</b>	61.809	61.809	64.863	64.863	67	69	69	69	89.1	89.1	89.1	89.1	109.514	109.514	129.915	129.915	151.915	151.915
<b>Face Weight</b>	1,520/1,575	1,520/1,575	1,641/1,646	1,641/1,646	1,702	1,753	1,753	1,753	1,938	1,938	2,683	2,683	3,311	3,311	4,333	4,333	5,612	5,612
<b>Lbs</b>	300	340	340	340	450	605	688	812	1,250	1,500	1,750	2,000	2,600	3,000	3,800	4,250	5,500	6,250
<b>Kg</b>	154	154	154	154	204	274	312	368	567	680	794	908	1,134	1,271	1,580	1,794	2,500	2,925



Chart's distribution system has been designed to complete an entire fill operation in approximately three minutes - from the moment the driver comes to a stop to the time the flow meter terminates the operation. The Orca mobile utilizes assets more fully, reducing labor costs and serving more customers.

## Features:

- Fast on-site filling of Perma-Cyl storage system
- Filling of small bulk tanks
- Instantaneous push-button delivery of product
- Simple valves to operate
- "Smart" flow metering system reduces required operator training
- NIST\*/California Weights and Measures approved delivery metering system
- Special delivery hose minimizes contamination, cool down and pressure loss
- Electronic control allows for fast in-and-out deliveries and invoicing
- Vessel designed with robust inner support system for rugged road conditions
- Stainless steel plumbing with bronze valves for long service life and reliability
- Low-maintenance submerged pump for instant starts and continuous delivery

\* NIST is the National Institute of Standards and Technology


SPECIFICATIONS	Orca	Orca	Orca	Orca
	HL-2000	HL-2800	HL-3300	HL-4200
Gross Capacity (gal)	2,144	2,880	3,399	4,654
MAWP (psig)	50	50	50	50
Length (in)	200	244	273	344
Diameter (in)	80	80	80	80
Height (in)	87	87	87	87
Tare Weight* (lbs)	8,000	9,000	10,000	12,000

*\* For MC338 tank only. For CGA 341 tank, lower operating pressure, refer to factory for weights and dimensions.*


*Design: ASME SEC VIII, Div. I / DOT MC-338 / CGA 341*



A "smart" flow metering system monitors flow electronically.



Back view of Orca truck

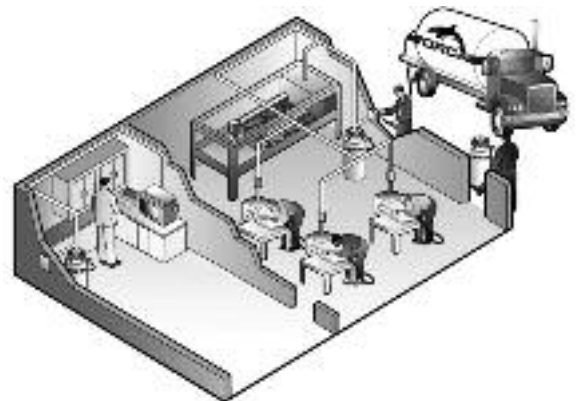

## Chart — Your Single Source Supplier of Cryogenic Equipment

Customer needs are the top priority with us. From handling carts to the largest cryogenic vessels, we have the accessories to create an efficient system for you.

### Dual Relief Valves

With dual relief valves, one cylinder can be used for both liquid (low pressure) or gas (medium pressure) accounts, which maximizes the flexibility of your liquid cylinders.



### Hose

Stainless steel transfer hoses that remain flexible during liquid transfer can be coupled with a bronze phase separator. Ideal for safe discharge of LN<sub>2</sub> into open dewars.

### Vent Muffler

The vent muffler can be attached to the vent connection of the liquid cylinder to reduce the venting noise during the fill. Plastic for inert service and brass for oxygen service.



### Carriage Cart

The four-wheeled carriage cart permanently attaches to the lower section of any 20 inch (508 mm) diameter liquid cylinder. The front pull handle is attached to the dual swivel wheels for easy mobility. Rear wheels are stationary so the carriage cart with liquid cylinder can be backed into a tight location. Ideal for lab users with dedicated liquid cylinders.




### Handling Cart

A variety of handling carts and accessories are available to make the transportation of liquid cylinders safe and easy. They optimize fast and safe deliveries by decreasing back injuries, along with lowering Worker's Compensation costs.

### Lo-Loss Filling System

Lo-loss is an automated filling system that dramatically reduces depressurization (flash) losses during liquid cylinder filling. By maintaining an optimal pressure difference between the bulk tank and liquid cylinder, losses are kept at a minimum without increasing fill times.





**M45 Manifold**

The M45 Manifold is a convenient, automatic way of increasing the gas delivery rate to any application. The unique changeover valve allows easy manual selection of the primary bank of cylinders. An indicator light shows when the system switches to the reserve bank so replacement cylinders can be ordered.

The economizer functions of all tanks still work through the M45 Manifold. Tank pressure and delivery pressure are shown on the manifold, while other features include:

- All stainless steel cabinet can be wall mounted or used with the optional floor stand.
- Hoses are easily mounted to the cabinet
- Takes up to six liquid cylinders

**Vaporizers**

Free standing or tank mounted, these vaporizers which gasify the liquid product are available in standard sizes ranging from 1700 to 90,000 standard cubic feet per hour and rated to 580 psig.



**-192°C\* Liquid Nitrogen Freezers**

The XC and SC series are designed for the user who has small capacity needs, but requires long-term storage and low liquid nitrogen consumption in a convenient lightweight package. By integrating features that users have requested with the widest variety of holding times and storage capacities, MVE Aluminum Freezers are the units of choice.

**Accessories:**

- Caster Base
- Canister
- Spare Corks
- Level Stick
- Transfer Hose
- Phase Separator
- Square Racks (47/11-6 only)
- Liquid Level Alarm
- Plastic Boxes
- Freezing Tray (34/18 and 47/11-6 only)
- Vapor Inserts

*\* Actual temperature may be ±10°C depending on current atmospheric condition, container history and actual product being stored.*



# XC Series Specifications

## SPECIFICATIONS

MODEL	XC Millennium									
	20	XC 2116	XC 2215	XC 328	XC 3322	XC 3418	XC 4328	XC 4711-6SQ	XC 4711-6	XC 4711-10
<b>Max. Storage Capacity</b>										
No. of canisters	6	9	6	9	6	6	6	6	6 sq.	6
No. of 1/2 cc straws (10/cane)	720	-	2,400	2,520	1,280	2,100	1,260	-	4,500	3,500
No. of 1/2 cc straws (1 Level/Bulk)	1,122	3,870	3,666	3,960	1,764	3,000	1,764	-	6,216	5,000
No. of 1.2 & 2.0 ml vials (5/cane)	210	-	810	855	360	630	360	-	1,320	1,050
No. of Racks (25 Vials)	-	-	-	-	-	-	-	-	750	-
<b>Performance</b>										
Liquid nitrogen capacity (liters)	20.5	21	22.4	32	33.4	34.8	42.2	47.4	47.4	47.4
Static evaporation rate (liters/day)*	0.095	0.35	0.35	0.35	0.14	0.18	0.14	0.39	0.39	0.39
Normal working duration (days)**	135	53	40	57	154	123	193	76	76	76
<b>Unit Dimensions</b>										
Neck opening (in)	2.18	3.5	3.81	3.81	2.75	3.5	2.75	5	5	5
Overall height (in)	25.7	17.2	22	21.5	26	26.6	26.4	26.5	26.5	26.5
Outside diameter (in)	14.5	18.2	14.5	18.2	18.2	18.25	20	20	20	20
Canister height (in)	11	5	11	11	11	11	11	-	11	11
Canister diameter (in)	1.65	2.75	3.09	2.62	2.22	2.81	2.22	-	4	2.81
Weight empty (lbs)	23	30	26	30	34	34	36	42	42	42
Weight full (lbs)	59.5	62.5	66	87	94	96	111	120.4	120.4	120.4

\* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

\*\* Normal working duration is an arbitrary reference to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.

# SC Series Specifications

## SPECIFICATIONS

MODEL	SC									
	SC 21	SC 3/3	SC 8/5	SC 11/7	SC 16/11	Millennium 20	SC 20/20	SC 33/26	SC 36/32	SC 36/32
<b>Max. Storage Capacity</b>										
No. of canisters	1	6	6	6	9	6	6	6	6	6
No. of 1/2 cc straws (10/cane)	-	-	-	720	-	540	540	540	540	540
No. of 1/2 cc straws (1 Level/Bulk)	88	1122	1122	1122	1098	780	780	780	780	780
No. of 1.2 & 2.0 ml vials (5/cane)	-	-	-	210	-	150	150	150	150	150
<b>Performance</b>										
Liquid nitrogen capacity (liters)	2.2	3.6	8.4	11	16.4	20.5	20.5	33	36.5	36.5
Static evaporation rate (liters/day)*	0.14	0.13	0.15	0.16	0.14	.095	0.09	0.13	0.10	0.10
Normal working duration (days)**	10	17	35	43	74	135	142	182	224	224
<b>Unit Dimensions</b>										
Neck opening (in)	1.4	2.18	2.18	2.18	2.18	2.18	2	2	2	2
Overall height (in)	13.5	16	18.5	21.6	17.5	25.7	25.7	25.9	27.2	27.2
Outside diameter (in)	7.25	8.7	10.2	10.2	17.2	14.5	14.5	18.2	18.2	18.2
Canister height (in)	5	5	5	11	5	11	11	11	11	11
Canister diameter (in)	1.2	1.65	1.65	1.65	1.5	1.5	1.5	1.5	1.5	1.5
Weight empty (lbs)	4.5	8	12	17	14	23	26	34	34	34
Weight full (lbs)	8.2	14.4	27	36.6	43	59.5	62.5	98.4	98.4	100

\* Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

\*\* Normal working duration is an arbitrary reference to estimate container performance under normal operating conditions. Actual working time may vary due to current atmospheric conditions, container history, manufacturing tolerances and any individual patterns of use.





## Liquid Nitrogen Storage Container

The Lab Series of cryogenic dewars earned their name from their worldwide acceptance in laboratories and medical offices. These high-efficiency, super-insulated dewars are the most convenient, economical way to store and dispense liquid nitrogen. Many lab units can be fitted with pouring spouts, pressurized dispensing devices or dippers to aid in the transfer of liquid nitrogen.

### Accessories:

- Transfer Hose
- Swivel Dipper
- Pressurized Discharge Device
- Phase Separator
- Dipper
- Caster Base
- Pouring Spout
- Spare Corks

### Cryo-Cyl Series

Cryo-Cyl units can be used to supply liquid through a transfer hose to your application. A convenient pressure and liquid level gauge monitors the operation of the cylinder.

### SPECIFICATIONS

Model	LAB 4	LAB 5	LAB 10	LAB 20	LAB 30	LAB 50	SS 5L TRANSFER UNIT
Net Capacity (liters)	4	5	10	20	32	50	5
<b>Performance</b>							
Static Evaporation Rate (liters/day)	0.19	0.15	0.18	0.18	0.22	0.49	N/A
<b>Unit Dimensions</b>							
Neck opening (in)	1.4	2.18	2.18	2.18	2.5	2.5	6
Usable height (in)	7.8	10.5	13.5	13.7	14.9	22	14
Overall height (in)	16.8	18.2	21.5	24.5	24	30.5	16.5
Outside diameter (in)	7.3	8.8	10.3	14.5	17	17	8
Internal diameter (in)	5.5	6.5	8.3	11.4	14	14	6
Weight empty (lbs)	6	8	12	19	25	31	11
Weight full (lbs)	13	17	31	55	82	120	20



MVE CryoShipper QWick Series utilizes an absorbent wicking material that charges with liquid nitrogen in fewer than two hours, providing the capacity for same-day vapor shipping. Manufactured from durable, lightweight aluminum, they employ a hydrophobic compound which absorbs the liquid nitrogen to ensure dry, spill-free shipping.

Protective shipping cartons are available. These containers may be used to ship your samples with a “nonhazardous” classification throughout the world, thus reducing shipping costs and helping to assure sample viability. Equipped with the same capacity and dimensions as the comparable MVE Vapor Shipper Series.

**Features Include:**

- CHARGES IN LESS THAN TWO HOURS
- Protective shipping carton to ensure upright shipping
- Low liquid nitrogen consumption
- Convenient lightweight packages

**SPECIFICATIONS**

CryoShipper Models	QWick 6/9	QWick 10/100	QWick 14/48	QWick 62/180	QWick 14/24	QWick 9/500	QWick 10/950
Comparable To	SC 2/1 V	SC 4/2 V	SC 4/3 V	SC 20/12V	MiniMoover	CryoShipper	CryoShipper
<b>Maximum Storage Capacity</b>							
No. of canisters	1	1	1	6	1	1	1
No. of 1/2 cc straws (10/cane)	-	280	120	540	60	-	-
No. of 1/2 cc straws (1 Level Bulk)	88	440	210	780	88	4,354	-
No. of 1/4 cc straws (1 Level Bulk)	182	938	452	1,630**	8,904	-	-
No. of 1.2 & 2.0 ml vials (5/cane)	-	95	40	150	20	-	-
No. of 1.2 & 2.0 ml vials (6/cane)	9***	106	48	180	24	500	966 (Bulk)
No. of blood bag stored (4FR9953)	-	-	-	-	-	10	10
<b>Performance</b>							
Liquid nitrogen capacity (liters)	1.5	3.6	4.3	12.3	2.9	8.5	10
Static evaporation rate* (liters/day)	0.16	0.26	0.20	0.09	0.16	0.80	0.70
Static holding time (days)	6	10	14	62	14	9	10
<b>Unit Dimensions</b>							
Neck opening (in)	1.4	2.75	2	2	1.4	8.5	8.5
Overall height (in)	13.5	18.4	19.4	25.7	19.5	21.5	23
Outer diameter (in)	7.2	8.7	8.7	14.5	7.2	14.5	15
Canister height (in)	5	11	11	11	11	-	12.5
Canister diameter (in)	1.2	2.62	1.8	1.5	1.2	-	-
Weight empty (lbs)	6	11	13	25	9	25.5	30
Weight charged (lbs)	8.0	17	20	42	13.0	39.0	48

\*Static evaporation rate and static holding time are nominal. Actual rate and holding time will be affected by the nature of container use, atmospheric conditions, and manufacturing tolerances.

\*\*With center absorbent canister (3 week holding time)

\*\*\*Stored on three half cans

## Technical Features

The Carbo-Mizer® 200 system is designed to meet the needs of consumers who use less than 200 lbs of CO<sub>2</sub> per month. Beverage providers who once thought their usage was too small for bulk CO<sub>2</sub> can now enjoy increased fountain profits, enhanced beverage quality, added safety and a continuous flow of CO<sub>2</sub>. Features of the Carbo-Mizer 200 product include:



- 38.625" height allows it to fit under most counters
- Easy-to-read gauges for CO<sub>2</sub> contents and tank pressure
- Fully automatic system requires no electricity
- Versatility offers both permanent and portable installation
- Safe, low operating pressure
- Proprietary vacuum-regeneration system for convenient on-site maintenance
- Stainless steel, double-walled, vacuum insulated container

SPECIFICATIONS	CARBO-MIZER 200	
<b>Dimensions</b>		
Diameter	(in)	20
Height	(in)	38.625
Empty Weight	(lbs)	154
Full Weight	(lbs)	341
<b>Design Criteria</b>		
Code		ASME**
MAWP	(psig)	300
Insulation type		Super Insulation/High Vacuum
<b>Capacity</b>		
Net Volume	(gal)	20
Liquid Storage Capacity at 125 psig	(lbs)	187
<b>Performance</b>		
Normal Evaporation Rate (NER)*	(lbs/day)	1.2
Continuous CO <sub>2</sub> Delivery Rate	(lbs/hr)	.75
Peak Flow Rate	(lbs/hr)	1.5
<b>Components</b>		
ASME Relief Valve Setting	(psig)	300
Secondary RV Setting	(psig)	450
Gas Use Connection	(in)	1/4 45° Flare
Fill Line Connection	(in)	5/8 Male 45° Flare
Vent Connection	(in)	1/2 OD Tubing
<b>Construction</b>		
Inner Vessel Material		Stainless Steel
Outer Vessel Material		Stainless Steel
Liquid Level Gauge		Float/Magnetic
* No loss in normal applications		
**ASME Boiler and Pressure Vessel Design Section VIII, Div. I		

## Technical Features

The Carbo-Mite 220 is a new generation bulk liquid CO<sub>2</sub> storage container designed for the small 20/50 lb. high-pressure cylinder user. The revolutionary design and construction of the Carbo-Mite provides all the benefits of bulk storage with no gas losses between refills up to six months apart.\*



- Safe, low operating pressure
- Enhanced drink quality
- Added back room security
- Eliminate changing high-pressure cylinders
- Eliminate running out of CO<sub>2</sub> during peak rush periods
- Peak flow rate: 1.5 lbs/hr
- Indoor or outdoor installation

\* Minimum account size CO<sub>2</sub> use: 1.0 lbs/day

SPECIFICATIONS	CARBO-MITE 220
<b>Dimensions</b>	
Diameter (in)	20
Height (in)	40
Empty Weight (lbs)	156
Full Weight (lbs)	377
<b>Design Criteria</b>	
Code	ASME*
MAWP (psig)	300
Insulation type	Super Insulation/High Vacuum
<b>Capacity</b>	
Net Volume (gal)	25.5
Liquid Storage Capacity at 200 psig (lbs)	221
<b>Performance</b>	
Normal Evaporation Rate (NER)* (lbs/day)	1.0
Continuous CO <sub>2</sub> Delivery Rate (lbs/hr)	1.0
Peak Flow Rate (lbs/hr)	1.5
<b>Components</b>	
ASME Relief Valve Setting (psig)	300
Gas Use Connection (in)	1/4 45° Flare
Fill Line Connection (in)	5/8 Male 45° Flare
Vent Connection (in)	1/2 OD Tubing
<b>Construction</b>	
Inner Vessel Material	Stainless Steel
Outer Vessel Material	Stainless Steel
Liquid Level Gauge	Roto-Tel**
*ASME Boiler and Pressure Vessel Design Section VIII, Div. 1	
**Telemetry Ready	

## Technical Features

The Carbo-Mizer® 300 Bulk CO<sub>2</sub> System is an affordable alternative to high-pressure cylinders. This system is designed to meet the requirements of operations using less than 299 pounds of CO<sub>2</sub> per month. Other features include:

- Stainless steel, double-walled, vacuum insulated container
- Proprietary vacuum maintenance system for convenient, on-site maintenance
- Safe, low operating pressure
- Easy-to-read gauges for CO<sub>2</sub> contents and tank pressure
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas in excess of 3 pounds per hour
- Fully automated system requiring no electricity
- Optional 6" welded uni-body legs



SPECIFICATIONS		CARBO-MIZER 300
<b>Dimensions</b>		
Diameter	(in)	20
Height (with legs) <sup>®</sup>	(in)	55.625
Empty Weight	(lbs)	216
Full Weight	(lbs)	515
<b>Design Criteria</b>		
Code		ASME**
MAWP	(psig)	300
Insulation type		Super Insulation/High Vacuum
<b>Capacity</b>		
Net Volume	(gal)	32
Liquid Storage Capacity at 125 psig	(lbs)	299
<b>Performance</b>		
Normal Evaporation Rate (NER)*	(lbs/day)	2.0
Continuous CO <sub>2</sub> Delivery Rate	(lbs/hr)	1.0
Peak Flow Rate	(lbs/hr)	3.0
<b>Components</b>		
ASME Relief Valve Setting	(psig)	300
Secondary RV Setting	(psig)	450
Gas Use Connection	(in)	1/4 45° Flare
Fill Line Connection	(in)	5/8 Male 45° Flare
Vent Connection	(in)	1/2 OD Tube
<b>Construction</b>		
Inner Vessel Material		Stainless Steel
Outer Vessel Material		Stainless Steel
Liquid Level Gauge		Differential Pressure
<sup>®</sup> Height without legs, subtract 6 in * No loss in normal applications **ASME Boiler and Pressure Vessel Design Section VIII, Div. I		



## Technical Features

The Carbo-Mizer® 450 Bulk CO<sub>2</sub> System is designed to meet all of your CO<sub>2</sub> gas requirements. One tank provides continuous CO<sub>2</sub> supply for single or multiple applications. Other features include:

- Stainless-steel, double-walled, vacuum-insulated container
- Proprietary vacuum regeneration system for convenient, on-site maintenance
- Optional 6" welded uni-body legs allow for easy cleaning around unit
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas up to 10 pounds per hour
- Easy-to-read gauges for contents and tank pressure
- Safe, low operating pressure
- Fully automated system requiring no electricity

SPECIFICATIONS	CARBO-MIZER 450	
<b>Dimensions</b>		
Diameter	(in)	20
Height (with legs) <sup>®</sup>	(in)	71.875
Empty Weight	(lbs)	273
Full Weight	(lbs)	750
<b>Design Criteria</b>		
Code		ASME**
MAWP	(psig)	300
Insulation type		Super Insulation/High Vacuum
<b>Capacity</b>		
Net Volume	(gal)	48
Liquid Storage Capacity at 125 psig	(lbs)	477
<b>Performance</b>		
Normal Evaporation Rate (NER)*	(lbs/day)	2.5
Continuous CO <sub>2</sub> Delivery Rate	(lbs/hr)	5.5
Peak Flow Rate	(lbs/hr)	10.0
<b>Components</b>		
ASME Relief Valve Setting	(psig)	300
Secondary Relief Valve Setting	(psig)	450
Gas Use Connection	(in)	1/4 45° Flare
Fill Line Connection	(in)	5/8 Male 45° Flare
Vent Connection	(in)	1/2 OD Tube
<b>Construction</b>		
Inner Vessel Material		Stainless Steel
Outer Vessel Material		Stainless Steel
Liquid Level Gauge		Differential Pressure
<sup>®</sup> Height without legs, subtract 6 in <sup>*</sup> No loss in normal applications <sup>**</sup> ASME Boiler and Pressure Vessel Design Section VIII, Div. I		



## Technical Features

The Carbo-Mizer® 550 Bulk CO<sub>2</sub> System is designed to meet all of your CO<sub>2</sub> gas requirements. One tank provides continuous CO<sub>2</sub> supply for single or multiple applications. Other features include:

- Stainless-steel, double-walled, vacuum-insulated container
- Proprietary vacuum regeneration system for convenient, on-site maintenance
- Patented CO<sub>2</sub> impurity removal system
- Optional 6" uni-body legs allow for easy cleaning around unit
- Efficient gas-withdrawal system supplies CO<sub>2</sub> gas up to 10 pounds per hour
- Easy-to-read gauges for contents and tank pressure
- Safe, low operating pressure
- Fully automated system requiring no electricity

SPECIFICATIONS	CARBO-MIZER 550
<b>Dimensions</b>	
Diameter (in)	22
Height (with legs) <sup>®</sup> (in)	72.9
Empty Weight (lbs)	318
Full Weight (lbs)	902
<b>Design Criteria</b>	
Code	ASME**
MAWP (psig)	300
Insulation type	Super Insulation/High Vacuum
<b>Capacity</b>	
Net Volume (gal)	62
Liquid Storage Capacity at 125 psig (lbs)	584
<b>Performance</b>	
Normal Evaporation Rate (NER)* (lbs/day)	2.5
Continuous CO <sub>2</sub> Delivery Rate (lbs/hr)	6.5
Peak Flow Rate (lbs/hr)	10.0
<b>Components</b>	
ASME Relief Valve Setting (psig)	300
Secondary Relief Valve Setting (psig)	450
Gas Use Connection (in)	<sup>1</sup> / <sub>4</sub> 45° Flare
Fill Line Connection (in)	<sup>5</sup> / <sub>8</sub> Male 45° Flare
Vent Connection (in)	<sup>1</sup> / <sub>2</sub> OD Tube
<b>Construction</b>	
Inner Vessel Material	Stainless Steel
Outer Vessel Material	Stainless Steel
Liquid Level Gauge	Differential Pressure
<sup>®</sup> Height without legs, subtract 6 in <sup>*</sup> No loss in normal applications <sup>**</sup> ASME Boiler and Pressure Vessel Design Section VIII, Div. I	



The Carbo-Mizer 750 bulk CO<sub>2</sub> system is an affordable alternative to high-pressure cylinders. This system offers flow rates that meet the demands of high-volume applications.

Each Carbo-Series vessel is equipped with a proprietary vacuum maintenance system to ensure optimized long-term performance. Unique to the market, this feature offers greater efficiency over longer periods of time.

A unique feature of this vessel's construction is its liquid withdrawal port, making high flow liquid CO<sub>2</sub> readily available.

## Technical Features

- Stainless-steel, double-walled, vacuum-insulated container
- Proprietary vacuum-regeneration system for convenient, on-site maintenance
- Optional patented Sure-Fill System enables tank filling with no manual venting
- Safe, low-operating pressure
- Stable 6" uni-body legs meet health department sanitation requirements
- Easy-to-read gauges for CO<sub>2</sub> contents and tank pressure
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas up to 15 pounds per hour

SPECIFICATIONS		CARBO-MIZER 750
<b>Dimensions</b>		
Diameter	(in)	26
Height (with legs) <sup>®</sup>	(in)	73.875
Empty Weight	(lbs)	430
Full Weight	(lbs)	1,219
<b>Design Criteria</b>		
Code		ASME**
MAWP	(psig)	300
Insulation Type		Super Insulation/High Vacuum
<b>Capacity</b>		
Net Volume	(gal)	82
Liquid Storage Capacity at 125 psig	(lbs)	789
<b>Performance</b>		
Normal Evaporation Rate (NER)*	(lbs/day)	3.0
Continuous CO <sub>2</sub> Delivery Rate	(lbs/hr)	10.0
Peak Flow Rate	(lbs/hr)	15.0
<b>Components</b>		
ASME Relief Valve Setting	(psig)	300
Secondary RV Setting	(psig)	450
Gas Use Connection	(in)	<sup>1</sup> / <sub>4</sub> 45° Flare
Fill Line Connection	(in)	<sup>5</sup> / <sub>8</sub> Male 45° Flare
Vent Connection	(in)	<sup>1</sup> / <sub>2</sub> OD Tube
<b>Construction</b>		
Inner Vessel Material		Stainless Steel
Outer Vessel Material		Stainless Steel
Vaporizer Coil		Stainless Steel
Liquid Level Gauge		Differential Pressure
<sup>®</sup> Height without legs, subtract 6 in * No loss in normal application **ASME Boiler and Pressure Vessel Design Section VIII, Div. I		





The Carbo-Max 750 High Flow container is designed to meet the CO<sub>2</sub> gas requirements for high-flow applications. The Carbo-Max 750 product features a proprietary, internal, stainless-steel vaporizer that provides superior CO<sub>2</sub> gas delivery at a rate of over 15 lbs. per hour.

## Technical Features

- Stainless-steel, double-walled, vacuum-insulated container
- Proprietary vacuum-regeneration system for convenient, on-site maintenance
- Optional patented Sure-Fill System enables tank filling with no manual venting
- Safe, low-operating pressure
- Stable 6" uni-body legs meet health department sanitation requirements
- Easy-to-read gauges for CO<sub>2</sub> contents and tank pressure
- CO<sub>2</sub> liquid withdrawal system with built in vaporization coil allows for higher maximum flow rates up to 40 pounds per hour

SPECIFICATIONS		CARBO-MAX 750
<b>Dimensions</b>		
Diameter	(in)	26
Height (with legs) <sup>®</sup>	(in)	73.875
Empty Weight	(lbs)	430
Full Weight	(lbs)	1,219
<b>Design Criteria</b>		
Code		ASME***
MAWP	(psig)	300
Insulation Type		Super Insulation/High Vacuum
<b>Capacity</b>		
Net Volume	(gal)	82
Liquid Storage Capacity at 125 psig	(lbs)	789
<b>Performance</b>		
Normal Evaporation Rate (NER)*	(lbs/day)	3.0
Continuous CO <sub>2</sub> Delivery Rate	(lbs/hr)	15.0
Peak Flow Rate**	(lbs/hr)	40.0
<b>Components</b>		
ASME Relief Valve Setting	(psig)	300
Secondary RV Setting	(psig)	450
Gas Use Connection	(in)	1/4 45° Flare
Fill Line Connection	(in)	5/8 Male 45° Flare
Vent Connection	(in)	1/2 OD Tube
<b>Construction</b>		
Inner Vessel Material		Stainless Steel
Outer Vessel Material		Stainless Steel
Vaporizer Coil		Stainless Steel
Liquid Level Gauge		Differential Pressure
<p><sup>®</sup> Height without legs, subtract 6 in</p> <p>* No loss in normal application</p> <p>** Can achieve flows up to 40 lb/hr, for 12 hours continuous use. At these higher flow rates, gas supply temperatures from the tank will be lower than freezing (32°F). Additional external vaporization should be added to achieve gas temperatures above freezing (32°F).</p> <p>***ASME Boiler and Pressure Vessel Design Section VIII, Div. I</p>		



The Carbo-Max 1000 High Flow container is designed to meet the CO<sub>2</sub> gas requirements for high-volume customers. The Carbo-Max 1000 product features a proprietary, internal, stainless-steel vaporizer that provides superior CO<sub>2</sub> gas delivery at a rate of over 30 lbs. per hour.

## Technical Features

- Internal vaporization coils with continuous flow rates up to 30 lbs/hr
- Internal pressure build coil
- 1000 lbs of CO<sub>2</sub> storage capacity
- Standard tank includes Sure-Fill system
- 30" diameter x 72" height allows tank to fit through standard doorways
- Pallet jack compatible base
- Differential Pressure liquid level gauge

SPECIFICATIONS	CARBO-MAX 1000
<b>Dimensions</b>	
Diameter (in)	30
Height (in)	72.5
Empty Weight (lbs)	788
Full Weight (lbs)	1,788
<b>Design Criteria</b>	
Code	ASME*
MAWP (psig)	300
Insulation Type	Super Insulation/High Vacuum
<b>Capacity</b>	
Net Volume (gal)	118
Liquid Storage Capacity at 125 psig (lbs)	1000
<b>Performance</b>	
Normal Evaporation Rate (NER)* (lbs/day)	3.0
Continuous CO <sub>2</sub> Delivery Rate** (lbs/hr)	30.0
Peak Flow Rate** (lbs/hr)	50.0
<b>Components</b>	
ASME Relief Valve Setting (psig)	300
Secondary RV Setting (psig)	450
Sure-Fill RV Setting (psig)	200
Gas Use Connection (in)	1/4 45° Flare
Fill Line Connection (in)	5/8 Male 45° Flare
Vent Connection (in)	1/2 OD Tube
<b>Construction</b>	
Inner Vessel Material	Stainless Steel
Outer Vessel Material	Stainless Steel
Vaporizer Coil	Stainless Steel
Liquid Level Gauge	Differential Pressure
*ASME Boiler and Pressure Vessel Design Section VIII, Div. I	
** 12 consecutive hours at room temperature	

The VLCD bulk CO<sub>2</sub> delivery system is an affordable alternative for transporting liquid CO<sub>2</sub>. Ideal for start-up installations, hot shot deliveries and remote operations, the VLCD provides easy delivery to Chart bulk CO<sub>2</sub> systems. The system is mounted in a secure mobile pallet base with all the interconnecting piping and controls that are easily accessible by the driver. Heat management of the liquid CO<sub>2</sub> is controlled with a vacuum-insulated jacket for long hold times in periods of non-use and external pressure building systems for fast pressurerecovery.


*\*Optional: Small accurate deliveries are performed with our exclusive FlowCom<sup>®</sup> meter system and a convenient ticket printer.*



Specifications	950		1900	
Capacity	950 lbs	431 kg	1,900 lbs	864 kg
<b>Design Criteria</b>				
MAWP	350 psig	24 barg	350 psig	24 barg
<b>Dimensions</b>				
Length	43 in	1,092 mm	65 in	1,651 mm
Width	34 in	864 mm	46 in	1,168 mm
Height	71.25 in	1,810 mm	77 in	1,956 mm
Tare Weight	1,150 lbs	522 kg	2,350 lbs	1,066 kg
Full Weight	2,180 lbs	989 kg	4,250 lbs	1,932 kg

## CO<sub>2</sub> Monitor System

The Analox 50™ is a precision instrument that provides continuous, accurate monitoring of CO<sub>2</sub> levels to ensure a safe working environment for your employees, suppliers and yourself. A proven system with over 80,000 units installed worldwide. The Chart/Analox CO<sub>2</sub> Monitoring System is comprised of one detector (with visual and audible alarms) and one alarm repeater for remote mounting. Additional accessories are available including an extension repeater, detector protector, detector splashguard and wearable protector.



**ANALOX**  
holding after the air YOU breathe!

## Product Advantages

- Relay on Alert 1 - Leak Alert (Set at 1.5% CO<sub>2</sub>)
- Relay on Alert 2 - No Entry Alert (Set at 3% CO<sub>2</sub>)
- Bright 10 LED visual and loud 80 dB audible alarms
- Detector housing designed to withstand splash environments (IP 65)
- 15 year CO<sub>2</sub> sensor warranty, 2 year electronics warranty
- Plug-in cables for fast and easy installation

## VaporMan 125

VaporMan 125 is a CO<sub>2</sub> vaporizer and manifold combination intended for use with the Carbo-Max series Beverage Systems tanks and CO<sub>2</sub> configured Perma-Cyl® tanks. The VaporMan 125 consists of one 2 fin parallel style vaporizer and one 2 fin series style vaporizer, connected together. The unit also includes a manifold for connecting a single tank or multiple tanks in pairs. The vaporizers and manifold are mounted to a stainless steel pedestal, which is attached to a 27" x 27" x 3/8" stainless steel base plate.



## Product Advantages

- Compact design, less than 2-1/2 ft square and 4 feet tall
- Cost effective, compared to larger traditional ambient vaporizers
- Easy to attach to bulk CO<sub>2</sub> tanks, using the manifold connections

## Liquid Nitrogen Dosing Systems

Extend product shelf life and improve package integrity with our liquid nitrogen (LN<sub>2</sub>) dosing systems. Designed for easy interchangeability to various packaging lines, our dosers provide continuous operation at all fill speeds, including high speed lines. Engineered options are available to meet your packaging specifications.

### CryoDoser®

The CryoDoser is the premier liquid nitrogen (LN<sub>2</sub>) dosing system utilizing advanced cryogenic technology and PLC programming. Three sensors detecting line speed, timing, and bottle presence allow the system to detect all line speeds, including high speeds, to dispense a precise dose of LN<sub>2</sub> into every container every time.



### UltraDoser®

The UltraDoser is the multi-purpose liquid nitrogen (LN<sub>2</sub>) dosing system utilizing advanced cryogenic technology and PLC programming. Chart engineers designed an ultra-efficient system for low to medium production line speeds to dispense a precise dose of LN<sub>2</sub> into every container every time. The LN<sub>2</sub> gasifies and is either trapped in the container to add rigidity or escapes with oxygen to inert the headspace.



### Inerter™

The Inerter is a large volume liquid nitrogen (LN<sub>2</sub>) dosing system for full container and high-volume headspace inerting applications. Chart engineers designed an ultra-efficient system to dispense a precise dose of LN<sub>2</sub> into every container every time to displace the oxygen in the container.



[www.chartdosers.com](http://www.chartdosers.com)

100

## Dosing Systems Specifications / AseptiDoser™

	Small		Large		Large	
	Small	Large	Small	Large	Small	Large
Package/Container	Small	Large	Small	Large	Small	Large
LN <sub>2</sub> Volume/Head Space	Small	Large	Small	Large	Small	Large
Body	Small	Large	Small	Large	Small	Large
Arm/Head Type	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
Quick Service Auto Defrost	Yes	Yes	Yes	Yes	Yes	Yes
Head Pressure	0.9 psi	0.45 psi	0.45 psi	0.45 psi	≥3 psi	≥3 psi
Controller	Yes	Yes	Yes	Yes	Yes	Yes
Discrete Dosing (cpm)	2000	2000	500	2000	500	150
Dose Duration (ms)	5.5-1000	5.5-1000	15-1000	15-1000	15-1000	10-1000
PLC Platform	Allen-Bradley or Siemens	Allen-Bradley or Siemens	Siemens	Allen-Bradley or Siemens	Siemens	Siemens
Encoder Compatible	Yes	Yes	Option	Option	Option	Option
Line Speed Auto Detect	Yes	Yes	Yes	Yes	Yes	Yes
Electronic Dose Targeting	Yes	Yes	Yes	Yes	Yes	Yes
Fixed Delay Mode	Yes	Yes	Yes	Yes	Yes	Yes
Container Speed Comp. Mode	Yes	Yes	Yes	Yes	Yes	Yes
Multiple Languages	Yes	Yes	Yes	Yes	Yes	Yes
Ethernet Ready	Yes	Yes	Yes	Yes	Yes	Yes
Recipe Storage	Yes	Yes	Yes	Yes	Yes	Yes
MicroDose™ Tech (Page 4)	Yes	Yes	Yes	Yes	Yes	Yes
InertilDose™ Technology	Yes	Yes	Option	Option	Option	Option
RemoteDose™ Web Tech.	Option	Option	Option	Option	Option	Option
SoftDose™ Technology	Option	Option	Option	Option	Option	Option

### AseptiDoser™

The AseptiDoser is the premier multi-head LN<sub>2</sub> system for aseptic packaging. Chart engineers designed an ultra-efficient system to reduce the sterilization time and nitrogen consumption by 50%.



101

MVIP™ Pro accommodates pressures up to 150 psi and is suitable for liquid nitrogen (LN<sub>2</sub>), liquid argon (LAR) and liquefied natural gas (LNG) applications.

The MVIP™ Pro system offers pre-engineered standard modular sections for flexible configuration and easy, low-cost installation. Bayonet connections eliminate the need for cutting or field welding. Modules can be reused and reconfigured if your facility layout changes or expands. Internal bellows offer improved protection while accommodating a greater than 400°F temperature differential between the interior and exterior.

### Modules Available

- Straight modules
- Flex modules
- Valve modules
- Cryovent modules
- Drop modules or Gas Traps
- Adapter modules
- (2) Tee modules (F x M x M) and (F x M x F)
- Elbow modules
- Bayonet connections to adapt to any existing VIP system



MVIP Python® accommodates pressures up to 400 psi and is suitable for liquid nitrogen (LN<sub>2</sub>), liquid argon (LAR), liquid carbon dioxide (LCO<sub>2</sub>) and liquefied natural gas (LNG) applications. MVIP Python® is ideal for highly temperature-sensitive piping systems found in the petrochemical, energy, manufacturing, and food and beverage industries around the world, and is an excellent choice for liquid CO<sub>2</sub> applications.

The MVIP Python® system offers lower-cost, pre-engineered standard modular sections for flexible configuration. Connections are field welded, and the modules can be reused by cutting and welding. Exterior bellows offer improved flow and reduced pressure drop while accommodating up to 400°F temperature differential. Design your own system with the online Python® Pick List. Knowledgeable Inside Sales staff is available for consultation.

### Modules Available

- Straight modules
- Flex modules
- Valve module kit
- Cryovent modules
- Adapter modules
- Tee module kit
- Elbow module kit
- Straight insulation kit
- End transitions are standard butt weld joints for the inner pipe



## MVIP™ Select

To meet complex application requirements, MVIP™ Select offers custom engineered, built-to-order vacuum insulated pipe systems. Chart's experienced staff is available to guide you through design and price trade-offs to create your best total value while meeting precise system requirements.

Chart's staff can design, build and install cryogenic system solutions of all levels of complexity. Sales engineers, field technicians, customer service representatives, project managers, project engineers, staff engineers and designers are at your service to create the optimal system to meet your unique specifications and installation needs.

### Five Major Pipe Design Platforms in Stainless Steel or Invar

- Invar
- Internal bellows
- External bellows
- Helium Lines
- Custom Python®



## C-Flex Vacuum Insulated Transfer Hoses

### C-Flex

Super flexible vacuum insulated liquid nitrogen transfer hoses are used in a wide variety of applications including tool connections and custom OEM applications. The coaxial bellowed construction allows for optimal flexibility. The use of lightweight stainless steel reduces cool-down loss to an absolute minimum. C-Flex hoses are protected by a stainless steel braided outer cover

### Features

- Custom Manifolds Available
- High Pressure Requirements
- Minimal Cool Down & Steady State Losses
- Integrated pump out

C-Flex Hose	04	06	08
<b>Inner Diameter (ID)</b>	1/4"	3/8"	1/2"
<b>Outer Diameter (OD)</b>	1.25"	1.65"	1.90"
<b>Minimum Flexible Bend Radius</b>	7"	8"	10"
<b>Minimum Static Bend Radius</b>	5"	6"	8"
<b>Maximum Operating Pressure</b>	150 psi	150 psi	150 psi


C-Flex hoses are available in standard lengths of 4', 6', 8', 10', 12', 16' and 20'. Custom lengths are available



# Cryogenic Piping Systems

- Multi-layer super insulation with vacuum jacket for lowest product loss
- Optional invar inner eliminates expansion bellows
- Accessories for instant liquid at use points
- Reusable bayonet couplings for easy installation and system modifications

## Typical Layout

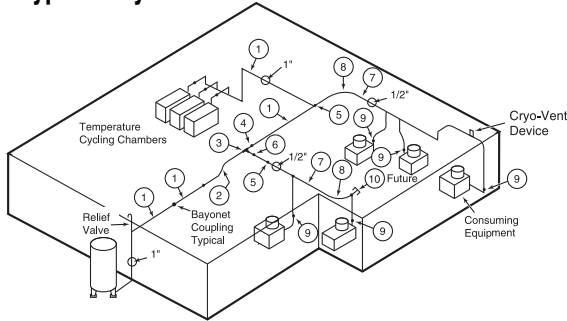

- |   |                          |    |                                       |
|---|--------------------------|----|---------------------------------------|
| 1 | 1" Rigid Section         | 6  | 1/2" Vacuum Jacketed Valve            |
| 2 | 1" Flexible Section      | 7  | 1/2" Rigid Section                    |
| 3 | 1" x 1/2" Reducing Tee   | 8  | 1/2" Flexible Section                 |
| 4 | 1" Vacuum Jacketed Valve | 9  | 1/2" Extended Packing Cryogenic Valve |
| 5 | 1" x 1/2" Reducer        | 10 | 1/2" Capped Bayonet                   |

### Vacuum Insulated Pipe

Customized size and length permits engineering or contractor personnel to design and install a liquid distribution center to fit any application.

### Bayonet Couplings

Provide a positive metal to metal interference fit at cryogenic temperatures. Interchangeable for easy assembly or removal for system expansion.

### Flexible Sections

Protected by stainless steel, interlocking guards to allow direction and elevation change while maintaining structural integrity.

### Accessories

Standard accessories such as the cryovent device to keep the line flooded, phase separator for single phase flow at the use points, and vacuum jacketed or non-jacketed valves provide optimum utilization of cryogenic piping.

# Cryogenic Piping Systems

Specify Chart Vacuum Insulated Pipe (VIP) and System components for state-of-the-art technology, lowest product loss (see chart) and instant liquid at use points. From design assistance and custom manufacturing to installation at your site, Chart provides total cryogenic distribution systems. This single source responsibility assures you of a trouble-free system guaranteed to perform as expected.

### Rigid Engineered-to-Order VIP Construction Details

Inner Pipe Size	Vacuum Jacket Pipe Size	Wt/ft	Cooldown Wt/ft	Heat Leak Btu/hr/ft	Bayonet Heat BTU/hr
1/2"	2"	1.9 lb	0.54 lb	.35	7.5
1"	3"	3.4 lb	0.87 lb	.50	11.8
1-1/2"	3"	4.4 lb	1.28 lb	.67	15.4
2"	3-1/2"	5.2 lb	1.61 lb	.81	17.9
3" +	Consult Factory				


### Flexible Engineered-to-Order VIP Construction Details

SS Inner Flex I.D.	SS Outer Flex I.D.	SS Outer Flex O.D.	Minimum Bend Radius	Weight Per Foot	Cooldown Weight/Foot	Heat Leak BTU hr/ft
1/2" Nom	2" Nom	2.80"	17"	2.75 lb	.45 lb	.50
1" Nom	2-1/2" Nom	3.32"	21"	3.50 lb	1.00 lb	1.00
1-1/2" Nom	3" Nom	3.87"	23"	4.65 lb	2.00 lb	1.35
2" Nom	4" Nom	4.92"	28"	6.00 lb	2.25 lb	1.65
3"+	Consult Factory					

Stainless steel braid cover is standard on the inner flex and optional for the outer vacuum jacket flex.

Chart vacuum insulated pipe utilizes multi-layer super insulation for lowest heat leak. When used to replace copper or conventionally insulated lines, investment payback can be extremely fast.

Custom manufactured sections and flexible piping allow easy system



planning and installation — no special tools are required.

Bayonet couplings provide positive metal-to-metal interference fit at cryogenic temperatures. With these reusable couplings, pipe sections and components can be easily assembled or removed for system modification or expansion.

FLUID	Conversion Data				BTU Total BTU per 10,000 SCFH	Energy Required		
	Std Cu Ft Per GPM	SCFH Per GPM	GPM at 10,000 SCFH to 70°F	Kilo Gasoline		Gals/Hr* Steam	Lbs/Hr** Air	CFM***
Gallon Liq								
Argon	112.5	6800	1.47	36.1	123,000	1.0	115	12,300
CO <sub>2</sub>	74.04	4440	2.25	50.2	171,000	1.39	160	17,100
Helium	100.8	6040	1.655	19.8	67,500	.55	63	6,750
Hydrogen	113.6	6820	1.47	26.4	89,000	.72	84	8,900
Nitrogen	93.11	5600	1.787	39.5	134,400	1.09	126	13,400
Oxygen	115.1	6900	1.45	41.6	142,000	1.15	133	14,200
Nitrous Oxide	89.05	5280	1.895	67.8	231,000	1.88	217	23,100
Propane	42	2520	3.97	62.5	213,000	1.73	200	21,300
Methane	84.82	5090	1.96	47.5	162,000	1.31	152	16,200

\* Calculated at 85% Thermal Efficiency

\*\* Calculated at 100 psig saturated inlet with outlet at 150°F

\*\*\* Calculated at 10° F<sup>-3</sup> thru vaporizer

Length	Multiply units in left column by proper factor below									
	in	ft	yd	mile	mm	cm	m	km		
1 inch	1	0.0633	0.0278	—	25.40	2.540	0.0254	—		
1 foot	12	1	0.3333	—	304.8	30.48	0.3048	—		
1 yard	36	3	1	—	914.4	91.44	0.9144	—		
1 mile	—	5280	1760	1	—	—	1609.3	1.609		
1 millimeter	0.0394	0.0033	—	—	1	0.100	0.001	—		
1 centimeter	0.3937	0.03281	0.0109	—	10	1	0.01	—		
1 meter	39.37	3.281	1.094	—	1000	100	1	0.001		
1 kilometer	—	3281	1094	0.6214	—	—	1000	1		

(1 micron = 0.001 millimeter)



## Area Conversion Factors

Area	Multiply units in left column by proper factor below							
	sq in	sq ft	acre	sq mile	sq cm	sq m	hectare	
1 sq inch	1	0.0069	—	—	6.452	—	—	
1 sq foot	144	1	—	—	929	0.0929	—	
1 acre	—	43,560	1	0.0016	—	4047	0.4047	
1 sq mile	—	—	640	1	—	—	259	
1 sq centimeter	0.1550	—	—	—	1	0.0001	—	
1 sq meter	1550	10.76	—	—	10,000	1	—	
1 hectare	—	—	2471	—	—	10,000	1	

Courtesy of Ingersoll-Rand Company

## Volume Conversion Factors

Volume	Multiply units in left column by proper factor below							
	cu in	cu ft	cu yd	cu cm	cu meter	liter	U.S. gal	imp gal
1 cu inch	1	—	—	16.387	—	0.0164	—	—
1 cu foot	1728	1	0.0370	28,317	0.0283	28.32	7.481	6.229
1 cu yard	46,656	27	1	—	0.7646	764.5	202	168.2
1 cu centimeter	0.0610	—	—	1	—	0.001	—	—
1 cu meter	61,023	35.31	1.308	1,000,000	1	999.97	264.2	220.0
1 liter	61.023	0.0353	—	1000	0.001	1	0.2642	0.2200
1 U.S. gallon	231	0.1337	—	3785.4	—	3.785	1	0.8327
1 Imperial gallon	227.4	0.1605	—	4546.1	—	4.546	1.201	1

Courtesy of Ingersoll-Rand Company

## Weight Conversion Factors

Weight	Multiply units in left column by proper factor below						
	grain	oz	lb	ton	gram	kg	metric ton
1 grain	1	—	—	—	0.0648	—	—
1 ounce	437.5	1	0.0625	—	28.35	0.02835	—
1 pound	7000	16	1	0.0005	453.6	0.4536	—
1 ton	—	32,000	2000	1	—	907.2	0.9072
1 gram	15.43	0.0353	—	—	1	0.001	—
1 kilogram	—	35,274	2,205	—	1000	1	0.001
1 metric ton	—	35,274	2205	1.102	—	1000	1

Courtesy of Ingersoll-Rand Company

## Density Conversion Factors

Density	Multiply units in left column by proper factor below				
	lb/cu in	lb/cu ft	lb/gal	g/cu cm	g/liter
1 pound/cu in	1	1728	231	27.68	27,680
1 pound/cu ft	—	1	0.1337	0.0160	16.019
1 pound/gal	0.00433	7.481	1	0.1198	119.83
1 gram/cu cm	0.03613	62.43	8.345	1	1000
1 gram/liter	—	0.06243	0.008345	0.001	1

Courtesy of Ingersoll-Rand Company

## Pressure Conversion Factors

Pressure	Multiply units in left column by proper factor below							
	lb/sq in	lb/sq ft	int atm	kg/cm <sup>2</sup>	mm Hg @ 32°F	in Hg @ 32°F	ft water at 39.2°F	KPa
1 pound/sq in	1	144	—	0.0703	51.713	2.0359	2.307	6.895
1 pound/sq ft	0.00694	1	—	—	0.3591	0.01414	0.01602	0.0479
1 int atmosphere	14.696	2116.2	1	1.0333	760	29.921	33.9	101.325
1 kilogram/sq cm	14.223	2048.1	0.9678	1	735.56	28.958	32.81	98.06
1 millimeter mercury — (1000 microns) 1 torr (torricell)—	0.0193	2.785	—	—	1	0.0394	0.0446	0.1333
1 inch mercury	0.4912	70.73	0.0334	0.0345	25.400	1	1.133	3.386
1 foot water	0.4335	62.42	—	0.0305	22.418	0.8826	1	2.989
1 kilopascal (0.01 bars 1000 N/sq meters)	.1450	20.89	0.009869	0.01020	7.502	0.3025	0.3346	1

Courtesy of Ingersoll-Rand Company

## Energy Conversion Factors

Energy	Multiply units in left column by proper factor below					
	ft-lb	BTU	g-cal	Joule	kw-hr	hp-hr
1 foot-pound	1	0.001285	0.3240	1.3556	—	—
1 BTU	778.2	1	252.16	1054.9	—	—
1 gram-calorie	3.0860	0.003966	1	4.1833	—	—
1 int Joule	0.7377	0.000948	0.2390	1	—	—
1 int kilowatt-hour	2,655,000	3412.8	860,563	—	1	1.3412
1 horsepower-hour	1,980,000	2544.5	641,700	—	0.7456	1

Courtesy of Ingersoll-Rand Company

Specific Energy	Multiply units in left column by proper factor below				
	absolute Joule/g	Int Joule/g	cal/g	int cal/g	BTU/lb
1 absolute Joule/gram	1	0.99984	0.23901	0.23885	0.42993
1 int Joule/gram	1.000165	1	0.23904	0.23892	0.43000
1 calorie/gram	4.1840	4.1833	1	0.99935	1.7988
1 int calorie/gram	4.1867	4.1860	1.00065	1	1.8000
1 BTU/lb	2.3260	2.3256	0.55592	0.55556	1

Courtesy of Ingersoll-Rand Company

Power (rate of energy use)	Multiply units in left column by proper factor below								
	hp	watt	kw	BTU/min	BTU/hr	ft-lb/sec	ft-lb/min	g-cal/sec	metric hp
1 horsepower	1	745.7	0.7457	42.41	2544.5	550	33,000	178.2	1.014
1 watt	—	1	0.001	0.0569	3.413	0.7376	44.25	0.2390	0.00136
1 kilowatt	1.3410	1000	1	56.88	3412.8	737.6	44,254	239	1360
1 BTU per minute	—	—	—	1	60	12.97	778.2	4.203	0.0239
1 metric hp	0.9863	735.5	0.7355	41.83	2509.6	542.5	32,550	175.7	1

Courtesy of Ingersoll-Rand Company

Refrigeration	Multiply units in left column by factor below					
	BTU (IT)/min	BTU (IT)/hr	kg cal/hr	ton (US) comm	ton (Brit) comm	frigorie/hr
1 ton (US) comm	200	12,000	3025.9	1	0.8966	3025.9
1 ton (Brit) comm	223.08	13,385	3375.2	1.1154	1	3375.2
1 frigorie/hr	0.06609	13,9657	1	0.0003305	0.0002963	1

BTU is Internal Steam Table BTU (IT). 1 frigorie = 1 kg cal (NOT IT).

One ton of refrigeration is the heat required to melt one ton (2000 lbs) of ice at 32°F to water at 32°F during 24 hours.

Courtesy of Ingersoll-Rand Company

## Velocity

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
Feet per minute	0.01136	Miles per hour
	0.01829	Kilometers per hour
	0.5080	Centimeters per second
	0.01667	Feet per second
Feet per second	0.6818	Miles per hour
	1.097	Kilometers per hour
	30.48	Centimeters per second
	0.3048	Meters per second
	0.5921	Knots
Knots	1.0	Nautical miles per hour
	1.6889	Feet per second
	1.1515	Miles per hour
	1.8532	Kilometers per hour
	0.5148	Meters per second
Meters per second	3.281	Feet per second
	2.237	Miles per hour
	3.600	Kilometers per hour
Miles per hour	1.467	Feet per second
	0.4470	Meters per second
	1.609	Kilometers per hour
	0.8684	Knots

## Flow Rate

1 SCFH = .472 liters/minute

## Thermal Conductivity

<u>Multiply</u>	<u>By</u>	<u>To Obtain</u>
BTU/(hr)(ft <sup>2</sup> )(°F/ft)	0.00413	Cal/(sec)(cm <sup>2</sup> )(°C/cm)
	12.0	BTU/(hr)(ft <sup>2</sup> )(°F/in)
	0.0173	Watts/(cm <sup>2</sup> )(°C/cm)

## Temperature

Degrees Fahrenheit = 1.8 (degrees Celsius) + 32

Degrees Kelvin = degrees Celsius = 273.16

Degrees Rankine = degrees Fahrenheit + 459.69

## Temperature Conversion

## Decimal Equivalents

	°K	°C	°F	°R
	0	-273.15	-459.7	0
He .....	4.216	-268.93	-452.1	7.6
	10	-263.15	-441.7	18.0
	20	-253.15	-423.7	36.0
H <sub>2</sub> .....	20.27	-252.88	-423.2	36.5
Ne .....	27.17	-245.98	-410.8	48.9
	30	-243.15	-405.7	54.0
	40	-233.15	-387.7	72.0
	50	-223.15	-369.7	90.0
	60	-213.15	-351.7	108.0
	70	-203.15	-333.7	126.0
N <sub>2</sub> .....	77.395	-195.76	-320.36	139.3
	80	-193.15	-315.7	144.0
Ar .....	87.29	-185.86	-302.55	157.1
	90	-183.15	-297.7	162.0
O <sub>2</sub> .....	90.19	-182.96	-297.33	162.4
	100	-173.15	-279.7	180.0
	110	-163.15	-261.7	198.0
Kr .....	119	-153.25	-243.8	215.9
	120	-153.15	-243.7	216.0
	130	-143.15	-225.7	234.0
	140	-133.15	-207.7	252.0
	150	-123.15	-189.7	270.0
	160	-113.15	-171.7	288.0
Xe .....	164.6	-108.55	-163.4	296.3
	170	-103.15	-153.7	306.0
	180	-93.15	-135.7	324.0
	190	-83.15	-117.7	342.0
	200	-73.15	-99.7	360.0
	210	-63.15	-81.7	378.0
	220	-53.15	-63.7	396.0
	230	-43.15	-45.7	414.0
	240	-33.15	-27.7	432.0
	250	-23.15	-9.7	450.0
	260	-13.15	8.3	468.0
	270	-3.15	26.3	486.0
	280	6.85	44.3	504.0
	290	16.85	62.3	522.0
	300	26.85	80.3	540.0
	310	36.85	98.3	558.0
	320	46.85	116.3	576.0
	330	56.85	134.3	594.0
	340	66.85	152.3	612.0
	350	76.85	170.3	630.0
	360	86.85	188.3	648.0
	370	96.85	206.3	666.0
	380	106.85	224.3	684.0
	390	116.85	242.3	702.0
	400	126.85	260.3	720.0

Boiling points of indicated gases are at one atmosphere pressure.

### Decimal Equivalents

Inch Fractions	Decimal Equivalent	Millimeter Equivalent
1/32	.03125	.794
1/16	.0625	1.588
3/32	.09375	2.381
1/8	.125	3.175
5/32	.15625	3.969
3/16	.1875	4.763
7/32	.21875	5.556
1/4	.250	6.350
9/32	.28125	7.144
5/16	.3125	7.938
3/8	.375	9.525
11/32	.34375	8.731
13/32	.40625	10.319
7/16	.4375	11.113
15/32	.46875	11.906
1/2	.500	12.700
17/32	.52125	13.494
9/16	.5625	14.288
19/32	.59375	15.081
5/8	.625	15.875
21/32	.65625	16.669
11/16	.6875	17.463
23/32	.71875	18.256
3/4	.750	19.050
25/32	.78125	19.844
13/16	.8125	20.638
27/32	.84375	21.431
7/8	.875	22.225
29/32	.90625	23.019
15/16	.9375	23.813
31/32	.96875	24.606

**Absolute Zero**— The lowest temperature attainable. All molecular activity is considered to cease. Its value is -459.7°F (-273.15°C)

**Coefficient of Viscosity**— A measure of the tendency of a fluid to resist shear. The unit for viscosity is the poise which is defined as the resistance (in dynes per square centimeter of its surface) to one layer of fluid to the motion of a parallel layer one centimeter away and with a relative velocity of one cm per second.

**Critical Pressure**— The pressure under which a substance may exist as a gas in equilibrium with the liquid at the critical temperature.

**Critical Temperature**— The temperature above which a gas cannot be liquefied by pressure alone.

**Cryogenics**— The science which involves very low temperatures, usually regarded as below -150°F.

**Density**— Mass per unit volume.

**Dew Point**— The temperature at which liquid first condenses when a vapor is cooled.

**Dielectric Constant**— The specific inductive capacitance of a material. It is equal to the ratio of the capacitances of two condensers of identical size, one using the particular dielectric, the other using air or a vacuum as the dielectric.

**Joule-Thomson Effect**— The change in temperature resulting from expansion of a gas or vapor through an orifice or other restriction. In general, a lowering of temperature or cooling effect is the usual result of such an expansion.

**Latent Heat of Fusion**— The heat required to convert a unit mass of substance from the solid state to the liquid state at a given pressure (and temperature).

**Latent Heat of Sublimation**— The heat required to convert a unit mass of substance from the solid state to the gaseous state.

**Latent Heat of Vaporization**— The heat required to convert a unit mass of substance from the liquid state to the gaseous state at a given pressure (and temperature).

**Liquefied Gases**— Usually applied to the liquid form of substances which under normal conditions of temperature and pressure are found as gases. Liquid oxygen is an example.

**Molecular Weight**— The sum of the atomic weights of all the atoms in a molecule. The atomic weight is the relative weight of the atom, on the basis of carbon isotope C<sup>12</sup>.

**Normal Boiling Point**— The temperature at which a liquid boils when under a total pressure of one atmosphere.

**Normal Sublimation Temperature**— The temperature at which a solid sublimes under a total pressure of one atmosphere.

**Specific Heat**— The ratio of the heat capacity of a body to the heat capacity of water at some reference temperature.

**Specific Gravity**— The ratio of the mass of a body to the mass of an equal volume of air (for gases) at a specified temperature. It is dimensionless. For liquids and solids, it is the ratio of the mass of a body to the mass of an equal volume of water.

**Specific Heat Ratio**— Ratio of specific heat at constant pressure to the specific heat at constant volume at a particular temperature.

**Specific Volume**— The volume occupied by one unit weight of a substance.

**Superconductivity**— The phenomenon by which some substances suddenly lose all electrical resistance when their temperatures are reduced. These transitions occur at temperatures lower than that of liquid hydrogen.

**Thermal Conductivity**— The property of a material that describes the rate at which heat will be conducted through a unit area of material for a given driving force. It is dependent on the material and upon its temperature.

**Triple Point**— The particular condition under which a substance can be present in any or all phases (gaseous, liquid, or solid).

**Vapor Pressure**— The pressure exerted by a vapor in equilibrium with the liquid phase of the same substance.

### Miscellaneous Physical Constants

Constant	Numerical Value	Units
Avogadro's Number . . .	6.0228 x 10 <sup>23</sup>	Molecules/gram mole
Boltzmann Constant . . .	1.38048 x 10 <sup>-16</sup>	Erg/°C
Electronic Charge . . . . .	4.80239 x 10 <sup>-10</sup>	Absolute esu
e . . . . .	2.718282	—
Gas-Law Constant R . . .	1.987	Cal/(gm-mole) (°K) or BTU/(lb-mole) (°K)
	82.05	(cm <sup>3</sup> ) (atm)/(gm-mole) (°K)
	0.08205	(liter) (atm)/(gm-mole) (°K)
	10.731	(ft <sup>3</sup> ) (lb)/(in <sup>2</sup> )(lb-mole) (°R)
	0.7302	(ft <sup>3</sup> ) (atm)/(lb-mole) (°R)
Loge 10 . . . . .	2.30258	—
Mechanical Equivalent of heat . . . . .	4.182	Joule/cal
Pi . . . . .	3.14159*	—
Planck Constant . . . . .	6.6254 x 10 <sup>-27</sup>	erg sec

\* Approximate value, since Pi is an irrational number

### Acknowledgment

Chart thanks AIRCO Welding Products for permission to copy various tables and data from the AIRCO Data Book.





