



2017 CATALOG

New Products



PAGE 6

Bracket for Tablets

(5200-35)

Includes a Ball and Socket Link and a Claw clamp with 1 inch ram ball



PAGE 31

Sliding 360° Prism Kit

(5910-24)

Allows for quick shots in confined line-of-sight situations and for more precise height measurements



(2159-06)

PAGE 37

Precision Traverse Kits

These new Traverse Kits are a high quality, high precision European made product

(2159-07)



PAGE 7

Tablet Shoulder Hook or Harness

(5200-95 and 5200-96)

Provides secure hands-free operation during field use



PAGE 71

Brass Survey Marker

(2183-01 - 2183-06)

Permanent monument markers for survey control points



PAGE 38

Tripod Dolly

(5610-15)

Allows for easy maneuverability of all surveying tripods



PAGE 24

POLE TRANSPORTER

(5125-058)

Reduce your daily effort with this new product designed to save energy and effort in the field



PAGE 60

SECO Class 2 Safety Utility Vest

(8261 Series)

Meets EN 20471:2014 Class 2 specifications

BACK LIGHTED TARGET WITH THREE PHASES

(6400-12-FOR)

Ideal for night surveys, forensics, tunneling, mining or any low-light situations.

PAGE 29




Note on the Flags: All products are available worldwide. The US flag means that the product is shipped from the US warehouse only. The EU flag means that it can also be shipped from our European warehouse.



EVERYTHING YOU WANTED TO KNOW ABOUT QR CODES, BUT WERE AFRAID TO ASK

Quick Response Codes (QR codes) are a type of two-dimensional, matrix-style barcode. Using a camera and an app installed on a smartphone, iPhone or tablet, QR codes link to a web page designed to provide more information and show pictures or a video. Most smartphones or tablets contain pre-loaded QR code reader apps, and there are free ones available through most device's app stores (examples: Android Market, Apple App Store, etc.).



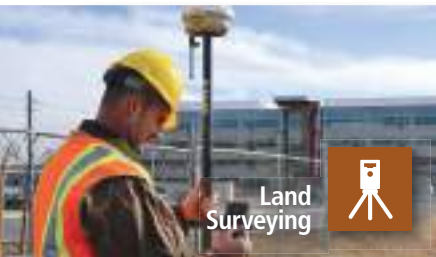

Land Surveying



GNSS



Construction Site Prep




Mining, Tunneling, Monitoring and Rail



Oil and Gas



Agriculture

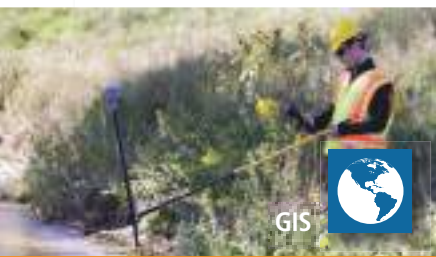

GIS

Section One

GNSS Accessories	6-11
Vehicle Accessories	12-13
Vials and Levels	13

Section Two

Laser Scanner Accessories	14-15
Robotics Applications Accessories	16
Specialty Prism Poles	17-18
Prism Poles and Accessories	19-24
Prism Pole Bipods & Tripods	25

Section Three

Prisms, Assemblies and Pin Pole Kits	27-30
Sliding Prisms and Surveyor Kits	31
Mini Prisms	32
Mining, Tunneling, Monitoring and Rail	32-34

Section Four

Tribrachs and Adapters	34
GeoDesy Products	35-36
Traverse Kits	37
Instrument Tripod and Accessories	38-42

Section Five

Leveling Rods and Accessories	43-46
Magnetic Locators	47
Measuring Rulers and Tapes	48-49
Laser Distance Meters	49
Stream Gauges and Supplies	50-51

Section Six

Hand Levels	51
Optical Instruments	52-53
Construction Lasers and Detectors	54-56
Gopher Pole Wire Installation Tool	56

Section Seven

Column Clamps	57
ANSI/ISEA Class Safety Utility Vests	58-63
Bags and Cases	64-68
Magnetic Nails and Hand Tools	69

Section Eight

Stake Flagging, Tape, Field Markers and Whiskers	70
Miscellaneous Field Supplies	71
Rite in the Rain	72
Notes	73
Index by Part Number	74-75
Index by Category	76-79

SECO Manufacturing – 40 Years of Innovation – 72 Years of Inspiration

SECO Manufacturing Co., today enjoys a worldwide reputation for being on the cutting edge of manufacturing accessories for surveying, construction, utilities and other industries using GPS/GNSS technology. It started as a father-son retail enterprise, more than 70 years ago.

Early beginnings: 1944-1977

The SECO story began in 1944 when Ivan Ogden, a civil engineer for the State of California Division of Highways, developed polio. Prior to his illness, he worked in the San Francisco Bay Area, including a stint as a surveyor on the Bay Bridge. After his illness, Ivan was confined to a wheelchair and unable to return to traditional work, so he began repairing survey transits in his home.

Soon, thereafter, Ivan and his wife, Viola, opened a retail surveying business called Ogden Surveying Equipment Company (OSECO) on Elvas Avenue in Sacramento. It offered instruments, equipment, supplies and services for land surveyors. Following his dad into the business, Paul Ogden opened his first retail store, Surveying Equipment Company (SECO), in Redding, CA in 1965. Over the next 12 years the company opened retail branches in Medford and Bend, Oregon as well as Boise, Idaho.

Manufacturing and Innovation: 1977-2017

In 1977, Paul Ogden established a new corporation, SECO Manufacturing Company, Inc., to focus on manufacturing rather than retail.

This came about through the invention of a new survey technology: the electronic distance measuring (EDM) instrument, which quickly replaced the traditional method of using a steel measuring tape. A survey that once took days or weeks with conventional equipment would now take seconds with the electronic mechanisms. The Ogden retail business sold this new instrument, which was housed in a box-like case that mounted on the telescope of the survey transit (theodolite). The mount was awkward and damaging to the instrument, but there was nothing else available.

Paul started experimenting with adapters and a yoke that would allow the surveyor to mount the distance meter to the standards (sides) of the instrument, thus freeing the telescope to move freely. The production of yoke adapters, as they were then called, would lead the Ogdens into the manufacturing industry.





In 1978, shortly after incorporation as SECO Manufacturing, Paul rented a small exhibit space at a national surveyors trade show and displayed several of his aluminum adapters. By then there were scores of competing EDM instruments on the market and each one had a different contour and configuration where the mount attached. SECO offered adapters for any instrument. The response allowed SECO to drop its retail business and concentrate on manufacturing products for the survey industry, starting with the yoke adapters.

Many things have changed since 1977. The electronic distance measuring box has been replaced with the "total station" which integrates the distance device with the theodolite. This created a need for numerous other accessories such as poles that would hold the glass prism for the distance meter, carrying cases, tripods, etc. The pioneering yoke adapter was officially discontinued in 1995.

The company has continued its tradition of innovation. SECO product managers are known for coming up with solutions for any kind of field requirement for survey, construction, mining and energy industries. It's also become a world-wide supplier of these products, with dealers in almost every continent.

SECO, with corporate headquarters based in Redding, CA, controls all facets of its manufacturing business. The company is vertically integrated, managing the entire process in-house, using its multiple manufacturing facilities. With sites in North America and

Europe, SECO controls the process from design to the manufacturing of goods. The multiple sites also assist in the distribution and service for the products.

In 2013, SECO acquired GeoDesy, a company based in Hungary that is well-known for supplying high-end tribrachs to the survey and construction industries.

Precision manufacturing, quality focus, and skilled workmanship provide consistency to always meet and exceed customers' expectations. SECO's continued goal is to be the best accessories supplier for surveying and construction markets. This ongoing mission will ensure that investing in SECO brand products will remain the smartest investment for productivity and longevity in the field.



In the Field with SECO

Standard and Heavy-Duty GNSS/MC Tripods

Large telescoping legs



FEATURES & BENEFITS

- ▶ 5119-00 version offers dual graduations, collapsible center staff with a screw clamp mechanism and includes removable 5/8 x 11 adapter, and an on-board compass

- ▶ Both GNSS tripods features 360° rotation and an 8-minute vial
- ▶ All aluminum hardware is anodized black for long life
- ▶ 5119-10 features large telescoping legs (1.25 to 1.5 inch diameters) feature adjustable handle bolts on the

- leg pivots and a large 6-inch diameter round head which easily holds lasers or robots
- ▶ Both tripods feature extendable electrostatically powder painted legs and include replaceable points



Part No.
5119-10-FLY

PART NO.	LOCKING	HEIGHT	COLLAPSES	COLOR	WEIGHS	
5119-10-FLY	Screw Clamp	1.5, 1.8, 2 m	55 inches (1.4 m)	Flo Yellow	20.00 lb (9.07 kg)	
5119-10-YEL	Screw Clamp	1.5, 1.8, 2 m	55 inches (1.4 m)	Yellow	20.00 lb (9.07 kg)	
5119-00-FLY	Quick Clamp/Screw Clamp	1.5, 1.8, 2 m	50 inches (1.27 m)	Flo Yellow	15.00 lb (6.80 kg)	
5119-00-FOR	Quick Clamp/Screw Clamp	1.5, 1.8, 2 m	50 inches (1.27 m)	Flo Orange	15.00 lb (6.80 kg)	
5119-00-YEL	Quick Clamp/Screw Clamp	1.5, 1.8, 2 m	50 inches (1.27 m)	Yellow	15.00 lb (6.80 kg)	

Adjustable-Tilt Stainless Steel Adapters

Professional Stainless Steel CORS monument adapters



FEATURES & BENEFITS

- ▶ Adapters in the 2072-Series have 3.20-in (8.19-cm) diameters and overall heights of 3.036-in (7.71-cm)
- ▶ Adapters are leveled by three screws with a tilt range +/- 7°
- ▶ Includes a removable brass 5/8 x 11 male stud that is adjustable in azimuth and held in location by two set screws
- ▶ The axis height is engraved on the outside of the monuments

- ▶ Height above the pivot point to stud shoulder is 1.37-in (3.50-cm)
- ▶ Height below the brass 5/8 stud to shoulder is 0.463-in (1.18-cm)
- ▶ The 2072-10 attaches to standard 2 inch threaded pipe used as 'mast' and made of anodized aluminum
- ▶ The 2072-20 installs by, drilling three 5/8-inch holes and fill with epoxy includes stainless steel
- ▶ 3/8 x 2-1/2-inch bolts and made of anodized aluminum

- ▶ Both 2072-10 and 2072-20 brass rotating adapters are removable and locks in the azimuth direction
- ▶ The 2072-50 permanently connects a GNSS antenna mount to a concrete structure
- ▶ The pipe threads measure 1.5 x 11.5 inches NPT and the overall height of the unit is 7 inches, including 3.5 inch length of pipe



Part No.
2072-30

PART NO.	DESCRIPTION	WEIGHS	
2072-30	1.5-inch pipe with MPT 1-1/2 x 11-1/2 TPI	5.50 lb (2.50 kg)	
2072-31	2-inch pipe with MPT 2 x 11-1/2 TPI	6.60 lb (3.00 kg)	
2072-32	3-inch pipe with MPT 3-1/2 x 8 TPI	6.90 lb (3.10 kg)	
2072-33	Male 5/8 x 11 TPI	6.20 lb (2.80 kg)	
2072-050	40-minute leveling vial for checking adapters	0.30 lb (0.14 kg)	

Ball and Socket Tablet Combos

Virtually unlimited positions on the pole keeps the glare off the collector



5200-35

FEATURES & BENEFITS

- ▶ Pole Clamp locks securely to the pole, no slipping!
- ▶ All ports, connections, and camera are accessible and usable

- with the bracket attached
- ▶ Easy "snap in/out" design holds the tablet securely
- ▶ Compatible with add-on keyboard and extended battery

- ▶ Made from a single, solid 0.080 inch (2.03 mm) aluminum sheet metal
- ▶ Features ram ball links which allow many positions



Part No.
5200-35

PART NO.	WORKS WITH	
5200-30	Panasonic FZ-G1/Leica CS35	
5200-31	Getac T800	
5200-35	Mesa 2, FC 5000, RT3	

Ball and Socket Cradles

Design your own custom solution with one bracket and one cradle



FEATURES & BENEFITS

- ▶ These Claw™ clamps are made of durable anodized aluminum
- ▶ The Claw technology allows maximum tightening without crushing

- ▶ Features a 1-inch ram ball – the Ball-and-Socket versions allow the data collector to be in more positions
- ▶ Use with 5200-201 Ball and Socket Link on page 9



Part No.
5200-16-050

PART NO.	WORKS WITH	TYPE	
5200-16-050	TSC3, Ranger 3 Series	Claw	
5200-17-050	Mesa/Tesla	Snap in/out	
5200-29-050	Panasonic FZ-M1, B2	Snap in/out	

Quick-Release Tablet Combos

Secure connection to your survey pole and tablet during field use



FEATURES & BENEFITS

- ▶ Pole Clamp locks securely to the pole, no slipping!
- ▶ Tilting Feature with three positions, +10, +30 or +50 degrees
- ▶ Quick Release from Pole Clamp

- ▶ for taking photos, etc. and also allows Landscape or Portrait orientation of the Display
- ▶ All ports, connections, and camera are accessible and usable with the bracket attached
- ▶ Easy "snap in/out" design holds

- ▶ the tablet securely
- ▶ Compatible with add-on keyboard and extended battery
- ▶ Made from a single, solid 0.080 inch (2.03 mm) aluminum sheet metal, powder-coated black



Part No.
5200-33

PART NO.	MODEL	TABLET SIZE	
5200-32	Panasonic FZ-M1	7 inch (17.78 cm) tablet	
5200-33	Panasonic FZ-G1/Leica CS35	10 inch (25.4 cm) tablet	

Over the Shoulder Tablet Harnesses

Provide Secure Hands-free Operation During Field Use



FEATURES & BENEFITS

- ▶ When purchased with the correct tablet bracket, each of these harnesses provide reliable hands-free operation
- ▶ Over one shoulder model allows for easy on/off operation (5200-95)
- ▶ Two-shoulder model allows for tighter movement and helps reduce fatigue for day-long operation (5200-96)
- ▶ Ball-and-Socket designs allows a

- ▶ tablet to be in multiple positions and very easy to adjust
- ▶ Mounts to tablet bracket using standard 1-1/2 inch ram ball connection
- ▶ Mount is made from a 0.080-inch (2.03-mm) black powder-coated aluminum sheet metal
- ▶ Weights: 5200-95 1.95 lbs, 5200-96 1.9 lbs
- ▶ Tablet brackets allow all ports, connections, and antenna to be accessible with the bracket attached

APPLICATIONS

- ▶ GNSS/Robotic surveying
- ▶ Construction Layout
- ▶ Road and highway surveys
- ▶ GIS Surveys



Part No.
5200-95

BRACKET PART NO.	FITS	
5200-29-051	Panasonic FZ-M1	
5200-30-051	Panasonic FZ-G1	
5200-31-051	Getac T800	
5200-35-051	Juniper Mesa 2/FC 5000/RT3	
5200-37-051	Trimble Yuma 2, 7" Rugged Tablet	
5200-38-051	Trimble Kenai, 10" Rugged Tablet	

Note: Tablet not included. Brackets sold separately.

Pole Clamps and Cradles

Design your own custom solution with clamp and cradle



5198-056



5198-153



5200-160



5198-073

FEATURES & BENEFITS

- ▶ Original Open-Style Pole Clamp technology for a complete solution
- ▶ Use a Claw Quick-Release cradle or clamp for a complete solution
- ▶ Made of black anodized aluminum

- ▶ Depressing the quick-release button will allow the Claw Quick-Release cradle or clamp to rotate in to a comfortable position for reading the data collector or controller

- ▶ Features a quick-release button and a stainless steel clamp screw that attaches to the pole
- ▶ Designed for standard poles or rods with a 0.75 to 1.25-inch OD



Part No.
5198-052

PART NO.	OPEN-STYLE CLAMPS	
5198-052	Plain	
5198-054	40-minute Vial	
5198-055	Compass	
5198-056	Compass and 40-minute Vial	
5198-059	0.15 x 0.92-inch Slot	
5198-152	For 1.5-inch OD Pole	
5198-153	Battery Slot and Quick Release	
PART NO.	BALL-AND-SOCKET CLAMPS (FOR 1.25-INCH OD POLE)	
5200-160	Plain	
5200-164	With Compass	
5200-165	With 40-minute Vial and Compass	
PART NO.	CLAW QUICK RELEASE CLAMPS (FOR 1.25-INCH OD POLE)	
5200-150	Plain	
5200-151	With 40-minute Vial	
5200-152	With 20-minute Vial	
5200-154	With Compass	
5200-155	With 40-minute Vial and Compass	
PART NO.	QUICK RELEASE CRADLES	
5198-073	Nautiz N7, DAP 9800, SDR33, Titan	
5198-081	PDA	
5198-086	Leica RX and Viva CS10/CS15 /CS20	

Quick Release Claw Cradles

Design your own custom solution with one bracket and one cradle



FEATURES & BENEFITS

- ▶ The Claw™ is a clamping system featuring an innovative clamping device that keeps your expensive data collecting hardware snug on the pole where it belongs without crushing it

- ▶ The Claw cradles and clamps are made of durable anodized aluminum for years of trouble-free use in the field
- ▶ Quick-Release cradles plug directly in to Quick Release Pole Clamps



Part No.
5200-062

PART NO.	WORKS WITH	
5200-050	TSC2, Ranger 300X, 500X, FC 2500	
5200-058	FC-200, FC-250	
5200-059	Nomad 800-900 Series	
5200-062	Carlson Surveyor, Surveyor +, GIS-1	
5200-064	Geo 6000 Series	
5200-065	TSC3, Ranger 3 Series	
5200-069	FC236, X7, PS236, PS336	
5200-070	Juno 5 / Juno T41 Series	
5200-072	Mesa Tesla	
5200-073	Archer 2, Mini2, FC 500	
5200-074	Allegro 2, Surveyor 2	
5200-075	Nautiz X8	
5200-076	Panasonic Toughpads FZ-M1, B2 (Not Claw – "Snap in")	
5200-077	Mesa 2, FC 5000, RT3 (Not Claw – "Snap in")	

Ball-and-Socket and Claw Accessories



- ▶ Perfect for creating a custom solution
- ▶ Fits any standard instrument tripod
- ▶ Use with a 5200-201 Ball-and-Socket Link and a Ball-and-Socket Cradle (designed for your data collector) for a complete system



5199-051 — Tripod Mount

- ▶ The Delrin® Adapter can be used when you want to increase the outside diameter (OD) of a pole from 1-inch to 1.25-inches
- ▶ Can be used with Quick-Release Claw Cradles and Clamps or the Ball-and-Socket Claw Combo



D11145 — Delrin 1-inch Pole Claw Clamp Adapter

- ▶ Mounts and connectors to complete your custom Ball-and-Socket Claw solution
- ▶ Includes base and suction cup with 1-inch ball



5199-054 — Suction Cup (temporary mount)

- ▶ Use the Ball-and-Socket Link for your custom solution
- ▶ Fits the 1-inch ram ball on cradles and clamps



5200-201 — Ball-and-Socket Link

- ▶ Mount your data collector or controller to this ball clamp and the handle bars of your ATV



5199-050 — ATV Ball Clamp

- ▶ Pole Clamp with 1-inch (32 mm) Ram Ball
- ▶ Fits poles with an outside diameter of 0.75-inches to 1.5-inches



5199-052 — Ram Ball Clamp Mount

Two-Piece GNSS Rover Rods

Two-piece is easy to set up and convenient to store and transport



Cable Slot on 5125-06 and 5128-08
5128-00
40-minute vial

FEATURES & BENEFITS

- ▶ Lightweight two-piece rover rods come in aluminum or carbon fiber and feature 5/8 x 11 tips (5125-01-YEL features a quick-release adapter) and 40-minute vials

- ▶ Outer graduations options are 10ths/100ths (GT), metric (GM) or Quick Release (QR)
- ▶ 5125-06-YEL and 5128-08 feature a cable management slot measuring 0.625 x 1.6-in to hide cables

- ▶ Aluminum models are available in flo yellow or standard yellow
- ▶ Order 8162-00-ORG for carrying case



Part No.
5125-01-YEL

PART NO.	POLE	TIP	CABLE SLOT	OUTER GRADS	LENGTH	WEIGHS	
5125-00-YEL	Aluminum	5/8 x 11	No	10ths/100ths (GT)	2 meters	3.00 lb (1.36 kg)	
5125-01-YEL	Aluminum	Quick Release	No	None	2 meters	3.00 lb (1.36 kg)	
5125-06-YEL	Aluminum	5/8 x 11	Yes	10ths/100ths (QR)	2 meters	3.00 lb (1.36 kg)	
5128-00	Carbon Fiber	5/8 x 11	No	10ths/100ths (GT) or Metric (GM)	2 meters	1.42 lb (0.64 kg)	
5128-08	Carbon Fiber	5/8 x 11	Yes	10ths/100ths (GT, QR)	2 meters	1.42 lb (0.64 kg)	

Telescopic Carbon Fiber Rover Rods

Carbon fiber rover rods are 30% lighter



5129-50
5129-70

FEATURES & BENEFITS

- ▶ Designed so the GNSS surveyor has all the features needed in a single rod
- ▶ 0 H.T

- ▶ The included pin can lock the length of the rod at set points
- ▶ TLV™ locking mechanism comes standard

- ▶ Carbon fiber makes these rods 30% lighter
- ▶ Order 8160-00-ORG for carrying case



Part No.
5129-50

PART NO.	GRADS	LENGTH	OUTER GRADS	PIN LOCKING	WEIGHS	
5129-50	Dual (10ths/2 mm)	4.48 ft (1.4 m) - 8.14 ft (2.45 m)	10ths/100ths (GT)	1.8 m, 2 m, 2.2 m	2.30 lb (1.05 kg)	
5129-51	Metric	4.48 ft (1.4 m) - 8.14 ft (2.45 m)	None	1.8 m, 2 m, 2.2 m	2.30 lb (1.05 kg)	
5129-70	Dual (0.05 ft/cm)	4.69 ft (1.43 m) - 11.7 ft (3.57 m)	None	Every 20 cm	3.30 lb (1.50 kg)	
5129-71	Metric	4.69 ft (1.43 m) - 11.7 ft (3.57 m)	None	Every 20 cm	3.30 lb (1.50 kg)	

Snap-Lock Rover Rods

Easy set up



FEATURES & BENEFITS

- ▶ Includes a one-piece design and two locking systems for stability
- ▶ The snap lock prevents slippage and the compression lock centers the telescopic inner pole and maintains straightness
- ▶ Telescoping rods include

standard locking lengths and also have **OPTIONAL** outer graduations in metric (GM), 10ths/100ths (GT) or Quick Release (QR)

- ▶ Your choice of either aluminum or carbon fiber rod includes a 40-minute vial

- ▶ Order 8160-00-FLY for standard case
- ▶ Order 8151-02-FLY system bag (tripod or bipod)



Part No.
5125-20-FLY

PART NO.	POLE	OPTIONAL OUTER GRADS	LOCKING LENGTHS	WEIGHS	
5125-20-FLY	Aluminum	10ths/100ths (GT) or Metric (GM)	2 m	2.30 lb (1.05 kg)	
5125-20-YEL	Aluminum	10ths/100ths (GT) or Metric (GM)	2 m	2.30 lb (1.05 kg)	
5125-22-FLY	Aluminum	10ths/100ths (GT)	2, 1.8, 1.6 m	2.30 lb (1.05 kg)	
5128-20	Carbon Fiber	10ths/100ths (GT), Metric (GM) or (QR)	2 m	1.60 lb (0.73 kg)	
5128-22	Carbon Fiber	10ths/100ths (GT) or Metric (GM)	2, 1.8, 1.6 m	1.60 lb (0.73 kg)	
5128-24	Carbon Fiber	Standard only	1.8, 1.6 m	1.60 lb (0.73 kg)	

GNSS Accessories and Adapters



- ▶ Radio antenna tripod with antenna mast gets your radio antenna to the desired height
- ▶ Telescoped to 7.5-ft (2.3-m) and the tripod can be set to 5.5-ft (1.7-m) for a total elevation of 13-ft (4-m)
- ▶ Aluminum with a male 5/8 x 11 tip
- ▶ Hardwood/Fiberglass tripod is SECO's 5302-13-ORG
- ▶ Aluminum tripod is SECO's 5301-21-ORG
- ▶ The antenna mast can be purchased separately to convert your own heavy-duty tripod as well
- ▶ Weighs 19.00 lb (8.62 kg)



- 5561-20 — Radio Antenna Mast Assembly
- 5300-11 — Hardwood/Fiberglass
- 5300-12 — Aluminum (shown)

- ▶ Used to elevate a radio antenna to 6 feet plus the height of the tripod setup
- ▶ Snap locks into a fixed length of 6-feet (1.8-m)
- ▶ Collapses to 41.5-inches (1-meter)
- ▶ Includes a 3.5-inch (8.89 cm) OD plate adapter (5182-002) to attach to any 5/8 x 11 tripod heads
- ▶ Available in standard yellow or fluorescent yellow
- ▶ Weighs 1.40 lb (0.62 kg)



5139-02-FLY — 6 Foot Snap-Lock Radio Antenna Pole

- ▶ SECO's Tripod Radio Antenna Kit attaches easily to instrument tripods
- ▶ Tripod leg clamp will attach to any tripod leg and ram ball and socket section of clamp quickly sets the antenna pole up vertically
- ▶ A large washer is included to allow a straight connection to a tripod for a separate setup
- ▶ Kit consists of three antenna sections that set up the radio antenna pole height to 3.1 ft (0.95 m) above the tripod
- ▶ Kit bag measures 16 x 6 x 2-inches (40.6 x 15.2 x 5.8-cm)
- ▶ Weighs 1.90 lb (0.86 kg)




2133-06 — Tripod Radio Antenna Kit

- ▶ Bracket holds a radio antenna securely to a tripod leg
- ▶ The heavy-duty bracket makes plumbing the antenna easy
- ▶ Fits all full-size and heavy-duty tripods and uses a 1/2-inch long, 5/8 x 11 male stud to secure the antenna or extension (tripod sold separately)
- ▶ Can be used with the SECO Six Foot Snap-Lock Radio Antenna Pole (5139-02, this page) or any extension with a male/female 5/8 x 11 connection
- ▶ Weighs 1.55 lb (0.70 kg)



2133-05 — Radio Antenna Bracket for Tripod

- ▶ The open clamp attachment allows quick and easy connection to the pole; it connects to 1-to-1.25-inch (25.4 to 31.8-mm) OD poles
- ▶ Brass male 5/8 x 11 captive stud is easily removed for direct attachment of the radio antenna to the bar
- ▶ Includes a non-slip Velcro® cable strap to help manage radio cables
- ▶ Weighs 0.22 lb (0.10 kg)



2133-03 — Antenna Bracket



GNSS Accessories and Adapters

- ▶ GNSS Compass for 1.25 inch (3.18 cm) diameter poles



5125-050 — GNSS Compass

- ▶ The Satellite Stick™ XL is composed of six, 1-in (25.4-mm) OD carbon fiber sections
- ▶ Collapses to 1.23-ft (37.5-cm)
- ▶ Weighs 2.40 lb (1.09 kg)



5126-10 — Satellite Stick XL

- ▶ Adapter has male 5/8 x 11 threads
- ▶ Weighs 0.08 lb (0.04 kg)



5113-012 — GNSS Quick-Release Tip

- ▶ The 5114-series allows quicker attachment of the GNSS antenna



5114-01

5114-01 — Quick-Release Triple Mag Mount
5114-02 — 5/8 x 11 Triple Mag Mount

- ▶ The 5114-10 is an extra-tall mag mount for use when attaching GNSS receivers with downward antennas



5114-10 — Triple Mag Mount for Trimble R10

- ▶ Both magnets have a 3.5-inch (8.89cm) diameters
- ▶ Weighs 0.92 lb (0.42 kg)



5114-050 — 5/8 x 11 Tip
5114-051 — Quick-Release Tip

- ▶ Converts any GNSS receiver or prism with 5/8 x 11 threads to a quick release
- ▶ Anti-rotation quick-release assembly
- ▶ Heavy-duty construction, will hold up to 20 lb (9.00 kg)
- ▶ Short height, only 60 mm
- ▶ Constructed of quality stainless steel and aluminum
- ▶ Easy to operate, push button release
- ▶ Weighs 0.35 lb (0.16 kg)



5111-04 — 60 mm Anti-Rotation Quick Release

- ▶ Use with GNSS Quick-Release Adapter (5187-00)
- ▶ Made of anodized aluminum or optional Stainless Steel version
- ▶ Adapter adds 76.22-mm to the pole length
- ▶ Weighs 0.14 lb (0.06 kg)



5111-00 — GNSS Quick-Disconnect Adapter
5111-00-SS — GNSS Quick-Disconnect Adapter (Stainless Steel)

- ▶ Adapter features a female 5/8 x 11 with quick release tip
- ▶ Made of anodized aluminum or optional Stainless Steel version
- ▶ Adds 23.8-mm to length of rod
- ▶ Weighs 0.05 lb (0.02 kg)



5187-00 — GNSS Quick-Release Adapter
5187-00-SS — GNSS Quick-Release Adapter (Stainless Steel)

- ▶ All-Terrain Rover Rod "Big Wheel"
- ▶ Measures 19 x 1-5/8-inch
- ▶ Rod and Bipod are not included with Wheel
- ▶ Perfect for RTK profiling
- ▶ Weighs 3.80 lb (1.72 kg)



5125-056 — All Terrain Wheel

Add Rover top section:
5125-057-FLY — Aluminum Rod
5128-052 — Carbon Fiber Rod

GNSS Bracket for Truck Door

Expands vertically from 47 to 61 inches



5114-20-050
Topo Shoe Adapter



5114-20-051
3-inch Extension Kit

FEATURES & BENEFITS

- ▶ This bracket holds a GNSS pole to the door of your survey truck
- ▶ Easy to put on and take off and features a non-damaging mount
- ▶ 5114-20 fits most trucks and SUVs
- ▶ The door opens and closes with the bracket attached to the door
- ▶ Bracket holds all GNSS- and RTKtype poles
- ▶ Utilizes a safety strap under tension to keep it on the door
- ▶ Brackets are available to hold controller inside the cab (#5199)
- ▶ Designed for off-road use
- ▶ Both products available in colors FLY, FOR, YEL
- ▶ Weighs 6.20 lb (2.80 kg)



Part No.
5114-20-FOR

5114-20 — GNSS Bracket for Truck
5114-21 — NEW Ford F-150 2015 & 2016 models



UTV Roll Cage Transporter for GNSS Rods

Easy set-up or disassembly in 10 minutes or less



FEATURES & BENEFITS

- ▶ The RUXWORKS GNSS Rod Transporter™ fits all popular UTVs
- ▶ 5114-40-01 fits UTVs with tubular roll cages up to 2-inches (5.08-cm)
- ▶ 5114-40-02 fits UTVs with rectangular roll cages up to 4"
- ▶ Mounts easily to either side and installs in 10 minutes or less
- ▶ The UTV bracket has up to 30° of tilt to set your rover rod plumb
- ▶ The pole clamp section is 63-in (160-cm) long and disassembles quickly from the UTV bracket with two quick release pins or two bolts
- ▶ The UTV bracket can stay permanently attached to the UTV
- ▶ Includes a rod clamp that fits all popular rover rods and poles with points and or topo shoes up to a 2-1/2-inch (6.35-cm) diameter and has a secure, non-marring quick release design



Part No.
5114-40-01

PART NO.	DESIGNED FOR	FITS	WEIGHS	
5114-40-01	Short Truck Bed	Tubular Roll Cage up to 2-inches (5.08 cm)	15.00 lb (6.80 kg)	
5114-40-02	Medium / Standard Truck Bed	Rectangular Roll Cage up to 2 x 4-inch (5.8 x 10-cm)	15.00 lb (6.80 kg)	

ATV Pole Bracket System

Holds a rover rod and can also hold an antenna bar



FEATURES & BENEFITS

- ▶ The ATV Pole Bracket System is designed to hold a rover rod and a radio antenna pole (sold separately)
- ▶ The universal bracket system fits most ATVs, it attaches with included u-bolts to the luggage rack
- ▶ The bracket holds all poles from 1-to-1.25-inch outside diameter
- ▶ Installation to the ATV takes about one hour using basic tools
- ▶ Quick clamp handles make loading and unloading the rover pole fast and secure
- ▶ This system comes with a transport and storage bag
- ▶ 5198-51 ATV Pole Bracket System is the same as above but does not include the radio antenna bar
- ▶ Weighs 24.00 lb (10.89 kg)



Part No.
5198-50

PART NO.	DESCRIPTION	
5198-50	ATV Bracket System with Radio Antenna Bar	
5198-51	ATV Pole Bracket System without Radio Antenna Bar (shown)	

Plan Holder

Conveniently organize and store job site materials in your vehicle



FEATURES & BENEFITS

► Plan holder hangs on the back or front of any vehicle seat

► Slots which hold four 6-inch (15.24 cm) diameter plans
 ► Front pocket accommodates a note pad, phone, or other small items

► Organizer strap holds pens, pencils, markers, and other necessary tools
 ► Weighs 0.95 lb (0.43 kg)



Part No.
8046-10-BLU

8046-10-BLU — Plan Holder

Vials



Vial for TLV™ Locks



5500-064-40 - Vial Assembly (Complete with 40-min vial)

- 40-Minute Vial D11232 Includes screws
- 20-Minute Vial D11233 Includes screws
- 8-Minute Vial D11234 Includes screws

Vial for QLV™ Locks



5801-052-40 - Vial Assembly (Complete with 40-min vial)

- 8-Minute Vial D11241 Includes screws
- 20-Minute Vial D11242 Includes screws
- 40-Minute Vial D11243 Includes screws

Vial for 1.25-inch OD Pole Levels



5081-052-40 - Vial Assembly (Complete with 40-min vial)

- 40-Minute Vial D11232 Includes screws
- 20-Minute Vial D11233 Includes screws
- 8-Minute Vial D11234 Includes screws

Vial for 1.50-inch OD Pole Levels



5070-051-40 - Vial Assembly (Complete with 40-min vial)

- 40-Minute Vial D11232 Includes screws
- 20-Minute Vial D11233 Includes screws
- 8-Minute Vial D11234 Includes screws

Levels



- No longer need to look down while traffic is flying by — simply look through the window
- Features a soft rubber knob on an adjustable clamp that fit most survey poles and most vials
- The Heads-Up™ level is more comfortable to read; the bubble is direct reading
- Fits 1- to- 1.25-inch (25.4- to- 31.75-mm) OD poles
- Weighs 0.40 lb (0.18 kg)



5001-20 — Heads-Up Level - 40-minute Vial

- Features a die-cast aluminum body and adjustable vial
- Use with track light, robotic instruments, or conventional leveling
- Fits round or rectangular rods
- Feature a 40-minute sensitivity
- Weighs 0.50 lb (0.22 kg)



5001-10 — Standard Rod Level

- Features a die-cast aluminum body and adjustable vial
- Suitable for use with track light, robotic instruments, or conventional leveling
- Fits round or rectangular rods
- Fits poles with a 1- to- 1.25-inch (25.4- to- 31.75-mm) OD
- Feature a 40 minute sensitivity vial
- Weighs 0.10 lb (0.04 kg)



5001-12 — Snap-On Rod Level



Scanner Spheres



FEATURES & BENEFITS

- ▶ 100 mm OD lightweight aluminum sphere
- ▶ Precision design, allowable deviation < 1 mm

- ▶ Female / x 20 threaded mounting
- ▶ Painted non-glare white
- ▶ Center height is 49 mm for bottom flat

- ▶ Weighs 0.60 lb (0.27 kg)



Part No.
6703-001

FEATURES & BENEFITS

- ▶ Lightweight aluminum scanner sphere

- ▶ 230 mm diameter, accuracy < 2 mm
- ▶ Female 5/8 x 11 threaded mounting

- ▶ Painted non-glare white
- ▶ Center height is 114 mm from bottom flat
- ▶ Weighs 2.70 lb (1.22 kg)

6703-001 — 100 mm Scanner Sphere
6704-001 — 230 mm Scanner Sphere



230 mm Sphere Adapters, Accessories and Case



- ▶ 3-7/8 inch diameter housing
- ▶ 3-1/2 inch ceramic grade 5 magnet
- ▶ 120 pounds of pull force
- ▶ Stainless steel 5/8 x 11 stud
- ▶ Height is 21 mm
- ▶ Weighs 0.95 lb (0.43 kg)



6704-002 — Magnet with 5/8 x 11 Stud



- ▶ Anodized aluminum body
- ▶ Male and female 5/8 x 11 threads
- ▶ Height is 21 mm
- ▶ Center height is 135 mm with 230 mm Sphere (6704-001)
- ▶ Weighs 0.05 lb (0.02 kg)



6704-003 — 21 mm Male and Female 5/8 x 11 Adapter



- ▶ Anodized aluminum body
- ▶ Male and female 5/8 x 11 threads
- ▶ Height is 48 mm
- ▶ Center height is 196 mm with 230 mm Sphere (6704-001) and Tribach Adapter (2070-00)
- ▶ Weighs 0.10 lb (0.04 kg)



6704-004 — 48 mm Male and Female 5/8 x 11 Adapter



- ▶ Includes three 230 mm scanner spheres in a hard case
- ▶ Includes cover bag for each sphere for insulation and scratch protection
- ▶ Airline approved shipping case
- ▶ Weighs 17.60 lb (7.98 kg)



6704-10 — Hard Case and Three 230 mm Scanner Spheres



- ▶ 3/8 x 16 stainless steel male stud
- ▶ Three prong tribrach interface connection
- ▶ Height is 60.5 mm
- ▶ Height to target with the TX5 / FARO3D achieves 196 mm
- ▶ Weighs 1.35 lb (0.61 kg)



6703-011 — 196 mm HT Tribach Adapter for TX5/FARO3D



- ▶ SECO is pleased to offer a new "Quick Release Adapter" specifically for Trimble TX5 and Faro Focus 3D scanners
- ▶ Quick and safe connection between the scanner instrument and a Gitzo or any tripod with a male 3/8 x 16 thread
- ▶ Rotates smoothly on Delrin® bearing for orientating the instrument

- ▶ Clamp screw is captured and protected from damage
- ▶ Anodized aluminum and stainless steel materials
- ▶ Base has a setscrew to lock base to tripod head
- ▶ Built-in 100-minute level vial on base
- ▶ Weighs 0.70 lb (0.32 kg)



6703-015 — Quick Release Adapter for Trimble TX5 and Faro Focus 3D



100 mm Sphere Prisms, Adapters, Magnets and Kits



- ▶ Lightweight aluminum sphere and ceramic 8 magnet
- ▶ Steel cup OD 2.03 inches
- ▶ Stainless steel 1/4 x 20 stud
- ▶ Magnet is chrome coated steel cup and offers 40 pull pounds
- ▶ 100 mm OD roundness <1 mm
- ▶ 1/4 x 20 threaded mounting
- ▶ Painted non-glare white
- ▶ Weighs 0.80 lb (0.36 kg)



6703-10 — 100 mm Scanner Sphere with Magnet

- ▶ 1/4 x 20 stainless steel male stud
- ▶ 5/8 x 11 female connection
- ▶ Height is 86 mm
- ▶ Height to target with 100 mm sphere achieves 135 mm
- ▶ Weighs 0.25 lb (0.11 kg)



6703-003 — 5/8 x 11, 135 mm HT Adapter

- ▶ 1/4 x 20 stainless steel male stud
- ▶ 5/8 x 11 female connection
- ▶ Height is 23.5 mm
- ▶ Height to target with 100 mm sphere achieves 72.5 mm
- ▶ Weighs 0.05 lb (0.02 kg)



6703-005 — 5/8 x 11, 72.5 mm HT Adapter

- ▶ 25 mm silver-coated prism
- ▶ -17.5 mm offset
- ▶ Length is 72.5 mm prism center to connections
- ▶ 5/8 x 11 female and magnetic connection
- ▶ Weighs 0.75 lb (0.34 kg)



6703-012 — 72.5 HT Prism Assembly with Magnet

- ▶ Rubber tips on stainless-steel legs prevent scratching of delicate surfaces
- ▶ Folding legs make tripod very portable
- ▶ Made of anti-corrosive materials
- ▶ Steel-plated washer atop tripod easily attaches to scanner sphere
- ▶ Height is 39 mm
- ▶ Weighs 0.15 lb (0.07 kg)



6703-008 — Scanner Sphere Mini Tripod

- ▶ 1/4 x 20 stainless steel male stud
- ▶ 5/8 x 11 female connection
- ▶ Height is 113 mm
- ▶ Height to target with 100 mm sphere (6703001) and Tribrach Adapter (2070-00) achieves 196 mm
- ▶ Weighs 0.35 lb (0.16 kg)



6703-006 — 5/8 x 11, 196 mm HT Adapter

- ▶ 6703-20 includes six 100 mm scanner spheres and six magnets with 1/4 x 20 studs
- ▶ 6703-20 weighs 6.60 lb (3.00 kg)



6703-20 — 6 piece 100 mm Sphere Kit includes Soft Case

- ▶ Brass washers centers to 6703-002 magnet base connection
- ▶ 90 pounds of pull force
- ▶ Connects to pipes and flat surfaces
- ▶ Weighs 0.90 lb (0.41 kg)



6703-013 — V-Base with Washer Magnet

- ▶ Compatible with the TX5
- ▶ Width is 3.12 in (79.3 mm)
- ▶ Height is 34 mm
- ▶ Weighs 1.75 lb (0.80 kg)



2070-02 — 3/8 x 16 Tribrach Adapter

- ▶ 8082-01-ORG offers six padded compartments (for 100 mm spheres, sold separately)
- ▶ Made from 1000D Cordura with 2 inch padded foam and includes a carrying handle
- ▶ Stow-able straps (cases can connect together)
- ▶ Dimensions: 16 x 11 x 8 in (40.64 x 27.94 x 20.32 cm)
- ▶ 8082-01-ORG weighs 2.00 lb (0.91 kg)



8082-01-ORG — Soft Case for 100 mm Scanner Spheres

- ▶ Pelican® hard shell case features custom foam keeping spheres, prisms, adapters, etc., safe and secure
- ▶ 6703-11 includes ten 100 mm scanner spheres and ten magnets with 1/4 x 20 studs
- ▶ Dimensions: 24.5 x 19 x 9 in (62.3 x 48.3 x 22.9 cm)
- ▶ 6703-11 weighs 22.00 lb (10.00 kg)
- ▶ 6703-014 weighs 14.00 lb (6.36 kg)



6703-11 — 10 piece 100 mm Sphere Kit includes Hard Case
6703-014 — Pelican Case for 100 mm Spheres (spheres sold separately)

- ▶ Stainless steel 1/4 x 20 stud
- ▶ Chrome-plated steel cup
- ▶ 2.03 inch OD steel cup
- ▶ Grade 8 ceramic magnet
- ▶ 40 pounds of pull force
- ▶ Weighs 0.20 lb (0.09 kg)



6703-002 — Magnet with 1/4 x 20 Stud

- ▶ Zinc-plated steel material
- ▶ 1.90 in (48.26 mm) in diameter
- ▶ Thickness is 0.098 in (2.5 mm)
- ▶ 0.24 in (6 mm) countersink hole connection
- ▶ Weighs 0.05 lb (0.02 kg)



6703-007 — Wall Washer Adapter

360° Robotic Prism Assembly

Copper-coated 35 mm prisms



FEATURES & BENEFITS

- ▶ Includes six 35 mm prisms
- ▶ 0 offset
- ▶ Copper-coated for moisture prevention
- ▶ Protective urethane bumper in yellow



Part No.
6401-00-YEL

PART NO.	PRISM HEIGHT	DESIGNED FOR
6401-00-YEL	77 mm	Topcon®
6401-03-YEL	135 mm	Spectra Precision®

Carbon Fiber Robotics Poles

Features carbon fiber and TLV locking mechanism



FEATURES & BENEFITS

- ▶ Graduated to read direct for a 135 mm prism height
- ▶ Adapters will achieve other prism heights
- ▶ Carbon fiber pole offers a stainless steel pin which locks the inner pole
- ▶ Features TLV™ lock mechanism with 40-minute vial built-in
- ▶ Optional outer graduations in metric (GM) or 10ths/100ths (GT)
- ▶ Order 8160-00-ORG for carrying case



Part No.
5129-52

PART NO.	GRADS	SECTIONS	PIN LOCKING	OUTER GRADS	LENGTH	WEIGHTS
5129-52	Dual	1	Every 0.5 ft	10ths/100ths (GT)	4.97 ft - 8.53 ft	2.30 lb (1.04 kg)
5129-53	Metric	1	Every 20 cm	Metric (GM)	1.53 m - 2.6 m	2.30 lb (1.04 kg)
5129-72	Dual	2	Every 0.5 ft	None	5.18 ft - 11.81 ft	3.30 lb (1.50 kg)
5129-73	Metric	2	Every 20 cm	None	1.58 m - 3.6 m	3.30 lb (1.50 kg)

Accessories for Robotics Gear



▶ 5/8 X 11 aluminum prism height adapters allow the base pole to be used with other manufacturer's 360° prisms



- 2090-01 — For Topcon Users w/ 77 mm Prism
- 2090-02 — For Leica Users w/86 mm Prism
- 2090-04 — Users w/115 mm Prism
- 2090-06 — Convert Robotics to GNSS Pole (not shown)
- 2090-07 — For Topcon ATP1/2 with 50 mm Prism

▶ This lightweight bipod is used to keep a GNSS or robotic pole off the ground when not in use


▶ Weighs 0.90 lb (0.41 kg)



5217-15-ABK — 12 inch Open Clamp Bipod

Geodimeter Style Poles and Prism

Create your measuring system by adding the Sliding Prism with Tilting Reflector

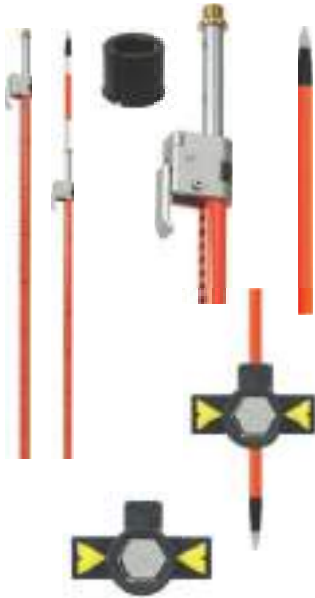

FEATURES & BENEFITS

- ▶ Small in diameter (20 mm), this light weight prism pole is designed to work with the Geodimeter® style sliding prism
- ▶ Can be mounted on the site rod or the graduated outer section
- ▶ Telescoping section is graduated in feet and centimeters

- ▶ Poles are constructed of durable fluorescent orange aluminum and has a hardened steel removable point
- ▶ Graduations in feet, 10ths and 100ths are on the outer section for direct reading of prism height
- ▶ Collapses to 4.80 ft (1.46 m)
- ▶ Expands to 8.60 ft (2.62 m)

- ▶ The site rod comes with the QLV™ locking mechanism with a 40-min circular, adjustable vial
- ▶ Can be used as a short hand held rod with two height marks, 0.50 ft (15.24 cm) and 1.00 ft (30.48 cm)
- ▶ Use Sliding Prism with Tilting Reflector to complete your system



Part No.
5120-00-FOR-GT

PART NO.	HEIGHT	GRADS	VIAL	DESCRIPTION	WEIGHS	
5120-00-FOR-GT	8.60 ft (2.62 m)	10ths	40-min	Pole Only	2.05 lb (0.92 kg)	
5120-01-FOR-GM	2.62 m (8.60 ft)	Metric	40-min	Pole Only	2.05 lb (0.92 kg)	
5120-02-FOR-GT	8.60 ft (2.62 m)	10ths	40-min	Pole w/ Site Rod	2.75 lb (1.24 kg)	
5120-03-FOR-GM	2.62 m (8.60 ft)	Metric	40-min	Pole w/ Site Rod	2.75 lb (1.24 kg)	
5120-024-FOR	N/A	Metric	N/A	Site Rod w/ Point	0.70 lb (0.31 kg)	
5120-025-FOR	N/A	10ths	N/A	Site Rod w/ Point	0.70 lb (0.31 kg)	
6455-00	N/A	N/A	N/A	Sliding Prism with Tilting Reflector	0.81 lb (0.37 kg)	

Telescopic Carbon Fiber Prism Pole

Carbon fiber poles are approximately 30% lighter than similar aluminum poles



FEATURES & BENEFITS

- ▶ Adjustable tip that will adjust to a prism height of 65 mm to 115 mm

- ▶ TLV locking and dual graduations and OD is 1.27 in (32 mm)
- ▶ Extends 8.53 ft (2.60 m)

- ▶ Collapses to 4.97 ft (1.51 m)
- ▶ Weighs 2.30 lb (1.05 kg)



Part No.
5129-54

5129-54 — Adjustable Tip Carbon Fiber Pole

Mini Poles

Compact, easy to set up, and convenient to store and transport



FEATURES & BENEFITS

- ▶ Mini poles are easy to use
- ▶ Adjustable or fixed-tip poles

- ▶ Light weight and convenient to transport and store
- ▶ 40-minute bubble vials

- ▶ Powder-coated and silk screened aluminum



Part No.
5500-23

PART NO.	HEIGHT	GRADS	LOCK TYPE	PRISM HEIGHT	WEIGHS	
5500-23	5.10 ft - 2.70 ft (1.55 - 0.82 m)	Dual	TLV	50 mm	2.30 lb (1.04 kg)	
5010-00-RED	1.28 ft (0.39 m)	N/A	N/A	N/A	1.50 lb (0.68 kg)	
5010-00-FLY	1.28 ft (0.39 m)	N/A	N/A	N/A	1.50 lb (0.68 kg)	
5010-01	4.7 inches (120 mm)	N/A	N/A	25 mm	0.40 lb (0.02 kg)	
5700-21	4.8 ft - 2.26 ft (1.5 - 0.7 m)	Dual	Quick-Release	115 mm	2.33 lb (1.80 kg)	

Swiss-Style QLV Prism Poles

Features European-style quick release stud



FEATURES & BENEFITS

- ▶ Swiss-style quick release stud Reads direct for any 86 mm height prisms
- ▶ The small-diameter, 25 mm bottom section fits Leica slide-on controller brackets
- ▶ QLV™ locking mechanisms
- ▶ Powder-coated and silk screened aluminum
- ▶ Lower lock features an adjustable 40-minute adjustable vial



Part No.
5802-10

PART NO.	LENGTH	TIP	TYPE	GRADS	WEIGHS	
5802-10	8 ft	Swiss-Style	Aluminum	Dual	2.50 lb (1.13 kg)	
5802-20	12 ft	Swiss-Style	Aluminum	Dual	3.55 lb (1.61 kg)	

Swiss-Style Quick-Release Prism Poles

Made for speciality prism height of 86 mm



FEATURES & BENEFITS

- ▶ Quick-Release locking mechanism features adjustable tension via a set screw in the handle and another set screw to assist in keeping the spring in position
- ▶ Swiss-style tip (for 86 mm prism heights) for GPH1-type prisms
- ▶ Powder-coated and silk screened aluminum



Part No.
5711-10

PART NO.	OD	LENGTH	TYPE	GRADS	WEIGHS	
5711-10	1 inch (25.4 mm)	8.30 ft - 4.76 ft (2.53 m - 1.45 m)	Aluminum	Dual	2.10 lb (0.95 kg)	
5721-10	1 inch (25.4 mm)	2.60 m - 1.52 m (8.53 ft - 4.97 ft)	Aluminum	Metric	3.30 lb (1.50 kg)	

Swiss-Style TLV and Twist-Lock Prism Poles

The popular TLV locking system provides simple but secure locking



FEATURES & BENEFITS

- ▶ Swiss-style tip (for 86 mm prism heights) for GPH1-type prisms
- ▶ 1.25- or 1.50-inch (31.75- or 38.1-mm) outside diameter
- ▶ Comes in 1 or 3 sections
- ▶ Dual or metric graduations
- ▶ TLV™ or Twist-Lock mechanisms



Part No.
5501-11

PART NO.	SECTIONS	LOCK STYLE	LENGTH	OD	GRADS	WEIGHS	
5501-11	1	TLV	8.53 ft - 4.97 ft (2.60 m - 1.51 m)	1.25 inch (31.75 mm)	Dual	3.30 lb (1.50 kg)	
5521-11	1	TLV	2.60 m - 1.51 m	31.75 mm	Metric	3.30 lb (1.50 kg)	
5503-30	3	Twist-Lock	15.25 ft - 5.41 ft (4.65 m - 1.65 m)	1.50 inch (38.1 mm)	Dual	7.60 lb (3.45 kg)	
5523-30	3	Twist-Lock	4.65 m - 1.65 m	38.1 mm	Metric	7.60 lb (3.45 kg)	

Quick Change Prism Poles

Vials are on the locks, out of the way of instruments on the pole



Part No. 5507-10

FEATURES & BENEFITS

- ▶ Compatible with all targets, prisms, and GNSS antennas
- ▶ Using adapters, any of the poles in this series can be used for GNSS, robotics or total station surveys
- ▶ Includes adapter 2090-12
- ▶ Quick conversion to another application by changing adapters (sold separately, see below)
- ▶ TLV™ (Twist-Lock with Vial) locking mechanism includes a 40-minute vial
- ▶ Available with locking pin & holes (the locking system guarantees no slipping of the sections)
- ▶ Carbon fiber and aluminum models offered



PART NO.	GRADS	GRADUATED LENGTH	OUTER POLE	LOCKING PIN	ADAPTER INCLUDED	
5507-10	Dual	4.36 to 7.22 ft	Aluminum		2090-12	
5507-11	Dual	1.64 to 2.30 ft	Aluminum		2090-12	
5507-13	Dual	4.36 to 7.22 ft	Carbon Fiber	Yes	2090-12	
5507-15	Dual	4.97 to 8.53 ft	Aluminum		2090-12	
5507-16	Dual	4.97 to 8.53 ft	Carbon Fiber		2090-12	
5507-17	Dual	4.97 to 8.53 ft	Carbon Fiber	Yes	2090-12	
5507-20	Dual	5.18 to 11.81 ft	Aluminum		2090-12	
5507-22	Dual	5.18 to 11.81 ft	Carbon Fiber	Yes	2090-12	
5507-30	Dual	5.41 to 15.25 ft	Aluminum		2090-12	
5527-10	Metric	1.33 to 2.20 m	Aluminum		2090-12	
5527-11	Metric	0.50 to 0.70 m	Aluminum		2090-12	
5527-13	Metric	1.33 to 2.20 m	Carbon Fiber	Yes	2090-12	
5527-15	Metric	1.51 to 2.60 m	Aluminum		2090-12	
5527-16	Metric	1.51 to 2.60 m	Carbon Fiber	Yes	2090-12	
5527-17	Metric	1.58 to 3.60 m	Carbon Fiber	Yes	2090-12	
5527-20	Metric	1.58 to 3.60 m	Aluminum		2090-12	
5527-22	Metric	1.58 to 3.60 m	Carbon Fiber	Yes	2090-12	
5527-30	Metric	1.65 to 4.65 m	Aluminum		2090-12	

Quick Change Pole Adapters


Use with SECO Quick Change Prism Poles to achieve desired height



Part No. 2090-10

FEATURES & BENEFITS

- ▶ Using adapters, any of the poles in the Quick Change series can be used for GNSS, robotics or total station surveys
- ▶ Quick conversions to another application by changing adapters
- ▶ Simple adapter determinations: 150 mm minus your target height = length of adapter needed



PART NO.	TARGET	TARGET HEIGHT	LENGTH "L"	
2090-10	Leica GPH1	86 mm	50 mm	
2090-11	SECO 6400 Series	100 mm	50 mm	
2090-12	SECO 6400 Series	115 mm	35 mm	
2090-13	Trimble RMT	135 mm	15 mm	
2090-14	Adjustable 5/8 x 11	50 mm to 135 mm	N/A	
2090-15	GNSS Antenna	0 mm	150 mm	
2090-17	Leica Adjustable	86 mm to 125 mm	N/A	
2090-19	SECO Mini Prisms	70 mm	80 mm	
2090-21	Topcon 360 Prism	77 mm	73 mm	
2090-26	Topcon APT1/2	50 mm	100 mm	
5079-066	Laser Detector Adapter	0 mm	150 mm	

2 mm Metric Telescoping Prism Poles

Fine metric graduation survey poles



FEATURES & BENEFITS

- ▶ 2 millimeter metric graduations
- ▶ Two models available; 135 mm HT, and 0 mm HT
- ▶ Extends to 8.53 ft (2.60 m)

- ▶ Collapses to 4.98 ft (1.52 m)
- ▶ Soft touch knob is easy to tighten and loosen
- ▶ High-visibility vial features 40-minute sensitivity

- ▶ Easy access screws are located underneath for quick calibration
- ▶ TLV™ is the most dependable locking mechanism on the market place



Part No.
5527-18-13



5527-18-13

5527-18-15

PART NO.	TIP	GRADS	WEIGHS
5527-18-13	Fixed, 135 mm HT	cm/2 mm	4.14 lb (1.88 kg)
5527-18-15	Fixed, 0 mm HT	cm/2 mm	4.36 lb (1.98 kg)

Quick-Release Telescoping Prism Poles

Vials are on the locks, out of the way of the instruments on the pole



FEATURES & BENEFITS

- ▶ Features the Quick-Release locking mechanism with 40-minute vial

- ▶ Features adjustable tension via set screw in the handle and another set screw to assist in keeping the spring in position

- ▶ Quick-Release handle lock allows for a simple and fast setup
- ▶ Lock includes 40-minute level vial
- ▶ Constructed of powder-coated and silk screened aluminum



Part No.
5700 Series



PART NO.	GRADS	SECTIONS	TIP	EXTENDED	COLLAPSED	WEIGHS
5700-10	Dual	1	Adjustable	8.53 ft (2.60 m)	4.97 ft (1.52 m)	3.30 lb (1.50 kg)
5720-10	Metric	1	Adjustable	8.53 ft (2.60 m)	4.97 ft (1.52 m)	3.30 lb (1.50 kg)
5700-20	Dual	2	Adjustable	11.81 ft (3.60 m)	5.18 ft (1.58 m)	5.10 lb (2.30 kg)

TLV and Twist-Locking Telescoping Prism Poles

The popular TLV locking system provides simple but secure locking



FEATURES & BENEFITS

- ▶ The aluminum twisting lock with vial (TLV) pole is wear-resistant for long life

- ▶ The soft rubber knob is easy to tighten or loosen, even when wearing gloves

- ▶ TLV locks feature a convenient 40-minute vial built into the lock
- ▶ Made of quality aluminum tubing
- ▶ Powder-coated red and white



Part No.
5500-11



PART NO.	SECTIONS	LOCK	TIP	EXTENDED	COLLAPSED	GRADS	WEIGHS
5500-11	1	TLV Lock	Adjustable	8.53 ft (2.60 m)	4.97 ft (1.52 m)	Dual	3.30 lb (1.50 kg)
5512-11	1	TLV Lock	Fixed	8.53 ft (2.60 m)	4.97 ft (1.52 m)	Dual	3.30 lb (1.50 kg)
5520-11	1	TLV Lock	Adjustable	8.53 ft (2.60 m)	4.97 ft (1.52 m)	Metric	3.30 lb (1.50 kg)
5500-21	2	TLV Lock	Adjustable	11.81 ft (3.60 m)	5.18 ft (1.58 m)	Dual	5.10 lb (2.32 kg)
5520-21	2	TLV Lock	Adjustable	11.81 ft (3.60 m)	5.18 ft (1.58 m)	Metric	5.10 lb (2.32 kg)
5500-30	3	Twisting Lock and Vial	Adjustable	15.25 ft (4.65 m)	5.41 ft (1.65 m)	Dual	7.60 lb (3.45 kg)
5520-30	3	Twisting Lock and Vial	Adjustable	15.25 ft (4.65 m)	5.41 ft (1.65 m)	Metric	7.60 lb (3.45 kg)

Compression Lock Telescopic Prism Poles

Constructed of brass and aluminum



FEATURES & BENEFITS

- ▶ Compression locking mechanism
- ▶ Constructed of sturdy aluminum tubing and a two-stage adjustable top-threaded tip
- ▶ Adjustable Tip
- ▶ Single (1) section pole
- ▶ Extends 8.53 ft (2.60 m)
- ▶ Collapses 4.97 ft (1.516 m)
- ▶ Dual graduations
- ▶ Finished with electrostatic powder paint coating on the outer pole and permanent silk-screened grads on the inner pole
- ▶ Weighs 3.30 lb (1.50 kg)



Part No.
5600-10

5600-10 — Compression Prism Pole

QLV Locking Prism Poles

Simple to adjust bubble and lever tension



QLV lock body



Fixed Tip



Adjustable Tip

FEATURES & BENEFITS

- ▶ The QLV™ (Quick Lever with Vial) lock allows fast, simple setups
- ▶ Simple to adjust bubble and lever tension
- ▶ Includes a lock with 40-minute level vial, adjustable, or fixed tip and your choice of dual (10ths cm) or metric graduations (cm)
- ▶ Easy locking
- ▶ Powder-coated and silk screened aluminum one- or two-section poles



Part No.
5801-10

PART NO.	SECTIONS	TIP	EXTENDS	COLLAPSES	GRADS	WEIGHS	
5801-10	1	Adjustable	8.53 ft (2.60 m)	4.97 ft (1.516 m)	Dual	2.95 lb (1.50 kg)	
5813-10	1	Fixed	8.53 ft (2.60 m)	4.97 ft (1.516 m)	Dual	2.95 lb (1.50 kg)	
5821-10	1	Adjustable	2.60 m (8.53 ft)	4.97 ft (1.516 m)	Metric	2.95 lb (1.50 kg)	
5813-20	2	Fixed	12 ft (3.65 m)	5.30 ft (1.65 m)	Dual	4.05 lb (1.83 kg)	

Ultralite Prism Poles

Non-conductive fiberglass



FEATURES & BENEFITS

- ▶ The lightest pole offered by SECO
- ▶ Included in this package is Crain's patented Topo Boot®
- ▶ Reduced weight SECO TLV™ lock
- ▶ Features a 40-minute adjustable vial, a soft touch knob, and an adjustable 5/8 x 11 tip
- ▶ The inner and outer poles are constructed of lightweight non-conductive fiberglass



Part No.
5540-10

PART NO.	SECTIONS	TIP	LENGTH	VIAL	GRADS	WEIGHS	
5540-10	1	Adjustable	8.58 ft (2.62 m)	40-minute	Dual	1.95 lb (0.88 kg)	
5541-10	1	Adjustable	2.62 m (8.58 ft)	40-minute	Metric	1.95 lb (0.88 kg)	
5540-20	2	Adjustable	11.81 ft (3.60 m)	40-minute	Dual	2.50 lb (1.13 kg)	
5541-20	2	Adjustable	3.60 m (11.81 ft)	40-minute	Metric	2.50 lb (1.13 kg)	
5540-30	3	Adjustable	15.27 ft (4.65 m)	40-minute	Dual	3.15 lb (1.43 kg)	
5541-30	3	Adjustable	4.65 m (15.27 ft)	40-minute	Metric	3.15 lb (1.43 kg)	

Contractor Series TLV Prism Poles

Import TLV prism poles



FEATURES & BENEFITS

- ▶ These 'no-frills' imported poles are designed to give service in the field at a lower purchase price

- ▶ TLVs and Twist-Locks include 40-minute level vials
- ▶ Aluminum outer and inner pole
- ▶ Hardened steel points

- ▶ Your choice of metric (cm) or dual (cm/10ths) graduations
- ▶ Traditional red and white color with Crain logo



Part No. 5530-10

PART NO.	SECTIONS	TIP	LENGTH	POLE TYPE	GRADS	WEIGHS	
5530-10	1	Adjustable	8.53 ft (2.60 m)	Aluminum	Dual	2.67 lb (1.21 kg)	
5531-10	1	Adjustable	2.60 m	Aluminum	Metric	2.67 lb (1.21 kg)	
5530-20	2	Adjustable	11.81 ft (3.60 m)	Aluminum	Dual	3.65 lb (1.66 kg)	
5531-20	2	Adjustable	3.60 m	Aluminum	Metric	3.65 lb (1.66 kg)	
5530-30	3	Adjustable	15.25 ft (4.65 m)	Aluminum	Dual	5.38 lb (2.44 kg)	
5531-30	3	Adjustable	4.65 m	Aluminum	Metric	5.38 lb (2.44 kg)	

Contractor Series Compression Lock Poles

Traditional Compression lock import prism poles



FEATURES & BENEFITS

- ▶ These 'no-frills' imported poles are designed to give service in the field at a lower purchase price

- ▶ Your choice of metric (cm) or dual (cm/10ths) graduations
- ▶ Aluminum outer and inner pole
- ▶ 40-minute level vials

- ▶ Adjustable tip
- ▶ Hardened steel points
- ▶ Red and white color with Crain logo



Part No. 5631-10

PART NO.	SECTIONS	TIP	LENGTH	POLE TYPE	GRADS	WEIGHS	
5631-10	1	Adjustable	2.60 m (8.53 ft)	Aluminum	Metric	2.65 lb (1.20 kg)	
5631-20	2	Adjustable	3.60 m (11.81 ft)	Aluminum	Metric	3.45 lb (1.56 kg)	
5631-30	3	Adjustable	4.65 m (15.25 ft)	Aluminum	Metric	5.00 lb (2.27 kg)	

Offset Tools



- ▶ Used with total stations and prism poles to help get accurate elevation measurements in hard-to-reach places ▽ Has an adjustable centerline, 1.60 to 1.00-ft (48.76 to 30.48-cm) in 0.20-ft (6.09-cm) increments
- ▶ Constructed of anodized 1/2 inch thick aluminum
- ▶ Includes brass male 5/8 x 11 threaded post and a stainless steel 5/8 x 11 Heli-Coil®
- ▶ Weighs 1.15 lb (0.52 kg)

- ▶ Perform odd setups and stay away from dangerous situations with the Offset Pole Holder Kit
- ▶ Combine the kit with any 5/8 x 11 threaded pole and a Heads-Up™ Level for a safe and sturdy setup
- ▶ A padded case, hex wrench, and an adapter plate for instrument tripods is included
- ▶ Weighs 1.79 lb (0.81 kg)



Maintains Exact Pole Elevation Readings!

5198-163 — Adjustable Offset Bar



5198-157 — Offset Pole Holder Kit





Prism Adapters, Tips and Topo Shoes

<ul style="list-style-type: none"> ▶ Adapts Swiss-style snap-on prisms to 5/8 x 11 tribrach adapter or prism pole ▶ Weighs 0.06 lb (0.03 kg) <p>2080-SS — Wild Prism Adapter </p> <p>2080-00 — Wild Prism Adapter </p> 	<ul style="list-style-type: none"> ▶ 5/8 x 11 adapter ▶ Weighs 0.06 lb (0.03 kg) <p>5180-00 — Double Male Adapter </p> 	<ul style="list-style-type: none"> ▶ Adapts Swiss-style prism poles to 5/8 x 11 ▶ Weighs 0.06 lb (0.03 kg) <p>2090-00 — Wild Prism Pole Adapter </p> 
<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) steel body ▶ Weighs 0.30 lb (0.14 kg) <p>5190-00 — Prism Pole Point </p> 	<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) aluminum body ▶ Weighs 0.34 lb (0.15 kg) <p>5191-00 — Prism Pole Topo Shoe </p> 	<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) aluminum with steel tip (91605) ▶ Weighs 0.01 lb (0.004 kg) ▶ The Topo-Boot® (91605) screws over the precision point made of black nylon and increases the area of the point for the use on soft surfaces in topo shots ▶ Weighs 0.05 lb (0.02 kg) 
<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) length, 64 mm OD with steel body ▶ Weighs 1.26 lb (0.57 kg) <p>5192-00 — Wide Base Topo Shoe </p> 	<ul style="list-style-type: none"> ▶ Allows easy conversions from 'control' to 'topo' surveys <p>5192-02 — Topo Shoe and Point Combo </p> 	<p>91605 — Aluminum Prism Pole Point and Steel Tip </p> <p>91601 — Topo-Boot </p>
<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) steel body, removable point ▶ Weighs 0.30 lb (0.14 kg) <p>5194-00 — Prism Pole Point with Replaceable Plumb Bob Point </p> 	<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) anodized aluminum body, dull steel point ▶ Weighs 0.16 lb (0.07 kg) <p>5194-03 — Lightweight Prism Pole Point with Replaceable Tip </p> 	<ul style="list-style-type: none"> ▶ Features an 'L-Bracket' to rest the prism pole point on and the adjustable top piece ▶ Convenient for adjusting and calibrating pole vials in the office ▶ Use the adjustable top to center your pole before adjusting the bubble ▶ Weighs 1.00 lb (0.45 kg) 
<ul style="list-style-type: none"> ▶ Hardened steel replacement point for 5194-series ▶ Weighs 0.06 lb (0.03 kg) <p>5194-003 — Prism Pole Sharp Point </p> 	<ul style="list-style-type: none"> ▶ The point features an aluminum body and an easy-to-replace steel point ▶ Male 5/8 x 11 Thread ▶ Weighs 0.16 lb (0.07 kg) <p>5194-04 — Point Assembly </p> 	<p>5195-01 — Pole Peg Adjusting Jig </p>
<ul style="list-style-type: none"> ▶ This point features an anodized aluminum body and an easy-to-replace steel point ▶ Weighs 0.16 lb (0.07 kg) <p>5194-05 — Prism Pole Point </p> 	<ul style="list-style-type: none"> ▶ This prism allows for easy determination of right angle points or perpendicular points between two targets <p>4900-00 — Double Right-Angle Prism </p> 	<ul style="list-style-type: none"> ▶ 3.37-inch (85.6-mm) aluminum body ▶ Removable point ▶ Weighs 0.10 lb (0.05 kg) <p>5194-01 — Aluminum Replaceable Point </p> 
<ul style="list-style-type: none"> ▶ The Center Punch Point fits all poles or products with male 5/8 x 11 threads ▶ The hardened steel point will mark all metal and non-metal surfaces ▶ Weighs 0.20 lb (0.09 kg) <p>5194-10 — Center Punch Point </p> 	<ul style="list-style-type: none"> ▶ Stedi-Rest® fits any 1.25 to 1.5 inch (31.75 to 38.1-mm) pole and can take the place of three separate products ▶ Weighs 0.15 lb (0.07 kg) <p>91641 — Stedi-Rest </p> 	<ul style="list-style-type: none"> ▶ 2-inch (50.8-mm) diameter chrome-plated steel housing with grade-8 ceramic magnet ring ▶ Standard topo shoe length, 3.375-inch (85.7-mm) ▶ Magnet has 40 pounds of pull force on 3/8-inch (9.5-mm) clean steel plate ▶ Female 5/8 x 11 threads are machined brass ▶ Black anodized machined 6061 aluminum body ▶ Tilting pivot allows measurement on sloped or flat pipe surfaces ▶ Weighs 0.55 lb (0.25 kg) <p>5193-04 — Tilting Magnetic Topo Shoe </p> 
<ul style="list-style-type: none"> ▶ 5/8 x 11 Double Female Adapter ▶ Weighs 0.08 lb (0.04 kg) <p>5181-00 — Double Female Adapter </p> 	<ul style="list-style-type: none"> ▶ Use this adapter if you have a 1 inch OD pole and want to use a Claw™ pole clamp ▶ Weighs 0.03 lb (0.01 kg) <p>D11145 — 1 inch OD Pole Adapter </p> 	
	<ul style="list-style-type: none"> ▶ 5/8 x 11 Female to 1/4 x 20 Female Adapter ▶ Weighs 0.20 lb (0.09 kg) <p>2131-00 — Prism Pole Adapter - Male </p> <p>2131-01 — Prism Pole Adapter - Female </p> 	

Range Pole Accessories



- ▶ The Rodrest is a self-retracting 'kickstand' for survey rods
- ▶ Activated by simply pushing down a few inches on the handle Weighs 1.55 lb (0.70 kg)



5214-01 — Gardener Rod Rest 1.25-inch OD

- ▶ Quickly connect this new accessory to your Rover Rod
- ▶ Holds the Rod upright when you need to "park"
- ▶ Makes moving from point to point easy, fast and tireless
- ▶ Six inch diameter solid wheels, travels over hard and rough surfaces
- ▶ Folds for easy storage when not in use
- ▶ Legs made of anodized aluminum bar
- ▶ Weight 3.1 lbs (1.4 kg)
- ▶ Reduce your daily effort with this new product designed to save energy and effort in the field



Shown parked and balanced

Pole and Bipod not included.

5125-058 — Pole Transporter

Pole Extensions

Aluminum, carbon fiber or fiberglass extensions



FEATURES & BENEFITS

- ▶ The pole extensions have 5/8 x 11 female threads on the bottom and 5/8 x 11 male

- threads on the top to allow more added sections
- ▶ Choose powder-painted aluminum, carbon fiber, or fiberglass



Part No. 5182-001



PART NO.	OUTSIDE DIAMETER	LENGTH	POLE TYPE	WEIGHS	
5182-001	1 in (25 mm)	3 in (7.62 cm)	Aluminum	0.40 lb (0.18 kg)	
5132-00-ACL	1 in (25 mm)	6 in (15.2 cm)	Aluminum	0.50 lb (0.23 kg)	
5130-01-FLY	1 in (25 mm)	1 ft (30.5 cm)	Aluminum	1.00 lb (0.45 kg)	
5902-00-FLY	1 in (25 mm)	50 cm (19.69 in)	Aluminum	0.70 lb (0.32 kg)	
5131-01-FLY	1 in (25 mm)	2 ft (61 cm)	Aluminum	1.10 lb (0.50 kg)	
5901-00-FLY	1 in (25 mm)	1 meter (39.37 in)	Aluminum	1.10 lb (0.50 kg)	
5110-01-FLY	1 in (25 mm)	4 ft (1.22 m)	Aluminum	1.30 lb (0.59 kg)	
5145-00-FLY	1.25 in (32 mm)	25 cm (9.84 in)	Aluminum	0.90 lb (0.41 kg)	
5130-00-FLY	1.25 in (32 mm)	1 ft (30.5 cm)	Aluminum	1.00 lb (0.45 kg)	
5144-00-FLY	1.25 in (32 mm)	50 cm (19.69 in)	Aluminum	1.00 lb (0.45 kg)	
5131-00-YEL	1.25 in (32 mm)	2 ft (61 cm)	Aluminum	1.10 lb (0.50 kg)	
5143-00-FLY	1.25 in (32 mm)	1 meter (39.37 in)	Aluminum	1.30 lb (0.59 kg)	
5110-00-FLY	1.25 in (32 mm)	4 ft (1.22 m)	Aluminum	1.30 lb (0.59 kg)	
5145-04	1 in (25 mm)	20 cm (7.87 in)	Carbon Fiber	0.30 lb (0.14 kg)	
5145-03	1 in (25 mm)	25 cm (9.84 in)	Carbon Fiber	0.35 lb (0.16 kg)	
5143-03	1 in (25 mm)	1 meter (39.37 in)	Carbon Fiber	0.70 lb (0.32 kg)	
5145-02	1.25 in (32 mm)	25 cm (9.84 in)	Carbon Fiber	0.35 lb (0.16 kg)	
5144-02	1.25 in (32 mm)	50 cm (19.69 in)	Carbon Fiber	0.50 lb (0.23 kg)	
5143-02	1.25 in (32 mm)	1 meter (39.37 in)	Carbon Fiber	0.70 lb (0.32 kg)	
5130-10	1.25 in (32 mm)	0.20 meter (7.87 in)	Fiberglass	0.34 lb (0.15 kg)	

Range Poles



- ▶ Single 4-foot (1.22-m) section range pole
- ▶ 1.13-in (29-mm) outside diameter
- ▶ Includes bag (no point included)
- ▶ Weighs 1.50 lb (0.68 kg)



5160-02-WOR — Contractor Series
4-ft Range Pole

- ▶ Two 4-ft (1.22 m) sections creating 8-ft (2.44-m) range pole
- ▶ 1.13-in (29-mm) outside diameter
- ▶ Includes point and bag
- ▶ Weighs 3.40 lb (1.54 kg)



5140-02-WOR — Contractor Series
8-ft Range Pole

- ▶ Three 4-foot (1.22-m) sections creating 12-ft (3.66-m) range pole
- ▶ 1.13-in (29-mm) outside diameter
- ▶ Includes point and bag
- ▶ Weighs 5.00 lb (2.27 kg)



5150-02-WOR — Contractor Series
12-ft Range Pole

Bipods & Tripods



- ▶ Carbon Fiber Thumb Release Bipod uses the same design concepts as the SECO aluminum Thumb Release Bipod, but weighs less
- ▶ 1- to 1.25-inch (25.6- to 32-mm) diameter poles attach easily through the open clamp
- ▶ 1.5-inch (38.1-mm) OD poles can be loaded through the top
- ▶ Collapses to 43-inches (109-cm)
- ▶ Legs (independently) extend to 6-feet (1.8-m)
- ▶ Weighs 4.10 lb (1.86 kg)



5219-03 — Carbon Fiber Thumb Release Bipod

- ▶ The Carbon Fiber Thumb Release Tripod features a large 5-lobe soft touch rubber clamping knob, and legs of super strong, lightweight carbon fiber
- ▶ Legs collapses to 43-inches (109-cm)
- ▶ Legs extend to 6-ft (1.8-m)
- ▶ Weighs 4.10 lb (1.86 kg)



5219-05 — Carbon Fiber Thumb Release Tripod

- ▶ This tripod is ideal for use with poles under 24-inches (61-cm) long 1- to 1.5inch (25.4- to 38.1-mm) diameter poles thread easily through the open clamp on top
- ▶ Legs are fixed at 12-inches (30.5-cm) each
- ▶ Includes stainless steel clamp screw and rubber tips
- ▶ Rod not included
- ▶ Weighs 1.30 lb (0.60 kg)



5218-15-ABK — Mini Tripod with 12 inch Legs

- ▶ This open-clamp head bipod features a Quick Lever™ locking mechanism that makes attaching or detaching the pole lightning fast — the lever cam action is mechanically simple and holds tight
- ▶ Locking mechanism is made of non-marring Delrin® with an EPDM 80-durometer rubber plug for positive grip
- ▶ Works with 1.25-inch (32-mm) OD poles
- ▶ Available in flo yellow, flo orange, red and yellow
- ▶ Pole shown, sold separately
- ▶ Weighs 4.20 lb (1.90 kg)



5217-50-FOR — Quick Lever Bipod with Thumb Release Legs

- ▶ The tripod features a ball-and-socket head, which makes leveling a bubble easy
- ▶ Legs extend from 2.62- to 4.17-ft (80-cm to 1.3-m)
- ▶ The rubberized jaws hold a pole (up to 2-inch (51-mm) OD) firmly in place
- ▶ Weighs 2.65 lb (1.20 kg)



5214-00 — Alligator Clamp Prism Pole Tripod

- ▶ The Mini Bipod utilizes the same design concepts as the popular 5217-04 bipod, just shorter (see below)
- ▶ Poles 1- to 1.25-inch (25.6- to 32-mm) diameter attach easily through the open clamp
- ▶ Poles 1.5-inch (38.1-mm) OD can load through the top
- ▶ Collapses to 25 inches (63.5 cm)
- ▶ Extends to 35 inches (88.9 cm)
- ▶ Leg clip is included (5217-30)
- ▶ Available colors: yellow, flo yellow, and flo orange
- ▶ Order 8180-20-ORG for carrying case
- ▶ Weighs 3.50 lb (1.60 kg)



5217-05-YEL — Thumb Release Mini Bipod

- ▶ The bipod leg clip easily attaches to the base of any 1.25-inch (32-mm) OD prism or antenna pole
- ▶ The bipod legs snap into the clip making the system convenient for transport or storage
- ▶ Weighs 0.04 lb (0.02 kg)



5217-30 — Bipod Leg Clip

- ▶ A surveyor can set up a free-standing GNSS antenna pole or prism pole
- ▶ Poles 1- to 1.25-inch (25.6- to 32-mm) OD attach through the open clamp
- ▶ 1.5-inch (38.1 mm) OD poles can be loaded through the top
- ▶ Legs (independently) extend to 6 feet (1.8 m)
- ▶ Collapses to 43 inches (109 cm)
- ▶ Available colors: flo yellow, flo orange, red and yellow
- ▶ Order 8180-20-ORG for carrying case
- ▶ Weighs 4.25 lb (1.93 kg)



5217-04-YEL — Original Thumb Release Bipod
5217-40-FLY — Crain Thumb Release Bipod (Includes Crain logo)

- ▶ Thumb-Release™ Tripods creates free-standing GNSS antenna poles or prism poles
- ▶ The thumb lock design allows adjustment of tension without disassembly of the leg
- ▶ Universal head accommodates poles from 1- to 1.25-inch (25.6- to 32-mm) OD
- ▶ Legs extend (independently) to 6-ft (1.8-m)
- ▶ Feature large, smooth, thumb release buttons
- ▶ Constructed of powder-coated aluminum
- ▶ Weighs 6.00 lb (2.60 kg)



5218-02-FLY — Original Thumb Release Tripod
5218-40-YEL — Crain Thumb Release Tripod (Includes Crain logo)


PRISM basics

Prism Offsets


▶ Corner cube prisms (or retroreflectors) used with electronic distance measuring (EDM) instruments have an offset due to the fact that the transmitted light beam from the EDM takes longer to enter and exit the prism. This longer time translates to a longer distance measured. This distance is corrected by using an 'offset' and/ or positioning the prism in relationship to the plumb line of the prism holder. The offset is determined by multiplying the height of the prism by the refractive index of the glass used. Common offsets are 0, -17.5 mm, -30 mm, -34 mm, and -40 mm.

Nodal Offsets


- ▶ A nodal offset is defined by the relationship of the prism holder and prism that places the optical center of the prism on the plumb line of the holder. This offset is the most advantageous at close range work when the apex or center of the prism is used as a pointing target for vertical and horizontal angle measurement. Every prism has a nodal offset. Prisms and holders that are not in the nodal position however, can cause angular errors when using the prism apex as a target if it is not perfectly pointed toward the measuring instrument.
- ▶ To reduce pointing errors, several SECO prism assemblies are designed with a nodal point alignment at -17.5 (for 25 mm prisms) or -40 mm offset (for 62 mm prisms). See illustration at right.
- ▶ Commonly, the best reading of the beam is achieved when the prism face is perpendicular to the incoming beam for a parallel return. Unfortunately, ideal alignment is not always achieved in the field.
- ▶ To compensate for pointing errors, nodal point alignment minimizes the error associated with misalignments (two illustrations below).

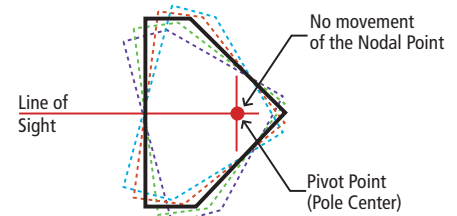

at -17.5 or -40 mm Offset

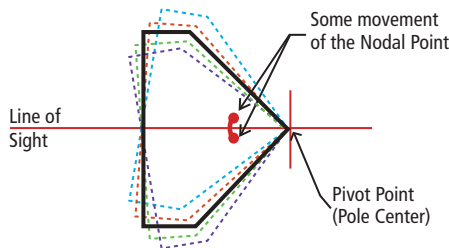

Non-Aligned at -30 mm Offset

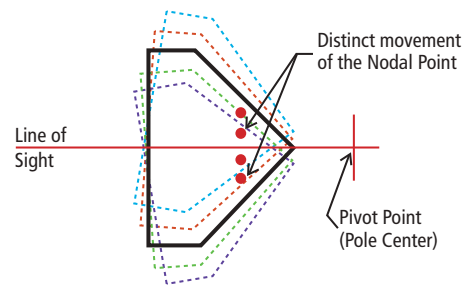

Non-Aligned at 0 mm Offset



Prism Range

- ▶ Corner cube prisms redirect the measuring beam back to the EDM for signal processing. There are two main factors for good range measurement: prism diameter and beam deviation. If the beam deviation is not accurate enough, the returned beam will miss the EDM entirely. This occurs mainly near the maximum range of the EDM (check with your manufacturer). SECO standard prisms are <5 seconds. Higher accuracy prisms are also available.



Prism Holder Accuracy

- ▶ Prism accuracy is determined by the physical location of the prism in its canister and then to its holder. SECO prism accuracy is 1 mm or less.
- ▶ SECO uses a ZYGO GPI-XP/D interferometer to test and confirm the beam deviation of prisms to ensure that they meet specifications. Certificates of compliance are available upon request. Come see us for more details.

62 mm Rear Screw Lock Premier Prism Assembly

Rear locking brass thumb screw



FEATURES & BENEFITS

- ▶ Tilting holder is anodized aluminum and features a 62 mm copper-coated canister prism
- ▶ Features an improved brass locking thumb screw design and a light but durable metal holder
- ▶ Tilting axis height is 115 mm
- ▶ Mounted in either 0 or -30 mm offset positions



Part No.
6402-02-FLB

PART NO.	TARGET COLOR	TARGET SIZE	WEIGHS
6402-02-FLB	Flo Yellow with Black	6 x 9 in	1.75 lb (0.79 kg)
6402-02-FOB	Flo Orange with Black	6 x 9 in	1.75 lb (0.79 kg)
6402-02-YLB	Yellow with Black	6 x 9 in	1.75 lb (0.79 kg)
6422-02-FLB	Flo Yellow with Black	5.5 x 7 in	1.59 lb (0.72 kg)
6422-02-FOB	Flo Orange with Black	5.5 x 7 in	1.59 lb (0.72 kg)
6422-02-YLB	Yellow with Black	5.5 x 7 in	1.59 lb (0.72 kg)

62 mm Rear Lever Lock Premier Prism Assembly

Rear locking stainless steel lever



FEATURES & BENEFITS

- ▶ The heavy-duty 62 mm silver-coated prism is sealed in a strong canister with an 'O' ring to prevent water and dust from getting inside
- ▶ Incorporates a simple stainless steel locking mechanism that's easy to set while adjusting the prism and target tilt
- ▶ Prism can be mounted in either 0 or -30 mm offset positions
- ▶ 115 mm tilting axis height
- ▶ Two target sizes and three color combinations are available



Part No.
6402-20-FLB

PART NO.	TARGET COLOR	TARGET SIZE	WEIGHS
6402-20-FLB	Flo Yellow with Black	6 x 9 in	1.75 lb (0.79 kg)
6402-20-FOB	Flo Orange with Black	6 x 9 in	1.75 lb (0.79 kg)
6402-20-YLB	Yellow with Black	6 x 9 in	1.75 lb (0.79 kg)
6422-20-FLB	Flo Yellow with Black	5.5 x 7 in	1.59 lb (0.72 kg)
6422-20-FOB	Flo Orange with Black	5.5 x 7 in	1.59 lb (0.72 kg)
6422-20-YLB	Yellow with Black	5.5 x 7 in	1.59 lb (0.72 kg)

62 mm Strobe Prism Premier Assembly

62 mm strobe prism assembly



FEATURES & BENEFITS

- ▶ Combines the premier target and holder with a strobe prism
- ▶ Features a strobing LED light which flashes every 0.5-second (6416-00)
- ▶ Perfect for low light conditions
- ▶ Tilting axis height is 115 mm
- ▶ Weighs 1.35 lb (0.62 kg)



Part No.
6402-03-FLB

PART NO.	TARGET COLOR	TARGET SIZE
6402-03-FLB	Flo Yellow with Black	6 x 9 in
6402-03-FOB	Flo Orange with Black	6 x 9 in
6402-03-YLB	Yellow with Black	6 x 9 in

-35 mm Premier Prism Assembly

Works with Trimble and Zeiss Total Stations



FEATURES & BENEFITS

- ▶ Features a -35 mm offset and a prism accuracy of <5 seconds
- ▶ Mounting base features standard female 5/8 x 11 threads
- ▶ Tilting holder is constructed of anodized aluminum
- ▶ Height of the prism in the holder is 100 mm
- ▶ 62 mm silver-coated prism is encased in a heavy-duty canister with M20 threads
- ▶ Weighs 1.75 lb (0.80 kg)
- ▶ Nodal



Part No.
6402-05-FLB

PART NO.	TARGET COLOR	TARGET SIZE	
6402-05-FLB	Flo Yellow with Black	6 x 9 in	
6402-05-FOB	Flo Orange with Black	6 x 9 in	
6402-05-YLB (shown)	Yellow with Black	6 x 9 in	

-30 and 0 mm Premier Prism Assembly

Works with Nikon, Topcon & Sokkia Total Stations



FEATURES & BENEFITS

- ▶ 62 mm copper-coated prism is encased in a heavy-duty canister with M20 threads
- ▶ Features a -30 and 0 mm offset
- ▶ Height of the prism in the holder is 100 mm
- ▶ Tilting holder is constructed of anodized aluminum
- ▶ Prism accuracy of <5 seconds
- ▶ Mounting base features standard female 5/8 x 11 threads
- ▶ Weighs 1.75 lb (0.80 kg)



Part No.
6402-06-YLB

PART NO.	TARGET COLOR	TARGET SIZE	
6402-06-FLB	Flo Yellow with Black	6 x 9 in	
6402-06-FOB	Flo Orange with Black	6 x 9 in	
6402-06-YLB (shown)	Yellow with Black	6 x 9 in	

Contractor Series 62 mm Prism Assembly

Standard prisms



FEATURES & BENEFITS

- ▶ Features a 62 mm copper-coated canister type prism
- ▶ Water-resistant and has a M20 universal mounting thread
- ▶ Tilting holder is powder-painted die cast aluminum
- ▶ Uses a simple but proven locking system
- ▶ Mounted in either 0 or -30 mm offset positions
- ▶ Tilting axis height is 115 mm
- ▶ Weighs 1.35 lb (0.62 kg)



Part No.
6402-10-FOB

6402-10-FOB — Construction Series Prism Assembly in Flo Orange with Black
 6402-10-FLB — Construction Series Prism Assembly in Flo Yellow with Black
 6402-10-YLB — Construction Series Prism Assembly in Yellow with Black



Tilting Triple Prism Assembly

Complete system is perfect for longer distances



FEATURES & BENEFITS

- ▶ Made from orange polycarbonate with metal inserts and an aluminum yoke
- ▶ H.T. is 97 mm
- ▶ Holds one to three prisms, is compatible with most screw-in prisms
- ▶ Has a peep sight for pointing the holder, perfect for longer distances
- ▶ Includes three sealed copper-coated 62 mm prisms in black canisters (6411-02-BLK)
- ▶ 0 and -30 mm prism offset
- ▶ Weighs 2.70 lb (1.23 kg)



Part No.
6341-00

6341-00 — Tilting Triple Prism Assembly
 6341-11 — Tilting Triple Prism Target



Adjustable Dual Prism

Allows accurate measurements from two or more directions or stations



FEATURES & BENEFITS

- ▶ The Adjustable Dual Prism is the newest addition to our 6603-Series for mining, tunneling, monitoring and rail
- ▶ Minimal horizontal angle is 84° (Hex tool included)

- ▶ Compatible with standard surveying 5/8 x 11 accessories
- ▶ Holders can be stacked for more than two prisms or an GNSS Receiver can be connected on the top 5/8 x 11 stud so an GNSS measurement can also be made

- ▶ Includes two 62 mm silver coated, water-resistant prisms, accuracy < 2 arc seconds
- ▶ Prism holder is machined from 303 stainless-steel
- ▶ Zero (0) prism offset, ±1 mm
- ▶ Weighs 2.60 lb (1.18 kg)



Part No. 6603-03

6603-03 — Adjustable Dual Prism



Sliding Prism with Tilting Reflector

Use with SECO's 5120-Series Geodimeter Style Prism Pole or Site Rod



FEATURES & BENEFITS

- ▶ The 6455-00 attaches to the bottom of the graduated section of the pole so heights can be taken close to the ground

- ▶ Includes a, large, 2.5 inch (63.5 mm) silver-coated prism with protective rubber ring
- ▶ 0 offset and 40-min leveling vial
- ▶ Tilts in 15° increments, spring locked

- ▶ Large easy-to-use clamping knob
- ▶ Targets made of fluorescent-yellow translucent polycarbonate
- ▶ Weighs 0.81 lb (0.37 kg)



Part No. 6455-00

6455-00 — Sliding Prism with Tilting Reflector



Backlight Prism Assembly

Ideal for night surveys, forensics, tunneling, mining, or any low-light situations



FEATURES & BENEFITS

- ▶ Back Lighted Target, three phases, solid, slow, and fast flashing
- ▶ Powered by 2 x 1600 mAh Lithium Ion Batteries
- ▶ 10 hours continual use, 500+

- ▶ Charge cycles
- ▶ Micro USB charge cable included
- ▶ 5 X 7 inch replaceable target plate
- ▶ Water and Dust resistant
- ▶ 62MM Prism, 0/-30 offset
- ▶ All metal tilting holder, front locking

- ▶ Tilting Axis Height 115mm or 100mm, both adapter included (80mm w/o adapters)
- ▶ Warranty, one year from date of purchase
- ▶ Weight, 1.5lbs (0.68kg)



Part No. 6400-12-FOR

6400-12-FOR — Backlight Prism Assembly



Eclipse 62 mm Nodal Point Prism Assembly

Can be offset to -40 mm



FEATURES & BENEFITS

- ▶ The Eclipse™ prism assembly features a water-resistant, nitrogen-charged, 62 mm prism canister and reversible target

- ▶ Can be set at a -40 mm, which offers optimal angle measurements, even when tilting in either the horizontal or the vertical axis

- ▶ Height to center of glass: 0.38 ft (115 mm)
- ▶ -30 mm adapter is included
- ▶ Weighs 1.15 lb (0.52 kg)



Part No. 6400-00

6400-00 — Eclipse 62 mm Nodal Point Prism Assembly
6410-00 — -30, -40 Offset Eclipse Prism Holder
6410-018 — 0 Offset Adapter for Eclipse Prism Assembly



62 mm Nodal Point Prism Assembly

Can be offset to -40 mm



FEATURES & BENEFITS

- ▶ The import assembly features a polycarbonate holder, three prism offset positions, 0, -30 and -40 (nodal)

- ▶ The 62 mm prism is silver-coated and has a <5-second accuracy
- ▶ The height to center of glass: 0.33 ft (100 mm)

- ▶ The reversible non-tilting metal target comes in orange & white and black & white
- ▶ Weighs 1.45 lb (0.66 kg)



Part No. 6400-10

6400-10 — Nodal Point 62 mm Prism Assembly




Prism Assemblies



- ▶ Includes copper-coated 62 mm prism (6411-02)
- ▶ -30 mm offset aluminum prism holder, sealed with a rugged corrosion-proof electrostatic powder paint coating
- ▶ Target Size: 4.75" x 4.75"
- ▶ Weighs 1.50 lb (0.68 kg)



6440-00-FOR — Single Prism Tilting Assembly 

- ▶ This high-quality GPH1 Swiss-style prism assembly features a coppercoated prism for consistent results and a removable target
- ▶ Metal prism holder
- ▶ Reversible target (long and short range, long range shown)
- ▶ Coating: Copper High Reflex coating and anti-reflex on front
- ▶ Offset: -34 mm, Nodal
- ▶ Diameter: 64,9 mm
- ▶ Centring accuracy: 1 mm
- ▶ Carrying case included
- ▶ Height: 86 mm
- ▶ Weighs 1.32 lb (0.60 kg)



Long Range Target

GEOPRISM — Surveying Prism with Metal Housing 

- ▶ The Eclipse™ mini system includes: a Mini Tilting Prism; plumb bob attachment; Mini Bob Prism Mount; Point, and Belt Case
- ▶ 0 and -30 offsets
- ▶ Black hardware
- ▶ Case included
- ▶ Weighs 0.30 lb (0.14 kg)



6450-00-BLK — Tilting Mini Prism System 

- ▶ -34 mm offset prism
- ▶ 86 mm H.T
- ▶ Weighs 0.92 lb (0.42 kg)





6406-00 — Nodal Point 62 mm Prism Assembly 

Mini and Stakeout Prisms






- ▶ Here's a versatile prism system in a small package
- ▶ Assembly features a 25 mm copper-coated prism, for fog prevention, a tilting holder, with friction axis, 0 or -30 mm offset
- ▶ Can mounted on a prism pole or tribrach at three heights: 70 mm, 100 mm, 115 mm, or can be hand-held using the plumb bob bracket or with S-hook for quick attachment to plumb bob
- ▶ Includes a 40-minute adjustable circular center or side mounted vial
- ▶ Also included a point for stake-out work, and a system bag with belt loop
- ▶ Powder painted flo orange
- ▶ Weighs 0.34 lb (0.15 kg)



6200-10-FOR — Mini Prism System with Center Vial 
6200-11-FOR — Mini Prism System with Side Vial (shown) 

- ▶ The 25 mm Stakeout Prism Assembly features 'site cones' that improve vertical angle pointing — the site cones double as tilting-axis lock knobs
- ▶ Adjustable 40-min vial is mounted on the front side
- ▶ and is easy to see and simple to adjust
- ▶ Includes carrying case
- ▶ Weighs 0.30 lb (0.14 kg)



PART NO.	OFFSET	COLOR	
6405-10-FLY	0 / -30 offset	Flo Yellow	
6405-10-FOR	0 / -30 offset	Flo Orange	
6405-12-FLY	-17.5 offset (Nodal)	Flo Yellow	
6405-12-FOR	-17.5 offset (Nodal)	Flo Orange	

- ▶ The Mini Stakeout Prism with Site Cones features a 25 mm, copper-coated prism, aluminum double yoke construction with tilting coaxial target
- ▶ Two on-board 130-minute vials — top and bottom
- ▶ Includes replaceable plumb bob point
- ▶ 0 and -30 mm offset
- ▶ Includes carrying case
- ▶ Weighs 0.62 lb (0.28 kg)



6405-01-FOR — 25 mm Stakeout Prism Assembly - Flo Orange 
6405-01-FLY — 25 mm Stakeout Prism Assembly - Flo Yellow 

- ▶ The white site cones on X and Y axis of the assembly help improve centering of your instrument's crosshairs for vertical and horizontal pointing
- ▶ Used in four height configurations: 50 mm, 100 mm, 115 mm and 150 mm, top or bottom of the pole, handheld, or tribrach mounted
- ▶ Choose between 0/-30 mm or -17.5 mm (nodal) offsets
- ▶ Weighs 0.80 lb (0.36 kg), 1.30 lb (0.59 kg) with heavy-duty point



6405-11-FOR — Stakeout Mini Prism Kit - 0 / -30 mm offset - Flo Orange 
6405-11-FLY — Stakeout Mini Prism Kit - 0 / -30 mm offset - Flo Yellow 
6405-13-FOR — Stakeout Mini Prism Kit - Nodal -17.5 mm offset 

- ▶ The Mini Prism Mono Pod Kit forms a stable base with your 6000-Series Mini Prism (sold separately, 6405-10-FOR)
- ▶ Kit is easy to set up and can be used by just one person
- ▶ Ideal for: construction surveys, inspections, asbuilts, and many other applications
- ▶ Add a standard 5/8 x 11 extension to the kit to achieve heights to four feet
- ▶ Weighs 2.25 lb (1.02 kg)



5216-00 — Mini Prism Mono Pod Kit 



Sliding Prisms and Pin Pole Kits

Site cones double as locks

- ▶ Prism assembly slides up and down the pin pole
- ▶ Features a 25 mm, 0 offset silver-coated prism and a high quality aluminum holder
- ▶ Kit includes four 1-foot (30.5-cm) pole sections each with a 0.50-ft (15.24-cm) mark
- ▶ Site cones double as locks
- ▶ 40-minute adjustable vial on prism
- ▶ Prism includes an adapter so it can be used on any pole or tribrach adapter with 5/8 x 11 threads
- ▶ A system bag is also included
- ▶ Weighs 1.40 lb (0.63 kg)



5910-05 — Feet, 0 Offset (shown)
5910-06 — Metric, 0 offset



- ▶ This Reflector Pin Pole kit is ideal for use with reflectorless total station instruments
- ▶ The target holder is machined anodized aluminum and allows the target to tilt 360°
- ▶ 40-minute vial is built in
- ▶ Comes with four aluminum 30-cm pole sections, prism and system case
- ▶ 5 cm point is a special three-piece nonconductive design
- ▶ Weighs 1.45 lb (0.66 kg)



5910-10 — Reflector Pin Pole Kit



The sliding 360° Prism Kit allows for quick shots in confined line-of-sight situations and allows for more precise height measurements. Easily find the right shot at the right height!

The included adapter allows for easy connection to controllers, making it great for handheld use. Use one or all four pin pole sections for the height/portability you need.

- ▶ The prism assembly slides on 9-mm-diameter solid steel pin poles, graduated in cm
- ▶ The four solid yellow pole sections have cm grooves that the ball-detent in the prism assembly will automatically center on
- ▶ Replaceable stainless steel point
- ▶ The assembly is composed of seven 12.7- mm diameter silver-coated mini-prisms in a 360° configuration
- ▶ Prism offset is +2mm
- ▶ Adjustable circular vial is 40-minute
- ▶ Clamp screw locks the prism assembly anywhere on the pole
- ▶ Data collector adapter and carrying case are included
- ▶ Weighs 1.70 lbs (0.77 kg)

- ▶ The 12.2 mm OD pin pole features three sections - each 60 cm in length to achieve 5.91 ft (1.8 m); each color section (red or white) is 10 cm in length
- ▶ An adjustable 40-minute circular vial is built in to the prism holder
- ▶ 25 mm sliding prism system features a silver-coated prism with a 0 offset
- ▶ The holder easily slides up and down the pole, the knobs lock in height and tilt – they also double as vertical angle targets
- ▶ Other features include a replaceable stainless steel point on the pole, accessory kit with plumb bob hook and cone for attachment to the prism for handheld applications and a system bag
- ▶ Weighs 1.95 lb (0.90 kg)



6600-10 — Pin Pole with Sliding 25 mm Prism System



- ▶ This Euro-Style Pole System features a 40-minute adjustable vial, white sight cones and a 5/8 x 11 adapter for standard prism poles (for height of 115 mm)
- ▶ All 30 cm sections are anodized aluminum
- ▶ A carrying case is also included
- ▶ Weighs 1.60 lb (0.73 kg)



PART NO.	OFFSET
5910-01-ARD	0 / -30 offset
5910-02-ARD	-17.5 offset (Nodal)



5910-24 — Sliding 360° Prism Kit

Prism Assembly Components

Customize your own prism solution



- ▶ 62 mm Nitrogen filled prism with hermetically sealed canister
- ▶ Features <5-second accuracy



6411-00

- ▶ 62 mm copper-coated prism with sealed canister
- ▶ Features <5-second accuracy



6411-02-BLK

- ▶ 62 mm silver-coated prism with heavy-duty sealed canister
- ▶ Features <5-second accuracy



6411-03-BLK

- ▶ 62 mm silver-coated prism with heavy-duty sealed-canister
- ▶ Features <2-second accuracy



6411-04-BLK

- ▶ 62 mm silver-coated strobe prism
- ▶ Features 0.5-second flash
- ▶ Sanyo CR 1/3N Battery



6416-00

- ▶ 25 mm copper-coated prism in a canister
- ▶ Weighs 0.06 lb (0.03 kg)



6020-01

- ▶ 25 mm silver-coated prism in a canister
- ▶ Weighs 0.06 lb (0.03 kg)



6020-02

Mini Prisms

Lightweight and inexpensive, made to be set up and left for extended periods



- ▶ Features a 60 mm diamond pattern sheeting and a 2 mm offset
- ▶ Use for distances up to 492 ft (15 m)
- ▶ Feature an 86 mm height
- ▶ Fit Swiss-style male tips or Quick Release adapters
- ▶ Weighs 0.17 lb (0.08 kg)



6600-01 — Small Tilting Mini Prism - Diamond Pattern

- ▶ Features a 60 mm diamond pattern with Crosshairs sheeting and a 2 mm offset
- ▶ Use for distances up to 492 ft (15 m)
- ▶ Features an 86 mm height
- ▶ Fits Swiss-style male tips or Quick Release adapters
- ▶ Weighs 0.15 lb (0.07 kg)



6600-03 — Diamond Pattern with Crosshairs

- ▶ Use for distances up to 492 ft (15 m)
- ▶ Features a 25 mm mini prism for longer distances up to 2,000 ft (600 m)
- ▶ Features an 86 mm height
- ▶ Fits Swiss-style male tips or Quick Release adapters
- ▶ Offset 17.5 mm
- ▶ Weighs 0.23 lb (0.10 kg)



6600-04 — Small Tilting 25 mm Mini Prism

- ▶ This Prism Series is ideal for deformation and mining surveys or wherever permanent mounting is needed
- ▶ This design makes mounting and pointing easy on uneven surfaces
- ▶ Mounting Arm allows tilt up to 240 degrees and Prism mount allows 360 degrees rotation
- ▶ Rechargeable battery
- ▶ The two Mounting holes are spaced 1.75" (44.4mm) apart
- ▶ Mounting holes are 0.328" (8.3mm) diameter
- ▶ Two Prism mounting holes, spaced 1.75" (44.4mm) apart
- ▶ Pivot and Prism mounting bolts are 8MM stainless steel with lock washers
- ▶ 6mm Hex wrench included
- ▶ Rain Hood included with 6603-05



- ▶ The 25 mm copper-coated prism is permanently bonded to the holder making it water and dust proof
- ▶ Features a black anodized aluminum holder
- ▶ Tilting screw uses an 8 mm hex wrench to loosen and tighten it
- ▶ Mounting hole is 10.3 mm (0.406 inch) in diameter
- ▶ Design makes mounting and pointing simple
- ▶ -25 mm offset
- ▶ Weighs 0.45 lb (0.20 kg)



6600-02 — 25 mm 'L-Bar' Copper-Coated Mini Prism

- ▶ The 25 mm silver-coated prism is permanently bonded to the holder making it water and dust proof
- ▶ Features a black anodized aluminum holder
- ▶ Tilting screw uses an 8 mm hex wrench to loosen and tighten it
- ▶ Mounting hole is 10.3 mm (0.406 inch) in diameter
- ▶ Design makes mounting and pointing simple
- ▶ -25 mm offset
- ▶ Weighs 0.45 lb (0.20 kg)



6600-05 — 25 mm 'L-Bar' Silver-Coated Mini Prism

PART NO.	PRISM SIZE	COATED	WEIGHT
6603-05	62 mm	Silver	1.15 lbs (0.52 kg)
6603-06	25 mm	Copper	0.50 lbs (0.23 kg)

Quick Release Adapters and Rebar Bolts

Lightweight and inexpensive, made to be set up and left for extended periods




- ▶ 6601-Series Quick Release Adapters are made of T-303 stainless steel with machined threads that attach to corresponding Anchor Bolts or the 6602-Series rebar bolts
- ▶ Weighs 0.10 lb (0.05 kg)



6601-01 — 1/4" x 20 Threads
 6601-02 — 3/8 x 16 Threads
 6601-03 — M8 Threads
 6601-04 — M12 Threads

- ▶ Measures 3/4 x 9.9 inches (19.05 x 251.46 mm) long
- ▶ Includes a hex bolt used to hammer the bolt in to the surface
- ▶ Once installed, remove the hex bolt and install the 6601-Series adapter of your choice
- ▶ Choose between 3/8 x 16, M8 or M12 thread patterns
- ▶ Weighs 1.25 lb (0.57 kg)



6602-01 — Rebar Bolt 3/8 x 16 Threads
 6602-02 — Rebar Bolt M12 Threads
 6602-03 — Rebar Bolt M8 Threads

Monitoring Accessories



- ▶ Prism center is located in center of the ball
- ▶ Prism Ball
- ▶ 50 mm diameter
- ▶ 25 mm prism
- ▶ Weighs 0.75 lb (0.34 kg)
- ▶ Prism constant -17mm



5 312 001 — 50 mm Diameter Prism Ball 

- ▶ Anodized aluminum plate
- ▶ Three key holes for screws to mount the plate
- ▶ 5/8 inch to the threaded stud Tribrach adapter centered on the plate
- ▶ Weighs 1.81 lb (0.82 kg)



1 510 011 — Screw Mounting Column Plate 

- ▶ Anodized aluminum plate
- ▶ The three bottom anchor bolts are embedded in concrete during installation
- ▶ With 5/8 x 11 threaded stud for Tribrach adapter centered on the plate
- ▶ Weighs 2.29 lb (1.04 kg)



1 510 001 — Column Plate 

- ▶ Wedge-shaped aluminum plate features a 12.5 mm prism
- ▶ Plate can be fixed with special adhesive on to the pavement
- ▶ Dimensions: 10 x 10 x 2 cm (3.94 x 3.94 x 0.79 inches)
- ▶ Weighs 0.62 lb (0.28 kg)



4 520 800 — 12.5 mm Street-Mountable Building Monitoring Prism System 

- ▶ 5/8 x 11 thread extensions
- ▶ Rod is constructed of aluminum and threads are made of stainless steel
- ▶ Choose between 30, 50 or 100 cm extension lengths
- ▶ 4 520 120 weighs 0.57 lb (0.26 kg)
- ▶ 4 520 122 weighs 0.79 lb (0.36 kg)
- ▶ 4 520 121-5/8" weighs 1.28 lb (0.58 kg)



4 520 120 — 30 cm Prism Height Extension for 5/8 x 11 Threads
 4 520 122 — 50 cm Prism Height Extension for 5/8 x 11 Threads
 4 520 121-5/8" — 100 cm Prism Height Extension for 5/8 x 11 Threads 

- ▶ For concreting a measuring
- ▶ Prisms and reflective target boards without any special adapter can be attached to the swiss-style system
- ▶ 20 mm diameter, made with ribbed steel with a galvanized stud
- ▶ Can be ordered with convergence steel protection ring (e.g. 5 114 150-PR)



5 114 150 — 150 mm Convergence Measuring Bolt 
 5 114 200 — 200 mm Convergence Measuring Bolt 
 5 114 270 — 270 mm Convergence Measuring Bolt 
 5 114 350 — 350 mm Convergence Measuring Bolt 

- ▶ For concreting as measuring point
- ▶ For placing a prism or reflective target plate on the 3/8-inch thread, a plastic adapter is screwed in
- ▶ Supplied with a simple plastic cap
- ▶ Corrugated steel, 20 mm diameter galvanized



5 115 150 — 150 mm Convergence Measuring Bolt 
 5 115 200 — 200 mm Convergence Measuring Bolt 
 5 115 270 — 270 mm Convergence Measuring Bolt 
 5 115 350 — 350 mm Convergence Measuring Bolt 

- ▶ The track has a bracket for tram or track shortened leg to allow the measurement in grooved rails
- ▶ With moving across the track axis for horizontal alignment
- ▶ With strong magnet



5 263 000 — Track Angle for Tram w/ 5/8 inch Threads 
 5 263 001 — Track Angle for Tram w/ Wild-Style Stud 
 5 263 002 — Track Angle for Tram w/ 10 mm Stud 

- ▶ Wild stud adapter with M8 threads
- ▶ Weighs 0.09 lb (0.04 kg)



5 113 100 — For 100 mm Wall Distance (M8 - Wild) 

Walleye Prism System

Lightweight and inexpensive, made to be set up and left for extended periods



FEATURES & BENEFITS

- ▶ The Walleye™ Prism System accommodates a full size 62 mm prism (6411-03-BLK) for long range applications or when a larger prism is needed
- ▶ Rain hood helps keep the prism clean to ensure continual measurements over a long measuring cycle

- ▶ The flat bottom of the L-Bracket is a large 2.3 x 3.4 inch with five holes for mounting to a variety of surfaces
- ▶ Components available individually so you can configure your specific needs
- ▶ The system is compatible with all M20 screw-in type prism canisters

- ▶ Center pivot hole is 3/8 inch (9.5 mm), the four screw holes are 4.5 mm OD
- ▶ Features include a -40 mm offset, ± 2 mm, ability to pivot in two axes, stainless-steel locking
- ▶ System weighs 1.55 lb (0.70 kg)



Part No.
6603-00

PART NO.	DESCRIPTION	
6603-00	Complete Walleye Prism System with Prism and 5/8 x 11 Adapter	
6603-01	Complete Walleye Prism System with Prism and M8 Adapter	
6603-00-050	L-Bracket Assembly Only	
6603-00-005-TMB	Rain Hood Only	
6603-00-051	5/8 x 11 Adapter with Screws and Washer	
6603-01-051	M8 Adapter with Screws and Washer	

Tribrachs & Adapters



- ▶ This adapts retro prisms to Swiss style tribrachs and has a removable Zeiss plug and locking screw
- ▶ Fits all tribrachs
- ▶ Weighs 1.75 lb (0.80 kg)
- ▶ Height 34.5 mm



2070-00 — Rotating Tribrach Adapter

- ▶ The Optical Plummet Twist Focus Tribrach features twist focus (2.5X mag) and leveling screws with center line
- ▶ Features an 8-min vial, three-prong forced centering and a 5/8 x 11 base
- ▶ Tribrach has a focusing range of 1.5 to 50 ft (0.5 to 15 m)
- ▶ 2152-04 available in yellow, grey or black
- ▶ Weighs 1.85 lb (0.84 kg)



2152-04-BLK — Tribrach with Optical Plummet
2153-04-BLK — Tribrach w/o Optical Plummet

- ▶ Allows adjusting of prism height by moving the threaded brass insert in the adapter
- ▶ Fits all tribrachs
- ▶ Weighs 1.91 lb (0.87 kg)
- ▶ 50-75 mm



2071-00 — Prism H.T. Adapter

- ▶ Bright 650-nm focused laser dot
- ▶ Circular vial w/ 8-minute sensitivity
- ▶ Standard three-prong forced centering with center lines
- ▶ Included is a standard 3 volt CR2 lithium battery
- ▶ Weighs 1.65 lb (0.75 kg)
- ▶ Laser class 2



2153-02-BLK — Laser Tribrach

- ▶ This rotating friction top tribrach adapter allows the prism to be pointed after installation in the tribrach
- ▶ Fits all tribrachs
- ▶ Weighs 0.90 lb (0.41 kg)
- ▶ Height 32 mm



2020-00 — Rotating Tribrach Adjuster

- ▶ Use adapter for mounting retro prisms and tripod mounted target systems
- ▶ Fits all tribrachs
- ▶ Weighs 0.50 lb (0.23 kg)
- ▶ Height 24.5 mm



2010-00 — Fixed Tribrach Adapter

- ▶ Will accept any 5/8 x 11 instrument
- ▶ Features a precision brass slow-motion tangent screw
- ▶ Fits all tribrachs
- ▶ Weighs 3.00 lb (1.36 kg)
- ▶ Height 48.5 mm



2021-00 — Horizontal Base

- ▶ Use for adjusting optical plummet tribrachs and tribrach bubbles
- ▶ Machined black anodized aluminum features a 2-minute bubble
- ▶ Weighs 1.30 lb (0.59 kg)



2002-00 — Tribrach Adjuster

- ▶ Check and adjusting optical plummet tribrachs in the office
- ▶ Precision-machined, black anodized aluminum
- ▶ Weighs 0.70 lb (0.32 kg)



2001-00 — Tribrach Adjusting Cylinder



- ▶ Tribrach Adapter
- ▶ Height: 136.2 mm
- ▶ Weighs 0.88 lb (0.40 kg)



FPT144-BLK — Traverse Tribrach Adapter & GPS Carrier w/ Swiss-Style Locking Pin



- ▶ Fixed Tribrach Adapter
- ▶ Height: 145.5 mm
- ▶ Weighs 1.10 lb (0.50 kg)



FPT146-BLK — Fixed Tribrach Adapter with 5/8 x 11 Stud



- ▶ Tribrach Adapter
- ▶ Height: 40 mm
- ▶ Weighs 0.62 lb (0.28 kg)



FPT247-BLK — Fixed Tribrach Adapter & GPS Carrier with 5/8 Stud



- ▶ Tribrach Adapter
- ▶ Includes rotating lock screw
- ▶ Height: 32 mm
- ▶ Weighs 1.10 lb (0.50 kg)



A455 — Tribrach Adapter with Rotating Lock Screw



- ▶ Tribrach Adapter
- ▶ Non-Rotatable
- ▶ Height: 22.5 mm
- ▶ Weighs 0.66 lb (0.30 kg)



A452 — Non-Rotatable 5/8 x 11 Tribrach Adapter



- ▶ Tribrach Adapter
- ▶ Height: 23 mm (slim)
- ▶ Rotating, Friction
- ▶ Weighs 0.79 lb (0.36 kg)



A458 — Rotatable Tribrach Adapter



- ▶ Tribrach Adapter
- ▶ Height: 32 mm
- ▶ Rotating, Friction
- ▶ Weighs 1.06 lb (0.48 kg)



A456 — Tribrach Adapter



- ▶ Rotatable prism holder
- ▶ With optical plummet
- ▶ Shortest focal distance: 0.35 mm
- ▶ Operating Temperature: -20°C to +50°C
- ▶ Magnification: 2x
- ▶ Image: Erect
- ▶ Height: 136.2 mm
- ▶ Accuracy: 0.5 mm/1.5 m
- ▶ Vial Sensitivity: 45"/2 mm
- ▶ Swiss-Style quick lock pin
- ▶ Weighs 1.41 lb (0.64 kg)



RT481WON-BLK — Rotatable Prism Holder with Optical Plummet and Swiss-Style Locking Pin



- ▶ Rotatable prism holder
- ▶ With optical plummet
- ▶ Shortest focal distance: 0.35 mm
- ▶ Operating Temperature: -20°C to +50°C
- ▶ Magnification: 2x
- ▶ Image: Erect
- ▶ Accuracy: 0.5 mm/1.5 m
- ▶ Height 100 mm
- ▶ Vial Sensitivity: 45"/2 mm
- ▶ Bayonet style tip
- ▶ Weighs 1.41 lb (0.64 kg)



RT482WON-BLK — Rotatable Prism Holder with Optical Plummet and Bayonet Tip



- ▶ Rotatable prism holder
- ▶ With optical plummet
- ▶ Shortest focal distance: 0.35 mm
- ▶ Operating Temperature: -20°C to +50°C
- ▶ Vial Sensitivity: 45"/2 mm
- ▶ Magnification: 2x
- ▶ Image: Erect
- ▶ Height 70 mm
- ▶ Accuracy: 0.5 mm/1.5 m
- ▶ 5/8 x 11 threaded stud
- ▶ Weighs 1.23 lb (0.56 kg)



RT484WON-BLK — Rotatable Prism Holder with Optical Plummet and 5/8 x 11 Threaded Stud



- ▶ Rotatable prism holder
- ▶ Without optical plummet
- ▶ Swiss-Style quick lock pin
- ▶ Height: 136.2 mm
- ▶ Vial: 45"/2 mm
- ▶ Weighs 1.21 lb (0.55 kg)



RT481W-BLK — Rotatable Prism Holder without Optical Plummet with Swiss-Style Locking Pin



- ▶ Rotatable prism holder
- ▶ Without optical plummet
- ▶ Bayonet tip
- ▶ Height: 100 mm
- ▶ Vial: 45"/2 mm
- ▶ Weighs 1.21 lb (0.55 kg)



RT482W-BLK — Rotatable Prism Holder without Optical Plummet with Bayonet Tip



- ▶ Rotatable prism holder
- ▶ Without optical plummet
- ▶ 5/8 x 11 threaded stud
- ▶ Height: 70 mm
- ▶ Weighs 1.06 lb (0.48 kg)



RT484W-BLK — Rotatable Prism Holder without Optical Plummet with 5/8 x 11 Threaded Stud



GeoDesy
by SECO

Quality European-made tribrachs allows your equipment to stay steady



FEATURES & BENEFITS

- ▶ SECO now offers Geodesy-MOM tribrachs in two different models; our High-Precision tribrach and now the Standard-Precision tribrach
- ▶ European-made with an effortless locking mechanism for fast and solid accessory connection

- ▶ A center line on each of the leveling screws allows the user to balance the lengths of the leveling screws
- ▶ All tribrachs feature 5/8 x 11 threaded base plates and 8-minute circular vials
- ▶ High-precision tribrachs feature an error in angle measurement (hysteresis) is under 3 cc (60

- Ncm torsion moment and 12 kg vertical load), standard tribrach is 5 cc
- ▶ The 2152-06-BLK has a shortest focus distance of 0.35 m and an accuracy of 0.5 mm / 1.5 m
- ▶ Features 2X magnification and an erect image
- ▶ Operating temperature is -20°C to +50°C (-4°F to +122°F)



Part No.
2152-06-BLK

- 2152-06-BLK — High-Precision Tribrach with Optical Plummet
- 2153-06-BLK — High-Precision Non-Optical Plummet Tribrach
- 2152-07-BLK — Standard Precision Tribrach with Optical Plummet
- 2153-07-BLK — Standard Precision Non-Optical Plummet Tribrach



European Style Tribrach

Choose with or without Optical Plummet



FEATURES & BENEFITS

- ▶ This tribrach features 2X magnification and a twist focus
- ▶ Its reticule is composed of two small concentric circles

- ▶ With a sighting distance of 0.3 m to 15 m, the tribrach has an accuracy of 0.5 mm per 1.5 m
- ▶ Locking forced-centering knob and a 5/8 x 11 base and an 8-minute circular vial

- ▶ Choose between with an optical plummet or without an optical plummet
- ▶ Weighs 1.55 lb (0.70 kg)



Part No.
2152-05-BLK

- 2152-05-BLK — European-Style Tribrach with Optical Plummet
- 2153-05-BLK — European-Style Tribrach Non-Optical Plummet Tribrach



Traverse Tribrach Adapter

Compatible with all 24.9 mm bayonet base prisms



FEATURES & BENEFITS

- ▶ The optical plummet is twist-focus with 2.5X magnification
- ▶ 60-second adjustable plate vial
- ▶ Precision-machined axis

- rotates 360°
- ▶ Compatible with all prisms with a 24.9 mm bayonet base
- The adjustable height is 100 to 120 mm — fits all standard

- three-prong tribrachs
- ▶ Over point accuracy is 0.5 mm at 1.5 m
- ▶ Available in black
- ▶ Weighs 1.70 lb (0.77 kg)



Part No.
2153-10-BLK

2153-10-050 Male
5/8 x 11 Adapter

2153-10-051 Quick
Release Adapter

2153-10-BLK — Traverse Tribrach Adapter



Single Prism Traverse Kit

Target, glass and plummet all in one hard-shell case



FEATURES & BENEFITS

- ▶ Includes a 62 mm prism with silver-coated canister (6400-10)
- ▶ The adjustable (and reversible) tilt target has a sighting collimator for precise pointing and has 0, -30, and -40 offsets
- ▶ The kit comes with a rotating tribrach adapter (2153-10) that is

- compatible with all prisms with a 24.9 mm bayonet base
- ▶ Features a 2.5X twist focus optical plummet and a 60-second adjustable plate vial
- ▶ Prism has <5 arc seconds angle deviation
- ▶ The adapter has a precision machined axis that rotates 360°
- ▶ The height is 180 to 200 mm and

- over the point accuracy is 0.5 mm at 1.5 m
- ▶ Also included is a tribrach (2153-04) which features three screw-leveling with center line, an 8-minute circular vial, and 5/8 x 11 base thread
- ▶ Includes hard shell case
- ▶ Weighs 9.95 lb (4.51 kg)



Part No.
2159-01-BLK

2159-01-BLK — Single Prism Traverse Kit
2159-050 — Hard Shell Traverse Carrying Case (included in kit or sold separately)



Precision Traverse Kits for 196 mm Heights

Perfect companion for Trimble or Spectra Precision Total Stations



2159-06 Precise Traverse Kit

2159-07 Precise Traverse Kit

FEATURES & BENEFITS

- ▶ These new Traverse Kits are a high quality, high precision European made product.
- ▶ Prism holder is all metal with a standard Swiss type push button quick release that will also work with all Swiss type poles.

- ▶ Target is reversible for short or long range applications
- ▶ Rotating Adapter has a 2X magnification optical plummet with a plumbing accuracy of 0.5mm/1.5M with a 45° sensitivity adjustable plate vial.
- ▶ Tribrach is a high precision model with torsional rigidity <1".

- Circular vial is 8 minutes per 2 mm of movement.
- ▶ Height of the assembly is 196mm, +,-0.5mm from tribrach dish to prism center.
- ▶ Carrying case is a bright orange hard shell with high density foam inserts and backpack straps.
- ▶ Weight 9.95 Lbs



Part No.
2159-06

PART NO.	PRISM SIZE	COATED	OFFSET
2159-06	62 mm	Copper	-34
2159-07	62 mm	Silver	-35



Traverse Kit for 196 mm Heights

Perfect companion for Trimble or Spectra Precision Total Stations



FEATURES & BENEFITS

- ▶ Preset to a 196 mm height
- ▶ Adjustable for taller instruments ranging from 196 mm to 216 mm heights
- ▶ Works with all Trimble® S6 and the Spectra Precision Focus 30 instruments
- ▶ Traverse or precise back sight kit includes a 62 mm prism assembly (6402-22-YLB)

- ▶ Prism has <5 arc seconds angle deviation and a silver-coated canister to resist fogging
- ▶ Kit comes with a rotating tribrach adapter (2153-10) with a 2.5X twist focus optical plummet and a 60-second adjustable plate vial
- ▶ Tilt target has 0 or -30 offsets
- ▶ Adapter has precision machined axis that rotates 360°
- ▶ Over the point accuracy is 0.5 mm at 1.5 m

- ▶ Also included is European-made tribrach (2153-06) which features three-screw-leveling with center line, an 8-minute circular vial, and 5/8 x 11 base thread
- ▶ Kit comes with a bright orange, hard shell carrying case (2159-050) with high density foam inserts, nickel plated latches and backpack straps
- ▶ Weighs 9.95 lb (4.51 kg)



Part No.
2159-03-BLK

2159-03-BLK — Traverse Kit for 196 mm Heights



Traverse Kit for 155 mm Heights

Perfect companion for Nikon Nivo Total Stations



FEATURES & BENEFITS

- ▶ Preset to a 155 mm height making it compatible with Nikon NIVO™ Series Total Stations
- ▶ Kit includes a 62 mm prism assembly
- ▶ Prism has <5 arc seconds angle deviation and a silver-coated prism to resist fogging

- ▶ Includes rotating tribrach adapter with a 2.5X pull focus optical plummet and a 45-second adjustable plate vial
- ▶ Adapter has a precision machined axis that rotates 360°
- ▶ Tilt target has 0 or -30 offsets
- ▶ Over the point accuracy is 0.5 mm at 1.5 meters
- ▶ Also included is a (2153-04)

- tribrach which features three-screw-leveling with center line, an 8-minute circular vial, and 5/8 x 11 base thread
- ▶ Kit comes in a bright orange, hard shell carrying case (2159-050) which features high density foam inserts, nickel plated latches and backpack straps
- ▶ Weighs 9.95 lb (4.51 kg)



Part No.
2159-04-BLK

2159-04-BLK — Traverse Kit for 155 mm Heights



Instrument Tripod Accessories



- ▶ Lightweight and portable, keep your tripod level in all surface conditions
- ▶ Simple to use
- ▶ Features cleats to minimize slipping
- ▶ Attached bungee cables enable easy carrying, hanging or placement
- ▶ Sold in packs of three
- ▶ Each weighs 0.29 lb (0.12 kg)



5610-11 — Sta-Level Feet Tripod Stabilizer (w/ Rubber Pads)

- ▶ Provides non-slip support for tripods
- ▶ Works on all ferrous metal surfaces
- ▶ Includes three 5-inch round ceramic magnets
- ▶ Each magnet has a tripod point connection with a bungee strap
- ▶ Handle to remove magnet from surface included
- ▶ Each magnet has 210 pull pounds
- ▶ Kit bag is included



5610-12 — Tripod Anchor Kit

- ▶ Holds the Allegro, Archer®, Explorer, Recon® or Jett®•ce



5196-07 — Tilted Bracket

- ▶ Easily holds a laptop computer
- ▶ Measures: 13 x 10.25 in (33 x 26.04 cm)



5196-02 — Laptop Bracket

- ▶ Designed to provide the extra stability required when working indoors on concrete and other hard surfaces
- ▶ Made of heavy-duty aluminum
- ▶ Measures 35 x 35 x 35 inches
- ▶ Collapses for compact storage
- ▶ Rubber O-ring fits over the foot of the tripod for extra stability
- ▶ Weighs 3.00 lb (1.36 kg)



5610-00 — Tripod Stabilizer

- ▶ Constructed from anodized aluminum



2120-00 — Tripod Adapter 3-1/2 x 8 to 5/8 x 11

2130-00 — Tripod Adapter 5/8 x 11 to 3-1/2 x 8

2132-01 — Tripod Adapter 5/8 x 11F to 1/4 x 20M

- ▶ This bracket rotates for easier access to your collector



5196-13 — Rotating Bracket
5196-13-005 — Adapter

- ▶ Designed to fit precisely on the back of the controller
- ▶ Works with most heavy-duty tripods that feature a connecting bar on the hinge area



Tripod Hook Brackets Designed for
5196-14 — Ranger 300X/500X, TSC2
5196-17 — Nomad
5196-18 — TSC3 or Ranger 3
5196-19 — Mesa Tesla
5196-20 — Archer 2

Tripod Dollies

Moves a tripod quickly to the next shot without breaking down the instrument



- ▶ The Tri-Max Tri-Dolly™ speeds up data collection
- ▶ Moving your instrument setup is quick, no need to break down to get to your next measuring location
- ▶ Features include sturdy fiberglass legs, stability locks, foot straps, and rubberized 3 inch tall castor wheels that swivel 360° and quick-lever style steel risers
- ▶ Includes hard ship case (tripod sold separately)
- ▶ Weighs 14.40 lb (6.54 kg)

Note: Tripod not included with dolly.



- ▶ Tripod Dolly for all surveying tripods
- ▶ Easily maneuvered through doorways
- ▶ Folds for portability, 25.5" folded
- ▶ Convenient carrying handle
- ▶ Locking 5" diameter, hard rubber wheels; ball bearing casters with cable guards
- ▶ Adjustable Velcro straps to keep tripod secure
- ▶ Load capacity 132 lbs
- ▶ Weight 17 lbs

Note: Tripod not included with dolly.



90555 — Tri-Max Tri-Dolly
90557-050 — Tri-Max Wheel Kit

5610-15 — Tripod Dolly

Cross Reference Table

Bags and Cases For Instrument Tripods



BAGS	PAGE NUMBER	TRIPODS WILL FIT	
8150-20-ORG	Pg. 65	Every Tripod Except for; 90558, 90560, 5321-17-ORG	
8153-10-ORG	Pg. 65	5321-17-ORG and 5115-00	
8154-00-ORG	Pg. 65	5119-00	
8154-10-ORG	Pg. 65	5300-11 and 5300-12	
8154-11-ORG	Pg. 65	Every Tripod Except for; 90558, 90560, 5321-17-ORG	
8154-12-ORG	Pg. 65	5119-10	
8160-31	Pg. 65	Every Tripod Except for; 5321-17-ORG	

Tri-Max Tripods

Features positive locking systems



FEATURES & BENEFITS

- ▶ The Tri-Max® is the only surveying-grade fiberglass tripod with certified accuracy – highly recommended for all servo-driven and robotic total stations, 3-D laser scanners or construction lasers
- ▶ The revolutionary design of this tripod series means this tripod will meet ISO standard (12858-2-H) right out of the box, and after years of field use
- ▶ The shape and size of the foot are designed to allow for a solid placement on any terrain
- ▶ Features a round head with large center hole to facilitate an easy set-up over a point
- ▶ The large ‘footbed’ is there to facilitate solid planting for stability
- ▶ A retaining system—which prevents leg kick out and accidental falls on slick surfaces—is stored on the inside of the leg and can be left in place when the tripod is not in use
- ▶ The foot is equipped with a replaceable point and a retention loop for use with a safety strap
- ▶ Tri-Max tripods can handle equipment up to 30 kg (65 lb)
- ▶ Collapsed: 113 cm (44.5 in) except 90560: 54 in (1.37 m)

APPLICATIONS

- ▶ Robotics
- ▶ Scanning
- ▶ Leveling



Part No. 90550

PART NO.	LOCK TYPE	LEGS	WEIGHS	EXTENSION	HEAD	HARDWARE	
90550	Quick Clamp	Fiberglass	17.00 lb (7.70 kg)	71 in (1.8 m)	Flat	Black	
90551	Screw Clamp	Fiberglass	17.00 lb (7.70 kg)	71 in (1.8 m)	Flat	Black	
90553	Dual Clamp	Fiberglass	17.00 lb (7.70 kg)	71 in (1.8 m)	Flat	Black	
90560	Dual Clamp	Fiberglass	20.00 lb (9.00 kg)	91 in (2.3 m)	Flat	Black	

Premier Fiberglass Tripods

Improved quality and stability for more accurate measurements



FEATURES & BENEFITS

- ▶ 6-5/8 inch (16.83 cm) flat head with large center hole (2-5/8 inch, 6.67 cm) to facilitate an easy set-up over a point
- ▶ Foot is equipped with a replaceable point made of hardened steel
- ▶ Standard 5/8 x 11 threaded brass instrument stud
- ▶ Snap cap to protect tripod head
- ▶ Extends to 70.75 inches (179 cm)
- ▶ Collapses to 43.75 inches (111 cm)
- ▶ Made in North America under strict quality controls
- ▶ Includes a comfortable shoulder strap for carrying over longer distances

APPLICATIONS

- ▶ Ideal for mounting theodolites, lasers, auto levels, or total stations



Part No. 90582

PART NO.	LOCKING	LEGS	EXTENDS	COLLAPSES	WEIGHS	COLOR	
90582	Dual Lock	Fiberglass	70.75 in (179 cm)	43.75 in (111 cm)	13.60 lb (6.16 kg)	Orange (shown)	

Extra-Tall Fiberglass Elevator Tripod

Locking leg stabilizers provide greater stability



FEATURES & BENEFITS

- ▶ Tripod has a fully-extended leg and center column height of 12.40 ft (3.80 m) and a collapsed height of 5.97 ft (1.82 m)
- ▶ Features an adjustable center column that gives you 3.7 ft (1.12 m) of lift
- ▶ Lockable leg stabilizer struts, dual clamps, screw clamp and quick clamp, along with dual metal and rubber leg points and handy leg strap create greater stability
- ▶ Detachable round head plate, with a 5/8 x 11 stud, gives your instrument a sturdy platform
- ▶ Column can hold 66 lb (30 kg) when collapsed, and 15.4 lb (7 kg) when elevating
- ▶ Legs and dowels are constructed of fiberglass for durability, strength and resistance to weathering
- ▶ Includes leg straps
- ▶ Weighs 33.10 lb (15.00 kg)

APPLICATIONS

- ▶ Use with lasers, scanners, machine control or other instruments



Part No.
5321-17-ORG

5321-17-ORG — Extra-Tall Fiberglass Elevator Tripod



Universal Tri-Max Elevator Tripod

A gear box controls the lift and descent so the center column cannot free fall



90557-050

FEATURES & BENEFITS

- ▶ SECO's Universal Tri-Max® Elevator Tripod features a working height range of 4.10 ft (1.20 m) collapsed to 8.60 ft (2.62 m) extended with the center column at full height
- ▶ Center column independently lifts 1 meter (90558-050)
- ▶ A gear box controls lift and descent so the center column cannot free fall
- ▶ The 5/8 x 11 mounting head is removable and adjustable in azimuth direction
- ▶ Additional 1 meter section may be added for a total recommended height of 10 ft (3 m) for instruments under 15 lb (6.80 kg)
- ▶ Sections can move up or down
- ▶ Machined-aluminum elevator column and fiberglass legs makes for a robust and easy-to-use laser instrument tripod
- ▶ Fiberglass Legs
- ▶ Stable for instruments up to 25 lb (11.33 kg) under most conditions
- ▶ Weighs 29.00 lb (13.20 kg)
- ▶ Collapsed length 53 in

APPLICATIONS

- ▶ Robotics
- ▶ Scanning
- ▶ Leveling



Part No.
90558

90558 — Universal Tri-Max Elevator Tripod
90558-050 — 1 Meter Extension for Universal Tri-Max Elevator Tripod
90557-050 — Tri-Max Wheel Kit
90558-052 — Adaptor Plate, 3/8-16



Aluminum Elevator Tripods

Locking leg stabilizers provide greater stability



FEATURES & BENEFITS

- ▶ Aluminum elevator tripods have smooth operating adjustable center columns
- ▶ The 5321-16-BLK model features a built-in circular vial in the instrument head and safety chains on the legs prevent slipping on hard surfaces
- ▶ The 5321-18-BLK model is a lighter weight Elevator Tripod version that features a flat 36 mm head and an elevator column that extends 15.75 in (84 cm)
- ▶ Black hardware on both tripods
- ▶ Both models feature tough kick-in cleats and points

APPLICATIONS

- ▶ Ideal for lasers, scanners machine control or other instruments



Part No.
5321-16-BLK

PART NO.	LOCK TYPE	HEAD	EXTENDS	COLLAPSES	WEIGHS	
5321-16-BLK	Quick Clamp	Elevator / Round	7.60 ft (2.3 m)	4.26 ft (1.26 m)	16.30 lb (7.39 kg)	
5321-18-BLK	Quick Clamp	Elevator / Flat 36 mm	67 in (170 cm)	34 in (86 cm)	7.35 lb (3.30 kg)	

Short Tri-Max

Standard Tri-Max quality in a smaller size



FEATURES & BENEFITS

- ▶ The Tri-Max® Short Quick Clamp Tripod features the exact same design and construction as the full-size (90550) Tri-Max but it's more portable

- ▶ Extends to 5.67 ft (1.73 m)
- ▶ Collapses to 3.44 ft (1.05 m)
- ▶ Highly recommended for all servo-driven and robotic total stations and 3-D laser scanners
- ▶ Fiberglass legs
- ▶ Weighs 15.40 lb (7.00 kg)

APPLICATIONS

- ▶ Robotics
- ▶ Scanning
- ▶ Leveling



Part No. 90550-S

90550-S — Short Tri-Max

Birch Wood / Fiberglass Hybrid Tripod

Improved kiln dried birch wood / fiberglass hybrid tripod models



FEATURES & BENEFITS

- ▶ Combination of hardwood legs with fiberglass dowels provides stability and weather resistance
- ▶ Large aluminum head and leg hinges provide stable mounting base

- ▶ Double banded extension legs and large positive locking quick clamp with large quick release clamps for extra stability
- ▶ Powder coated wear-resistant metal hardware
- ▶ Aluminum shoe with hardened steel replaceable shoe points

- ▶ Includes: plastic head cap for protection, heavy-duty poly-webbing shoulder strap for ease of carrying to the job site (not shown)

Disclaimer: the full-view tripod is a composite photograph for illustrative purposes

PART NO.	MATERIAL	EXTENDED	COLLAPSES	CLAMPING	HEAD	WEIGHT	COLOR	
5302-13-BLK	Wood / Fiberglass	69" (175.26 cm)	43" (109 cm)	Quick Clamp	Triangle	16.5 lb (7.48 kg)	Black	
5302-13-ORG	Wood / Fiberglass	69" (175.26 cm)	43" (109 cm)	Quick Clamp	Triangle	16.5 lb (7.48 kg)	Orange	
5402-13-BLK	Wood / Fiberglass	72" (183 cm)	43" (109 cm)	Twist Locks	Triangle	15.7 lb (7.14 kg)	Black	
5402-13-ORG	Wood / Fiberglass	72" (183 cm)	43" (109 cm)	Twist Locks	Triangle	15.7 lb (7.14 kg)	Orange	

Heavy-Duty Birch Wood Tripods

Improved kiln dried birch wood tripod models



FEATURES & BENEFITS

- ▶ Made of high quality birch hardwood with wide-frame extension legs and 123mm (0.91") dowels
- ▶ Large 6.5" (165mm) aluminum head
- ▶ Twist locks with die cast leg bands for maximum locking

- ▶ Quick clamps, adjustable, for quick sets ups
- ▶ Powder Coated metal fittings
- ▶ Aluminum shoe with hardened steel replaceable shoe points
- ▶ Instrument Fastener brass 5/8-11
- ▶ Includes heavy-duty poly-webbing shoulder strap for ease of carrying to the job site (not shown)

Disclaimer: the full-view tripod is a composite photograph for illustrative purposes

PART NO.	MATERIAL	EXTENDED	COLLAPSES	CLAMPING	HEAD	WEIGHT	COLOR	
5220-13-BLK	Wood	68" (173 cm)	43" (109 cm)	Dual Locks	Round	16.5 lb (7.48 kg)	Black	
5220-13-ORG	Wood	68" (173 cm)	43" (109 cm)	Dual Locks	Round	16.5 lb (7.48 kg)	Orange	
5420-13-BLK	Wood	72" (183 cm)	43" (109 cm)	Twist Locks	Round	15.0 lb (6.82 kg)	Black	
5420-13-ORG	Wood	72" (183 cm)	43" (109 cm)	Twist Locks	Round	15.0 lb (6.82 kg)	Orange	



product can also be shipped from our European warehouse

Square Leg Aluminum Tripods

Heavy-duty aluminum square leg tripods offer stability and accuracy



FEATURES & BENEFITS

- ▶ Equipped with square outer dowels for a more secure lock
- ▶ These tripods are equipped with a 5/8 x 11 threaded adapter for convenient mounting of instruments

- ▶ They're built to last—with heavy construction throughout—and are designed to withstand rigorous field conditions

APPLICATIONS

- ▶ Ideal for mounting theodolites, lasers, auto levels, or total stations



Part No.
5301-31-BLK

PART NO.	LOCK TYPE	LEGS	WEIGHS	EXTENSION	HEAD	HARDWARE	
5301-31-BLK	Quick Clamp	Aluminum (Square)	9.70 lb (4.40 kg)	64 in (1.60 m)	Triangle / Flat	Black	
5301-31-ORG	Quick Clamp	Aluminum (Square)	9.70 lb (4.40 kg)	64 in (1.60 m)	Triangle / Flat	Orange	

Round Leg Aluminum Tripods

Sturdy and lightweight tripods for many applications



FEATURES & BENEFITS

- ▶ These tripods accommodate 5/8 x 11 instruments and are designed for all types of jobs
- ▶ Choices include: Flat or dome head, standard, elevator or mini tripod size

- ▶ The telescopic legs allow for setup at various heights and are available with orange or black hardware (on some models)

APPLICATIONS

- ▶ Ideal for mounting theodolites, lasers, auto levels, or total stations



Part No.
5301-21-ORG

PART NO.	LOCK TYPE	LEGS	WEIGHS	EXTENSION	HEAD	HARDWARE	
5301-21-ORG	Quick Clamp	Aluminum (Round)	9.35 lb (4.24 kg)	65 in (1.65 m)	Triangle / Flat	Orange	
5301-21-BLK	Quick Clamp	Aluminum (Round)	9.35 lb (4.24 kg)	65 in (1.65 m)	Triangle / Flat	Black	
5301-25-BLK	Quick Clamp	Aluminum (Round)	7.45 lb (3.38 kg)	63.5 in (1.60 m)	Triangle / Flat	Black	
5301-24-BLK	Quick Clamp	Aluminum (Round)	6.75 lb (3.06 kg)	27 in (68.65 cm)	Triangle / Flat	Black	
5311-21-ORG	Quick Clamp	Aluminum (Round)	7.60 lb (3.45 kg)	63.5 in (1.60 m)	Dome	Orange	
5401-21-BLK	Screw Clamp	Aluminum (Round)	9.35 lb (4.24 kg)	65 in (1.65 m)	Triangle / Flat	Black	

Leveling Rod Accessories



- ▶ Use with aluminum leveling rods
- ▶ Weighs 0.50 lb (0.23 kg)



7321-050 — Leveling Rod Vial

- ▶ These replacement rod button kits fit on SECO aluminum leveling rods



70014-6 — Round 17 mm Button
70014-7 — Round 13 mm Button w/ Ring

- ▶ Adapt the thread size to 5/8 x 11 for mounting prisms on the LR's female adapter
- ▶ Weighs 0.20 lb (0.09 kg)



91133 — 5/8 x 11 Double Male Prism Adapter

- ▶ USL/SVR Hook



91275 — USL/SVR Hook

- ▶ Swiss-Style Prism Adapter



91259 — Swiss-Style Prism Adapter

- ▶ 6-inch long caliper for SVR/Oval rods and CMR ruler



91014 — 6-inch Caliper for SVR/Oval Rods and CMR Ruler

- ▶ Snap-Tite® SVR Rod Level



91255 — Snap-Tite SVR Rod Level

- ▶ Snap-Tite CR Rod Level



91535 — Snap-Tite CR Rod Level

- ▶ The Leveling Plates (or Turtles as they are commonly known) are cast heavy steel and red powder painted for durability
- ▶ Other quality features include chrome plating on the dome, carrying handle and ground points
- ▶ Use to improve the accuracy of level runs in soft terrain
- ▶ Diameter 5.51 in (14 cm)
- ▶ Diameter of half ball 1.81 in (3 cm)
- ▶ Height of half ball 0.79 in (2 cm)
- ▶ Height of foot to top half ball 2.60 in (6.6 cm)
- ▶ Weighs 4.41 lb (2.00 kg)



7304-01 — Leveling Plate (Turtle)

- ▶ 5/8 x 11 Prism Mounting Adapter Kit



91258 — 5/8 x 11 Prism Mounting Adapter Kit

- ▶ This 6.5 ft nylon-coated tape is ideal for foundation work, grading, swimming pools and construction
- ▶ Easy-to-read numbers printed on both sides
- ▶ The blade also features a built-in target



7321-00 — 6.5 ft Pocket Rod - inches
7301-00 — 6.5 ft Pocket Rod - 10ths

- ▶ This bipod features a special head that will hold a rectangular rod
- ▶ The head will fit rods with widths between 1.57 and 2.56 inches



5217-21-FOR — Leveling Rod Thumb Release Bipod

- ▶ This bipod features a special head that will hold a rectangular rod
- ▶ The head will fit rods with widths between 2.95 and 3.8 inches
- ▶ Depth: 1.75 inches



5217-20-FLY — Invar Rod Thumb Release Bipod

Laser Receiver Cut & Fill Rod

Perfect Rod for Curb and Gutter and Grade Setting jobs



FEATURES & BENEFITS

- ▶ Crain's Laser Receiver Cut & Fill Rod is perfect for Curb & Gutter and Grade Setting jobs
- ▶ Red graduations is a "Cut" value from grade with a range of 1.40 ft (0.43 m)
- ▶ Blue graduations are a "Fill" value with a range of 1.84 ft (0.562 m)
- ▶ Dual 0.01 ft and 2 mm graduations
- ▶ Rod collapsed to 4.5 ft (1.37 m) and extends to 8.0 ft (2.4 m)

- ▶ The Quick Release sliding bracket works with all standard Laser Receiver rod clamps
- ▶ Leveling vial built into the sliding bracket for easy viewing
- ▶ Telescoping bottom section reads direct height to the "zero" mark on the rod
- ▶ Manufactured in Fiberglass and Delrin to resist concrete adhesion
- ▶ Weighs 2.25 lb (1.02 kg)

APPLICATIONS

- ▶ Construction grading



Part No. 7310-13

7310-13 — Laser Receiver Cut & Fill Rod

Aluminum Builder's Rods

Light and durable anodized leveling rods



FEATURES & BENEFITS

- ▶ These aluminum leveling rods are made of a light and durable alloy
- ▶ The telescopic sections are anodized and silk-screened with moisture-resistant ink
- ▶ Each rod section uses sturdy polycarbonate buttons that lock each section when extended; the height gauge is on the back side
- ▶ Each rod includes a special level and protective bag

*Replacement buttons PN: 70014-6 and 70014-7 (see page 43)

APPLICATIONS

- ▶ Grading
- ▶ Masonry
- ▶ Site work
- ▶ Forms
- ▶ Landscaping
- ▶ Foundations
- ▶ Sewers
- ▶ Slab work



Part No.
7321-30

PART NO.	SECTIONS	LENGTH	GRADS	WEIGHS	
7321-30	3	9 ft, 9.5 in	8ths	2.40 lb (1.10 kg)	
7301-30	3	9.8 ft	10ths	2.40 lb (1.10 kg)	
7321-40	4	13 ft, 1.38 in	8ths	3.10 lb (1.40 kg)	
7301-40	4	13.12 ft	10ths	3.10 lb (1.40 kg)	
7341-40	4	4 m	5 mm	3.10 lb (1.40 kg)	
7321-50	5	16 ft, 4.75 in	8ths	3.50 lb (1.60 kg)	
7301-50	5	16.4 ft	10ths	3.50 lb (1.60 kg)	

'E' Pattern Builder's Rods

Dual-sided lightweight rod



FEATURES & BENEFITS

- ▶ Features a standard 'E' pattern
- ▶ Lightweight aluminum sections are in contrasting white, red and black colors and have round spring-loaded locking buttons
- ▶ Graduations are cm on the front
- ▶ Height scale is in millimeters on the back
- ▶ 7341-45 and -55 models have a standard scale on the back
- ▶ Includes a level vial and case

APPLICATIONS

- ▶ Grading
- ▶ Masonry
- ▶ Site work
- ▶ Forms
- ▶ Landscaping
- ▶ Foundations
- ▶ Sewers
- ▶ Slab work



Part No.
7341-31

PART NO.	LENGTH	GRADS	WEIGHS	
7341-31	3 m	cm	2.40 lb (1.10 kg)	
7341-41	4 m	cm	3.10 lb (1.40 kg)	
7341-45	4 m	mm	3.10 lb (1.40 kg)	
7341-51	5 m	cm / mm	3.80 lb (1.73 kg)	
7341-52	5 m	cm / inches	3.80 lb (1.73 kg)	
7341-55	5 m	cm / mm	3.80 lb (1.73 kg)	
7341-56	5 m	UK cm / mm	3.80 lb (1.73 kg)	

Grade/Trenching Rod

Fast, highly-visible, cut measurements without moving the laser receiver



FEATURES & BENEFITS

- ▶ SECO's 92090 is two rods in one, a grade/trenching rod and a standard leveling rod
- ▶ The direct reading "cut" measurement is displayed at three convenient locations including the, highly visible, top of the rod
- ▶ The unique internal bungee cord allows for fast cut measurements once the rod is set on the desired grade without having to move the laser receiver
- ▶ Graduated in feet, tenths, and 0.5 ft
- ▶ Extend the 6-foot-long rod to 9 feet with three 1-foot telescoping boots
- ▶ A large 2.5-inch-round foot provides stability when working in dirt and gravel
- ▶ The rectangular fiberglass body fits all laser rod clamps
- ▶ Both sides can be used with laser receivers or optical levels
- ▶ Order 91402 for carrying case
- ▶ Weighs 4.20 lb (1.90 kg)

APPLICATIONS

- ▶ Foundation walls and trenching
- ▶ Grading




Part No.
92090

92090 — Grade/Trenching Rod - Tenths

**Surveyor's Series (SVR)
Leveling Rods**

Waterproof and wear-resistant

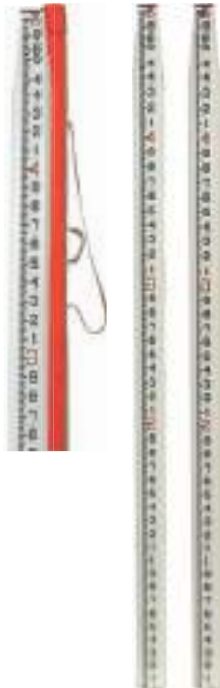

Rectangular-oval shape allows for wide, glare resistant and wear-resistant scales.

FEATURES & BENEFITS

- ▶ Features a new shorter collapsed length (58.5 inches on 25 ft versions) and a lighter weight
- ▶ Constructed of strong, rigid fiberglass with reinforcing ribs for added stability
- ▶ Water-resistant and non-conductive

- ▶ A tight locking mechanism features round buttons that resist jamming from sand and dirt
- ▶ Includes a 1/4 x 20 female adapter in top section
- ▶ Includes carrying case
- ▶ Order 91411 for replacement carrying case

APPLICATIONS

- ▶ Grading
- ▶ Masonry
- ▶ Site work
- ▶ Forms
- ▶ Landscaping
- ▶ Foundations
- ▶ Sewers
- ▶ Slab work



Part No.
98010

PART NO.	HEIGHT SCALE	LENGTH	GRADS	WEIGHTS	
98010	Height Scale	25 ft	10ths	6.00 lb (2.72 kg)	
98011	Height Scale	25 ft	8ths	6.00 lb (2.72 kg)	
98012	Height Scale	7.6 m	0.5 cm metric	6.00 lb (2.72 kg)	
98013	Height Scale	7.6 m	'E' metric	6.00 lb (2.72 kg)	
98014	Height Scale	7.6 m	Philly metric	6.00 lb (2.72 kg)	
98015	Dual Scale	25 ft	8ths / 10ths	6.00 lb (2.72 kg)	
98016	Dual Scale	25 ft (7.6 m)	10ths / Philly Metric	6.00 lb (2.72 kg)	
98017	Dual Scale	25 ft	10ths / 10ths	6.00 lb (2.72 kg)	
98020	Height Scale	17 ft	10ths	5.00 lb (2.27 kg)	
98021	Height Scale	17 ft	8ths	5.00 lb (2.27 kg)	
98023	Height Scale	5.18 m	'E' metric	5.00 lb (2.27 kg)	
98024	Height Scale	5.18 m	Philly metric	5.00 lb (2.27 kg)	
98025	Dual Scale	17 ft	8ths / 10ths	5.00 lb (2.27 kg)	
98026	Dual Scale	17 ft (5.18 m)	10ths / Philly metric	5.00 lb (2.27 kg)	

**SVR Brackets
for Laser Receivers**

Easily attaches to SVR rods



FEATURES & BENEFITS

- ▶ Brackets are needed to attach laser sensors to the SVR rod

- ▶ Top or side brackets are available for all popular laser receiver models

APPLICATIONS

- ▶ Use with an SVR rod to mount your laser receiver




Part No.
91100

PART NO.	MOUNT TYPE	DESIGNED FOR	
91100	Top	Universal	
91162	Top	Storm® HL700I/750I450	
91163	Side	Storm HL700I/750I450	

Standard/Pro Series (LR) Leveling Rods

Round rod is wind resistant

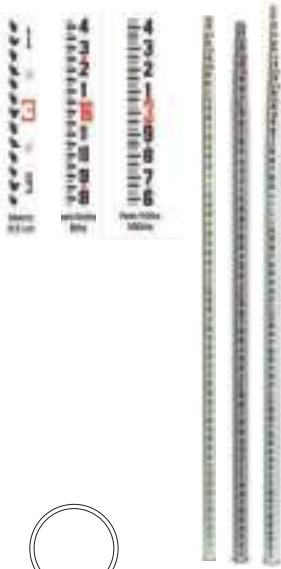

Round design makes the LR Series rods a good choice for certain applications like in areas of high wind.

FEATURES & BENEFITS

- ▶ The LR Series leveling rods are round and easy to handle
- ▶ The LR-STD is available in a 25 ft model in 10ths, inches, and 0.5 cm metric scales
- ▶ The LR-PRO is larger in diameter so sturdier and easier to read
- ▶ The LR-PRO available in 25 ft, 35 ft and 45 ft lengths in feet/10ths/100ths
- ▶ Carrying case is included or purchase replacement 91402

APPLICATIONS

- ▶ Grading
- ▶ Masonry
- ▶ Site work
- ▶ Forms
- ▶ Landscaping
- ▶ Foundations
- ▶ Sewers
- ▶ Slab work



Part No. 90004

PART NO.	LENGTH	OD	GRADS	WEIGHS	
90004	LR-STD 25 ft	1-5/8 inch	10ths	5.00 lb (2.26 kg)	
90009	LR-STD 25 ft	1-5/8 inch	8ths	5.00 lb (2.26 kg)	
90014	LR-STD 7.6 m	1-5/8 inch	Metric	5.00 lb (2.26 kg)	
90022	LR-PRO 25 ft	2 inch	10ths	7.00 lb (3.17 kg)	
90024	LR-PRO 35 ft	2-3/16 inch	10ths	9.00 lb (4.08 kg)	
90026	LR-PRO 45 ft	2-3/16 inch	10ths	10.00 lb (4.53 kg)	

Rectangular Series (CR) Leveling Rods

Rounded back corners for better gripping



Rectangular shape allows for laser detectors to be mounted directly to the rod - no bracket required!

FEATURES & BENEFITS

- ▶ Features a rectangular shape with rounded back corners for better gripping
- ▶ Scale width is graduated to fill the entire face of the rod and measuring scale on the back side that allows for overall height readings
- ▶ For laser detector mounting with no special brackets required
- ▶ Made with strong fiberglass which is waterproof, corrosion-resistant and non-conductive
- ▶ Features 1/4 x 20 female adapter in the top section
- ▶ Carrying case is included
- ▶ Order 91410 for 8 ft or 91411 for 13 - 20 ft for replacement carrying case

APPLICATIONS

- ▶ Grading
- ▶ Masonry
- ▶ Site work
- ▶ Forms
- ▶ Landscaping
- ▶ Foundations
- ▶ Sewers
- ▶ Slab work



Part No. 92001

PART NO.	LENGTH	GRADS	WEIGHS	
92001	8 ft	10ths	3.00 lb (1.36 kg)	
92002	8 ft	8ths	3.00 lb (1.36 kg)	
92021	13 ft	10ths	5.00 lb (2.26 kg)	
92022	13 ft	8ths	5.00 lb (2.26 kg)	
92041	16 ft	10ths	6.00 lb (2.72 kg)	
92042	16 ft	8ths	6.00 lb (2.72 kg)	
92031	20 ft	10ths	7.00 lb (3.17 kg)	
92032	20 ft	8ths	7.00 lb (3.17 kg)	
92026	4.0 m	'E' metric	5.00 lb (2.26 kg)	
92027	4.0 m	0.5 cm metric	5.00 lb (2.26 kg)	
92046	5.0 m	'E' metric	6.00 lb (2.72 kg)	
92047	5.0 m	0.5 cm metric	6.00 lb (2.72 kg)	
92048	5.0 m	British 'E' metric	6.00 lb (2.72 kg)	
92043	5.0 m	Philly metric	6.00 lb (2.72 kg)	

SubSurface Handheld Magnetic Locators

Built by the team with the most experience in the industry



FEATURES & BENEFITS

- ▶ Both models come with an industry exclusive 7 year warranty
- ▶ Choose the standard model or the LCD meter model
- ▶ Tube-through construction ensures strength and durability from the bottom tip to the handle

- ▶ Overall length: 38.75 in (98.4 cm)
- ▶ The system comes with a padded carrying bag and four alkaline 9-volt batteries — two to use and two spares
- ▶ Hard-shell case is impact resistant ABS plastic construction (ML-1-050, sold separately)
- ▶ Weighs 2.00 lb (0.91 kg)

APPLICATIONS

- ▶ Perfect for locating survey corner markers, PK and Mag Nails, valve and covers, steel and iron pipes, well casings, steel tanks, lost tools or even downed and buried fence lines



Part No. ML-1



ML-1 — SubSurface Handheld Magnetic Locators Standard Model
 ML-1M — SubSurface Handheld Magnetic Locators With LCD Meter
 ML-1-050 — Hard Shell Case for Locators



SubSurface Waterproof Magnetic Locator

Built by the team with the most experience in the industry



Close up of four-button keypad and LCD monitor

FEATURES & BENEFITS

- ▶ Features include 'Zero Adjust' that compensates for 'magnetic gradient' in the soil
- ▶ Single narrow LCD monitor is built into the four-button keypad and features a bar graph that expands according to signal strength
- ▶ A '+' or '-' illuminates above the graph to indicate polarity
- ▶ 100% waterproof - tube pressure tested to depths up to 200 ft

- ▶ The SSI computer microprocessor retains volume and gain settings from last use
- ▶ Detects buried ferrous metal objects at depths up to 8 feet
- ▶ Sturdy tube-through-construction ensures stability and long life
- ▶ Includes soft carrying/storage case with carrying straps and inside pocket for spare 9-volt batteries
- ▶ Both models have 7 year warranty

APPLICATIONS

- ▶ Perfect for locating survey corner markers, PK and Mag Nails, valve and covers, steel and iron pipes, well casings, steel tanks, lost tools or even downed and buried fence lines



Part No. ML-35Y

PART NO.	OVERALL LENGTH	BATTERY LIFE	WEIGHT
ML-35Y	40 in (1 m)	60 hours	1.80 lb (0.80 kg)



Heavy-Duty Pocket Tape

Light weight measuring tools for all situations



FEATURES & BENEFITS

- ▶ Rubberized black and high visibility yellow case
- ▶ Positive thumb lock and release action

- ▶ Lengths vary from 12 ft to 33 ft
- ▶ Tape made from epoxy paint coated steel

APPLICATIONS

- ▶ General construction



Part No. 4769-00

PART NO.	LENGTH	WIDTH	GRADS
4769-00	25 ft	1 inch (32 mm)	10ths
4769-01	25 ft	1 inch (32 mm)	10ths / Metric
4769-02	25 ft	1 inch (32 mm)	10ths / 8ths
4769-03	33 ft	1 inch (32 mm)	10ths
4769-04	33 ft	1 inch (32 mm)	10ths / 8ths
4769-06	33 ft (10 m)	1 inch (32 mm)	10ths / Metric
4769-14	5 m	3/4 inch (19 mm)	mlcm/mm
4769-15	10 m	3/4 inch (19 mm)	mlcm/mm



Triangular Scale Tapes

Light weight measuring tools for all situations



FEATURES & BENEFITS

- ▶ The Engineer and Architect Scale Tapes are the new standard for scaling plans in the field or office
- ▶ One of the main problems with triangular rules is they cannot easily be taken out on a job site or carried in your pocket

- ▶ The Engineer Scale Tape has all of the 10, 20, 30, 40, 50, 60 scales you would find on a standard Engineer rule
- ▶ Included in the Architect Scale Tape you'll find the following scales: 16, 3, 1 1/2, 1, 1/2, 1/4, 1/8, 3/4, 3/8, 3/16, 3/32, and 1/16

APPLICATIONS

- ▶ Engineering and Architectural construction



Part No.
9006-00

9006-00 — Triangular Engineer Scale Tape
9006-01 — Triangular Architect Scale Tape



Coated Fiberglass and Steel Measuring Tapes

Great in all kinds of weather conditions



FEATURES & BENEFITS

- ▶ These coated tapes are designed to be used in the field for many years
- ▶ Single sided tape

- ▶ Choose between of PVC-coated fiberglass or nylon-coated steel tape
- ▶ Features a hook end and fast-winding crank

APPLICATIONS

- ▶ General construction



Part No.
3003-06

PART NO.	TYPE	LENGTH	GRADS	
3003-06	PVC-Coated Fiberglass	100 ft	10ths	
3003-07	PVC-Coated Fiberglass	200 ft	10ths	
3003-10	PVC-Coated Fiberglass	30 m	m/cm/mm	
3003-14	PVC-Coated Fiberglass	90 m	m/cm/mm	
3006-06	Nylon-Coated Steel	100 ft	10ths	
3006-07	Nylon-Coated Steel	200 ft	10ths	
3006-10	Nylon-Coated Steel	30 m	m/cm/mm	
3006-11	Nylon-Coated Steel	60 m	m/cm/mm	
3006-17	Nylon-Coated Steel	200 ft	8ths / 10ths (Dual Grad)	
3006-18	Nylon-Coated Steel	200 ft/60 m	10ths / Metric (Dual Grad)	
3006-08	Nylon-Coated Steel	300 ft	10ths	
3003-08	PVC-Coated Fiberglass	300 ft	10ths	

Rhino Ruler Engineer's Folding Ruler

Rhino Ruler outlasts wood rulers four to one



FEATURES & BENEFITS

- ▶ Waterproof fiberglass construction prevents common problems that occur with wood rulers such as fading, splintering, and chipping

- ▶ Engraved graduations resist weather and scratches
- ▶ Easy-to-fold locking joints are tighter than traditional folding rulers made of wood allowing for a more accurate measurement along the ruler's length

APPLICATIONS

- ▶ General construction



Part No.
4770-00

4770-00 — Rhino Ruler Waterproof Fiberglass Engineer's Folding Ruler - 10ths / 8ths
4770-01 — Rhino Ruler Waterproof Fiberglass Engineer's Folding Ruler - 10ths / Metric



CMR Series Measuring Rulers and Cases

Designed for one-person measuring



FEATURES & BENEFITS

- ▶ A versatile tool for fast, accurate, one-person measuring, the CMR Series is the tool for measuring heights, clearances and horizontal distances up to fifty feet

- ▶ The rod is equipped with a female 1/4 x 20 adapter in the top section
- ▶ Made of rugged, non-conductive fiberglass and includes a carrying case and calliper tip

- ▶ Carrying cases are made from the highest quality 1000-denier nylon



Part No. 90180

PART NO.	LENGTH	WEIGHT	OD	REPLACEMENT CARRY CASE	OD CASE MEASUREMENTS	
90180	25 ft (7.6 m)	5.00 lb (2.27 kg)	1-13/16 inch	91415	3.5 x 65 in (8.89 x 165.1 cm)	
90181	36 ft (11 m)	9.00 lb (4.08 kg)	2-7/32 inch	91416	4.5 x 68 in (11.43 x 172.72 cm)	
90182	50 ft (15.2 m)	12.00 lb (5.44 kg)	2-13/32 inch	91417	4.5 x 76 in (11.43 x 193.04 cm)	

Laser Distance Meters

Tough — can be dropped up to 5 feet (1.5m)



FEATURES & BENEFITS

- ▶ Can be dropped 5 feet (1.5 m)
- ▶ Accurate and reliable
- ▶ Many functions
- ▶ Indoor / Outdoor options
- ▶ Fastest products available

- ▶ Long battery life (8000 measures)
- ▶ Range from 50 m to 200 m
- ▶ See technical specifications below

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No. QM55


- QM55 — Indoor Laser Distance Meter
- QM75 — Indoor/Outdoor Laser Distance Meter
- QM95 — Indoor/Outdoor Laser Distance Meter



SPECIFICATIONS	QM55	QM75	QM95
Range	165 feet (50 m)	230 feet (70 m)	650 feet (200 m)
Accuracy	± 1/16 in ± (1.5 mm)	± 1/16 in ± (1.5 mm)	± 1/24 in ± (1.0 mm)
Units of Measure	m, ft, in, ft-in	m, mm, ft, in, yds	m, mm, ft, in, yds
Automatic Shut Off	3 minutes	10 minutes	10 minutes
Battery Life	5000+ measures	8000 measures	8000 measures
Power Supply	2 x AAA 1.5 V	2 x AAA 1.5 V	2 x AA 1.5 V
Power Indication	LCD 3 segments	LCD 4 segments	LCD 4 segments
Drop Performance	5 feet (1.5 m)	5 feet (1.5 m)	5 feet (1.5 m)
Dust & Water Resistance	IP54	IP55	IP54
Laser Type / Power	635nm visible red / < 1 mW	635nm visible red / < 1 mW	635nm visible red / < 1 mW
Dimensions	2.0 x 1.1 x 4.9 in (52 x 28 x 125 mm)	1.3 x 1.6 x 4.9 in (34 x 42 x 125 mm)	2.4 x 1.2 x 4.7 in (62 x 28 x 120 mm)
Weight with Batteries	6.60 oz (187 g)	5.10 oz (144 g)	7.70 oz (217 g)
Warranty	3 Years (2 Years at No Cost)	3 Years (2 Years at No Cost)	3 Years (2 Years at No Cost)
FUNCTIONS	QM55	QM75	QM95
Usage	Indoor	Indoor / Outdoor	Indoor / Outdoor
Single Measure	√	√	√
Continuous Measure	√	√	√
Addition / Subtraction	√		√
Area	√		√

Stream Gauges

Allows you to instantly see water levels

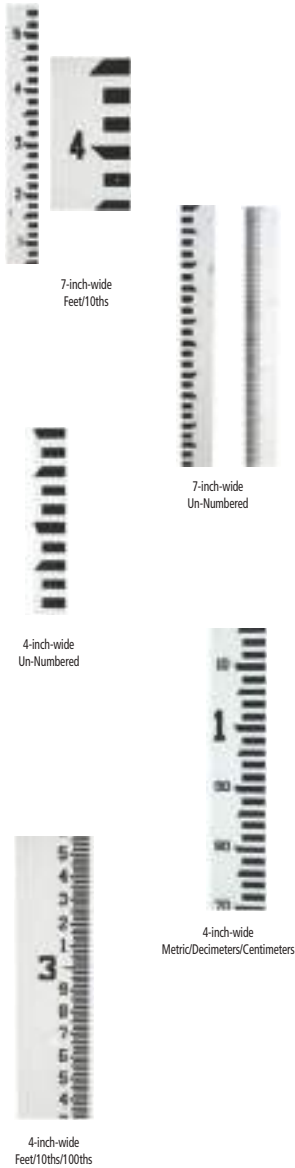

FEATURES & BENEFITS

- ▶ Stream Gauges allow you to instantly see water levels
- ▶ Graduations are specified in table
- ▶ Gauges are available in successive increments to form ranges and elevations for 7 inch is 0.5 to 5.5 feet and 4 inch is 0 to 4 ft
- ▶ Fiberglass stream gauge are the best permanent marker in a variety of applications and environments
- ▶ Sturdy fiberglass assures a long life, it does not rot, rust or corrode
- ▶ Stream gauges are provided in separate units that can be used separately or combined for convenient measuring
- ▶ Easy to read at long distances, gauges are protected with a non-glare coating and are easy to mount

- ▶ Stainless steel fasteners are provided which will attach to most surfaces including metal, masonry, wood, and many other surface types
- ▶ 1/8 inch thick and the pre-drilled holes for mounting have a diameter of 1/4 inch
- ▶ Gauges may be ordered in successive increments to form ranges and elevations
- ▶ Number plates (sold separately) may be used to customize elevations for a particular application
- ▶ 7-inch Stream Gauges feature 2-1/4 inch (5.72 cm) tall numbers
- ▶ 4-inch Stream Gauges features 1-1/4-inch (3.175 cm) tall numbers
- ▶ Use unnumbered gauges for height beyond 15.5 ft, 16 ft, or 3.66 m as needed

APPLICATIONS

- ▶ Monitoring the water level of rivers, creeks, streams, bays etc.



Part No. 99000

PART NO.	DESCRIPTION	LENGTH	WIDTH	GRADS	WEIGHS	
99000	Un-Numbered	4 ft	4 inch (10.2 cm)	feet / 10ths / 100ths	2.00 lb (0.91 kg)	
99001	4 ft	0 - 4 ft	4 inch (10.2 cm)	feet / 10ths / 100ths	2.00 lb (0.91 kg)	
99002	4 ft	4 - 8 ft	4 inch (10.2 cm)	feet / 10ths / 100ths	2.00 lb (0.91 kg)	
99003	4 ft	8 - 12 ft	4 inch (10.2 cm)	feet / 10ths / 100ths	2.00 lb (0.91 kg)	
99004	4 ft	12 - 16 ft	4 inch (10.2 cm)	feet / 10ths / 100ths	2.00 lb (0.91 kg)	
99023	Un-Numbered	4 ft	4 inch (10.2 cm)	feet / 10ths	2.00 lb (0.91 kg)	
99051	1.22 m	0 - 1.22 m	10.2 cm (4 inch)	m / dm / cm	2.00 lb (0.91 kg)	
99052	1.22 m	1.22 - 2.44 m	10.2 cm (4 inch)	m / dm / cm	2.00 lb (0.91 kg)	
99053	1.22 m	2.44 - 3.66 m	10.2 cm (4 inch)	m / dm / cm	2.00 lb (0.91 kg)	
99071	Un-Numbered	5 ft	7 inch (17.78 cm)	feet / 10ths / 100ths	4.00 lb (1.81 kg)	
99072	Un-Numbered	5 ft	7 inch (17.78 cm)	feet / 10ths	4.00 lb (1.81 kg)	
99079	5 ft	0.5 - 5.5 ft	7 inch (17.78 cm)	feet / 10ths	4.00 lb (1.81 kg)	
99080	5 ft	5.5 ft - 10.5 ft	7 inch (17.78 cm)	feet / 10ths	4.00 lb (1.81 kg)	
99081	5 ft	10.5 - 15.5 ft	7 inch (17.78 cm)	feet / 10ths	4.00 lb (1.81 kg)	

Mounting Hardware For Stream Gauges

Included with purchase of any Stream Gauge



FEATURES & BENEFITS

- ▶ Includes 7 sets of stainless steel screws and anchors

- ▶ Contains 14 each of screws and anchors packaged in packs of four

APPLICATIONS

- ▶ Monitoring the water level of rivers, creeks, streams, bays etc.



Part No. 99043

99043 — Mounting Hardware for Stream Gauges

Stream Gauges
Plate Numbers

Sturdy fiberglass assures a long life, will not rust or corrode



FEATURES & BENEFITS

- ▶ Number plates may be used to customize elevations for a particular application
- ▶ Gauges may be ordered in successive increments to form ranges and elevations
- ▶ All stream gauges are 1/8-inch thick and the pre-drilled holes for mounting have a diameter of 1/4-inch

- ▶ Numbers on 7-inch stream gauges are 2-1/4-inch tall
- ▶ Numbers on 4-inch stream gauges are 1-1/4-inch tall
- ▶ Stream Gauges are provided in separate units that can be used separately or combined for convenient measuring
- ▶ Easy to read at long distances, the Gauges are protected with a non-glare coating
- ▶ Unnumbered gauges also available

APPLICATIONS

- ▶ Monitoring the water level of rivers, creeks, streams, bays etc.

PART NO.	NUMBER PLATE	MEASURES	
99060	0 (zero)	2-1/4 x 4 inches	
99061	1 (one)	2-1/4 x 4 inches	
99062	2 (two)	2-1/4 x 4 inches	
99063	3 (three)	2-1/4 x 4 inches	
99064	4 (four)	2-1/4 x 4 inches	
99065	5 (five)	2-1/4 x 4 inches	
99066	6 (six)	2-1/4 x 4 inches	
99067	7 (seven)	2-1/4 x 4 inches	
99068	8 (eight)	2-1/4 x 4 inches	
99069	9 (nine)	2-1/4 x 4 inches	
99070	- (Minus)	2-1/4 x 4 inches	

1X and 2X Magnification
Hand Levels

Features brass bodies, non-glare internal finish, high-visibility neon yellow vials, and 3 line mirrors



- ▶ Features brass bodies, a non-glare internal finish, high-visibility neon yellow vials, and three-line mirrors
- ▶ 5 inch (127 mm) 1X hand level extends to 7 inches (178 mm)
- ▶ External vial is easily replaced in the field
- ▶ Case included
- ▶ Weighs 0.30 lb (0.14 kg)



4040-05 — 5 to 7 inch, 1X External Vial

- ▶ Features brass bodies, a non-glare internal finish, high-visibility neon yellow vials, and 3-line mirrors
- ▶ Economically priced hand level
- ▶ 5 inch (127 mm) 1X level has an external vial that is easily replaced in the field
- ▶ Case included
- ▶ Weighs 0.30 lb (0.14 kg)



4040-60 — 5 inch, 1X External Vial

- ▶ The Abney level is ideal for preliminary survey or landscaping, where the determination of slope, angle and percentage is required
- ▶ Measures 5.25 inches (133 mm) in length
- ▶ Weighs 0.15 lb (0.07 kg)



4050-01 — Abney Hand Level

- ▶ Features brass bodies, a non-glare internal finish, high-visibility neon yellow vials, and 3-line mirrors
- ▶ The 2X model is a heavy-duty 5 inch (127 mm) hand level that extends to 7 inches (178 mm)
- ▶ External vial is easily replaced in the field
- ▶ Case included
- ▶ Weighs 0.35 lb (0.16 kg)



4040-30 — 5 to 7 inch, 2X External Vial

- ▶ Features brass bodies, a non-glare internal finish, high-visibility neon yellow vials, and three-line mirrors
- ▶ 2X model is a heavy-duty, 5 inch (127 mm) hand level that extends to 7 inches (178 mm)
- ▶ Features an enclosed vial
- ▶ Case included
- ▶ Weighs 0.40 lb (0.18 kg)



4300-00 — 5 to 7 inch, 2X External Vial

- ▶ Features brass bodies, a non-glare internal finish, high-visibility neon yellow vials, and three-line mirrors
- ▶ 2X hand level is the industry standard hand level
- ▶ The 6 inch (152 mm) level extends to 7 inches (178 mm) and has an enclosed vial
- ▶ Case included
- ▶ Weighs 0.40 lb (0.18 kg)



4200-00 — 6 to 7 inch, 2X Internal Vial

- ▶ Made from padded Nylon Cordura is perfect for your level
- ▶ Measures 6.5 x 2.62 inches (16.5 x 6.66 cm)
- ▶ Weighs 0.05 lb (0.02 kg)



8030-00-CABLU — Hand Level Case

Magnetic Dampened Auto Level and Packages

Easy-to-use 24X and 32X auto-levels



FEATURES & BENEFITS

- ▶ The 32X auto level features a sturdy metal Japanese-style body with a magnetic dampened compensator
- ▶ Fits 5/8 x 11 flat or domed tripods
- ▶ The top cover plate is easily removed for adjustment
- ▶ Accurate to 1/16 inch per 100 feet (with good weather conditions)
- ▶ Includes carrying case
- ▶ Air dampened auto compensator
- ▶ Double-sided, continuous horizontal tangent drives
- ▶ Stadia lines for simple distance measurement
- ▶ Water resistant construction
- ▶ Convenient horizontal angle measurement
- ▶ Built in bubble mirror and optical sighting alignment
- ▶ Metal housing for increased durability
- ▶ Kit comes with 5301-25-BLK tripod; rod in kit may be inches or mm

APPLICATIONS

- ▶ Two-person leveling across the job site
- ▶ Leveling forms and footers
- ▶ Checking elevation
- ▶ Measuring cut and fill



Part No.
4811-24



PART NO.	POWER/DAMPENING	TRIPOD	ROD	
4811-24	24X / Magnetic Dampened	No	None	
4811-24P1	24X / Magnetic Dampened	Yes	9 ft, 8ths / feet	
4811-24P2	24X / Magnetic Dampened	Yes	9 ft, 10ths / feet	
4811-24P3	24X / Magnetic Dampened	Yes	3 m, Metric	
4811-24P4	24X / Magnetic Dampened	Yes	13 ft, 8ths / feet	
4811-24P5	24X / Magnetic Dampened	Yes	13 ft, 10ths / feet	
4811-24P6	24X / Magnetic Dampened	Yes	4 m, Metric	
4811-24P7	24X / Magnetic Dampened	Yes	16 ft, 8ths / feet	
4811-24P8	24X / Magnetic Dampened	Yes	16 ft, 10ths / feet	
4811-32	32X / Magnetic Dampened	No	None	
4811-32P1	32X / Magnetic Dampened	Yes	9 ft, 8ths / feet	
4811-32P2	32X / Magnetic Dampened	Yes	9 ft, 10ths / feet	
4811-32P3	32X / Magnetic Dampened	Yes	3 m, Metric	
4811-32P6	32X / Magnetic Dampened	Yes	4 m, Metric	

SPECIFICATIONS	4811-24	4811-32	AL24A	AL24M	AL32A
Magnification	24X	32X	24X	24X	32X
Objective Diameter	36 mm	42 mm	30 mm	30 mm	36 mm
Field of View Angle	1° 20'	1° 20'	1° 20'	1° 20'	1° 20'
Shortest Focusing Distance	0.3 m	0.3 m	0.6 m	0.6 m	0.6 m
Stadia Constant	100	100	100	100	100
Additive Constant	0	0	0	0	0
Compensator Dampening	Magnetic	Magnetic	Air	Magnetic	Air
Compensator Range	±15'	±15'	±15'	±15'	±15'
Compensator Setting Accuracy	<0.5"	<0.5"	<0.5"	<0.5"	<0.3"
Double Run Leveling per 1 km	2 mm	1 mm	2 mm	2 mm	1 mm
Circular Vial Accuracy	8/2 mm	8/2 mm	8/2 mm	8/2 mm	8/2 mm
Horizontal Circle	1°	1°	1°	1°	1°
Base Plate	5/8 x 11	5/8 x 11	5/8 x 11	5/8 x 11	5/8 x 11
Color	Red	Red	Yellow	Yellow	Yellow
Weight	3.97 lb (1.80 kg)	3.97 lb (1.80 kg)	3.50 lb (1.60 kg)	3.50 lb (1.60 kg)	3.50 lb (1.60 kg)

PART NO.	POWER/DAMPENING	TRIPOD	ROD	
AL24A	24X / Air Dampened	No	None	
AL24A-1	24X / Air Dampened	Yes	16 ft, 10ths	
AL24A-2	24X / Air Dampened	Yes	16 ft, inches	
AL24A-3	24X / Air Dampened	Yes	5 m, metric	
AL24M	24X / Magnetic Dampened	No	None	
AL24M-1	24X / Magnetic Dampened	Yes	16 ft, 10ths	
AL24M-2	24X / Magnetic Dampened	Yes	16 ft, inches	
AL24M-3	24X / Magnetic Dampened	Yes	5 m, metric	
AL32A	32X / Air Dampened	No	None	

Construction Theodolite

Full-featured digital theodolite for construction



DE-50
Optional eye piece sold separately

FEATURES & BENEFITS

- ▶ Designed for general construction applications
- ▶ The Spectra Precision DET-2 digital electronic theodolite gives you accurate measurements in an affordable, versatile, easy to use platform
- ▶ Offers dual displays and controls for easy accessibility and operation, very large backlit LCD characters for easy reading (also, reduces eye strain and chance for errors), and a host of features and parameters normally found on much higher priced instruments
- ▶ Fast investment payback is the goal of the Spectra Precision DET-2
- ▶ With its 2-second accuracy (1- or 5-second selectable display readings) and vertical axis compensation, it can handle any construction job
- ▶ Operating costs are kept low with the included rechargeable battery pack and charger
- ▶ Able to be fully customized for your preferred operating style or job, with programmable settings for the horizontal angle resolution and beep, vertical degrees or %, automatic shutoff (to save battery life), and zenith angle

- ▶ A backup alkaline pack holding four standard AA batteries is also included
- ▶ Includes a built-in reticle illuminator that allows you to work inside buildings and other environments with little or no light, such as near dawn or dusk
- ▶ You can count on working in difficult conditions with an environmental rating of IP-54 making it water and dust-proof
- ▶ Comes equipped with a plumb bob, NiMH rechargeable battery pack and charger, alkaline battery pack, adjustment tools, rain hood, multi-language user guide, and hard-shell carrying case
- ▶ Accurate enough for any job, yet the display resolution can be tailored to any operator's preferences for fast readings
- ▶ Vertical axis compensation can be turned on or off depending on the operator or job
- ▶ Programmable settings for the horizontal angle resolution and beep, vertical degrees or percent are easy to configure
- ▶ The recharge kit reduces operating costs and downtime
- ▶ For Specifications see website

APPLICATIONS

- ▶ Establishing 90 degree reference lines
- ▶ Checking angles, alignment, and plumb
- ▶ Anchor bolt alignment
- ▶ Gravity flow pipe laser setup
- ▶ Steel column placement
- ▶ Alignment of forms, tilt-up walls, and curtain walls
- ▶ Basic grade work
- ▶ Short range leveling



Part No.
DET-2

DET-2 — Construction Theodolite
DE-50 — Diagonal Eye Piece



Batter Board Clamp

Accessories and components for rotating lasers



FEATURES & BENEFITS

- ▶ Attaches to boards with thicknesses up to 2.17 in (55 mm)
- ▶ Mounting plate with its 5/8 x 11 screw can easily be removed when connecting it to a laser or theodolite
- ▶ Nail hole ensures that a theodolite's axis is positioned exactly over the reference point

- ▶ Soft-touch locking knobs prove comfortable when using in cold and wet weather
- ▶ 3-point contact for secure, sturdy grip
- ▶ Quick release clamp for quick instrument attachment
- ▶ Weighs 2.43 lb (1.10 kg)

APPLICATIONS

- ▶ Perfect for a laser for vertical applications or Theodolites



Part No.
4852-14

4852-14 — Batter Board Clamp



product can also be shipped from our European warehouse

Storm Laserometer Receiver

Highly-visible LED lights show red for off-grade and green for on-grade



FEATURES & BENEFITS

- ▶ Features a digital readout of elevation which provides a numeric display of ± 2 inches (± 5 cm)
- ▶ Accurate measurements can be made without moving the rod clamp, saving time and increasing productivity
- ▶ Waterproofed to IP67 standards
- ▶ The protective over-molding allows it to withstand a drop of 10 feet (3 meters) onto concrete
- ▶ The patented universal reversible clamp fits square and oval rods

- ▶ 5 inch (12.7 cm) reception height, allows quick acquisition of the laser beam
- ▶ A patented anti-strobe sensor prevents construction lights from giving faulty signals
- ▶ The high visible LEDs on the front show red for high and low and green for on-grade
- ▶ Fiberglass rod sold separately
- ▶ Weighs (with batteries) 0.85 lb (0.38 kg)
- ▶ Weighs (with batteries and rod clamp) 1.20 lb (0.54 kg)

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1994000-02

AT1994000-02 — Storm Laserometer Receiver - Red
AT1994000-09 — Storm Laserometer Receiver - Yellow



Lightning 2 Laser Detector

Lets you get to grade faster on a wide variety of job sites



FEATURES & BENEFITS

- ▶ The Lightning™ 2 has an easy-to-read dual LCD and LED displays
- ▶ Comes equipped with a snap-in rod clamp allowing for fast switching from rod-mounted to hand-held applications
- ▶ Tough IP67 waterproof housing protects the unit from dust, moisture, and accidental drops

- ▶ Loud 100 db speaker can be heard on noisy job sites
- ▶ With two on-grade sensitivities (fine and medium), the Lightning 2 lets you get to grade faster on a wide variety of job sites
- ▶ Weighs (with batteries) 0.65 lb (0.29 kg)
- ▶ Weighs (with batteries and rod clamp) 1.00 lb (0.45 kg)

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1993600-02

AT1993600-02 — Lightning 2 Laser Detector - Red
AT1993600-09 — Lightning 2 Laser Detector - Yellow



Twister Laser Receiver

Specifically designed for harsh, loud construction environments



FEATURES & BENEFITS

- ▶ Designed to receive reference elevation information from rotating laser levels
- ▶ Detector receives invisible laser beams as well as visible red beams
- ▶ Detector includes a Liquid Crystal Display (LCD) on the front and rear for easy indication of detector status and grade information
- ▶ Beeper emits an audible tone that indicates on grade, high or low
- ▶ Specifically designed for use in harsh, loud construction environments

- ▶ Battery life is 70+ hours
- ▶ Beam window height is 2 inches
- ▶ Accuracy levels are user selectable to meet various job requirements
- ▶ Impact resistant housings, recessed windows, waterproof design, durable battery contacts, and a high volume beeper are incorporated into every detector
- ▶ General purpose clamp is designed to mount the detector on various grade rods and staffs
- ▶ Weighs 1.00 lb (0.45 kg) with batteries

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1993640-02

AT1993640-02 — Twister Laser Receiver - Red
AT1993640-09 — Twister Laser Receiver - Yellow





**Bullseye 6
Laser Receiver**

Four selectable accuracies for each on-grade location



FEATURES & BENEFITS

- ▶ Angle compensation automatically calculates and corrects grade display for the angle of the dipper arm
- ▶ Check grade with the dipper arm extended or retracted up to 30°
- ▶ Plumb indication built in - for quick and accurate grade checking for excavators and backhoes

- ▶ Offset on-grade - for productive excavation
- ▶ Center On-grade - for grading operations - use on dozers, graders, scrapers, box blades
- ▶ Up to 8 channels of grade information plus directional out of beam indicators

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1991320-02

PART NO.	POWER SOURCE	COLOR	
AT1991320-02	Alkaline	Red	
AT1991320-09	Alkaline	Yellow	
AT1991326-02	Rechargeable NIMH	Red	
AT1991326-09	Rechargeable NIMH	Yellow	

**Bullseye 5+
Laser Receiver**

Up to six channels of grade information



FEATURES & BENEFITS

- ▶ Built-in blade tilt indication helps the operator keep the blade level or the stick plumb for increased production and accuracy
- ▶ Can be programmed to match an existing or known grade for slope matching operations
- ▶ Center on-grade provides an equal amount of grade information above and below on-grade
- ▶ For grading and excavating machinery

- ▶ Plumb indication is built in for quick and accurate grade checking
- ▶ Offset on-grade provides more information above grade utilizing the entire receiver for productive excavation
- ▶ Three selectable accuracies for each on grade location and up to six channels of grade information plus directional out of beam indicators

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1991370-02

PART NO.	POWER SOURCE	COLOR	
AT1991370-02	Alkaline	Red	
AT1991370-09	Alkaline	Yellow	
AT1991376-02	Rechargeable NIMH	Red	
AT1991376-09	Rechargeable NIMH	Yellow	

**Bullseye 3+
Laser Receiver**

Use on dozers, graders, scrapers, and box blades



FEATURES & BENEFITS

- ▶ Adapts to grading and excavating machinery
- ▶ Easy to move from one machine to another 3 selectable accuracies - work from rough grading to final finishing

- ▶ Bright LED's with green on-grade
- ▶ 5 channels of grade information plus directional out of beam indicators

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1991340-02

PART NO.	POWER SOURCE	COLOR	
AT1991340-02	Alkaline	Red	
AT1991340-09	Alkaline	Yellow	
AT1991346-02	Rechargeable NIMH	Red	
AT1991346-09	Rechargeable NIMH	Yellow	

Bullseye Magnetic Mounts

Use with Bullseye Receivers



FEATURES & BENEFITS

- ▶ Both magnetic mount models can be used with all Bullseye receivers
- ▶ Two magnet banks combine for 900 pounds of holding force

- ▶ Easy to slide receiver up and down
- ▶ Easy removal is accomplished using a release lever
- ▶ Features a large vertical adjustment range for quicker laser set-ups

APPLICATIONS

- ▶ Highly accurate distance measurement



Part No.
AT1991360-02

AT1991360-02 — Bullseye Magnetic Mount - For Backhoe and Excavator
AT1991364-02 — Bullseye Magnetic Mount - For Flat Back Dozer Blades



Bullseye Receiver Accessories

PART NO.	BULLSEYE RECEIVER ACCESSORIES	
AT1010972-15	Receiver cable, straight, 15 ft	
AT1010972-20	Receiver cable, straight, 20 ft	
AT1010972-25	Receiver cable, straight, 25 ft	
AT1010972-35	Receiver cable, straight, 35 ft	
AT1010972-50	Receiver cable, straight, 50 ft	
AT1010983	Machine power cable, lighter adapter, 2-8 ft	
AT1010987-25	Machine power cable, ring terminals, 25 ft	
AT1991604	Universal battery charger with wall plugs	
AT1010536-02S	Bullseye carrying case (Red)	
AT1010976-02	Swivel mount (shown in AT1991570)	

Gopher Pole Wire Installation Tool

Installing wires across ceiling spans is a lot easier with this unique fiberglass pole



FEATURES & BENEFITS

- ▶ With its long, adjustable span of up to 22 feet, the Gopher Pole makes wiring easy in hard-to-reach areas such as suspended ceilings, sub-rooms, crawl spaces and attics
- ▶ Ideal for pushing/pulling wire over long spans and acoustic ceiling tiles
- ▶ Telescopes from 4 to 22 feet (1.22 to 6.70 meters) in seconds

- ▶ Features a positive-locking system that won't accidentally collapse
- ▶ Features a strong but malleable metal tip that allows for easy shaping of the hook
- ▶ Sturdy and lightweight with no loose parts; constructed of durable non-conductive fiberglass
- ▶ Includes a carrying case

APPLICATIONS

- ▶ Utility Companies
- ▶ Electrical Contractors
- ▶ Electrical Supply Distributors
- ▶ Communications
- ▶ Data Network Solutions
- ▶ Commercial And Industrial Lighting
- ▶ Security Equipment Firms
- ▶ General Interior Construction



Part No.
90520



90520 — Gopher Pole Wire Installation Tool
91415 — Carrying Case



Wall/Column Bracket for Lasers and Total Stations

Dual mounting options enable flexibility on the construction job site



FEATURES & BENEFITS

- ▶ SECO's 4852-17 is a dual-use bracket for lasers and total stations
- ▶ Mounts easily to columns (or corners) and flat walls
- ▶ The unique design allows quick and easy separation for dual usage
- ▶ 5/8 x 11 platform holds the instrument 5 inches from the wall/column surface

- ▶ A ratchet and strap secures the bracket to columns up to 20 inches (use Extension Strap #D12328 for larger columns, offering 37 to 69 inches of extra length)
- ▶ Multiple nail/screw holes enable wall mounting
- ▶ Features a powder coated steel frame
- ▶ Weighs 5.00 lb (2.30 kg)

APPLICATIONS

- ▶ For use with Lasers and Total Stations on large construction sites



Part No. 4852-17

4852-17 — Wall/Column Bracket for Lasers and Total Stations 

Heavy-Duty Instrument Column Clamp

Mounts to structural columns for stability and support for heavy instruments



FEATURES & BENEFITS

- ▶ SECO's Heavy-Duty Column Clamp has a solid stable design and works with all 5/8 x 11 instruments
- ▶ The adjustable column rotates and moves vertically to orient the instrument when needed and features 12-inches (30.48 cm) of height adjustment
- ▶ Centerline of the 5/8 x 11 stud to column measures 15-inches (38.1-cm)

- ▶ Includes a 2-inch (5.08 cm) by 10-ft (3.05-m) strap rated for a 2200 pound load and a heavy-duty ratchet to create a strong connection to both round and square columns
- ▶ Constructed of structural aluminum for industrial applications and stainless steel hardware
- ▶ Weighs 13.75 lb (6.24 kg)

APPLICATIONS

- ▶ For use with Robotic Total Stations and scanners
- ▶ Ideal for mounting theodolites, lasers, etc.



Part No. 4852-16

4852-16 — Heavy-Duty Column Clamp 

Wall Mount Bracket

Simple and secure set-up for any ferrous metal surfaces



FEATURES & BENEFITS

- ▶ Strong one-piece construction
 - ▶ Designed to hold U-Bolts for 2- or 3-inch (50.8- or 7.62-cm) diameter pipe
- *Installation hardware not included*

- ▶ 4 x 0.69-inch (10.16 x 1.75-cm) wall mounting holes on 6-inch (15.24 cm) centers*
- ▶ 8-inch (203-mm) stand off from flat wall surface

- ▶ Welded 1/2-inch (6.35-mm) steel
- ▶ Powder painted wrinkle black
- ▶ Weighs 9.15 lb (4.20 kg)

2072-60 — Wall Mount Bracket 

Rotating Laser Column Clamp

Accessories and components for rotating lasers



FEATURES & BENEFITS

- ▶ Works with all 5/8 x 11 instruments
- ▶ Column rotates to orientate the instrument when needed and features 1 ft (30 cm) of height adjustment
- ▶ Center-line of the 5/8 x 11 stud to column measures 6.5 in (16.5 cm)
- ▶ Designed to fit both round and square columns

- ▶ A ratchet strap quickly tightens the column clamp into place to create a strong connection to columns with diameters up to 20 inches (0.5 m)
- ▶ Made of aluminum and stainless steel
- ▶ An Extension Strap is also available (D12328, sold separately) which adds 37 to 69 in (94 to 175.2 cm) to the existing strap for big columns
- ▶ Weighs 5.10 lb (2.32 kg)

APPLICATIONS

- ▶ Perfect for a laser for vertical applications or Theodolites



Part No. 4852-15

4852-15 — Column Clamp 

8365-Series Safety Utility Vest

Designed to meet ANSI/ISEA Class 3 Standards



FEATURES & BENEFITS

- ▶ Made from durable ANSI/ISEA compliant polyester and polyester mesh
- ▶ Features include YKK zippers, 4 inch (10.16 cm) wide reflective tape with 2 inch (50.8 mm) wide silver stripes made with 3M Scotchlite Reflective Material
- ▶ Padded collar is made with Outlast fabric on the inside

- ▶ Developed in conjunction with surveyors from the California Department of Transportation
- ▶ Includes many quality features; multiple pockets for cell phone, tapes, radio, pencils, maps, spray cans and etc
- ▶ Plus, two inside pockets and comes with dual mic clips

APPLICATIONS

- ▶ Workplace safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8365

PART NO.	COLOR	SIZE	
8365-42-FLY	Fluorescent Yellow	42 (S)	
8365-42-FOR	Fluorescent Orange	42 (S)	
8365-46-FLY	Fluorescent Yellow	46 (M)	
8365-46-FOR	Fluorescent Orange	46 (M)	
8365-50-FLY	Fluorescent Yellow	50 (L)	
8365-50-FOR	Fluorescent Orange	50 (L)	
8365-54-FLY	Fluorescent Yellow	54 (XL)	
8365-54-FOR	Fluorescent Orange	54 (XL)	
8365-58-FLY	Fluorescent Yellow	58 (XXL)	
8365-58-FOR	Fluorescent Orange	58 (XXL)	
8365-62-FLY	Fluorescent Yellow	62 (XXXL)	
8365-62-FOR	Fluorescent Orange	62 (XXXL)	
8365-66-FLY	Fluorescent Yellow	66 (J)	
8365-66-FOR	Fluorescent Orange	66 (J)	

8368-Series Safety Utility Vest

Designed to meet ANSI/ISEA Class 3 Standards



FEATURES & BENEFITS

- ▶ Meets the standards for the ANSI/ ISEA Class 3 specifications
- ▶ Features include an extra large pocket on the back that is perfect for maps with convenient pockets with flaps
- ▶ Snaps along front allow vest to close

- ▶ Durable fabric is 100% texturized polyester for softness, comfort, superior strength, abrasion resistance and is machine-washable
- ▶ Includes a 2 inch (50.8 mm) wide retro reflective tape on the fluorescent body and sleeves

APPLICATIONS

- ▶ Workplace safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8368

PART NO.	COLOR	SIZE	
8368-42-FLY	Fluorescent Yellow	42 (S)	
8368-42-FOR	Fluorescent Orange	42 (S)	
8368-46-FLY	Fluorescent Yellow	46 (M)	
8368-46-FOR	Fluorescent Orange	46 (M)	
8368-50-FLY	Fluorescent Yellow	50 (L)	
8368-50-FOR	Fluorescent Orange	50 (L)	
8368-54-FLY	Fluorescent Yellow	54 (XL)	
8368-54-FOR	Fluorescent Orange	54 (XL)	
8368-58-FLY	Fluorescent Yellow	58 (XXL)	
8368-58-FOR	Fluorescent Orange	58 (XXL)	
8368-62-FLY	Fluorescent Yellow	62 (XXXL)	
8368-62-FOR	Fluorescent Orange	62 (XXXL)	
8368-66-FLY	Fluorescent Yellow	66 (J)	
8368-66-FOR	Fluorescent Orange	66 (J)	

**8390-Series
Mesh Safety Vest**

Designed to meet ANSI/ISEA Class 3 Standards



FEATURES & BENEFITS

- ▶ Meets ANSI/ISEA Class 3 standards for reflectivity
- ▶ Manufactured with tricot and textured Polyester mesh for durability and comfort
- ▶ Includes three front outside pockets and a mic clip

- ▶ Stays cool in the summer heat and are highly visible in low-light conditions and includes snaps to allow vest to close
- ▶ Features a 3 inch (76.2 mm) wide reflective tape with 2 inch (50.8 mm) wide silver stripes

APPLICATIONS

- ▶ Workplace safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



PART NO.	COLOR	SIZE	
8390-50-FLY	Fluorescent Yellow	50 (L)	
8390-50-FOR	Fluorescent Orange	50 (L)	
8390-54-FLY	Fluorescent Yellow	54 (XL)	
8390-54-FOR	Fluorescent Orange	54 (XL)	
8390-58-FLY	Fluorescent Yellow	58 (XXXL)	
8390-58-FOR	Fluorescent Orange	58 (XXXL)	
8390-62-FLY	Fluorescent Yellow	62 (XXXL)	
8390-62-FOR	Fluorescent Orange	62 (XXXL)	

**8265-Series
Safety Utility Vest**

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Developed in conjunction with surveyors from the California DOT
- ▶ Features include bright fluorescent material, 4 inch (101.6 mm) wide contrasting reflective material with 2 inch (50.8 mm) wide silver stripes made of 3M™ Scotchlite™ reflective material
- ▶ Made of durable polyester, brass grommets, heavy-duty webbing and trim, and a genuine YKK™ zipper

- ▶ Adaptive Comfort® material by Outlast®, a Certified Space Technology™, designed to balance body temperature
- ▶ Features four large pockets on the outside and two generous pockets on the inside — great for field books, tapes, pencils, flagging, cell phones, etc
- ▶ Includes two spray can holders

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



PART NO.	COLOR	SIZE	
8265-42-FLY	Fluorescent Yellow	42 (S)	
8265-42-FOR	Fluorescent Orange	42 (S)	
8265-46-FLY	Fluorescent Yellow	46 (M)	
8265-46-FOR	Fluorescent Orange	46 (M)	
8265-50-FLY	Fluorescent Yellow	50 (L)	
8265-50-FOR	Fluorescent Orange	50 (L)	
8265-54-FLY	Fluorescent Yellow	54 (XL)	
8265-54-FOR	Fluorescent Orange	54 (XL)	
8265-58-FLY	Fluorescent Yellow	58 (XXL)	
8265-58-FOR	Fluorescent Orange	58 (XXL)	
8265-62-FLY	Fluorescent Yellow	62 (XXXL)	
8265-62-FOR	Fluorescent Orange	62 (XXXL)	
8265-66-FLY	Fluorescent Yellow	66 (L)	
8265-66-FOR	Fluorescent Orange	66 (L)	

8260-Series U.S./Canada Dual Safety Utility Vest

Designed to meet ANSI/ISEA Class 2 and Canadian CSA-Z96 Standards



FEATURES & BENEFITS

- ▶ Manufactured to meet ANSI/ISEA 107-2010 Class 2 and CSA-Z96 standards
- ▶ Vest compartments include a field notebook pocket, pencil slots, flagging tape pocket with grommets, and an internal cell phone pocket
- ▶ Includes a special padded collar made of Outlast® material for added comfort

- ▶ Four-inch-wide reflective tape that includes a two-inch-wide silver stripe and high-vis material makes this vest highly visible in any weather condition — day or night
- ▶ Also including two exterior radio mic clips and a front closing zipper
- ▶ Made of 100% polyester

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8260

PART NO.	COLOR	SIZE	
8260-46-FLY	Fluorescent Yellow	46 (M)	
8260-46-FOR	Fluorescent Orange	46 (M)	
8260-50-FLY	Fluorescent Yellow	50 (L)	
8260-50-FOR	Fluorescent Orange	50 (L)	
8260-54-FLY	Fluorescent Yellow	54 (XL)	
8260-54-FOR	Fluorescent Orange	54 (XL)	
8260-58-FLY	Fluorescent Yellow	58 (XXL)	
8260-58-FOR	Fluorescent Orange	58 (XXL)	
8260-62-FLY	Fluorescent Yellow	62 (XXXL)	
8260-62-FOR	Fluorescent Orange	62 (XXXL)	
8260-66-FLY	Fluorescent Yellow	66 (J)	
8260-66-FOR	Fluorescent Orange	66 (J)	

8261-Series Safety Utility Vest

Designed to meet EN 20471:2014 Class 2 Standards



FEATURES & BENEFITS

- ▶ Features durable ISO 20471 compliant polyester and polyester mesh. This vest has heavy-duty YKK® zippers
- ▶ Features zipper openings on the side to allow for ventilation
- ▶ The padded collar is made with Outlast® fabric on the inside to help regulate body temperature
- ▶ 10.16 cm wide reflective tape with 5.08 cm wide silver stripes

- ▶ Vest is third-party CE certified
- ▶ Comes with an easy-to-access mic clip
- ▶ This vest has multiple pockets that are secure and easily accessible
- ▶ Chest sizes range from 96.52-167.64 cm (38" - 66")
- ▶ Sizes available: XS, S, M, L, XL, 2X, 3X, J
- ▶ Available in fluorescent orange or fluorescent yellow



Part No.
8261

PART NO.	COLOR	SIZE	
8261-XS-FLY	Fluorescent Yellow	96.52 cm (XS)	
8261-XS-FOR	Fluorescent Orange	96.52 cm (XS)	
8261-S-FLY	Fluorescent Yellow	106.68 cm (S)	
8261-S-FOR	Fluorescent Orange	106.68 cm (S)	
8261-M-FLY	Fluorescent Yellow	116.84 cm (M)	
8261-M-FOR	Fluorescent Orange	116.84 cm (M)	
8261-L-FLY	Fluorescent Yellow	127 cm (L)	
8261-L-FOR	Fluorescent Orange	127 cm (L)	
8261-XL-FLY	Fluorescent Yellow	137.16 cm (XL)	
8261-XL-FOR	Fluorescent Orange	137.16 cm (XL)	
8261-XXL-FLY	Fluorescent Yellow	147.32 cm (XXL)	
8261-XXL-FOR	Fluorescent Orange	147.32 cm (XXL)	
8261-XXXL-FLY	Fluorescent Yellow	157.48 cm (XXXL)	
8261-XXXL-FOR	Fluorescent Orange	157.48 cm (XXXL)	
8261-J-FLY	Fluorescent Yellow	167.64 cm (J)	
8261-J-FOR	Fluorescent Orange	167.64 cm (J)	

**8292-Series
Safety Utility Vest**

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Designed to meet ANSI/ISEA Class 2 requirements
- ▶ Made from compliant tricot for durability and comfort and a zipper to keep vest closed during cool weather

- ▶ Comes with an easy access mic clip
- ▶ Has 2.5 inch (63.5 mm) wide reflective tape with 2-inch (50.8 mm) wide silver stripes
- ▶ Features multiple pockets for cell phone, tapes, radio, pencils and includes two inside pockets

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8292



PART NO.	COLOR	SIZE	
8292-46-FLY	Fluorescent Yellow	46 (M)	
8292-46-FOR	Fluorescent Orange	46 (M)	
8292-50-FLY	Fluorescent Yellow	50 (L)	
8292-50-FOR	Fluorescent Orange	50 (L)	
8292-54-FLY	Fluorescent Yellow	54 (XL)	
8292-54-FOR	Fluorescent Orange	54 (XL)	
8292-58-FLY	Fluorescent Yellow	58 (XXL)	
8292-58-FOR	Fluorescent Orange	58 (XXL)	
8292-62-FLY	Fluorescent Yellow	62 (XXXL)	
8292-62-FOR	Fluorescent Orange	62 (XXXL)	

**8290-Series
Economy Safety Vest**

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Manufactured to meet ANSI/ISEA Class 2 standards
- ▶ Manufactured with tricot and texturized polyester mesh for durability and comfort
- ▶ Made with 3M™ Scotchlite™ Reflective Material and a zipper on chest for frontal closure

- ▶ Stays cool in the summer heat and is visible in low-light conditions
- ▶ Features a wide variety of pockets including: radio pocket; pencil pocket; two front outside pockets; two front inside pockets and a rear map pocket
- ▶ Weighs 0.71 lb (0.32 kg)

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8290



PART NO.	COLOR	SIZE	
8290-50-FLY	Fluorescent Yellow	50 (L)	
8290-50-FOR	Fluorescent Orange	50 (L)	
8290-54-FLY	Fluorescent Yellow	54 (XL)	
8290-54-FOR	Fluorescent Orange	54 (XL)	
8290-58-FLY	Fluorescent Yellow	58 (XXL)	
8290-58-FOR	Fluorescent Orange	58 (XXL)	
8290-62-FLY	Fluorescent Yellow	62 (XXXL)	
8290-62-FOR	Fluorescent Orange	62 (XXXL)	

8068-Series Safety Utility Vest

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Durable fluorescent fabric is constructed of 100% polyester for softness, comfort, superior strength and abrasion resistance
- ▶ Features convenient pockets with sturdy fasteners, map pocket and mic clip

- ▶ Complies with ANSI/ISEA Class 2 standards for high-visibility safety apparel with two-inch-wide stripes of retroreflective tape
- ▶ Snaps on chest allow vest to close

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8068

PART NO.	COLOR	SIZE	
8068-42-FLY	Fluorescent Yellow	42 (S)	
8068-42-FOR	Fluorescent Orange	42 (S)	
8068-46-FLY	Fluorescent Yellow	46 (M)	
8068-46-FOR	Fluorescent Orange	46 (M)	
8068-50-FLY	Fluorescent Yellow	50 (L)	
8068-50-FOR	Fluorescent Orange	50 (L)	
8068-54-FLY	Fluorescent Yellow	54 (XL)	
8068-54-FOR	Fluorescent Orange	54 (XL)	
8068-58-FLY	Fluorescent Yellow	58 (XXL)	
8068-58-FOR	Fluorescent Orange	58 (XXL)	
8068-62-FLY	Fluorescent Yellow	62 (XXXL)	
8068-62-FOR	Fluorescent Orange	62 (XXXL)	
8068-66-FLY	Fluorescent Yellow	66 (J)	
8068-66-FOR	Fluorescent Orange	66 (J)	

8063-Series Surveyors Utility Vest

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Vests are manufactured to meet ANSI/ISEA Class 2 standards
- ▶ Features a comfortable hi-tech liner made of Adaptive Comfort® material by Outlast®, a Certified Space Technology™, designed to balance body temperature
- ▶ 100% polyester

- ▶ Vest snaps on chest allow for frontal closure
- ▶ Includes pockets for notebooks, maps, pencils, compasses, flagging tape, etc
- ▶ Also features exterior radio mic clip
- ▶ Weighs 1.94 lb (0.89 kg)

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired

PART NO.	COLOR	SIZE	
8063-38-FOR	Fluorescent Orange	38 (XS)	
8063-42-FLY	Fluorescent Yellow	42 (S)	
8063-42-FOR	Fluorescent Orange	42 (S)	
8063-46-FLY	Fluorescent Yellow	46 (M)	
8063-46-FOR	Fluorescent Orange	46 (M)	
8063-50-FLY	Fluorescent Yellow	50 (L)	
8063-50-FOR	Fluorescent Orange	50 (L)	
8063-54-FLY	Fluorescent Yellow	54 (XL)	
8063-54-FOR	Fluorescent Orange	54 (XL)	
8063-58-FLY	Fluorescent Yellow	58 (XXL)	
8063-58-FOR	Fluorescent Orange	58 (XXL)	
8063-62-FLY	Fluorescent Yellow	62 (XXXL)	
8063-62-FOR	Fluorescent Orange	62 (XXXL)	
8063-66-FLY	Fluorescent Yellow	66 (J)	
8063-66-FOR	Fluorescent Orange	66 (J)	

8067-Series Heavy-Duty Safety Utility Vest

Built with Cordura



FEATURES & BENEFITS

- ▶ Vest is made of heavy-duty, water-repellent 1000 denier Cordura®
- ▶ Snaps allow vest closure
- ▶ Cordura is more durable than cotton, polyester, ordinary nylon

- ▶ Perfect for jobs away from federal highways (non ANSI/ISEA compliant) but where high visibility is still desired
- ▶ Weighs 1.65 lb (0.72 kg)

APPLICATIONS

- ▶ Workplace Safety
- ▶ Light-duty applications where visibility is desired but not mandated



Part No.
8067

PART NO.	COLOR	SIZE	
8067-38-FOR	Fluorescent Orange	38 (XS)	
8067-42-FLY	Fluorescent Yellow	42 (S)	
8067-42-FOR	Fluorescent Orange	42 (S)	
8067-46-FLY	Fluorescent Yellow	46 (M)	
8067-46-FOR	Fluorescent Orange	46 (M)	
8067-50-FLY	Fluorescent Yellow	50 (L)	
8067-50-FOR	Fluorescent Orange	50 (L)	
8067-54-FLY	Fluorescent Yellow	54 (XL)	
8067-54-FOR	Fluorescent Orange	54 (XL)	
8067-58-FLY	Fluorescent Yellow	58 (XXL)	
8067-58-FOR	Fluorescent Orange	58 (XXL)	
8067-62-FLY	Fluorescent Yellow	62 (XXXL)	
8067-62-FOR	Fluorescent Orange	62 (XXXL)	
8067-66-FLY	Fluorescent Yellow	66 (J)	
8067-66-FOR	Fluorescent Orange	66 (J)	

8069-Series Safety Utility Vest

Designed to meet ANSI/ISEA Class 2 Standards



FEATURES & BENEFITS

- ▶ Vests are manufactured to meet ANSI/ISEA Class 2 standards
- ▶ Features a cool, comfortable mesh back and snaps in front to close vest

- ▶ 100% polyester
- ▶ Includes special compartments for notebooks, pencils, compass, flagging tape, etc
- ▶ Features exterior radio mic clip

APPLICATIONS

- ▶ Workplace Safety
- ▶ Perfect for construction crews or surveyors near busy roads or other possibly hazardous locations where worker visibility is desired



Part No.
8069

PART NO.	COLOR	SIZE	
8069-38-FOR	Fluorescent Orange	38 (XS)	
8069-42-FLY	Fluorescent Yellow	42 (S)	
8069-42-FOR	Fluorescent Orange	42 (S)	
8069-46-FLY	Fluorescent Yellow	46 (M)	
8069-46-FOR	Fluorescent Orange	46 (M)	
8069-50-FLY	Fluorescent Yellow	50 (L)	
8069-50-FOR	Fluorescent Orange	50 (L)	
8069-54-FLY	Fluorescent Yellow	54 (XL)	
8069-54-FOR	Fluorescent Orange	54 (XL)	
8069-58-FLY	Fluorescent Yellow	58 (XXL)	
8069-58-FOR	Fluorescent Orange	58 (XXL)	
8069-62-FLY	Fluorescent Yellow	62 (XXXL)	
8069-62-FOR	Fluorescent Orange	62 (XXXL)	
8069-66-FLY	Fluorescent Yellow	66 (J)	
8069-66-FOR	Fluorescent Orange	66 (J)	

Hydration Backpack

Stay hydrated on the job while maintaining workplace safety



FEATURES & BENEFITS

- ▶ 20 x 8 inches (20.32 x 50.8 cm)
- ▶ Chest strap with side release buckle
- ▶ 4-inch (101.6 mm) wide fabric with 2-inch (50.8 mm) wide reflective tape (same as safety vest)
- ▶ 1-inch (25.4 mm) wide polypropylene webbing allows shoulder straps to adjust
- ▶ 1000D Cordura Nylon is bonded to the 1/4-inch (6.35 mm) back padding

- ▶ Neoprene sleeve surrounds the hydration tube
- ▶ Bladder size 2.5 liters (84.5 fl oz)
- ▶ When bladder is completely full the hydration pack is 5 inches (127 mm) thick
- ▶ Mod-U-Lox® keeps hydration tube secure on either strap, allowing access to the bite valve for either right or left handed use (one on each side)
- ▶ Weighs (with water) 6.70 lb (3.03 kg)
- ▶ Weighs (without water) 1.20 lb (0.54 kg)

APPLICATIONS

- ▶ Workplace Safety
- ▶ Construction environment



Part No.
8125-60-FOR

8125-60-FOR — Hydration Backpack



Utility Bags and Miscellaneous Cases

Designed to keep your field equipment and supplies safe and secure



- ▶ Features four exterior deep-zippered pockets — two front and two side
- ▶ Two interior pockets — 14 x 12 x 2 inches with hook-and-loop closures
- ▶ Heavy-duty nylon webbing carrying straps
- ▶ Measures 30 x 14 x 20 inches (76.2 x 35.6 x 50.8 cm)
- ▶ Weighs 3.78 lb (1.72 kg)



8106-10-ORG — Monster Gear Bag 

- ▶ Excellent for carrying surveying accessories, clothing, and other miscellaneous gear
- ▶ Made of heavy-duty water resistant polyester
- ▶ Measures 27 x 11 x 11 inches (69 x 28 x 28 cm)
- ▶ Weighs 1.56 lb (0.71 kg)



8106-20-ORG — Surveyor's Gear Bag with Rhinotek Bottom 

- ▶ Fits most large controllers like the Ranger™ series, Allegro, TSC2™
- ▶ Features a Velcro® flap closure, belt loop and shoulder strap
- ▶ Main compartment measures 10.25 x 5.25 x 2 inches (26 x 13.3 x 5 cm)
- ▶ Padded with 0.25 in (6.35 mm) 1000D Cordura material with khaki trim
- ▶ Outside pocket is 6 x 5 in (15 x 12.7 cm)
- ▶ Weighs 0.35 lb (0.16 kg)



8142-01-ORG — Large Controllers Case 

- ▶ Features include an outside pocket with a Velcro closure and 2 inch straps made with heavy-duty webbing
- ▶ Also features a Rhinotek™ and leather reinforced bottom
- ▶ Measures 10.25 x 15 inches (26 x 38 cm)
- ▶ Weighs 1.30 lb (0.59 kg)



8095-20-ORG — Heavy-Duty Collapsible Bucket Bag 

- ▶ This case holds the Trimble® Pathfinder® ProXH™ or the ProXT™ GNSS unit securely
- ▶ Weighs 0.45 lb (0.20 kg)



8143-21-YEL — Trimble Pathfinder Series Pole Case 

- ▶ Secure your cell phone to any survey pole without slipping
- ▶ Inside dimensions: 5 x 2.5 x 1.5 inches (12.7 x 6.35 x 3.81 cm)
- ▶ Weighs 0.10 lb (0.45 kg)



8143-22-FLY — GNSS Rod Cell Phone Case 

- ▶ The MiFi Hotspot Case secures any MiFi unit to any GNSS survey pole or prism pole
- ▶ Easily attaches to a GNSS or prism pole with the metal clamp on case
- ▶ This pouch stays in place; it will not slip down the pole
- ▶ Features a window to clearly view the installed unit activity
- ▶ Works with all MiFi Hotspots and most smart phones on the market today
- ▶ A Velcro strap keeps unit safely inside clear pouch
- ▶ Inside dimensions 6 x 4.25 inches (15.24 x 10.8 cm)
- ▶ Constructed of heavy-duty Cordura®
- ▶ Comes in fluorescent yellow
- ▶ Weighs 0.35 lb (0.16 kg)



8143-40-FLY — MiFi Hotspot Case 

Tool Pouches

Designed to keep your tools safe and organized



- ▶ Features include an 11 x 7 inch (28 x 18 cm) and 6 x 4 inch (15 x 10 cm) pouches
- ▶ Has slots for markers, a loop for axes or hammers
- ▶ Weighs 0.40 lb (0.18 kg)



8046-20-ORG — Construction-Style Tool Pouch

- ▶ Features a 9 x 2 x 11 inch (22.9 x 5.08 x 27.9 cm) pocket
- ▶ Large pocket is lined with two layers of 1000D Cordura
- ▶ Webbed belt adjusts to a 50 inch (127 cm) waist
- ▶ Includes a hammer loop and marker storage
- ▶ Weighs 1.05 lb (0.48 kg)



8046-30-ORG — Surveyor's Tool Pouch with Belt

GNSS Pole and Tripod Bags

Designed to keep your GNSS tripods and rods safe and secure



- ▶ This bag features heavy-duty Cordura® material and Rhinotek™
- ▶ Shoulder strap is included
- ▶ Use with Heavy-Duty GNSS Antenna Tripods (5119-10)
- ▶ Measures: 8 inch ID x 56 inches (20.32 x 142.24 cm)
- ▶ Weighs 1.80 lb (0.82 kg)



8154-12-ORG — Heavy-Duty GNSS Tripod Bag

- ▶ Replacement carrying case for Radio Antenna Tripod
- ▶ Case comes included when you purchased the Radio Antenna Tripod (5300-11 & 5300-12)



8154-10-ORG — Radio Antenna Tripod Carrying Case

- ▶ Use with our Collapsible GNSS Antenna Tripod (5119-00) or other conventional tripods
- ▶ Designed to carry the tripod without the point on the center pole to prevent damage to the pole
- ▶ Features a full length heavy-duty zipper
- ▶ Available in orange
- ▶ Weighs 1.70 lb (0.77 kg)
- ▶ 7" x 50"




8154-00-ORG — Collapsible GNSS Antenna Tripod Bag

- ▶ Features a full-length zipper and shoulder strap
- ▶ Measures: 82 x 9 OD inches (208.28 x 22.86 OD cm)
- ▶ Weighs 1.88 lb (0.85 kg)



8153-10-ORG — Extra-Large Antenna Tripod Bag

- ▶ Designed to protect the rods during transportation or storage
- ▶ 5.5 ID x 41 inches long with a 10" flap
- ▶ Weighs 0.45 lb (0.20 kg)



8162-00-ORG — GPS Rover Rod Carrying Case

- ▶ This bag holds a 2 meter Snap-Lock pole and bipod or tripod (connected)
- ▶ Constructed of tough Cordura material and Rhinotek ends
- ▶ Measures 56 inches long (1.42 m)
- ▶ Weighs 1.50 lb (0.68 kg)



8151-02-FLY — Heavy-Duty Snap-Lock 2-Meter Pole System Bag

Instrument Tripod Bags and Cases

Designed to keep your instrument tripods safe and secure



- ▶ The SECO Instrument Tripod Bag holds all major brands of aluminum and wooden tripods
- ▶ Made of heavy-duty nylon Cordura, with a leather bottom, and pull string ties at the top
- ▶ Measures: 52 x 8.75 OD inches (132 x 22.23 OD cm)
- ▶ 8150-00 weighs 0.26 lb (0.57 kg)
- ▶ 8150-20 weighs 1.85 lb (0.84 kg)



8150-20-ORG — Heavy-Duty Instrument Tripod Bag with Rhinotek Bottom

- ▶ Fits all tripods, 47-inches (1.2-m) or less collapsed
- ▶ Full-length aluminum hinge with four fold-down latches
- ▶ Two carry handles: one on the side, one on the end
- ▶ Internal #2 EPE foam tripod cutout, two securing straps
- ▶ Hard 0.125 ABS bracket pad to prevent tripod points from penetrating the foam
- ▶ Area for business card and shipping labels
- ▶ Replaceable wheels
- ▶ Hard durable black ABS plastic
- ▶ Size: 49.125 x 12.12 x 11.27 inches (125 x 30.78 x 28.63 cm)
- ▶ Weighs 24.75 lb (11.25 kg)



8160-31 — Hard Tripod Case with Wheels

- ▶ Heavy-duty bag for carrying many different brands of tripods, including SECO and Tri-Max
- ▶ Features zipper closure
- ▶ Measures: 48 x 8 OD inches (121.9 x 20.3 OD cm)
- ▶ Weighs 1.80 lb (0.82 kg)



8154-11-ORG — Super-Duty Tripod Bag

Rover Rods and Prism Pole Tripod Cases

Designed to keep your Rover rod, Robotics role and Prism pole tripods safe and clean



- ▶ Store your two-piece rover rod in this hard shell case and know it's protected
- ▶ Measures 4 ID x 41 in (10.16 ID x 104.14 cm)
- ▶ Weighs 3.20 lb (1.40 kg)



8162-20-BLK — GNSS Rover Rod Hard Shell Case

- ▶ Designed to carry a prism pole with tripod attached
- ▶ Has a fold-over flap and shoulder strap
- ▶ Made from nylon Cordura and durable Rhinotek
- ▶ Measures: 7.5 ID x 60 inches (19.1 ID x 152 cm)
- ▶ Weighs 1.55 lb (0.70 kg)



8180-20-ORG — Heavy-Duty Prism Pole Tripod Bag

- ▶ External and internal side pockets hold extra gear
- ▶ Measurements: 6 OD x 58 inches (15.25 OD x 147.32 cm)
- ▶ Weighs 2.70 lb (1.23 kg)



8157-01-ORG — Long Padded System Bag

- ▶ Protect your prism or range pole from dirt and moisture
- ▶ Measures: 61.5 x 6 in (156.21 x 15.24 cm)
- ▶ Fits all SECO and Crain poles
- ▶ Weighs 0.68 lb (0.31 kg)



8160-00-ORG — Prism or Range Pole Protective Bag

- ▶ The heavy-duty material-covered tube holds one- or two-section poles or rods
- ▶ Measures: 65 inches (1.63 m) in length
- ▶ Use to protect and carry your pole or rod
- ▶ Weighs 5.50 lb (2.50 kg)



8160-20-BLK — Prism Pole Hard Shell Case

Assorted Rod Carrying Cases

Designed to keep your One Shot, DE rod, Range pole, LR-STD, LR-PRO and CR rod safe and clean



- ▶ This carrying case is made from the highest quality 1000-denier nylon
- ▶ Water-resistant
- ▶ Measures: 4.5 x 82 inches (11.4 x 208.3 cm)
- ▶ Weighs 0.45 lb (0.20 kg)



91402 — LR-STD/LR-PRO Carrying Case

- ▶ Fits 13 ft (4 m), 16 ft (5 m) and 20 ft (6 m) rods
- ▶ Made from 1000-denier nylon
- ▶ Water-resistant
- ▶ Measures: 4.25 x 65.5 inches (10.8 x 166.4 cm)
- ▶ Weighs 0.45 lb (0.20 kg)



91411 — CR-13/16/20 ft / SVR-16/25 Carrying Case

- ▶ Textured heavy-duty poly
- ▶ Measures 7.5 x 46 inches (19.05 x 116.84 cm)
- ▶ Weighs 0.48 lb (0.22 kg)



8170-00-ORG — Range Pole Case

- ▶ Fits 8 ft (2.4 m) rods
- ▶ Made from 1000-denier nylon
- ▶ Water-resistant
- ▶ Measures: 3.5 x 56.5 inches (8.9 x 143.5 cm)
- ▶ Weighs 0.30 lb (0.14 kg)



91410 — CR-8 ft/2.4m Carrying Case

BACK BY POPULAR DEMAND!

This DE Rod Bag, previously discontinued, has been brought back through customer requests

- ▶ Extremely durable Cordura(R) bag with reinforced bottom
- ▶ Pocket for a sensor bracket
- ▶ Shoulder strap included
- ▶ 4 x 71 inch (10.16 x 180.34 cm)
- ▶ Weighs 0.5 lb (0.23 kg)



8166-01-ORG — Direct Elevation Rod Bag

- ▶ CMR Measuring Ruler Cases
- ▶ Made from the highest-quality 1000-denier nylon.
- ▶ For use with our rugged fiberglass CMR Series Measuring Rulers 90180, 90181 and 90182 on page 49, and for gopher pole 90520 on page 56.



PART NO.

SIZE

91415	3.5 x 65 in (8.89 x 165.1 cm)	
91416	4.5 x 68 in (11.43 x 172.72 cm)	
91417	4.5 x 76 in (11.43 x 193.04 cm)	

Lath and Stake Bags

Designed to hold your lath and stakes secure



- ▶ Carries up to 50 lath or rebar
- ▶ Measures 9 x 38 inches (2.54 x 96.52 cm)
- ▶ Weighs 0.22 lb (0.10 kg)



8102-01-ORG — 38 inch Lath Carrier

- ▶ Carries up to 50 lath or rebar
- ▶ Measures 9 x 38 inches (2.54 x 96.52 cm)
- ▶ Weighs 0.22 lb (0.10 kg)



8102-00-ORG — Lath Carrier

- ▶ Heavy-duty lath carrier fits 36 or 48-inch lath features space inside for any standard 12 inch, five-gallon bucket
- ▶ Weighs 1.50 lb (0.68 kg) without bucket and approx. 3.85 lb (1.75 kg) with bucket added



8104-20-ORG — Heavy-Duty Bucket Lath Carrier

- ▶ Holds 36 or 48 inch (84 or 122 cm) wood lath
- ▶ Features a hand loop, shoulder strap, and outside pocket
- ▶ Weighs 0.80 lb (0.36 kg)



8100-00-ORG — 8 ID x 36 inches Lath Bag
8101-00-ORG — 8 ID x 48 inches Lath Bag

- ▶ Holds 24 inch (61 cm) wood lath
- ▶ Features a hand loop, shoulder strap, outside pocket
- ▶ 8 inch (20.3 cm) inside diameter
- ▶ Weighs 0.40 lb (0.18 kg)



8103-20-ORG — Heavy-Duty Rhinotek Lath Bag

- ▶ Use to carry 21 inch (53 cm) or 30 inch (76 cm) flags
- ▶ 8093-00-ORG weighs 0.22 lb (0.10 kg)
- ▶ 8094-00-ORG weighs 0.28 lb (0.13 kg)



8093-00-ORG — Wire Stake Flag Bag for 21 in Flags
8094-00-ORG — Wire Stake Flag Bag for 30 in Flags

- ▶ The main compartment of this bag is constructed of tough Rhinotek™ material and designed to hold 18 inch stakes or rebar
- ▶ Include hammer loop, adjustable strap and brass grommet drain holes — the 8091-20-ORG features a partition
- ▶ Standard bag weighs 1.55 lb (0.70 kg)
- ▶ Partitioned bag weighs 1.70 lb (0.77 kg)



8090-20-ORG — Heavy-Duty 18-inch Bag for Stakes or Rebar
8091-20-ORG — Heavy-Duty 18-inch Bag w/ Center Partition

- ▶ Heavy-Duty Lath Bag but with Rhinotek material on the bottom and six inches up the sides
- ▶ Designed in two sizes: 8 inches wide by 36 or 48 inches deep
- ▶ Both weigh approximately 1.50 lb (0.68 kg)



8100-20-ORG — 36 inch Heavy-Duty Lath or Rebar Bag
8101-20-ORG — 48 inch Heavy-Duty Lath or Rebar Bag

- ▶ This stake bag is the same as the 8090-20-ORG, but holds 24 inch stakes
- ▶ Features a Rhinotek bottom
- ▶ Standard bag weighs 1.70 lb (0.77 kg)
- ▶ Partitions bag weighs 1.60 lb (0.73 kg)



8092-20-ORG — Heavy-Duty 24-inch Bag for Stakes or Rebar
8096-20-ORG — Heavy-Duty 24-inch Bag w/ Center Partition

- ▶ Choose between a standard spray can holder or a holder with updated features like four pockets for pens/pencils and a heavy web strap
- ▶ Both weighs approximately 1.00 lb (0.45 kg)



8098-00-ORG — Standard Spray Can Holder
8098-10-ORG — With Accessory Pockets (shown)

Front and Top Loading Total Station Cases

Heavy-duty cases for your Total Station



FEATURES & BENEFITS

- ▶ Features a Rhinotek™ bottom and durable backpack straps

*Measured between the pads

- ▶ Measures: 14 x 9 x 7 in (35.6 x 22.9 x 17.8 cm)*

APPLICATIONS

- ▶ Keeps your total station safe and secure during transport



Part No.
8120-00-ORG



PART NO.	LOADING SPACE	FEATURES	WEIGHS	
8120-00-ORG	Front Loading	Cloth Frame	5.75 lb (2.61 kg)	
8121-00-ORG	Top Loading	Cloth Frame	5.75 lb (2.61 kg)	
8123-00-ORG	Top Loading	Aluminum Frame	7.50 lb (3.40 kg)	

Total Station, GIS and GNSS Backpacks

Designed to keep your Total Station, GIS and GNSS equipment safe and secure



- ▶ This pack includes a cam-lock antenna pole, adjustable straps, several interior pockets, belt loop straps, rain flap and much more
- ▶ Interior dimensions: 15 x 9 x 4 in*
- ▶ Pole extends from 16.5 to 36.5 inches (41.91 to 92.71 cm)
- ▶ Has 5/8 x 11 tip on antenna pole
- ▶ Weighs 2.00 lb (0.91 kg)

*Measured between the pads



8125-50-ORG — Small GIS Backpack



- ▶ The Total Station Backpack is similar in style to a commercially available lightweight day pack
- ▶ Main compartment has an innovative 'wrap' made of 3/8-inch high-density foam with hook and loop adjustment that securely cradles all total stations
- ▶ Features extra pockets and Rhinotek™ bottom
- ▶ Weighs 2.40 lb (1.10 kg)



8120-30-ORG — 400 mm Total Station Backpack (shown)
8120-40-ORG — 500 mm Total Station Backpack



- ▶ Features a double-zipped, top-loading station compartment lined with rigid foam padding, two side pockets for cables, and one front battery pocket
- ▶ Comfortable padded belt with lumbar back support system, shoulder straps with all-point adjustment features, and a rubberized carrying handle
- ▶ The free-standing aluminum frame keeps the pack upright even when fully loaded
- ▶ Has a top rain flap with closure and rain flaps on the side pockets
- ▶ Features a Rhinotek bottom
- ▶ Interior dimensions: 17 x 10 x 10 in*
- ▶ Exterior dimensions: 24.5 x 15 x 16 in
- ▶ Weighs 8.00 lb (3.62 kg)
- ▶ Holds 40 lb (18.14 kg)

*Measured between the pads



8134-00-ORG — Robotics Backpack



- ▶ This pack, which includes cool mesh and foam back pad, offers a convenient and comfortable way to transport and manage GIS instrumentation
- ▶ Features include a built-in pocket for CamelBak® or other hydration systems and a protective rain flap round out this pack
- ▶ Also features adjustable internal pockets; padded, adjustable shoulder straps, and waist belt
- ▶ Constructed of heavy-duty, high-vis polyester
- ▶ Interior dimensions: 20 x 9.5 x 4 in
- ▶ Includes a 5/8 x 11 tip
- ▶ Weighs 2.80 lb (1.27 kg)



8125-11-ORG — Large GIS Backpack with Cam-Lock Antenna Pole



Prism and Tribrach Bags

Designed to keep prisms and tribrachs secure



- ▶ Heavily padded for single prisms
- ▶ Measures: 5 x 7 x 2 inches*
- ▶ Available in Orange
- ▶ Weighs 0.48 lb (0.22 kg)

*Measured between the pads



8070-00-ORG — Single Prism Bag



- ▶ For triple prisms and prism targets or tribrachs
- ▶ Measures: 10 x 9.5 x 3 inches*
- ▶ Available in Orange
- ▶ Weighs 1.06 lb (0.48 kg)

*Measured between the pads



8081-00-ORG — Jumbo Triple Prism Bag



- ▶ Heavily padded for triple prisms
- ▶ Available in Orange
- ▶ Measures (interior*) 9 x 7 x 2 inches
- ▶ Weighs 0.75 lb (0.34 kg)

*Measured between the pads



8080-00-ORG — Triple Prism Bag



- ▶ Easily holds a tribrach
- ▶ Measures: 6 x 6 x 2 inches*
- ▶ Available in Orange
- ▶ Weighs 0.40 lb (0.18 kg)

*Measured between the pads



8071-00-ORG — Tribrach Case



- ▶ Holds a tilting prism with tribrach and adapter
- ▶ Measures: 12 x 12 x 3 inches*
- ▶ Available in Orange
- ▶ Weighs 1.85 lb (0.84 kg)

*Measured between the pads



8082-00-ORG — Super Jumbo Padded Bag



- ▶ Designed for vertical triple prism assemblies
- ▶ Holds target with tribrach and adapter
- ▶ Measures: 15 x 8 x 2 inches*
- ▶ Available in Orange
- ▶ Weighs 1.45 lb (0.66 kg)

*Measured between the pads



8130-00-ORG — Tall Triple Prism Bag



ChrisNik MagNails, MagSpikes and MagHubs

"Pound it Harder. Find it Farther"



- ▶ Mag Nails have been coated with an environmentally friendly zinc and clear chromate to resist corrosion
- ▶ Stronger, more durable, higher quality, magnetic and longer lasting than other nails
- ▶ Mag Nails are larger and magnetic making them easier to locate using the naked eye or a locator
- ▶ Each box includes 100 Mag Nails



- 24750 — 3/4 x 1/8 inch - Weighs 0.50 lb (0.23 kg)
- 241000 — 1 x 5/32 inch - Weighs 1.00 lb (0.45 kg)
- 241250 — 1-1/4 x 3/16 inch - Weighs 1.16 lb (0.53 kg)
- 241500 — 1-1/2 x 1/4 inch - Weighs 2.75 lb (1.25 kg)
- 242000 — 2 x 1/4 inch - Weighs 3.42 lb (1.55 kg)
- 242500 — 2-1/2 x 1/4 inch - Weighs 4.00 lb (1.81 kg)



- ▶ Constructed of premium steel that produces the most durable survey marker in the industry
- ▶ Like the Mag Nail the Mag Spike is magnetized for easy detection
- ▶ Featuring a large center point and 1-inch (25.4 mm) diameter head makes it great for control points and property corners
- ▶ Made in the USA



- 253MAGSPIKE — 3/8 x 3 inch (25 per box)
- 254MAGSPIKE — 3/8 x 4-1/2 inch (25 per box)
- 256MAGSPIKE — 3/8 x 6 inch (20 per box)
- 258MAGSPIKE — 3/8 x 8 inch (20 per box)



- ▶ The Mag Hub is magnetized for easy detection and zinc plated to resist corrosion
- ▶ Featuring a large center point and looks like a standard survey marker
- ▶ Not made to be driven into asphalt or concrete
- ▶ Easy to carry and less expensive than stakes
- ▶ Mag Hubs come in a 30 lb (13.61 kg) box approximate quantities are below



- 23MAGHUB4 — 3/16 x 4 inch (Approx. 885)
- 23MAGHUB6 — 1/4 x 6 inch (Approx. 362)
- 23MAGHUB8 — 1/4 x 8 inch (Approx. 272)



Estwing Hand Tools



- ▶ Estwing's Camper's Axe is forged in one piece steel and features the exclusive nylon Shock Reduction Grip®
- ▶ Comes with an embossed leather sheath
- ▶ Cutting edge: 4 inches (102 mm)
- ▶ Overall length: 16 inches (406 mm)
- ▶ Weighs 2.90 lb (1.32 kg)



9070-00 — Camper's Axe with Sheath



- ▶ Estwing's Rigger's Axe is forged in one piece steel
- ▶ Features the exclusive Nylon Shock Reduction Grip
- ▶ Hammer head on one side and cutting edge on the other
- ▶ Cutting edge: 3.5 inches (89 mm)
- ▶ Overall length: 16.75 inches (426 mm)
- ▶ Weighs 3.00 lb (1.36 kg)



9070-01 — Rigger's Axe



- ▶ The 22 oz Long Handle Rock Pick features a bonded and molded Shock Reduction Grip which offers the utmost in both comfort and durability, while reducing vibrations caused by impact
- ▶ The head and handle are forged in one piece and have a fully polished head
- ▶ Overall length: 16.5 inches (419 mm)
- ▶ Weighs 22 oz (616 g)



9070-02 — Long Handle Rock Pick



- ▶ Estwing Rock Picks have bonded and molded Shock Reduction Grip which offers the utmost in both comfort and durability, while reducing vibrations caused by impact
- ▶ The head and handle are forged in one piece and have a fully polished head
- ▶ Overall length: 13 inches (330 mm)
- ▶ Weighs 22 oz (616 g)



9070-03 — Rock Pick



- ▶ Estwing Nylon Sheath for Pointed Tip and Chisel Edge Picks
- ▶ Weighs 0.20 lb (0.09 kg)



9070-04 — Nylon Pick Sheath



- ▶ Estwing's Solid Steel Framing Hammer has a long handle for more striking power
- ▶ The head and handle are fully polished and forged in one piece
- ▶ Our exclusive Shock Reduction Grip is molded on and offers the utmost in both comfort and durability, while reducing vibrations caused by impact
- ▶ Overall length: 16 inches (406 mm)
- ▶ Weighs 30 oz (840 g)



9070-05 — Milled Face Framing Hammer



- ▶ The Drilling Hammer has a bonded and molded Shock Reduction Grip which offers the utmost in both comfort and durability, while reducing vibrations caused by impact
- ▶ The head and handle are forged in one piece, both faces are fully polished
- ▶ Overall length: 11.5 inches (292 mm)
- ▶ Weighs 4.00 lb (1.80 kg)



9070-06 — Drilling Hammer



- ▶ The Estwing Rock Chisel features a vinyl grip for comfort and durability
- ▶ Overall length: 12 inches (305 mm)
- ▶ Cut Point: 0.625 inch
- ▶ Stock: 0.375 inch
- ▶ Weighs 0.97 lb (0.44 kg)



9070-07 — Rock Chisel



- ▶ The Engineer's Hammer has a bonded and molded Shock Reduction Grip which offers the utmost in both comfort and durability, while reducing vibrations caused by impact
- ▶ The head and handle are forged in one piece, and have an attractive blue UV coating, both faces are fully polished
- ▶ Overall Length: 16 inches (406 mm)
- ▶ Weighs 48 oz (1.34 kg)



9070-08 — Engineer's Hammer



Stake Flags, Flagging Tape, Field Marking and Whiskers



- ▶ These biodegradable stake flags are made of a new superior formula
- ▶ Presco PVC marking flags resist breaking under high wind conditions and extreme cold
- ▶ Two flag sizes and three wire length options are available in regular or PresGlo colors
- ▶ 100 flags per bundle



PART NO.	FLAG SIZE	WIRE	COLOR
9035-01	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Orange Glo
9035-02	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Pink Glo
9035-03	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Yellow
9035-04	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	White
9035-05	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Blue
9035-06	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Red
9035-07	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Blue Glo
9035-08	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Green
9035-09	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Green Glo
9035-10	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Lime Glo
9035-11	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Orange
9035-12	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Red Glo
9035-13	4 x 5 inch (102 x 127 mm)	21 inch (533 mm)	Yellow Glo
9036-01	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Orange Glo
9036-02	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Pink Glo
9036-03	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Yellow
9036-04	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	White
9036-05	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Blue
9036-06	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Red
9036-07	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Blue Glo
9036-08	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Green
9036-09	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Green Glo
9036-10	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Lime Glo
9036-11	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Orange
9036-12	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Red Glo
9036-13	4 x 5 inch (102 x 127 mm)	30 inch (762 m)	Yellow Glo
9037-01	4 x 5 inch (102 x 127 mm)	36 inch (914 mm)	Orange Glo
9037-02	4 x 5 inch (102 x 127 mm)	36 inch (914 mm)	Pink Glo
9037-03	4 x 5 inch (102 x 127 mm)	36 inch (914 mm)	Yellow
9037-05	4 x 5 inch (102 x 127 mm)	36 inch (914 mm)	Blue
9037-06	4 x 5 inch (102 x 127 mm)	36 inch (914 mm)	Red

- ▶ Presco long-lasting outdoor flagging
- ▶ Roll Width: 1 inch (25.4 mm)
- ▶ 5 lb boxes of 12 rolls

PART NO.	COLOR	LENGTH
9040-01	Orange Glo	150 ft (45.7 m)
9040-02	Pink Glo	150 ft (45.7 m)
9040-03	Yellow	300 ft (91.4 m)
9040-04	White	300 ft (91.4 m)
9040-05	Blue	300 ft (91.4 m)
9040-06	Red	300 ft (91.4 m)
9040-07	Blue Glo	150 ft (45.7 m)
9040-08	Green	300 ft (91.4 m)
9040-09	Green Glo	150 ft (45.7 m)
9040-10	Lime Glo	150 ft (45.7 m)
9040-11	Orange	300 ft (91.4 m)
9040-12	Red Glo	150 ft (45.7 m)
9040-13	Yellow Glo	150 ft (45.7 m)
9040-14	Black	300 ft (91.4 m)
9040-15	Pink	300 ft (91.4 m)
9040-16	Purple	300 ft (91.4 m)



- ▶ Permanent marker are leak-proof with a seamless metal body
- ▶ Chisel tip marks are extremely durable on wood, metal, and more
- ▶ AP certified non-toxic
- ▶ Box of 12 weighs 3.75 lb (1.70 kg)



9060-06 — Dixon Redimark Marker - Red
9060-14 — Dixon Redimark Marker - Black

- ▶ The steel Presco Roll Flagging Belt Dispenser is a convenient time-saver
- ▶ Weighs 1.30 lb (0.59 kg)



9040-20 — Flagging Tape Dispenser
8025-00-ORG — Padded Flagging Dispenser

- ▶ Presco 6-inch Marking Whiskers™ are an alternative marking choice for survey and construction sites, underground utility locating and many other uses
- ▶ Use with a 60-Penny nail or a wood stake
- ▶ Whiskers come in a bundle of 25 each



PART NO.	COLOR	WEIGHS
9050-01	Orange Glo	0.30 lb (0.14 kg)
9050-02	Pink Glo	0.30 lb (0.14 kg)
9050-03	Yellow	0.30 lb (0.14 kg)
9050-04	White	0.30 lb (0.14 kg)
9050-05	Blue	0.30 lb (0.14 kg)
9050-06	Red	0.30 lb (0.14 kg)
9050-08	Green	0.30 lb (0.14 kg)



- ▶ Ideal-Mark® permanent marking pens are legendary for their performance and are an excellent value
- ▶ Features include a leak-proof aluminum valve, pocket clip and color-coded cap
- ▶ 12 count each



9063-06 — Ideal-Mark Valve Action Markers - Red
9063-14 — Ideal-Mark Valve Action Markers - Black
9064-01 — Replacement Bullet Tip
9064-02 — Replacement Chisel Tip

- ▶ For aerial mapping and surveying jobs requiring a perimeter for photos
- ▶ Rolls are white in color



PART NO.	SIZE	WEIGHS
9045-01	300 ft x 12 in	4.90 lb (2.22 kg)
9045-02	300 ft x 18 in	7.36 lb (3.34 kg)
9045-03	300 ft x 24 in	7.70 lb (3.49 kg)
9045-04	300 ft x 36 in	14.00 lb (6.35 kg)

- ▶ Dixon® Lumber Crayons are great for marking steel, concrete, stone, lumber, etc.
- ▶ Box of 12 weighs 3.00 lb (1.36 kg)

9061-02 — Crayons - Flo Pink
9061-03 — Crayons - Yellow
9061-04 — Crayons - White
9061-05 — Crayons - Blue
9061-06 — Crayons - Red
9061-14 — Crayons - Black



- ▶ Holds a crayon or marker up to 0.5-in in diameter
- ▶ Holds round or hexagonal shapes
- ▶ Has a metal chuck and a wrist strap hole for increased durability and functionality
- ▶ Weighs 0.50 lb (0.23 kg)



9062-00 — Dixon Wood Crayon Holder

Field Marking and Miscellaneous Accessories



- ▶ Choose between a 17.5 inch blade and a 13 inch blade for clearing that thick underbrush on the job site
- ▶ Weighs approx. 1.00 lb (0.45 kg)



9500-17 — 17.5 inch blade, includes sheath
9500-13 — 13 inch blade, includes sheath



- ▶ Replacement caps and points fit all SECO plumb bobs



6000-001 — Plumb Bob Cap
6000-002 — Plumb Bob Point



- ▶ Pin cushion for holding stake tacks



25456855 — Stake Tacks 1 LB
2180-00 — Regular Tac Ball
2180-01 — Tac Ball with Clip



- ▶ Each solid brass bob features a hardened steel point and a storage area for a spare point



6000-012	12 oz	340 g	
6000-014	14 oz	397 g	
6000-016	16 oz	454 g	
6000-018	18 oz	510 g	
6000-024	24 oz	680 g	
6000-032	32 oz	907 g	

- ▶ 9500-01 for knife and scissor sharpening
- ▶ 9500-02 for Axes or other edged tool sharpening
- ▶ 9500-01 weighs 0.05 lb (0.02 kg)
- ▶ 9500-02 weighs 0.20 lb (0.09 kg)



9500-01 — For knives and scissors
9500-02 — For hand tools



- ▶ Use the paper targets with a #50 survey nail or stick the target to just about anything
- ▶ Measures 2 x 3.5 inches



9000-01 — Paper Targets with holes, 100 count
9000-02 — Paper Targets (sticky back), 25 count



- ▶ Heavy-duty sheath is double stitched top grain leather with a belt loop for SECO plumb bobs



6000-120 — Leather Sheath for 10-12 oz (283-340 g)
6000-160 — Leather Sheath for 14-18 oz (397-454 g)
6000-240 — Leather Sheath for 24-32 oz (510-907 g)



- ▶ Shot bags are great for holding down maps or blueprints in windy conditions
- ▶ Weighs 1.50 lb (0.68 kg)



8010-10-BLU — Cordura Shot Bag



- ▶ The 3/16 inch spring steel, 14 inch pins are powder-painted red and white, alternating at each inch
- ▶ Quiver (8041-00-ORG) sold separately
- ▶ Weighs 1.54 lb (0.70 kg)



2183-00 — Marking Pins 11 count



- ▶ Lightweight aluminum center punches are great for marking a variety of materials or punching starter holes for nails or drill bits
- ▶ Durable removable-tip scribers are perfect for making quick and accurate marks on hard work pieces
- ▶ The scriber features a durable tungsten carbide point that is able to make precise marks to 1/100th of an inch
- ▶ The magnetic cap quickly cleans up stray metal shavings



9068-02 — Heavy-Duty Center Punch
9068-03 — Carbide Scriber




- ▶ The Gammon Reel® is almost a given on any job site
- ▶ The 24 yard (22 m) refillable cord comes in many colors



6001-06 — Gammon Reel 7 ft (2 m)
6001-12 — Gammon Reel 12 ft (3.7 m)



- ▶ 24 yard (22 m) bobbin of Gammon Reel refill cord
- ▶ Available in flo red, flo yellow and orange



6001-FR — Gammon Reel Refill - Flo Red
6001-FY — Gammon Reel Refill - Flo Yellow
6001-OR — Gammon Reel Refill - Orange



- ▶ 10 lb of Shiners with bag included
- ▶ 2181-10 - approximate qty: 1,125
- ▶ 2182-10 - approximate qty: 1,300
- ▶ Weighs 10.00 lb (4.53 kg)



2181-10 — Bulk Shiners - Flat
2182-10 — Bulk Shiners - Raised



- ▶ Raised Shiners are 1.94 in (49.3 mm) OD
- ▶ Features a raised 29 mm center
- ▶ Weighs 1.00 lb (0.45 kg)



2182-00 — Raised Shiners, 260 count



- ▶ Flat shiners are 2.25 in (57.2 mm) OD
- ▶ Featuring punched centers with crimped edges
- ▶ Weighs 2.60 lb (1.18 kg)



2181-00 — Flat Shiners, 250 count



Brass Survey Marker

Permanent monument markers for survey control points.



- ▶ Both at and dome top
- ▶ Pressure cast from solid brass
- ▶ Can be hand stamped in the field
- ▶ 1 3/8" (34.925 mm) - 2 1/2" (63.5 mm) diameter head
- ▶ Features a 2" (50.8 mm) ribbed cross section shank for staying power and prevents marker from turning or loosening

- ▶ 1/8" (3.5 mm) head thickness thick top with a matte finish
- ▶ Install in fresh concrete or insert into drilled hole and secure with epoxy



- ▶ ALSO AVAILABLE: 2183-10 Metal Stamp Kit: available to hand stamp your markers with necessary RCE (Registered Civil Engineer) #; LS (Land Surveyor) #; or other data information. 1/4 inch, customizable

PART NO.	DIAMETER	TOP	WEIGHT(g)	WEIGHT(oz)	
2183-01	1 3/8 in	Flat	49.3 g	1.74 oz	
2183-02	2 in	Flat	83.0 g	2.93 oz	
2183-03	2.5 in	Flat	111.5 g	3.93 oz	
2183-05	2 in	Dome	110.2 g	3.89 oz	
2183-06	2.5 in	Dome	157.8 g	5.57 oz	



Rite in the Rain

- ▶ Rite in the Rain bound books ensure that your valuable data won't be lost
- ▶ These all-weather books have 160 pages (80 sheets), including a title and contents page
- ▶ This 4-3/4 x 7-1/2 inch yellow field book also features a sewn binding
- ▶ Weighs 0.65 lb (0.29 kg)



Transit Pattern
8 vertical lines
to the inch



Level Pattern
6 vertical columns on
the page

- 300F — Transit Pattern Bound Books
- 310F — Level Pattern Bound Books



- ▶ Rite in the Rain Field Ring Binders are extremely durable
- ▶ Made with Polydura and rust resistant metals
- ▶ Designed to fit the 4-5/8 x 7 inch standard size loose leaf sheets (sold separately, see details below)
- ▶ Weighs 0.30 lb (0.14 kg)



- 200 — Field Ring Binder
- 302 — Transit Pattern Loose Leaf Sheets (100 Sheets)
- 312 — Level Pattern Loose Leaf Sheets (100 Sheet)



- ▶ Overall Size: 4.625 x 7 inches (11.75 x 17.78 cm)
- ▶ Cover Material: field flex
- ▶ Binding: side stapled
- ▶ Number of Pages: 48 (numbered)
- ▶ Number of Sheets: 24
- ▶ Sold in Packs of 3
- ▶ Weighs 0.56 lb (0.25 kg) (3-pack)



- 351FX — Field pattern Side-stapled Notebook for Tough Conditions
- 311FX — Level pattern Side-stapled Notebook for Tough Conditions
- 301FX — Transit pattern Side-stapled Notebook for Tough Conditions



- ▶ Page Size: 4.625 x 7-inch (11.75 x 17.78 cm)
- ▶ Fits Yellow Binder (Part No. 200)
- ▶ Pattern: Field
- ▶ Sold in Packs of 100 sheets
- ▶ Weighs 0.55 lb (0.25 kg)



- 352 — Field pattern Standard Loose Leaf Sheets



- ▶ Overall Size: 4.75 x 7.5 inches (12.07 x 19.05 cm)
- ▶ Super Tough Cover Material: fabrikoid
- ▶ Binding: sewn bound
- ▶ Number of Pages: 160
- ▶ Weighs 0.65 lb (0.29 kg)



- 350F — Field pattern sewn-bound book surviving any weather conditions



- ▶ Overall Size: 5.25 inches (13.34 cm)
- ▶ Writes on wet paper and upside-down
- ▶ Works from -30F to 250F (pressurized cartridge)
- ▶ Plastic Barrel: chrome/black
- ▶ Ink Color: Black
- ▶ Refills: 37R, see below (fits any All-Weather pen)
- ▶ Weighs 0.04 lb (0.02 kg)



- 37 — All-Weather Clicker Pen with Black Ink



- ▶ Overall Size: 5.75 inches (14.61 cm)
- ▶ Included Refills: 7 (1.1 mm/HB No. 2) leads and 2 extra erasers
- ▶ Fits comfortably in the hand
- ▶ Tip expands so lead will not break, wobble, twist or fall out in the field
- ▶ Keeps you writing in any conditions
- ▶ Strong Resin Barrel
- ▶ Additional refills available, see below
- ▶ Weighs 0.05 lb (0.02 kg)



- YE99 — All-Weather Yellow Mechanical Pencil



- ▶ Overall Size: 3.5 inches (8.89 cm)
- ▶ Fits in any All-Weather Pen
- ▶ Ink Color: Black
- ▶ Weighs 0.02 lb (0.01 kg)



- 37R — All-Weather Black Ink Pen Refill



- ▶ Fits any All Weather Mechanical Pencil
- ▶ Sold in Packs of 3
- ▶ Weighs 0.02 lb (0.01 kg)



- 99ER — Handy Eraser Refill



- ▶ Fits any All-Weather Mechanical Pencil
- ▶ Package includes: 12 (1.1 mm) HB (No.2) Leads
- ▶ Weighs 0.01 lb (0.005 kg)



- 99BR — Black Lead Refills



- ▶ Overall Size: 4.625 x 7 inches (11.75 x 17.78 cm)
- ▶ Soft Cover Material: Polydura (recycled material)
- ▶ Binding: side-spiral
- ▶ Number of Pages: 64 (32 sheets)
- ▶ Weighs 0.20 lb (0.09 kg)



- 303 — Transit pattern Recyclable Side-spiral Notebook
- 313 — Level pattern Recyclable Side-spiral Notebook
- 353 — Field pattern Recyclable Side-spiral Notebook



- ▶ 135 Overall Size: 3 x 5 inches (7.62 x 12.7 cm)
- ▶ 146 Overall Size: 4 x 6 inches (10.16 x 15.24 cm)
- ▶ Soft Cover Material: Polydura (recycled material)
- ▶ Binding: Top spiral
- ▶ Number of Pages: 100 (50 sheets)
- ▶ Pattern: Universal
- ▶ Part No. 135 weighs 0.13 lb (0.06 kg)
- ▶ Part No. 146 weighs 0.20 lb (0.09 kg)



- 135 — Universal pattern Pocket Top-Spiral Book Perfect for any Situation
- 146 — Universal pattern Pocket Top-Spiral Book Perfect for any Situation





Lined writing area on the left side of the page.

Lined writing area on the right side of the page.

PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE
37	72	99060	51	2183-01	71	5010-00-RED	17	5194-003	23	5301-21-ORG	42
135	72	99061	51	2183-02	71	5010-01	17	5194-01	23	5301-24-BLK	42
146	72	99062	51	2183-03	71	5070-051-40	13	5194-03	23	5301-25-BLK	42
200	72	99063	51	2183-05	71	5079-066	19	5194-04	23	5301-31-BLK	42
302	72	99064	51	2183-06	71	5081-052-40	13	5194-05	23	5301-31-ORG	42
303	72	99065	51	23MAGHUB4	69	5110-00-FLY	24	5194-10	23	5302-13-BLK	41
312	72	99066	51	23MAGHUB6	69	5110-01-FLY	24	5195-01	23	5302-13-ORG	41
313	72	99067	51	23MAGHUB8	69	5111-00	11	5196-02	38	5311-21-ORG	42
352	72	99068	51	253MAGSPIKE	69	5111-00-SS	11	5196-07	38	5321-16-BLK	40
353	72	99069	51	254MAGSPIKE	69	5111-04	11	5196-13	38	5321-17-ORG	40
24750	69	99070	51	256MAGSPIKE	69	5113-012	11	5196-13-005	38	5321-18-BLK	40
90004	46	99071	50	258MAGSPIKE	69	5114-01	11	5198-052	8	5401-21-BLK	42
90009	46	99072	50	3003-06	48	5114-02	11	5198-054	8	5402-13-BLK	41
90014	46	99079	50	3003-07	48	5114-050	11	5198-055	8	5402-13-ORG	41
90022	46	99080	50	3003-08	48	5114-051	11	5198-056	8	5420-13-BLK	41
90024	46	99081	50	3003-10	48	5114-10	11	5198-059	8	5420-13-ORG	41
90026	46	241000	69	3003-14	48	5114-20	12	5198-073	8	5500-064-40	13
90180	49	241250	69	3006-06	48	5114-21	12	5198-081	8	5500-11	20
90181	49	241500	69	3006-07	48	5114-40-01	12	5198-086	8	5500-21	20
90182	49	242000	69	3006-08	48	5114-40-02	12	5198-152	8	5500-23	17
90520	56	242500	69	3006-10	48	5119-00-FLY	6	5198-153	8	5500-30	20
90550	39	25456855	71	3006-11	48	5119-00-FOR	6	5198-157	22	5501-11	18
90551	39	1 510 001	33	3006-17	48	5119-00-YEL	6	5198-163	22	5503-30	18
90553	39	1 510 011	33	3006-18	48	5119-10-FLY	6	5198-50	12	5507-10	19
90555	38	2001-00	34	300F	72	5119-10-YEL	6	5198-51	12	5507-11	19
90558	40	2002-00	34	301FX	72	5120-00-FOR-GT	17	5199-050	9	5507-13	19
90560	39	2010-00	34	310F	72	5120-01-FOR-GM	17	5199-051	9	5507-15	19
90582	39	2020-00	34	311FX	72	5120-02-FOR-GT	17	5199-052	9	5507-16	19
91014	43	2021-00	34	350F	72	5120-024-FOR	17	5199-054	9	5507-17	19
91100	45	2070-00	34	351FX	72	5120-025-FOR	17	5200-050	8	5507-20	19
91133	43	2070-02	15	37R	72	5120-03-FOR-GM	17	5200-058	8	5507-22	19
91162	45	2071-00	34	4 520 120	33	5125-00-YEL	9	5200-059	8	5507-30	19
91163	45	2072-050	6	4 520 121-5/8"	33	5125-01-YEL	9	5200-062	8	5512-11	20
91255	43	2072-30	6	4 520 122	33	5125-050	11	5200-064	8	5520-11	20
91258	43	2072-31	6	4 520 800	33	5125-056	11	5200-065	8	5520-21	20
91259	43	2072-32	6	4040-05	51	5125-057-FLY	11	5200-069	8	5520-30	20
91275	43	2072-33	6	4040-30	51	5125-058	24	5200-070	8	5521-11	18
91402	66	2072-60	57	4040-60	51	5125-06-YEL	9	5200-072	8	5523-30	18
91410	66	2080-00	23	4050-01	51	5125-20-FLY	10	5200-073	8	5527-10	19
91411	66	2080-55	23	4200-00	51	5125-20-YEL	10	5200-074	8	5527-11	19
91415	56	2090-00	23	4300-00	51	5125-22-FLY	10	5200-075	8	5527-13	19
91415	66	2090-01	16	4769-00	47	5126-10	11	5200-076	8	5527-15	19
91416	66	2090-02	16	4769-01	47	5128-00	9	5200-077	8	5527-16	19
91417	66	2090-04	16	4769-02	47	5128-052	11	5200-150	8	5527-17	19
91535	43	2090-06	16	4769-03	47	5128-08	9	5200-151	8	5527-18-13	20
91601	23	2090-07	16	4769-04	47	5128-20	10	5200-152	8	5527-18-15	20
91605	23	2090-10	19	4769-06	47	5128-22	10	5200-154	8	5527-20	19
91641	23	2090-11	19	4769-14	47	5128-24	10	5200-155	8	5527-22	19
92001	46	2090-12	19	4769-15	47	5129-50	9	5200-16-050	7	5527-30	19
92002	46	2090-13	19	4770-00	48	5129-51	9	5200-160	8	5530-10	22
92021	46	2090-14	19	4770-01	48	5129-52	16	5200-164	8	5530-20	22
92022	46	2090-15	19	4811-24	52	5129-53	16	5200-165	8	5530-30	22
92026	46	2090-17	19	4811-24P1	52	5129-54	17	5200-17-050	7	5531-10	22
92027	46	2090-19	19	4811-24P2	52	5129-70	9	5200-201	9	5531-20	22
92031	46	2090-21	19	4811-24P3	52	5129-71	9	5200-29-050	7	5531-30	22
92032	46	2090-26	19	4811-24P4	52	5129-72	16	5200-29-051	7	5540-10	21
92041	46	2120-00	38	4811-24P5	52	5129-73	16	5200-30	6	5540-20	21
92042	46	2130-00	38	4811-24P6	52	5130-00-FLY	24	5200-30-051	7	5540-30	21
92043	46	2131-00	23	4811-24P7	52	5130-01-FLY	24	5200-31	6	5541-10	21
92046	46	2131-01	23	4811-24P8	52	5130-10	24	5200-31-051	7	5541-20	21
92047	46	2132-01	38	4811-32	52	5131-00-YEL	24	5200-32	7	5541-30	21
92048	46	2133-03	10	4811-32P1	52	5131-01-FLY	24	5200-33	7	5561-20	10
92090	44	2133-05	10	4811-32P2	52	5132-00-ACL	24	5200-35	6	5600-10	21
98010	45	2133-06	10	4811-32P3	52	5139-02-FLY	10	5200-35-051	7	5610-00	38
98011	45	2152-04-BLK	34	4811-32P6	52	5140-02-WOR	24	5200-37-051	7	5610-11	38
98012	45	2152-05-BLK	36	4852-14	53	5143-00-FLY	24	5200-38-051	7	5610-12	38
98013	45	2152-06-BLK	36	4852-15	57	5143-02	24	5214-00	25	5610-15	38
98014	45	2152-07-BLK	36	4852-16	57	5143-03	24	5214-01	24	5631-10	22
98015	45	2153-02-BLK	34	4852-17	57	5144-00-FLY	24	5216-00	30	5631-20	22
98016	45	2153-04-BLK	34	4900-00	23	5144-02	24	5217-04-YEL	25	5631-30	22
98017	45	2153-05-BLK	36	5 113 100	33	5145-00-FLY	24	5217-05-YEL	25	5700-10	20
98020	45	2153-06-BLK	36	5 114 150	33	5145-02	24	5217-15-ABK	16	5700-20	20
98021	45	2153-07-BLK	36	5 114 200	33	5145-03	24	5217-20-FLY	43	5700-21	17
98023	45	2153-10-BLK	36	5 114 270	33	5145-04	24	5217-21-FOR	43	5711-10	18
98024	45	2159-01-BLK	37	5 114 350	33	5150-02-WOR	24	5217-30	25	5720-10	20
98025	45	2159-03-BLK	37	5 115 150	33	5160-02-WOR	24	5217-40-FLY	25	5721-10	18
98026	45	2159-04-BLK	37	5 115 200	33	5180-00	23	5217-50-FOR	25	5801-052-40	13
99000	50	2159-050	37	5 115 270	33	5181-00	23	5218-02-FLY	25	5801-10	21
99001	50	2159-06	37	5 115 350	33	5182-001	24	5218-15-ABK	25	5802-10	18
99002	50	2159-07	37	5 263 000	33	5187-00	11	5218-40-YEL	25	5802-20	18
99003	50	2180-00	71	5 263 001	33	5187-00-SS	11	5219-03	25	5813-10	21
99004	50	2180-01	71	5 263 002	33	5190-00	23	5219-05	25	5813-20	21
99023	50	2181-00	71	5 312 001	33	5191-00	23	5220-13-BLK	41	5821-10	21
99043	50	2181-10	71	5001-10	13	5192-00	23	5220-13-ORG	41	5821-20	21
99051	50	2182-00	71	5001-12	13	5192-02	23	5300-11	10	5901-00-FLY	24
99052	50	2182-10	71	5001-20	13	5193-04	23	5300-12	10	5902-00-FLY	24
99053	50	2183-00	71	5010-00-FLY	17	5194-00	23	5301-21-BLK	42	5910-01-ARD	31



PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE	PART NUMBER	PAGE		
5910-02-ARD	31	6602-01	32	8067-66-FLY	63	8260-46-FOR	60	8390-50-FLY	59	9064-01	70
5910-05	31	6602-02	32	8067-66-FOR	63	8260-50-FLY	60	8390-50-FOR	59	9064-02	70
5910-06	31	6602-03	32	8068-42-FLY	62	8260-50-FOR	60	8390-54-FLY	59	9068-02	71
5910-10	31	6603-00	34	8068-42-FOR	62	8260-54-FLY	60	8390-54-FOR	59	9068-03	71
5910-24	31	6603-00-005-TMB	34	8068-46-FLY	62	8260-54-FOR	60	8390-58-FLY	59	9070-00	69
6000-001	71	6603-00-050	34	8068-46-FOR	62	8260-58-FLY	60	8390-58-FOR	59	9070-01	69
6000-002	71	6603-00-051	34	8068-50-FLY	62	8260-58-FOR	60	8390-62-FLY	59	9070-02	69
6000-012	71	6603-01	34	8068-50-FOR	62	8260-62-FLY	60	8390-62-FOR	59	9070-03	69
6000-014	71	6603-01-051	34	8068-54-FLY	62	8260-62-FOR	60	9000-01	71	9070-04	69
6000-016	71	6603-03	29	8068-54-FOR	62	8260-66-FLY	60	9000-02	71	9070-05	69
6000-018	71	6603-05	32	8068-58-FLY	62	8260-66-FOR	60	9006-00	48	9070-06	69
6000-024	71	6603-06	32	8068-58-FOR	62	8261-XS-FLY	60	9006-01	48	9070-07	69
6000-032	71	6703-001	14	8068-62-FLY	62	8261-XS-FOR	60	9035-01	70	9070-08	69
6000-120	71	6703-002	15	8068-62-FOR	62	8261-S-FLY	60	9035-02	70	9500-01	71
6000-160	71	6703-003	15	8068-66-FLY	62	8261-S-FOR	60	9035-03	70	9500-02	71
6000-240	71	6703-005	15	8068-66-FOR	62	8261-M-FLY	60	9035-04	70	9500-13	71
6001-06	71	6703-006	15	8069-38-FOR	63	8261-M-FOR	60	9035-05	70	9500-17	71
6001-12	71	6703-007	15	8069-42-FLY	63	8261-L-FLY	60	9035-06	70	99BR	72
6001-FR	71	6703-008	15	8069-42-FOR	63	8261-L-FOR	60	9035-07	70	99ER	72
6001-FY	71	6703-011	14	8069-46-FLY	63	8261-XL-FLY	60	9035-08	70	A452	35
6001-OR	71	6703-012	15	8069-46-FOR	63	8261-XL-FOR	60	9035-09	70	A455	35
6020-01	32	6703-013	15	8069-50-FLY	63	8261-XXL-FLY	60	9035-10	70	A456	35
6020-02	32	6703-014	15	8069-50-FOR	63	8261-XXL-FOR	60	9035-11	70	A458	35
6200-10-FOR	30	6703-015	14	8069-54-FLY	63	8261-XXXL-FLY	60	9035-12	70	AL24A	52
6200-11-FOR	30	6703-10	15	8069-54-FOR	63	8261-XXXL-FOR	60	9035-13	70	AL24A-1	52
6341-00	28	6703-11	15	8069-58-FLY	63	8261-J-FLY	60	9036-01	70	AL24A-2	52
6341-11	28	6703-20	15	8069-58-FOR	63	8261-J-FOR	60	9036-02	70	AL24A-3	52
6400-00	29	6704-001	14	8069-62-FLY	63	8265-42-FLY	59	9036-03	70	AL24M	52
6400-10	29	6704-002	14	8069-62-FOR	63	8265-42-FOR	59	9036-04	70	AL24M-1	52
6400-12-FOR	29	6704-003	14	8069-66-FLY	63	8265-46-FLY	59	9036-05	70	AL24M-2	52
6401-00-YEL	16	6704-004	14	8069-66-FOR	63	8265-46-FOR	59	9036-06	70	AL24M-3	52
6401-03-YEL	16	6704-10	14	8070-00-ORG	68	8265-50-FLY	59	9036-07	70	AL32A	52
6402-02-FLB	27	70014-6	43	8071-00-ORG	68	8265-50-FOR	59	9036-08	70	ATI010536-02S	56
6402-02-FOB	27	70014-7	43	8080-00-ORG	68	8265-54-FLY	59	9036-09	70	ATI010972-15	56
6402-02-YLB	27	7301-00	43	8081-00-ORG	68	8265-54-FOR	59	9036-10	70	ATI010972-20	56
6402-03-FLB	27	7301-30	44	8082-00-ORG	68	8265-58-FLY	59	9036-11	70	ATI010972-25	56
6402-03-FOB	27	7301-40	44	8082-01-ORG	15	8265-58-FOR	59	9036-12	70	ATI010972-35	56
6402-03-YLB	27	7301-50	44	8090-20-ORG	67	8265-62-FLY	59	9036-13	70	ATI010972-50	56
6402-05-FLB	28	7304-01	43	8091-20-ORG	67	8265-62-FOR	59	9037-01	70	ATI010976-02	56
6402-05-FOB	28	7310-13	43	8092-20-ORG	67	8265-66-FLY	59	9037-02	70	ATI010983	56
6402-05-YLB	28	7321-00	43	8093-00-ORG	67	8265-66-FOR	59	9037-03	70	ATI010987-25	56
6402-06-FLB	28	7321-050	43	8094-00-ORG	67	8290-50-FLY	61	9037-05	70	ATI991320-02	55
6402-06-FOB	28	7321-30	44	8095-20-ORG	64	8290-50-FOR	61	9037-06	70	ATI991320-09	55
6402-06-YLB	28	7321-40	44	8096-20-ORG	67	8290-54-FLY	61	9040-01	70	ATI991326-02	55
6402-10-FLB	28	7321-50	44	8098-00-ORG	67	8290-54-FOR	61	9040-02	70	ATI991326-09	55
6402-10-FOB	28	7341-31	44	8098-10-ORG	67	8290-58-FLY	61	9040-03	70	ATI991340-02	55
6402-10-YLB	28	7341-40	44	8100-00-ORG	67	8290-58-FOR	61	9040-04	70	ATI991340-09	55
6402-20-FLB	27	7341-41	44	8100-20-ORG	67	8290-62-FLY	61	9040-05	70	ATI991346-02	55
6402-20-FOB	27	7341-45	44	8101-00-ORG	67	8290-62-FOR	61	9040-06	70	ATI991346-09	55
6402-20-YLB	27	7341-51	44	8101-20-ORG	67	8292-46-FLY	61	9040-07	70	ATI991360-02	56
6405-01-FLY	30	7341-52	44	8102-00-ORG	67	8292-46-FOR	61	9040-08	70	ATI991364-02	56
6405-01-FOR	30	7341-55	44	8102-01-ORG	67	8292-50-FLY	61	9040-09	70	ATI991370-02	55
6405-10-FLY	30	7341-56	44	8103-20-ORG	67	8292-50-FOR	61	9040-10	70	ATI991370-09	55
6405-10-FOR	30	8010-10-BLU	71	8104-20-ORG	67	8292-54-FLY	61	9040-11	70	ATI991376-02	55
6405-11-FLY	30	8025-00-ORG	70	8106-10-ORG	64	8292-54-FOR	61	9040-12	70	ATI991376-09	55
6405-11-FOR	30	8030-00-CABLU	51	8106-20-ORG	64	8292-58-FLY	61	9040-13	70	ATI991604	56
6405-12-FLY	30	8046-10-BLU	13	8120-00-ORG	67	8292-58-FOR	61	9040-14	70	ATI993600-02	54
6405-12-FOR	30	8046-20-ORG	65	8120-30-ORG	68	8292-62-FLY	61	9040-15	70	ATI993600-09	54
6405-13-FOR	30	8046-30-ORG	65	8120-40-ORG	68	8292-62-FOR	61	9040-16	70	ATI993640-02	54
6406-00	30	8063-38-FOR	62	8121-00-ORG	67	8365-42-FLY	58	9040-20	70	ATI993640-09	54
6410-00	29	8063-42-FLY	62	8123-00-ORG	67	8365-42-FOR	58	9045-01	70	ATI994000-02	54
6410-018	29	8063-42-FOR	62	8125-11-ORG	68	8365-46-FLY	58	9045-02	70	ATI994000-09	54
6411-00	32	8063-46-FLY	62	8125-50-ORG	68	8365-46-FOR	58	9045-03	70	D11145	9
6411-02-BLK	32	8063-46-FOR	62	8125-60-FOR	64	8365-50-FLY	58	9045-04	70	D11145	23
6411-03-BLK	32	8063-50-FLY	62	8130-00-ORG	68	8365-50-FOR	58	9050-01	70	DE-50	53
6411-04-BLK	32	8063-50-FOR	62	8134-00-ORG	68	8365-54-FLY	58	9050-02	70	DET-2	53
6416-00	32	8063-54-FLY	62	8142-01-ORG	64	8365-54-FOR	58	9050-03	70	FPT144-BLK	35
6422-02-FLB	27	8063-54-FOR	62	8143-21-YEL	64	8365-58-FLY	58	9050-04	70	FPT146-BLK	35
6422-02-FOB	27	8063-58-FLY	62	8143-22-FLY	64	8365-58-FOR	58	9050-05	70	FPT247-BLK	35
6422-02-YLB	27	8063-58-FOR	62	8143-40-FLY	64	8365-62-FLY	58	9050-06	70	ML-1	47
6422-20-FLB	27	8063-62-FLY	62	8150-20-ORG	65	8365-62-FOR	58	9050-08	70	ML-1-050	47
6422-20-FOB	27	8063-62-FOR	62	8151-02-FLY	65	8365-66-FLY	58	9055-05	41	ML-1M	47
6422-20-YLB	27	8063-66-FLY	62	8153-10-ORG	65	8365-66-FOR	58	90557-050	38	ML-35Y	47
6440-00-FOR	30	8063-66-FOR	62	8154-00-ORG	65	8368-42-FLY	58	90557-050	40	QM55	49
6450-00-BLK	30	8067-38-FOR	63	8154-10-ORG	65	8368-42-FOR	58	90558-050	40	QM75	49
6455-00	17	8067-42-FLY	63	8154-11-ORG	65	8368-46-FLY	58	90558-052	40	QM95	49
6455-00	29	8067-42-FOR	63	8154-12-ORG	65	8368-46-FOR	58	9060-06	70	RT481W-BLK	35
6600-01	32	8067-46-FLY	63	8157-01-ORG	66	8368-50-FLY	58	9060-14	70	RT481WON-BLK	35
6600-02	32	8067-46-FOR	63	8160-00-ORG	66	8368-50-FOR	58	9061-02	70	RT482W-BLK	35
6600-03	32	8067-50-FLY	63	8160-20-BLK	66	8368-54-FLY	58	9061-03	70	RT482WON-BLK	35
6600-04	32	8067-50-FOR	63	8160-31	65	8368-54-FOR	58	9061-04	70	RT484W-BLK	35
6600-05	32	8067-54-FLY	63	8162-00-ORG	65	8368-58-FLY	58	9061-05	70	RT484WON-BLK	35
6600-10	31	8067-54-FOR	63	8162-20-BLK	66	8368-58-FOR	58	9061-06	70	YE99	72
6601-01	32	8067-58-FLY	63	8166-01-ORG	66	8368-62-FLY	58	9061-14	70		
6601-02	32	8067-58-FOR	63	8170-00-ORG	66	8368-62-FOR	58	9062-00	70		
6601-03	32	8067-62-FLY	63	8180-20-ORG	66	8368-66-FLY	58	9063-06	70		
6601-04	32	8067-62-FOR	63	8260-46-FLY	60	8368-66-FOR	58	9063-14	70		

PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE
SECTION ONE							
GNSS Accessories		Two-Piece GNSS Rover Rods	9	100 mm Sphere Prisms, Adapters, Magnets and Kits	15	5527-30	
Standard and Heavy-Duty GNSS/MC Tripods	6	5125-00-YEL		2070-02		Quick Change Pole Adapters	19
5119-00-FLY		5125-01-YEL		6703-002		2090-10	
5119-00-FOR		5125-06-YEL		6703-003		2090-11	
5119-00-YEL		5128-00		6703-005		2090-12	
5119-10-FLY		5128-08		6703-006		2090-13	
5119-10-YEL		Telescopic Carbon Fiber Rover Rods	9	6703-007		2090-14	
Adjustable-Tilt Stainless Steel Adapters	6	5129-50		6703-008		2090-15	
2072-050		5129-51		6703-012		2090-17	
2072-30		5129-70		6703-013		2090-19	
2072-31		5129-71		6703-014		2090-21	
2072-32		Snap-Lock Rover Rods	10	6703-10		2090-26	
2072-33		5125-20-FLY		6703-11		5079-066	
Ball and Socket Tablet Combos	6	5125-20-YEL		6703-20		2 mm Metric Telescoping Prism Poles	20
5200-30		5125-22-FLY		8082-01-ORG		5527-18-13	
5200-31		5128-20		Robotics Applications Accessories		5527-18-15	
5200-35		5128-22		360° Robotic Prism Assembly	16	Quick-Release Telescopic Prism Poles	20
Ball and Socket Cradles	7	5128-24		6401-00-YEL		5700-10	
5200-16-050		GNSS Accessories and Adapters	10	6401-03-YEL		5700-20	
5200-17-050		2133-03		Carbon Fiber Robotics Poles	16	5720-10	
5200-29-050		2133-05		5129-52		TLV and Twist-Locking Telescopic Prism Poles	20
Quick-Release Tablet Combos	7	2133-06		5129-53		5500-11	
5200-32		5139-02-FLY		5129-72		5500-21	
5200-33		5300-11		5129-73		5500-30	
Over the Shoulder Tablet Harnesses	7	5300-12		Accessories for Robotics Gear	16	5512-11	
5200-29-051		5561-20		2090-01		5520-11	
5200-30-051		GNSS Accessories and Adapters	11	2090-02		5520-21	
5200-31-051		5111-00		2090-04		5520-30	
5200-35-051		5111-00-SS		2090-06		Compression Lock Telescopic Prism Poles	21
5200-37-051		5111-04		2090-07		5600-10	
5200-38-051		5113-012		5217-15-ABK		QLV Locking Prism Poles	21
Pole Clamps and Cradles	8	5114-01		Specialty Prism Poles		5801-10	
Open-Style Clamps		5114-02		Geodimeter Style Poles and Prism	17	5813-10	
5198-052		5114-050		5120-00-FOR-GT		5813-20	
5198-054		5114-051		5120-01-FOR-GM		5821-10	
5198-055		5114-10		5120-02-FOR-GT		5821-20	
5198-056		5125-050		5120-03-FOR-GM		5821-20	
5198-059		5125-056		5120-024-FOR		Ultralite Prism Poles	21
5198-152		5125-057-FLY		5120-025-FOR		5540-10	
5198-153		5126-10		6455-00		5540-20	
Ball-and-Socket Clamps		5128-052		Telescopic Carbon Fiber Prism Pole	17	5540-30	
5200-160		5187-00		5129-54		5541-10	
5200-164		5187-00-SS		Mini Poles	17	5541-20	
5200-165		Vehicle Accessories		5010-00-FLY		5541-30	
Claw Quick Release Clamps		GNSS Bracket for Truck Door	12	5010-00-RED		Contractor Series TLV Prism Poles	22
5200-150		5114-20		5010-01		5530-10	
5200-151		5114-21		5500-23		5530-20	
5200-152		UTV Roll Cage Transporter for GNSS Rods	12	5700-21		5531-10	
5200-154		5114-40-01		Swiss-Style QLV Prism Poles	18	5531-20	
5200-155		5114-40-02		5802-10		5531-30	
Quick Release Cradles		ATV Pole Bracket System	12	5802-20		Contractor Series Compression Lock Poles	22
5198-073		5198-50		Swiss-Style Quick-Release Prism Poles	18	5631-10	
5198-081		5198-51		5711-10		5631-20	
5198-086		Plan Holder	13	5721-10		5631-30	
Quick Release Claw Cradles	8	8046-10-BLU		Swiss-Style TLV and Twist-Lock Prism Poles	18	Offset Tools	22
5200-050		Vials and Levels		5501-11		5198-157	
5200-058		Vials	13	5503-30		5198-163	
5200-059		5070-051-40		5521-11		Prism Adapters, Tips and Topo Shoes	23
5200-062		5081-052-40		5523-30		91601	
5200-064		5500-064-40		Prism Poles and Accessories		91605	
5200-065		5801-052-40		Quick Change Prism Poles	19	91641	
5200-069		Levels	13	5507-10		2080-00	
5200-070		5001-10		5507-11		2080-SS	
5200-072		5001-12		5507-13		2090-00	
5200-073		5001-20		5507-15		2131-00	
5200-074		SECTION TWO		5507-16		2131-01	
5200-075		Laser Scanner Accessories		5507-17		4900-00	
5200-076		Scanner Spheres	14	5507-20		5180-00	
5200-077		6703-001		5507-22		5181-00	
Ball-and-Socket and Claw Accessories	9	6704-001		5507-30		5190-00	
5199-050		230 mm Sphere Adapters, Accessories and Case	14	5527-10		5191-00	
5199-051		6703-011		5527-11		5192-00	
5199-052		6703-015		5527-13		5192-02	
5199-054		6704-002		5527-15		5193-04	
5200-201		6704-003		5527-16		5194-00	
D11145		6704-004		5527-17			
		6704-004		5527-20			
		6704-10		5527-22			

PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE
5194-003		6402-06-YLB		4 520 121-5/8"		5196-13	
5194-01		Contractor Series 62 mm	28	4 520 122		5196-13-005	
5194-03		Prism Assembly		4 520 800		5610-00	
5194-04		6402-10-F0B		5 113 100		5610-11	
5194-05		6402-10-FLB		5 114 150		5610-12	
5194-10		6402-10-YLB		5 114 200		Tripod Dollies	38
5195-01		Tilting Triple Prism Assembly	28	5 114 270		90555	
D11145		6341-00		5 114 350		5610-15	
Range Pole Accessories	24	6341-11		5 115 150		90557-050	
5214-01		Adjustable Dual Prism	29	5 115 200		Tri-Max Tripods	39
5125-058		6603-03		5 115 270		90550	
Pole Extensions	24	Sliding Prism with Tilting Reflector	29	5 115 350		90551	
5110-00-FLY		6455-00		5 263 000		90553	
5110-01-FLY		Backlight Prism Assembly	29	5 263 001		90560	
5130-00-FLY		6400-12-FOR		5 263 002		Premier Fiberglass Tripods	39
5130-01-FLY		Eclipse 62 mm Nodal Point Prism	29	5 312 001		90582	
5130-10		Assembly		Walleye Prism System	34	Extra-Tall Fiberglass Elevator	40
5131-00-YEL		6400-00		6603-00		Tripod	
5131-01-FLY		6410-00		6603-00-005-TMB		5321-17-ORG	
5132-00-ACL		6410-018		6603-00-050		Universal Tri-Max Elevator Tripod	40
5143-00-FLY		62 mm Nodal Point Prism Assembly	29	6603-00-051		90558	
5143-02		6400-10		6603-01		90557-050	
5143-03		Prism Assemblies	30	6603-01-051		90558-050	
5144-00-FLY		6406-00				90558-052	
5144-02		6440-00-FOR		SECTION FOUR		Aluminum Elevator Tripods	40
5145-00-FLY		6450-00-BLK		Tribrachs and Adapters		5321-16-BLK	
5145-02		GEOPRISM		Tribrachs & Adapters	34	5321-18-BLK	
5145-03		Mini and Stakeout Prisms	30	2001-00		Short Tri-Max	41
5145-04		5216-00		2002-00		90550-S	
5182-001		6200-10-FOR		2010-00		Birch Wood / Fiberglass Hybrid	41
5901-00-FLY		6200-11-FOR		2020-00		Tripod	
5902-00-FLY		6405-01-FLY		2021-00		5302-13-BLK	
Range Poles	24	6405-01-FOR		2070-00		5302-13-ORG	
5140-02-WOR		6405-10-FLY		2071-00		5402-13-BLK	
5150-02-WOR		6405-10-FOR		2152-04-BLK		5402-13-ORG	
5160-02-WOR		6405-11-FLY		2153-02-BLK		Heavy-Duty Birch Wood Tripods	41
Prism Pole Bipods & Tripods		6405-11-FOR		2153-04-BLK		5220-13-BLK	
Bipods & Tripods	25	6405-12-FLY		GeoDesy Products		5220-13-ORG	
5214-00		6405-12-FOR		GeoDesy by SECO	35	5420-13-BLK	
5217-04-YEL		6405-13-FOR		A452		5420-13-ORG	
5217-05-YEL		Sliding Prisms and Surveyor Kits		A455		Square Leg Aluminum Tripods	42
5217-30		Sliding Prisms and Pin Pole Kits	31	A456		5301-31-BLK	
5217-40-FLY		5910-01-ARD		A458		5301-31-ORG	
5217-50-FOR		5910-02-ARD		FPT144-BLK		Round Leg Aluminum Tripods	42
5218-02-FLY		5910-05		FPT146-BLK		5301-21-BLK	
5218-15-ABK		5910-06		FPT247-BLK		5301-21-ORG	
5218-40-YEL		5910-10		RT481W-BLK		5301-24-BLK	
5219-03		5910-24		RT481WON-BLK		5301-25-BLK	
5219-05		6600-10		RT482W-BLK		5311-21-ORG	
		Prism Assembly Components	32	RT482WON-BLK		5401-21-BLK	
		6411-00		RT484W-BLK			
		6411-02-BLK		RT484WON-BLK		SECTION FIVE	
		6411-03-BLK		GeoDesy by SECO	36	Leveling Rods and Accessories	
		6411-04-BLK		2152-06-BLK		Leveling Rod Accessories	43
		6416-00		2152-07-BLK		91014	
		6020-01		2153-06-BLK		91133	
		6020-02		2153-07-BLK		91255	
		Mini Prisms		European Style Tribrach	36	91258	
		Mini Prisms	32	2152-05-BLK		91259	
		6600-01		2153-05-BLK		91275	
		6600-02		Traverse Tribrach Adapter	36	91535	
		6600-03		2153-10-BLK		5217-20-FLY	
		6600-04		Traverse Kits		5217-21-FOR	
		6600-05		Single Prism Traverse Kit	37	70014-6	
		6603-05		2159-01-BLK		70014-7	
		6603-06		2159-050		7301-00	
		Mining, Tunneling, Monitoring		Precision Traverse Kits for	37	7304-01	
		and Rail		196 mm Heights		7321-00	
		Quick Release Adapters and	32	2159-06		7321-050	
		Rebar Bolts		2159-07		Laser Receiver Cut & Fill Rod	43
		6601-01		Traverse Kit for 196 mm Heights	37	7310-13	
		6601-02		2159-03-BLK		Aluminum Builder's Rods	44
		6601-03		Traverse Kit for 155 mm Heights	37	7301-30	
		6601-04		2159-04-BLK		7301-40	
		6602-01		Instrument Tripod and Accessories		7301-50	
		6602-02		Instrument Tripod Accessories	38	7321-30	
		6602-03		2120-00		7321-40	
		Monitoring Accessories	33	2130-00		7321-50	
		1 510 001		2132-01		7341-40	
		1 510 011		5196-02		'E' Pattern Builder's Rods	44
		4 520 120		5196-07		7341-31	



PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE
7341-41		3003-14		AL24A		8365-58-FOR	
7341-45		3006-06		AL24A-1		8365-62-FLY	
7341-51		3006-07		AL24A-2		8365-62-FOR	
7341-52		3006-08		AL24A-3		8365-66-FLY	
7341-55		3006-10		AL24M		8365-66-FOR	
7341-56		3006-11		AL24M-1		8368-Series Safety Utility Vest	58
Grade/Trenching Rod	44	3006-17		AL24M-2		8368-42-FLY	
92090		3006-18		AL24M-3		8368-42-FOR	
Surveyor's Series (SVR)	45	Rhino Ruler Engineer's Folding Ruler 48		AL32A		8368-46-FLY	
Leveling Rods		4770-00		Construction Theodolite	53	8368-46-FOR	
98010		4770-01		DET-2		8368-50-FLY	
98011		CMR Series Measuring Rulers	49	DE-50		8368-50-FOR	
98012		and Cases		Batter Board Clamp	53	8368-54-FLY	
98013		90180		4852-14		8368-54-FOR	
98014		90181		Construction Lasers and Detectors		8368-58-FLY	
98015		90182		Storm Laserometer Receiver	54	8368-58-FOR	
98016		Laser Distance Meters		AT1994000-02		8368-62-FLY	
98017		Laser Distance Meters	49	AT1994000-09		8368-62-FOR	
98020		QM55		Lightning 2 Laser Detector	54	8368-66-FLY	
98021		QM75		AT1993600-02		8368-66-FOR	
98023		QM95		AT1993600-09		8390-Series Mesh Safety Vest	59
98024		Stream Gauges and Supplies		Twister Laser Receiver	54	8390-50-FLY	
98025		Stream Gauges	50	AT1993640-02		8390-50-FOR	
98026		99000		AT1993640-09		8390-54-FLY	
SVR Brackets for Laser Receivers	45	99001		Bullseye 6 Laser Receiver	55	8390-54-FOR	
91100		99002		AT1991320-02		8390-58-FLY	
91162		99003		AT1991320-09		8390-58-FOR	
91163		99004		AT1991326-02		8390-62-FLY	
Standard/Pro Series (LR)	46	99023		AT1991326-09		8390-62-FOR	
Leveling Rods		99051		Bullseye 5+ Laser Receiver	55	8265-Series Safety Utility Vest	59
90004		99052		AT1991370-02		8265-42-FLY	
90009		99053		AT1991370-09		8265-42-FOR	
90014		99071		AT1991376-02		8265-46-FLY	
90022		99072		AT1991376-09		8265-46-FOR	
90024		99079		Bullseye 3+ Laser Receiver	55	8265-50-FLY	
90026		99080		AT1991340-02		8265-50-FOR	
Rectangular Series (CR)	46	99081		AT1991340-09		8265-54-FLY	
Leveling Rods		Mounting Hardware For	50	AT1991346-02		8265-54-FOR	
92001		Stream Gauges		AT1991346-09		8265-58-FLY	
92002		99043		Bullseye Magnetic Mounts	56	8265-58-FOR	
92021		Stream Gauges Plate Numbers	51	AT1991360-02		8265-62-FLY	
92022		99060		AT1991364-02		8265-62-FOR	
92026		99061		Bullseye Receiver Accessories	56	8265-66-FLY	
92027		99062		AT1010536-02S		8265-66-FOR	
92031		99063		AT1010972-15		8260-Series U.S./Canada	60
92032		99064		AT1010972-20		Dual Safety Utility Vest	
92041		99065		AT1010972-25		8260-46-FLY	
92042		99066		AT1010972-35		8260-46-FOR	
92043		99067		AT1010972-50		8260-50-FLY	
92046		99068		AT1010976-02		8260-50-FOR	
92047		99069		AT1010983		8260-54-FLY	
92048		99070		AT1010987-25		8260-54-FOR	
Magnetic Locators				AT1991604		8260-58-FLY	
SubSurface Handheld	47	SECTION SIX		Gopher Pole Wire Installation Tool		8260-58-FOR	
Magnetic Locators		Hand Levels		Gopher Pole Wire Installation Tool	56	8260-62-FLY	
ML-1		1X and 2X Magnification	51	90520		8260-62-FOR	
ML-1M		Hand Levels		91415		8260-66-FLY	
ML-1-050		4040-05		SECTION SEVEN		8260-66-FOR	
SubSurface Waterproof	47	4040-30		Column Clamps		8261-Series Safety Utility Vest	60
Magnetic Locator		4040-60		Wall/Column Bracket for Lasers	57	8261-XS-FLY	
ML-3SY		4050-01		and Total Stations		8261-XS-FOR	
Measuring Rulers and Tapes		4200-00		4852-17		8261-S-FLY	
Heavy-Duty Pocket Tape	47	4300-00		Heavy-Duty Instrument	57	8261-S-FOR	
4769-00		8030-00-CABLU		Column Clamp		8261-M-FLY	
4769-01		Optical Instruments		4852-16		8261-M-FOR	
4769-02		Magnetic Dampened	52	Wall Mount Bracket	57	8261-L-FLY	
4769-03		Auto Level and Packages		2072-60		8261-L-FOR	
4769-04		4811-24		Rotating Laser Column Clamp	57	8261-XL-FLY	
4769-06		4811-24P1		4852-15		8261-XL-FOR	
4769-14		4811-24P2		ANSI/ISEA Class Safety Utility Vests		8261-XXL-FLY	
4769-15		4811-24P3		8365-Series Safety Utility Vest	58	8261-XXL-FOR	
Triangular Scale Tapes	48	4811-24P4		8365-42-FLY		8261-J-FLY	
9006-00		4811-24P5		8365-42-FOR		8261-J-FOR	
9006-01		4811-24P6		8365-46-FLY		8292-Series Safety Utility Vest	61
Coated Fiberglass and	48	4811-24P7		8365-46-FOR		8292-46-FLY	
Steel Measuring Tapes		4811-24P8		8365-50-FLY		8292-46-FOR	
3003-06		4811-32		8365-50-FOR		8292-50-FLY	
3003-07		4811-32P1		8365-54-FLY		8292-50-FOR	
3003-08		4811-32P2		8365-54-FOR		8292-54-FLY	
3003-10		4811-32P3		8365-58-FLY			
		4811-32P6					



PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	PRODUCT CATEGORY/NUMBER	PAGE	
8292-54-FOR		Bags and Cases		242000		9050-04		
8292-58-FLY			Utility Bags & Miscellaneous Cases	64	242500		9050-05	
8292-58-FOR			8095-20-ORG		23MAGHUB4		9050-06	
8292-62-FLY			8106-10-ORG		23MAGHUB6		9050-08	
8292-62-FOR			8106-20-ORG		23MAGHUB8		9060-06	
8290-Series Economy Safety Vest	61		8142-01-ORG		253MAGSPIKE		9060-14	
8290-50-FLY			8143-21-YEL		254MAGSPIKE		9061-02	
8290-50-FOR			8143-22-FLY		256MAGSPIKE		9061-03	
8290-54-FLY			8143-40-FLY		258MAGSPIKE		9061-04	
8290-54-FOR			Tool Pouches	65	Estwing Hand Tools	69	9061-05	
8290-58-FLY		8046-20-ORG		9070-00		9061-06		
8290-58-FOR		8046-30-ORG		9070-01		9061-14		
8290-62-FLY		GNSS Pole and Tripod Bags	65	9070-02		9062-00		
8290-62-FOR		8151-02-FLY		9070-03		9063-06		
8068-Series Safety Utility Vest	62	8153-10-ORG		9070-04		9063-14		
8068-42-FLY		8154-00-ORG		9070-05		9064-01		
8068-42-FOR		8154-10-ORG		9070-06		9064-02		
8068-46-FLY		8154-12-ORG		9070-07		Miscellaneous Field Supplies		
8068-46-FOR		8162-00-ORG		9070-08		Field Marking and	71	
8068-50-FLY		Instrument Tripod Bags and Cases	65	SECTION EIGHT		Miscellaneous Accessories		
8068-50-FOR		8150-20-ORG		Stake Flagging, Tape, Field Markers		25456855		
8068-54-FLY		8154-11-ORG		and Whiskers		2180-00		
8068-54-FOR		8160-31		Stake Flags, Flagging Tape,	70	2180-01		
8068-58-FLY		Rover Rods and Prism	66	Field Marking and Whiskers		2181-00		
8068-58-FOR		Pole Tripod Cases		8025-00-ORG		2181-10		
8068-62-FLY		8157-01-ORG		9035-01		2182-00		
8068-62-FOR		8160-00-ORG		9035-02		2182-10		
8068-66-FLY		8160-20-BLK		9035-03		2183-00		
8068-66-FOR		8162-20-BLK		9035-04		6000-001		
8063-Series Surveyors Utility Vest	62	8180-20-ORG		9035-05		6000-002		
8063-38-FOR		Assorted Rod Carrying Cases	66	9035-06		6000-012		
8063-42-FLY		91402		9035-07		6000-014		
8063-42-FOR		91410		9035-08		6000-016		
8063-46-FLY		91411		9035-09		6000-018		
8063-46-FOR		91415		9035-10		6000-024		
8063-50-FLY		91416		9035-11		6000-032		
8063-50-FOR		91417		9035-12		6000-120		
8063-54-FLY		8166-01-ORG		9035-13		6000-160		
8063-54-FOR		8170-00-ORG		9036-01		6000-240		
8063-58-FLY		Lath and Stake Bags	67	9036-02		6001-06		
8063-58-FOR		8090-20-ORG		9036-03		6001-12		
8063-62-FLY		8091-20-ORG		9036-04		6001-FR		
8063-62-FOR		8092-20-ORG		9036-05		6001-FY		
8063-66-FLY		8093-00-ORG		9036-06		6001-OR		
8063-66-FOR		8094-00-ORG		9036-07		8010-10-BLU		
8067-Series Heavy-Duty Safety Utility Vest	63	8096-20-ORG		9036-08		9000-01		
8067-38-FOR		8098-00-ORG		9036-09		9000-02		
8067-42-FLY		8098-10-ORG		9036-10		9068-02		
8067-42-FOR		8100-00-ORG		9036-11		9068-03		
8067-46-FLY		8100-20-ORG		9036-12		9500-01		
8067-46-FOR		8101-00-ORG		9036-13		9500-02		
8067-50-FLY		8101-20-ORG		9037-01		9500-13		
8067-50-FOR		8102-00-ORG		9037-02		9500-17		
8067-54-FLY		8102-01-ORG		9037-03		Brass Survey Marker	71	
8067-54-FOR		8103-20-ORG		9037-05		2183-01		
8067-58-FLY		8104-20-ORG		9037-06		2183-02		
8067-58-FOR		Front and Top Loading Total	67	9040-01		2183-03		
8067-62-FLY		Station Cases		9040-02		2183-05		
8067-62-FOR		8120-00-ORG		9040-03		2183-06		
8067-66-FLY		8121-00-ORG		9040-04		Rite in the Rain		
8067-66-FOR		8123-00-ORG		9040-05		Rite in the Rain	72	
8069-Series Safety Utility Vest	63	Total Station, GIS & GNSS Backpacks	68	9040-06		37		
8069-38-FOR		8120-30-ORG		9040-07		37R		
8069-42-FLY		8120-40-ORG		9040-08		99BR		
8069-42-FOR		8125-11-ORG		9040-09		99ER		
8069-46-FLY		8125-50-ORG		9040-10		135		
8069-46-FOR		8134-00-ORG		9040-11		146		
8069-50-FLY		Prism and Tribrach Bags	68	9040-12		200		
8069-50-FOR		8070-00-ORG		9040-13		300F		
8069-54-FLY		8071-00-ORG		9040-14		301FX		
8069-54-FOR		8080-00-ORG		9040-15		302		
8069-58-FLY		8081-00-ORG		9040-16		303		
8069-58-FOR		8082-00-ORG		9040-20		310F		
8069-62-FLY		8130-00-ORG		9045-01		311FX		
8069-62-FOR		Magnetic Nails and Hand Tools		9045-02		312		
8069-66-FLY		ChrisNik MagNails, MagSpikes	69	9045-03		313		
8069-66-FOR		and MagHubs		9045-04		350F		
Hydration Backpack	64	24750		9050-01		351FX		
8125-60-FOR		241000		9050-02		352		
		241250		9050-03		353		
		241500				YE99		



www.surveying.com



Scan with your smart device
to view the mobile version
of this catalog