



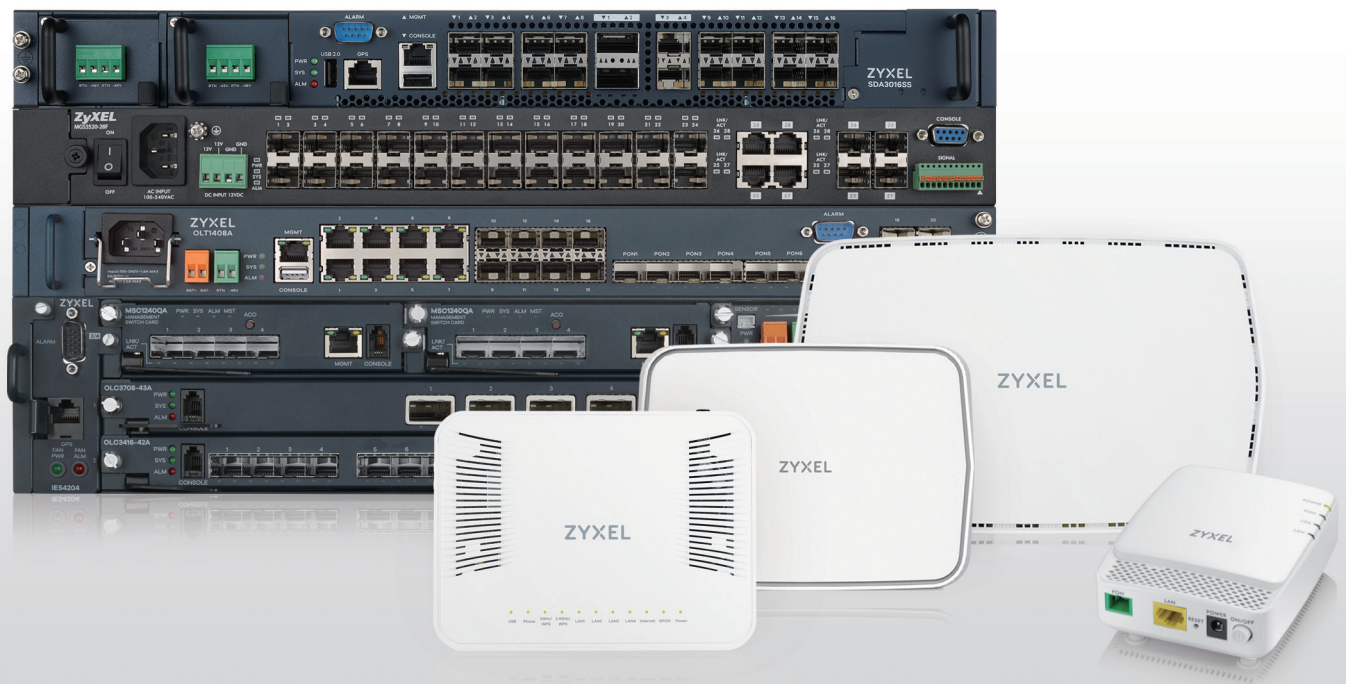

Fiber Access E2E


Fiber COE product portfolio

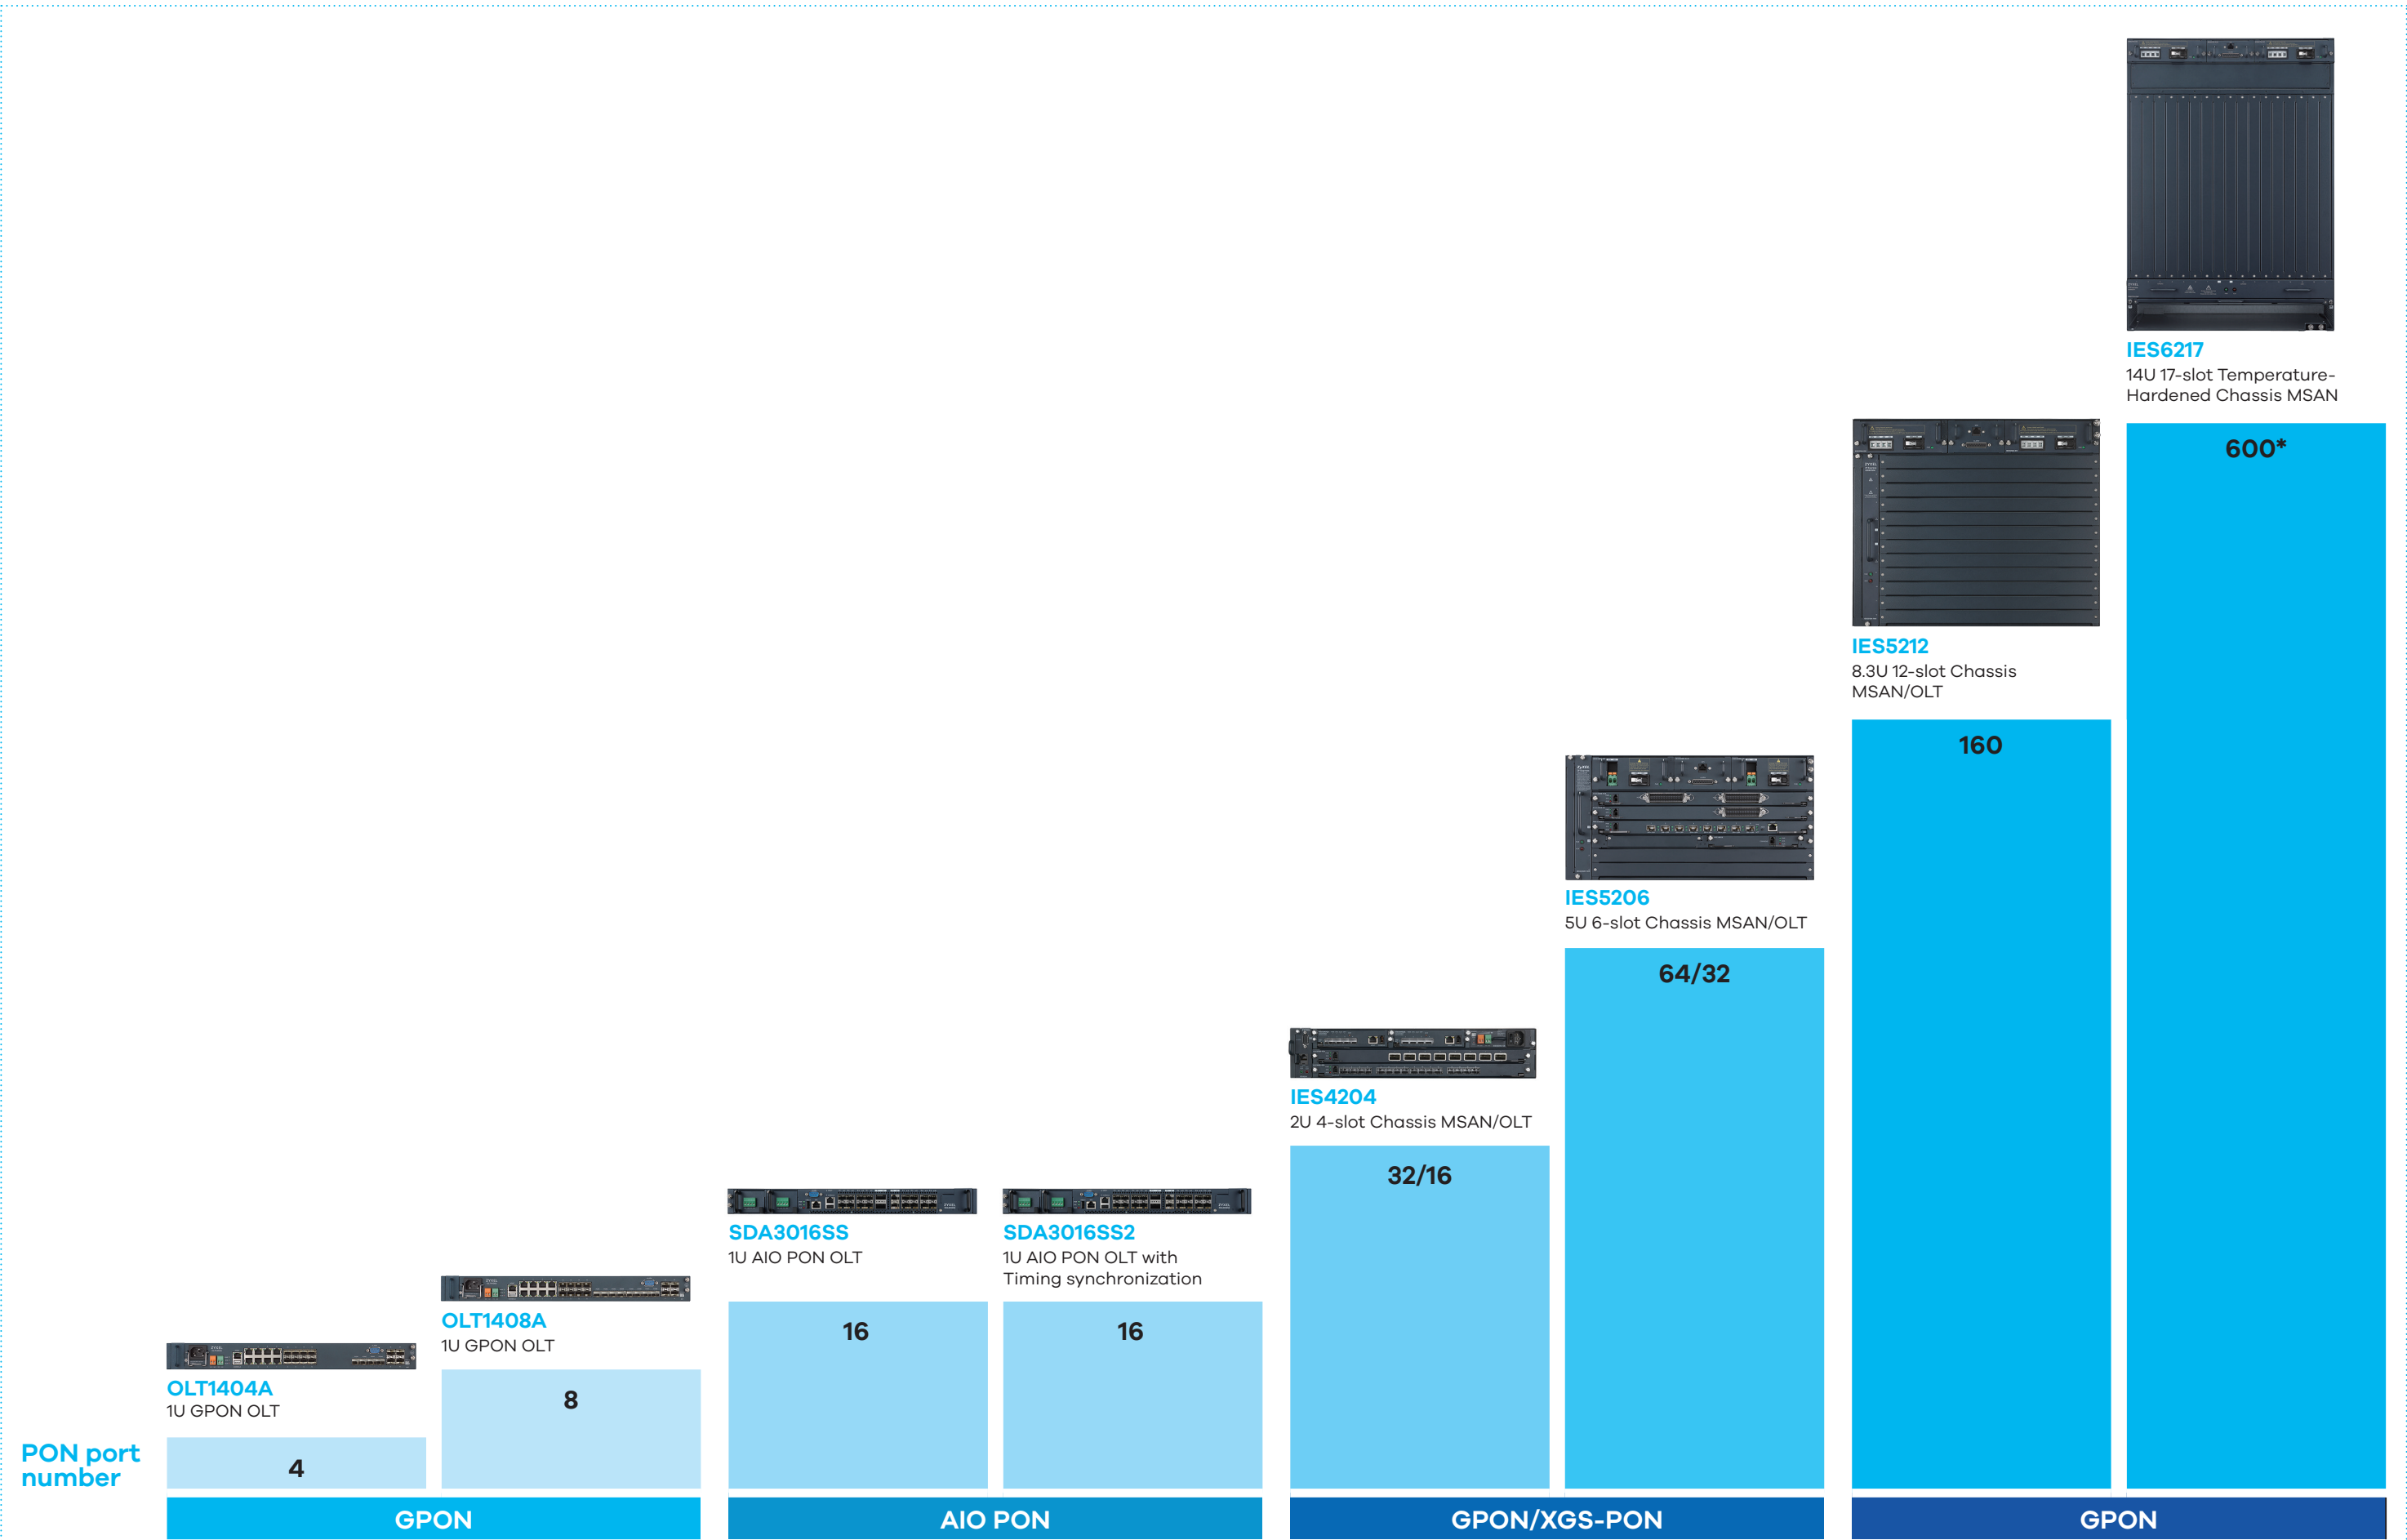

* Please contact us for detailed PON function availability.

Fiber COE key features

Category	Model	Key features
Chassis MSAN/OLT		IES6217 • Maximum 192x3-port vectoring VDSL density, 600-port Gigabit Ethernet density • Flexible ACL, VLAN-aware DHCP, and anti-IP/MAC address spoofing to prevent malicious attacks • Board-Level Vectoring (BLV) and System-Level Vectoring (SLV) • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation
		IES5212 • Maximum 192x2-port vectoring VDSL density, 400-port Gigabit Ethernet density, or 160-port GPON density • Flexible ACL, VLAN-aware DHCP, and anti-IP/MAC address spoofing to prevent malicious attacks • DHCP option 82 and PPPoE IA features support versatile IP address assignment • Board-Level Vectoring (BLV) and System-Level Vectoring (SLV) • Full redundancy of Management card and power module • Comprehensive QoS for network efficiency • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation • Zero-Touch Provisioning for fast xPON ONT commissioning
		IES5206 • Maximum 192-port vectoring VDSL density, 200-port Gigabit Ethernet density, 64-port GPON density, or 32-port XGS-PON density • Supports symmetric XGS-PON for residential, cloud, and enterprise services • Flexible ACL, VLAN-aware DHCP, and anti-IP/MAC address spoofing to prevent malicious attacks • DHCP option 82 and PPPoE IA features support versatile IP address assignment • Board-Level Vectoring (BLV) and System-Level Vectoring (SLV) • Full redundancy of management card and power module • Comprehensive QoS for network efficiency • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation • Zero-Touch Provisioning for fast xPON ONT commissioning
		IES4204 • Maximum 96-port vectoring VDSL density, 80-port Gigabit Ethernet density, 32-port GPON density, or 16-port XGS-PON density • Supports symmetric XGS-PON for residential, cloud, and enterprise services • Flexible ACL, VLAN-aware DHCP, and anti-IP/MAC address spoofing to prevent malicious attacks • DHCP option 82 and PPPoE IA features support versatile IP address assignment • Full redundancy of management cards and power module • Comprehensive QoS for network efficiency • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation


Category	Model	Key features
PON OLT		SDA3016SS2 • Disaggregated open whitebox OLT with 16 SFP+ ports with (All-in-One) AIO PON technology • ITU-T mode GPON, XGS-PON, C-PON (GPON+XGSPON) and 10G Active Ethernet • IEEE mode EPON, 10G-EPON, C-PON (EPON+10G-EPON) and 10G Active Ethernet • Time synchronization compliant with IEEE 1588v2 PTP • ETSI-Rack compliant, 260 mm depth, 1RU height, temperature-hardened
		SDA3016SS • Disaggregated open whitebox OLT with 16 SFP+ ports with (All-in-One) AIO PON technology • Each AIO PON port supports GPON, XGS-PON or C-PON (GPON+XGS-PON) • ETSI-Rack compliant, 260 mm depth, 1RU height, temperature-hardened
		OLT1408A • Eight ITU-T G.984-compliant GPON ports; each port supports up to 128 ONTs • Four 10G, eight 2.5G and eight 1G uplink ports • Comprehensive QoS for network efficiency • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation • Compact size and front access design for easy installation and deployment
		OLT1404A • Four ITU-T G.984-compliant GPON ports; each port supports up to 128 ONTs • Four 10G, eight 2.5G, and eight 1G uplink ports • Comprehensive QoS for network efficiency • Field-proven IGMP snooping and proxy for IPTV deployments • Sophisticated OAM&P features • Temperature-hardened for flexible installation • Compact size and front access design for easy installation and deployment
Network management		NetAtlas EMS • Intuitive Graphical User Interface (GUI) • Fast system recovering • Up to 300 concurrent remote login clients • Periodical configuration file backup • Batch firmware upgrade and service provisioning • XML/SOAP northbound interface supported

Fiber COE feature matrix

Model	IES6217*	IES5212	IES5206	IES4204	SDA3016SS	SDA3016SS2	OLT1408A	OLT1404A
Product name	14U 17-slot Temperature-Hardened Chassis MSAN	8.3U 12-slot Temperature-Hardened Chassis MSAN/OLT	5U 6-slot Temperature-Hardened Chassis MSAN/OLT	2U 4-slot Temperature-Hardened Chassis MSAN/OLT	1U Pizza Box 16-port Combo PON SDN Access OLT	1U Pizza Box 16-port All-In-One (AIO) PON SDN Access OLT with Timing synchronization	1U Pizza Box 8-port GPON OLT	1U Pizza Box 4-port GPON OLT
Power	-36 to -72 V DC	-36 to -72 V DC	-36 to -72 V DC 100 to 240 V AC	-36 to -72 V DC 100 to 240 V AC Battery charger	-38.4 to -72 V DC 100 to 240 V AC	-38.4 to -72 V DC 100 to 240 V AC	-36 to -72 V DC 100 to 240 V AC Battery charger	-36 to -72 V DC 100 to 240 V AC Battery charger
Operating temperature	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C	-40°C to 65°C
Operating humidity	10% to 95% RH	10% to 95% RH	10% to 95% RH	10% to 95% RH	10% to 95% RH	10% to 95% RH	10% to 95% RH	10% to 95% RH
Interface								
Uplink	1000BASE-T	-	-	-	-	-	8	8
	SFP slot (2.5G/1G)	-	-	-	-	-	8	8
	SFP+ slot (10G/2.5G/1G)	4/8	4/8	4/8	4+4	-	4	4
	SFP28 slot (25G/10G/1G)	-	-	-	2	2	-	-
	QSFP28 slot (100G/40G)	-	-	-	2	2	-	-
Downlink	AIO PON interface	-	-	-	16	16	-	-
	Combo PON interface (G/XGS-PON)	-	-	-	16	16	-	-
	XGS-PON interface	-	-	32 XGS-PON	16 XGS-PON	16	-	-
	GPON interface	600	160	64	32	16	8	4
	Combo PON interface (1GE/10GE PON)	-	-	-	-	16	-	-
	EPON interface	-	-	-	-	16	-	-
	10G-EPON interface	-	-	-	-	16	-	-
	VDSL2 interface	192 x 3 (Vectoring)	192 x 2 (Vectoring)	192 (Vectoring)	96 (Vectoring)	16	-	-
	GbE interface	400	400	200	80	-	-	-
	10GbE interface	-	-	-	-	8	-	-
PON								
Maximum splitter ratio	1: 128	1: 128	10G PON: 1: 256 GPON: 1: 128	10G PON: 1: 256 GPON: 1: 128	Combo (G/XGS-PON): 1: 256 + 1: 128 10G PON: 1: 256 GPON: 1: 128	Combo (G/XGS-PON): 1: 256 + 1: 128 10G PON: 1: 256 GPON: 1: 128	1: 128	1: 128
Type B protection	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
AES	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
SFP digital diagnostic management	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
QoS								
802.1p priority queue	8	8	8	8	8	8	8	8
802.1q tag-based VLAN	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
SPQ/WFQ	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
DBA	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Security								
IGMP v2, v3	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
IGMP fast leave	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
Multicast VLAN	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
MLDv1 & MLDv2 snooping and proxy	Yes	Yes	Yes	Yes	Yes, HW ready	Yes, HW ready	Yes	Yes
Management								
SNMP v2c, v3	Yes	Yes	Yes	Yes	-	-	Yes	Yes
Web management	Yes	Yes	Yes	Yes	-	-	Yes	Yes
CLI management	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
EMS management	NetAtlas EMS	NetAtlas EMS	NetAtlas EMS	NetAtlas EMS	-	-	NetAtlas EMS	NetAtlas EMS
Timing								
IEEE1588v2	-	-	-	-	-	Yes	-	-
Sync-E	-	-	-	-	-	Yes	-	-
1PPS	-	-	-	-	-	Yes	-	-
Physical specifications								
Dimensions (WxDxH)(mm/in.)	440 x 275 x 622/ 17.32 x 10.83 x 24.49	440 x 275 x 370/ 17.32 x 10.83 x 14.57	440 x 275 x 222/ 17.32 x 10.83 x 8.74	440 x 285 x 89/ 17.32 x 11.22 x 3.5	440 x 260 x 44.5/ 17.32 x 10.23 x 1.75	440 x 260 x 44.5/ 17.32 x 10.23 x 1.75	440 x 250 x 44/ 17.32 x 9.84 x 1.73	440 x 250 x 44/ 17.32 x 9.84 x 1.73
Weight (kg/lb.)	25.5/56.22	15.5/34.17	13/28.66	10.6/23.37	5.1/11.24	5.1/11.24	4/8.8	4/8.8

* Please contact us for detailed PON function availability.

Carrier and access switch product portfolio

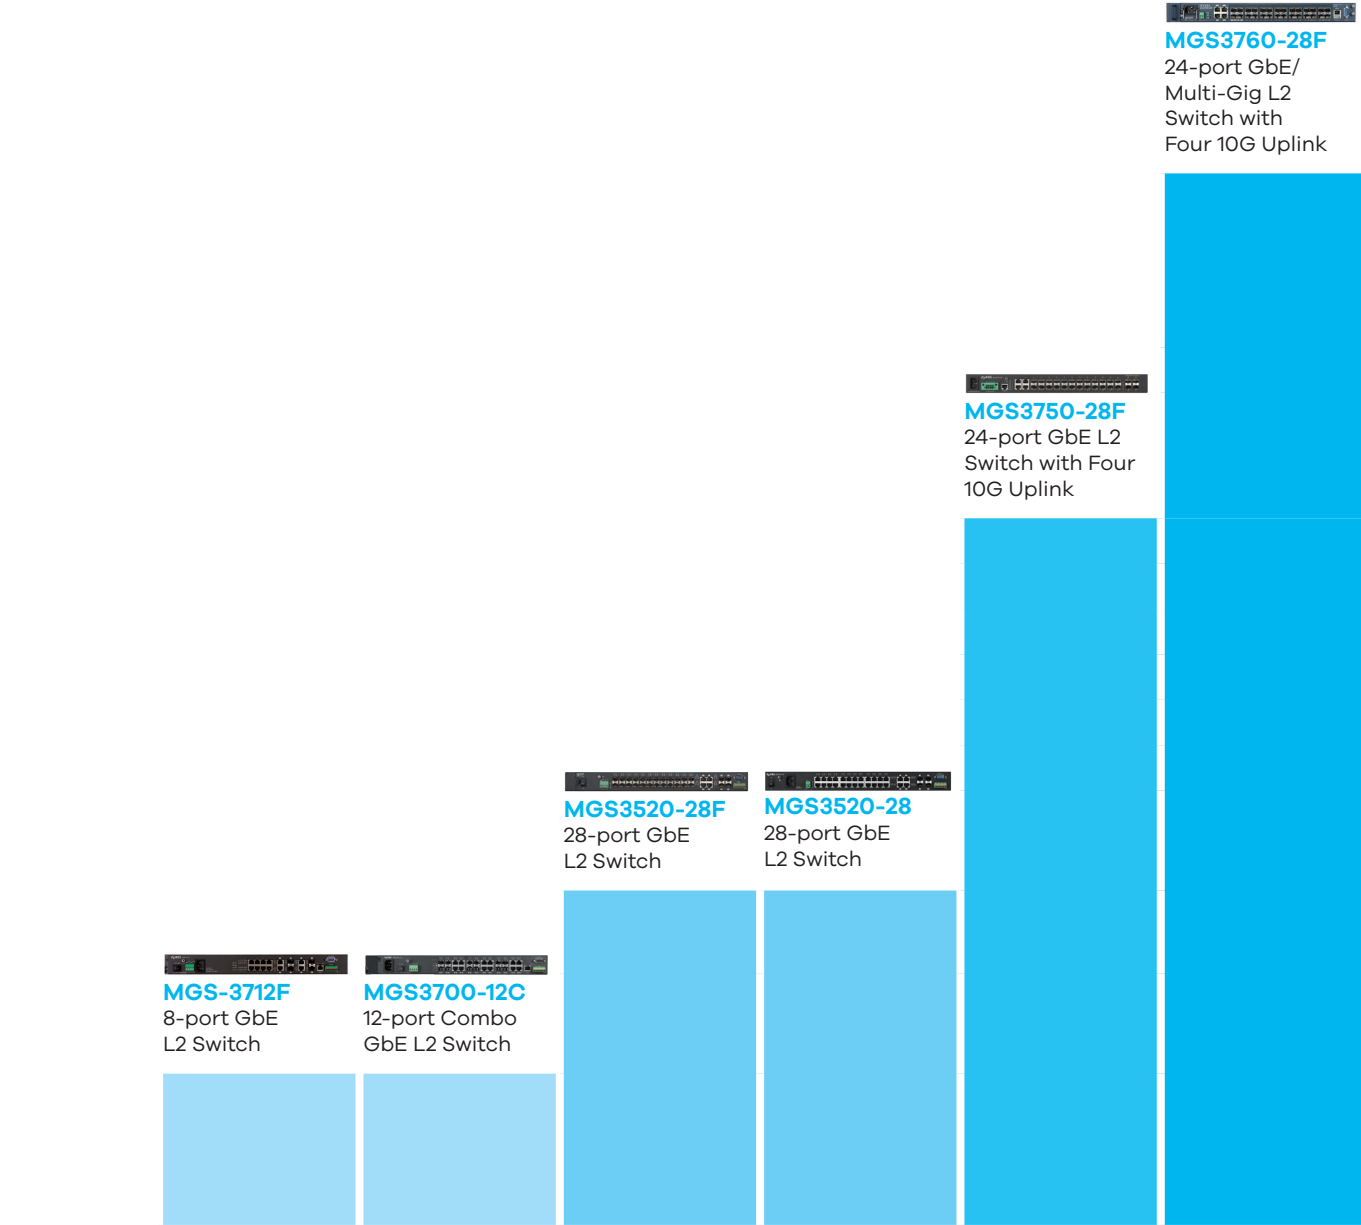

Port density						
Backplane bandwidth (Gbps)	24	24	56	56	128	176
1 Gigabit RJ-45 ports	-	-	-	24	-	-
1 Gigabit SFP slots	8	-	24	-	20	4
Combo Gigabit ports (RJ-45/SFP)	4	12	4	4	4	4
2.5 Gigabit SFP slots	-	-	-	-	-	16
10 Gigabit SFP+ slots	-	-	-	-	4	4

Carrier and access switch key features

Category	Model	Key features
Layer 2	MGS-3712F 	• Eight SFP ports and four combo Gigabit ports (RJ-45/SFP open slots) • 24 Gbps non-blocking switching fabric; 17.8 MPPs forwarding rate • Multilayer-aware (L2/L3/L4) ACL for security protection • Front access design; external alarm block • Supports CO-LPR (Dying Gasp); errdisable recovery trap; CPU protection • Operating temperature: 0°C to 65°C
	MGS3700-12C 	• 12 combo Gigabit ports (RJ-45/SFP open slots) • 24 Gbps non-blocking switching fabric; 17.8 MPPs forwarding rate • Multilayer-aware (L2/L3/L4) ACL for security protection • Front access design; external alarm block • Supports CO-LPR (Dying Gasp); errdisable recovery trap; CPU protection • Operating temperature: 0°C to 65°C
	MGS3760-28F 	• Four combo ports (Fixed RJ-45 1G BASE-T or SFP open slot), four SFP 1GbE fiber ports, and 16 SFP ports (up to 1GbE/2.5GbE) • Four 10GbE/2.5GbE/1GbE SFP+ uplinks flexibility • Fully managed Layer-2 switching • ITU-T G.8032 Ethernet ring protection switching • Future-proof with IPv6 support • Policy-based QoS optimizes multi-service quality • Temperature-hardened for flexible installation • Operating temperature: -40°C to 60°C
	MGS3750-28F 	• 20 SFP ports, four SFP+ ports and four combo Gigabit ports (RJ-45/SFP open slots) • 128 Gbps non-blocking switching fabric; 95.232 MPPs forwarding rate • 16K MAC address table; eight 802.1p priority queues per port • Multilayer-aware (L2/L3/L4) ACL for security protection • Front access design • Operating temperature: 0°C to 50°C
	MGS3520-28 	• 24 100/1000BASE-TX ports and four combo Gigabit ports (RJ-45/SFP open slots) • 56 Gbps non-blocking switching fabric; 41.67 MPPs forwarding rate • 16K MAC address table; 12 KB jumbo frame; 4K multicast forwarding table • Front access design; external alarm block • Operating temperature: 0°C to 50°C
	MGS3520-28F 	• 24 GbE SFP open slots and four combo Gigabit ports (RJ-45/SFP open slots) • 56 Gbps non-blocking switching fabric; 41.67 MPPs forwarding rate • 16K MAC address table; 12 KB jumbo frame; 4K multicast forwarding table • Front access design; external alarm block • Operating temperature: 0°C to 50°C

Carrier and access switch feature matrix

Model	MGS-3712F	MGS3700-12C	MGS3760-28F	MGS3750-28F	MGS3520-28	MGS3520-28F
Product name	8-port GbE with 4-port Combo GbE L2 Managed Switch	12-port Combo GbE L2 Managed Switch	24-port GbE/Multi-GbE L2 Switch with Four 10G SFP+ Uplink Ports	24-port GbE L2 Switch with Four 10G Uplink	28-port GbE L2 Switch with GbE Uplink	28-port GbE L2 Switch with GbE Uplink
Switch class	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2	Layer 2
Hardware						
1 Gigabit RJ-45 ports	-	-	-	-	24	
1 Gigabit SFP slots	8	-	4	20	-	24
Combo Gigabit ports (RJ-45/SFP)	4	12	4	4	4	4
SFP with up to 1GbE/2.5GbE	-	-	16	-	-	-
1GbE/2.5GbE/10GbE SFP+ ports	-	-	4	-	-	-
USB type console port	-	-	1	-	-	-
DB9 alarm port	-	-	1	-	-	-
10 Gigabit XFP/SFP+ slots	-	-	-	4	-	-
Wire-speed	Yes	Yes	Yes	Yes	Yes	Yes
Backplane bandwidth (Gbps)	24	24	176	128	56	56
Forwarding rate (Mbps)	17.8	17.8	131.1	95.32	41.67	41.67
MAC addresses	16000	16000	16000	16000	16000	16000
Management						
CLI, web, GUI	Yes	Yes	Yes	Yes	Yes	Yes
Alarm block	Yes	Yes	Yes	-	Yes	Yes
Out-of-band management port	Yes	Yes	Yes	-	-	-
Routing/redundancy						
Spanning tree (STP/MSTP/RSTP)	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes
Backup power support (DC 12V)	Dual-power AC & 48 V DC	Dual-power AC & 48 V DC	Dual-power AC & 48 V DC	Dual-power AC & 48 V DC	Yes	Yes
Quality of Service (QoS)						
Priority queues	8	8	8	8	8	8
Data prioritization (SPQ/WRR/WFQ)	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes	Yes/Yes/Yes
ACL data prioritization (L2/L3/L4)	Yes	Yes	Yes	Yes	Yes	Yes
IGMP snooping (v1/v2/v3)	Yes	Yes	Yes	Yes	Yes	Yes
MVR	Yes	Yes	Yes	Yes	Yes	Yes
Jumbo frame forwarding	Yes	Yes	Yes	Yes	Yes	Yes
802.1p class of service	Yes	Yes	Yes	Yes	Yes	Yes
Security						
MAC freeze/intrusion lock	Yes	Yes	Yes	Yes	Yes	Yes
802.1X authentication	Yes	Yes	Yes	Yes	Yes	Yes
TACACS+	Yes	Yes	Yes	Yes	Yes	Yes
ACL security filter L2/L3/L4	Yes	Yes	Yes	Yes	Yes	Yes
RADIUS MAC login	Yes	Yes	Yes	Yes	Yes	Yes
VLAN stacking (Q-in-Q)	Yes	Yes	Yes	Yes	Yes	Yes
Selective Q-in-Q	Yes	Yes	Yes	Yes	Yes	Yes
Green features						
Fan type	Fan-tray	Fan-tray	Swappable fan	Fixed fan	Fanless	Fan-tray
Others						
IPv6	Yes	Yes	Yes	Yes	Yes	Yes
Physical specifications						
Dimensions (WxDxH)(mm/in.)	440 x 225 x 44/ 17.32 x 8.86 x 1.73	440 x 225 x 44/ 17.32 x 8.86 x 1.73	440 x 250 x 44.35/ 17.32 x 9.84 x 1.74	441 x 269 x 45/ 17.36 x 10.59 x 1.77	440 x 270 x 44/ 17.32 x 10.63 x 1.73	440 x 270 x 44/ 17.32 x 10.63 x 1.73
Weight (kg/lb.)	3.5/7.7	3.5/7.7	5.6/12.345	3.7/8.2	3.1/6.8	3.7/8.2

Fiber ONT product portfolio

	XGS-PON	GPON
Wireless		 PMG5622GA GPON HGU with 4-port GbE LAN, RF Overlay
		 PMG5617GA GPON HGU with 4-port GbE LAN
		 EP240P GPON PoE HGU with 4-port GbE LAN
		 PMG5617-T20B2 GPON AC1200 HGU with 4-port GbE LAN
SFU	 PM7320-B0 XGS-PON SFU with 10GbE LAN	 PMG1005-T20C GPON SFU with 1-port GbE LAN
	 PM7300-T0 XGS-PON SFU with 10GbE LAN	 PMG3000-D20B SFP-Type SFU

Fiber ONT key features

Category	Model	Key features
XGS-PON ONT	PM7320-B0 	- Integrated internet services via symmetric 10G fiber - Effortless integration into multiple scenarios - Zyxel NetAtlas EMS and field-proven interoperability with Zyxel XGS-PON OLTs - Remote management via OMCI and APS - Zyxel-developed OPAL for superior flexibility and faster time-to-market
	PM7300-T0 	- Integrated internet services via symmetric 10G fiber - Effortless integration into multiple scenarios - Remote management via TR-069 and OMCI - Zyxel-developed OPAL for superior flexibility and faster time to market - Comprehensive QoS for network efficiency
GPON ONT	PMG5622GA 	- Supports Gigabit data access via passive fiber - Concurrent dual-band wireless circuit design - Remote management via OMCI and APS - Zyxel-developed OPAL for superior flexibility and faster time-to-market - RF overlay for traditional CATV video services through the GPON network
	PMG5617GA 	- Supports Gigabit data access via passive fiber - Concurrent dual-band wireless circuit design - Remote management via OMCI and APS - Zyxel-developed OPAL for superior flexibility and faster time-to-market
	PMG5617-T20B2 	- Supports Gigabit data access via passive fiber - Concurrent dual-band wireless circuit design - Remote Management via OMCI and TR-069 - MU-MIMO to maximize bandwidth utilization
	EP240P 	- Supports Gigabit data access via passive fiber - Compliant with IEEE 802.3at/af standard 30 watt output per LAN port/up to 70 watt per system - Remote management via TR-069, Zyxel NetAtlas EMS and Zyxel OLT - Simultaneous port-based bridge and router modes - Temperature-hardened for flexible installation
	PMG1005-T20C 	- Supports Gigabit data access via passive fiber - Compact size and simple bridge design for easy installation and deployment - Remote management via OMCI
	PMG3000-D20B 	- Supports Gigabit data access via passive fiber - Remote management via OMCI - MSA-compliant SFP electrical footprint

Fiber ONT feature matrix

Model	XGS-PON		GPON					
	PM7320-B0	PM7300-T0	PMG5622GA	PMG5617GA	PMG5617-T20B2	EP240P	PMG1005-T20C	PMG3000-D20B
Product name	XGS-PON SFU with 10GbE LAN	XGS-PON SFU with 10GbE LAN	Dual-Band Wireless AC/N GPON HGU with 4-port GbE LAN and RF Overlay	Dual-Band Wireless AC/N GPON HGU with 4-port GbE LAN	AC1200 WiFi 5 GPON VoIP Gateway ONT	GPON HGU with 4-port GbE LAN	GPON SFU with 1-port GbE LAN	Gigabit GPON SFP-Type SFU
WAN interface	XGS-PON (SC/APC)	XGS-PON (SC/APC)	GPON (SC/APC)	GPON (SC/APC)	GPON (SC/APC)	GPON (SC/APC)	GPON (SC/APC)	GPON (SC/APC)
Ethernet port (10/100/1000)	3 (1 for 10G LAN)	1 (1 for 10G LAN)	4	4	4	4	1	1 (SGMII/SerDes)
POTS FXS port	-	-	2	2	1	1	-	-
USB port	-	-	1 (USB 2.0)	1 (USB 2.0)	1 (USB 2.0)	1 (USB 2.0)	-	-
UPS	-	-	Yes	Yes	-	-	-	-
CATV	-	-	Yes	-	-	-	-	-
PON								
Standard compliance	ITU-T G.9807.1/G.988	ITU-T G.9807.1/G.987.x/G.988	ITU-T G.984.x/G.988	ITU-T G.984.x/G.988	ITU-T G.984.x/G.988	ITU-T G.984.x/G.988	ITU-T G.984.x/G.988	ITU-T G.984.x/G.988
PMD class (ITU G.984.2)	N1, N2, E1, E2	N1, N2, E1, E2	B+	B+	B+	B+	B+	B+
Physical distance support (km)	20	20	20	20	20	20	20	20
Wavelength support (nm)(DS/US)	1577/1270	1577/1270	1550 nm (CATV) 1490/1310	1490/1310	1490/1310	1490/1310	1490/1310	1490/1310
Speed (Gbps)(DS/US)	9.95328/9.95328	9.95328/9.95328	2.488/1.244	2.488/1.244	2.488/1.244	2.488/1.244	2.488/1.244	2.488/1.244
T-CONTs/GEM ports	8/32	32/256	8/32	8/32	8/32	8/32	8/32	8/32
Priority queue per T-CONT	8	8	8	8	8	8	8	8
Dynamic Bandwidth Allocation (DBA)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Forward Error Correction (FEC) DS/US	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Advanced Encryption Standard (AES) DS	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
GEM header removal/insertion and data extraction/segmentation	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Voice								
SIP v2 (RFC 3261)	-	-	Yes	Yes	Yes	Yes	-	-
SDP (RFC 2327)	-	-	Yes	Yes	Yes	Yes	-	-
RTP (RFC 1889)	-	-	Yes	Yes	Yes	Yes	-	-
RTCP (RFC 1890)	-	-	Yes	Yes	Yes	Yes	-	-
CODEC: G.711a/u, G.726-32, G.729	-	-	Yes	Yes	Yes	Yes	-	-
Wireless								
WLAN	-	-	2.4 GHz 2x2 n + 5 GHz 2x2 ac	2.4 GHz 2x2 n + 5 GHz 2x2 ac	2.4 GHz 2x2 n + 5 GHz 2x2 ac	2.4 GHz 2x2 n + 5 GHz 2x2 ac	-	-
Firewall								
Stateful packet inspection	-	Yes	Yes	Yes	Yes	Yes	-	-
Denial of service	-	-	Yes	Yes	Yes	Yes	-	-
VPN								
IPSec (pass-thru)	-	-	Yes	Yes	Yes	Yes	-	-
Network								
IEEE 802.1D transparent bridge	Yes	Yes	Yes	Yes	Yes	Yes	Yes	-
IGMP v1/v2/v3, fast leave/snooping	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
IGMP proxy	-	-	Yes	Yes	Yes	Yes	-	-
MLD v1/v2, fast leave/snooping	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
MLD proxy	-	-	Yes	Yes	Yes	Yes	-	-
MAC filtering	Yes	-	Yes	Yes	Yes	Yes	Yes	Yes
PPPoE	-	-	Yes	Yes	Yes	Yes	-	-
DHCP client/server/relay	-	-	Yes	Yes	Yes	Yes	-	-
PPPoA	-	-	Yes	Yes	Yes	Yes	-	-
Multi-to-multi NAT	-	-	Yes	Yes	Yes	Yes	-	-
Dynamic DNS (DDNS)	-	-	Yes	Yes	Yes	Yes	-	-
Management								
Web configurator	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
TR-069/TR-181 i2	-	Yes	Yes	Yes	Yes	Yes	-	-
Remote firmware upgrade	Yes (OMCI)	Yes	Yes	Yes	Yes	Yes	Yes (OMCI)	Yes (OMCI)
SNMP	-	-	Yes	Yes	Yes	Yes	-	-
Physical specifications								
Dimensions (WxDxH)(mm/in.)	195 x 141.5 x 39/ 7.68 x 5.57 x 1.54	130 x 120 x 32/ 5.11 x 4.72 x 1.25	252 x 162 x 32/ 9.92 x 6.38 x 1.26	252 x 162 x 32/ 9.92 x 6.38 x 1.26	171 x 128 x 42/ 6.73 x 5.04 x 1.65	196.9 x 143 x 43.5/ 7.8 x 5.6 x 1.7	109.4 x 83.6 x 36.5/ 4.3 x 3.29 x 1.43	74.7 x 14.06 x 12.4/ 2.94 x 0.55 x 0.48
Weight (g/lb.)	350/0.77	380/0.84	435/0.96	345/0.76	276/0.61	368/0.81	113/0.25	10/0.02

Corporate headquarters

Zyxel Communications Corp.
Tel: +886 3 578 3942
Fax: +886 3 578 2439
Email: sales@zyxel.com.tw
<https://service-provider.zyxel.com>

EMEA

Zyxel Belarus
Tel: +375 25 604 3739

Zyxel Benelux
Tel: +31 23 555 3689
Fax: +31 23 557 8492

Zyxel Bulgaria
Tel: +3592 4443343

Zyxel Czech Republic
Tel: +420 241 091 350
Hotline: +420 241 774 665
Fax: +420 241 091 359

Zyxel Denmark
Tel: +45 39 55 07 00
Fax: +45 39 55 07 07

Zyxel Finland
Tel: +358 9 4780 8400

Zyxel France
Tel: +33 (0) 4 72 52 97 97
Fax: +33 (0) 4 72 52 19 20

Zyxel Germany
Tel: +49 (0) 2405 6909 0
Fax: +49 (0) 2405 6909 99

Zyxel Hungary & SEE
Tel: +36 1 848 0690

Zyxel Iberia
Tel: +34 911 792 100

Zyxel Italy
Tel: +39 011 2308000

Zyxel Kazakhstan
Tel: +7 727 350 5683
Fax: +7 727 2590 689

Zyxel Israel
Email: da.sales@zyxel.com.tw

Zyxel Egypt
Email: da.sales@zyxel.com.tw

Zyxel Norway
Tel: +47 22 80 61 80
Fax: +47 22 80 61 81

Zyxel Poland
Tel: +48 223 338 250
Hotline: +48 226 521 626
Fax: +48 223 338 251

Zyxel Romania
Tel: +40 31 0809 888
Fax: +40 31 0809 890

Zyxel Russia
Tel: +7 499 705 6106

Zyxel Slovakia
Tel: +421 220 861 847
Hotline: +421 220 861 848
Fax: +421 243 193 990

Zyxel Sweden
Tel: +46 8 55 77 60 60
Fax: +46 8 55 77 60 61
Email: isp@zyxel.eu

Zyxel Switzerland
Tel: +41 (0) 44 806 51 00
Fax: +41 (0) 44 806 52 00

Zyxel Turkey
Tel: +90 212 314 18 00
Fax: +90 212 220 25 26

Zyxel UK
Tel: +44 (0) 118 9121 700
Fax: +44 (0) 118 9797 277

Zyxel Ukraine
Tel: +380 89 323 9959

APAC

Zyxel India
Tel: +91 11 4760 8800
Fax: +91 11 4052 3393
Email: info@zyxel.in

Zyxel Malaysia
Email: apac.sales@zyxel.com.tw

Zyxel Philippine
Email: apac.sales@zyxel.com.tw

Zyxel Singapore
Email: apac.sales@zyxel.com.tw

Zyxel Taiwan (Taipei)
Tel: +886 2 2739 9889
Fax: +886 2 8913 1896
Email: sales_tw@zyxel.com.tw

Zyxel Thailand
Tel: +66 (0) 2831 5315
Fax: +66 (0) 2831 5395
Email: info@zyxel.co.th

Zyxel Vietnam
Email: apac.sales@zyxel.com.tw

Zyxel Japan
Email: apac.sales@zyxel.com.tw

Zyxel Australia
Email: apac.sales@zyxel.com.tw

North America

Zyxel USA
Tel: +1 714 632 0882
+1 800 255 4101 (free)
Fax: +1 714 632 0858
Email: keyaccount@zyxel.com

Zyxel Canada
Tel: +1 714 632 0882
+1 800 255 4101 (free)
Fax: +1 714 632 0858
Email: keyaccount@zyxel.com

South America

Zyxel Brazil
Tel: +55 (11) 3373 7470
Fax: +55 (11) 3373 7510
Email: comercial@zyxel.com.br

Zyxel Bolivia
Email: sa.sales@zyxel.com.tw

Zyxel Chile
Email: sa.sales@zyxel.com.tw

Zyxel Colombia
Email: sa.sales@zyxel.com.tw

Zyxel Ecuador
Email: sa.sales@zyxel.com.tw

Zyxel Paraguay
Email: sa.sales@zyxel.com.tw

Zyxel Peru
Email: sa.sales@zyxel.com.tw

Zyxel Uruguay
Email: sa.sales@zyxel.com.tw

Zyxel Argentina
Email: sa.sales@zyxel.com.tw

For more product information, visit us on the web at
<https://service-provider.zyxel.com>

Copyright © 2022 Zyxel and/or its affiliates. All rights reserved.
All specifications are subject to change without notice.

