

# Agilent J-BERT M8020A High-Performance BERT


*Master Your Next Designs*

Preliminary Data Sheet Version 0.8



## Key features:

- Data rates up to 8.5 and 16 Gb/s expandable to 32 Gb/s
- 1 to 4 BERT channels in a 5-slot AXIe chassis
- Integrated and calibrated jitter injection: RJ, PJ1, PJ2, SJ, BUJ, sinusoidal interference (common-mode and differential-mode), SSC (triangular and arbitrary, residual) and F/2
- 8 tap de-emphasis, positive and negative
- Interactive link training for PCI Express
- Built-in clock recovery and equalization

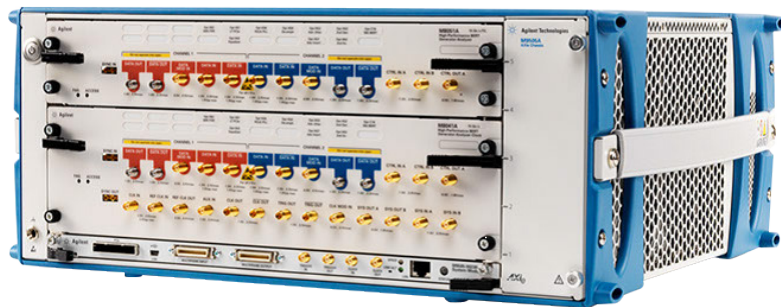

## Description

The high-performance Agilent J-BERT M8020A enables fast and accurate receiver characterization of single- and multi-lane devices running up to 16 or 32 Gb/s.

With today's highest level of integration, the M8020A streamlines your test setup. In addition, automated in situ calibration of signal conditions ensures accurate and repeatable measurements. And, through interactive link training, it can behave like your DUT's link partner. All in all, the J-BERT M8020A will accelerate insight into your design.



## M8000 Series of BER Test Solutions

Simplified time-efficient testing is essential when you are developing next-generation computer, consumer, or communication devices.

The Agilent M8000 Series is a highly integrated BER test solution for physical layer characterization, validation, and compliance testing.

With support for a wide range of data rates and standards, the M8000 Series provides accurate, reliable results that accelerate your insight into the performance margins of high-speed digital devices.

Shift into high gear with the M8000 Series and take the design verification express lane.

**Highly integrated and scalable for simplified, time efficient testing**

**M8000 Series of BER Test Solutions**

- 16 Gb/s J-BERT M8020A 1 - 2 channel
- 16 Gb/s J-BERT M8020A 4 channels
- 32 Gb/s J-BERT M8020A 1 channel

- Interactive link training
- Analyzer equalization and clock recovery
- In situ calibration, de-embedding
- Expandable to higher data rates up to 32 Gb/s
- Higher integration: 16G BERT with 1-4 channels, jitter, de-emphasis

J-BERT N4903B, 1-2 channel      ParBERT 81250, multi-channel

**Industry-leading J-BERT N4903B and ParBERT 81250A**

Figure 1. The M8000 Series BER Test Solution is highly integrated and scalable to address the test challenges of the next generation of high-speed digital receiver test.

# J-BERT M8020A high-performance BERT

Enabling fast, accurate receiver characterization of single- and multi-lane devices running up to 16 or 32 Gb/s.

## Highest level of integration for streamlined test setups

With J-BERT M8020A all receiver (RX) test capabilities are built-in: jitter sources, common- and differential-mode level interference, and de-emphasis to emulate the transmitter (TX) of the device under test (DUT). In addition M8020A provides a built-in reference clock multiplier for synchronization of the BERT pattern generator with the DUT's reference clock which can carry spread spectrum clocking (SSC). On the analyzer side an equalizer to open closed eyes and a clock recovery with adjustable loop bandwidth for the analyzer is built-in.

With this high level of integration a receiver test set-up with M8020A is now much easier to connect and more robust. Set up and debug time is shortened, calibration is simpler and the frequency of recalibration is lower, resulting in more efficient use of overall test time.

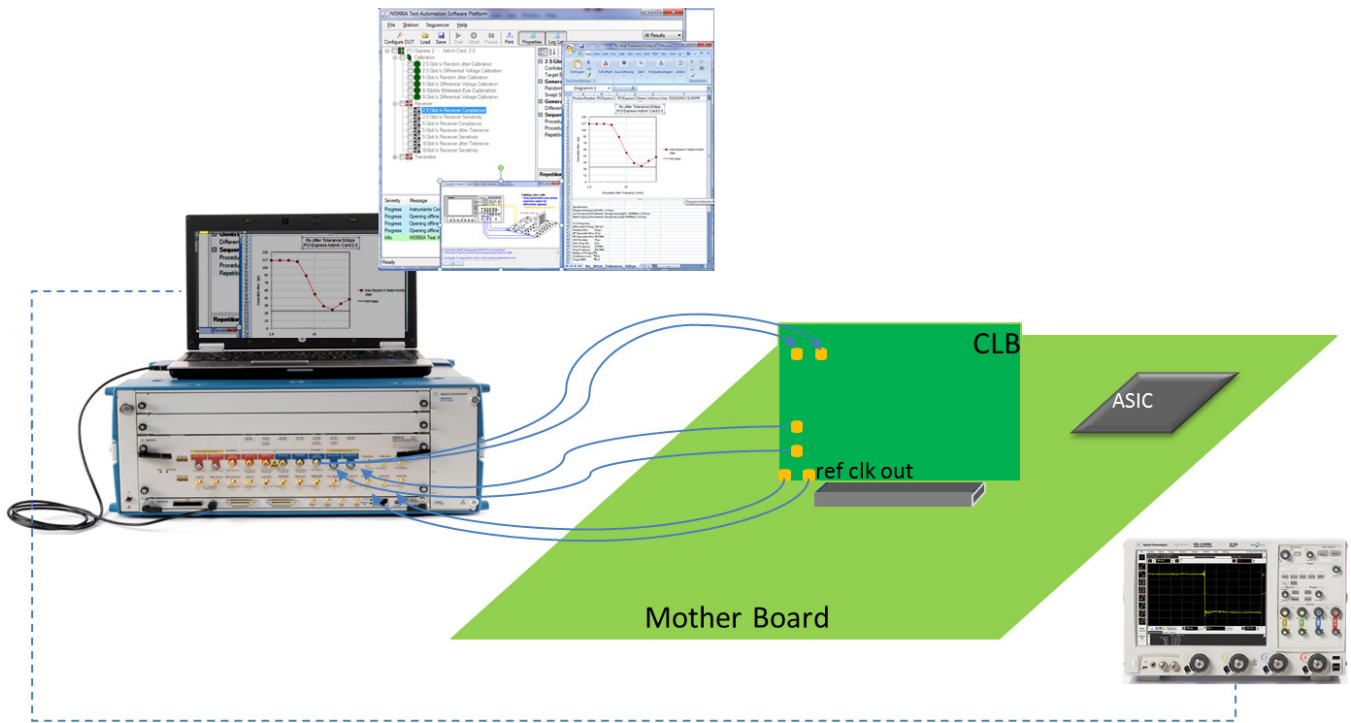


Figure 2: M8020A streamlines complex receiver test setups. The example shows a PCIe 3 (8 GT/s) mother board RX test with J-BERT M8020A connected via a compliance load board (CLB). J-BERT M8020A provides built-in de-emphasis, jitter sources, common-mode and differential mode interference (CMI, DMI), reference clock multiplier, clock recovery and continuous time linear equalizer (CTLE) – everything that is needed is built-in and calibrated.

### In situ calibration for the most accurate and repeatable results

At data rates above 5 Gb/s, the influence of the channel (PC-board, cable, connectors) between transmitter (TX) and receiver (RX) is no longer negligible. The reference point for the RX specification moves to the RX input, the test set-up typically has to contain a certain channel characteristic, often an ISI channel, as well. To accurately inject a defined stress condition to the RX in situ calibration is required: at that same exact point where the receiver under test has to be connected during test, a reference load is connected instead and the generated signal is measured. This allows calibration of the test signal at that point where the specification applies by adjusting the instrument generated stress such as jitter in a way that the target signal with all its ingredients is achieved.

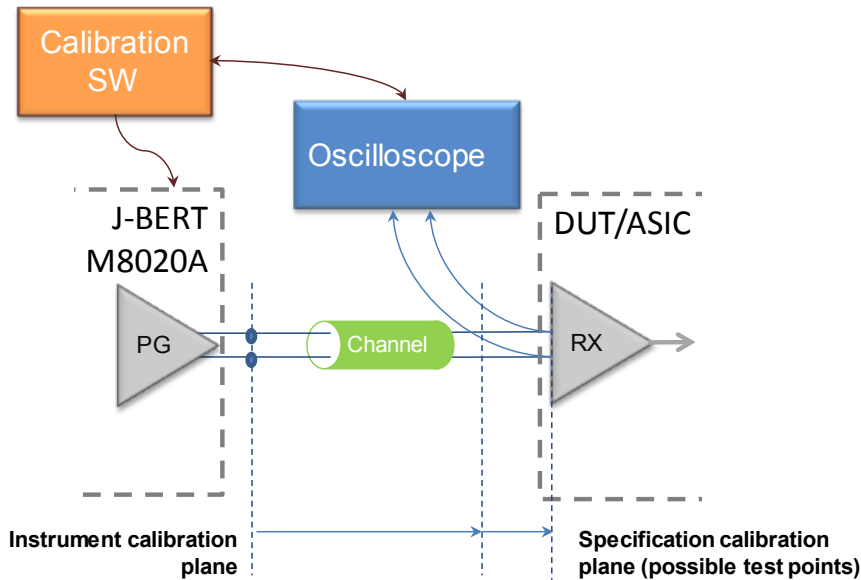


Figure 3. With increasing bit rates the calibration plane for the receiver stress conditions moves closer to the receiver inputs. J-BERT M8020A supports in situ calibration to achieve higher accuracy of the signal and stress conditions at the relevant definable test point.

### Interactive link training to fasten loopback

The ever increasing data rate of computer buses and datacom interfaces results in shrinking margins and the necessity to use equalization techniques in transmitters and receivers to compensate for the lossy channels caused by cheap PC board material or long cables. For the latest industry standards, such as PCI Express 3 or 4, SAS 12G, and backplanes such as 100GBASE-KR4, the link partners are required to optimize the TX de-emphasis and RX equalization combination. The RX takes the active part during this procedure. In order to do so, the BERT must be capable to understand the low level protocol and to react accordingly, i.e. change its TX de-emphasis as requested. J-BERT M8020A can behave like a real link partner with its interactive link training capability, initially PCIe is supported.

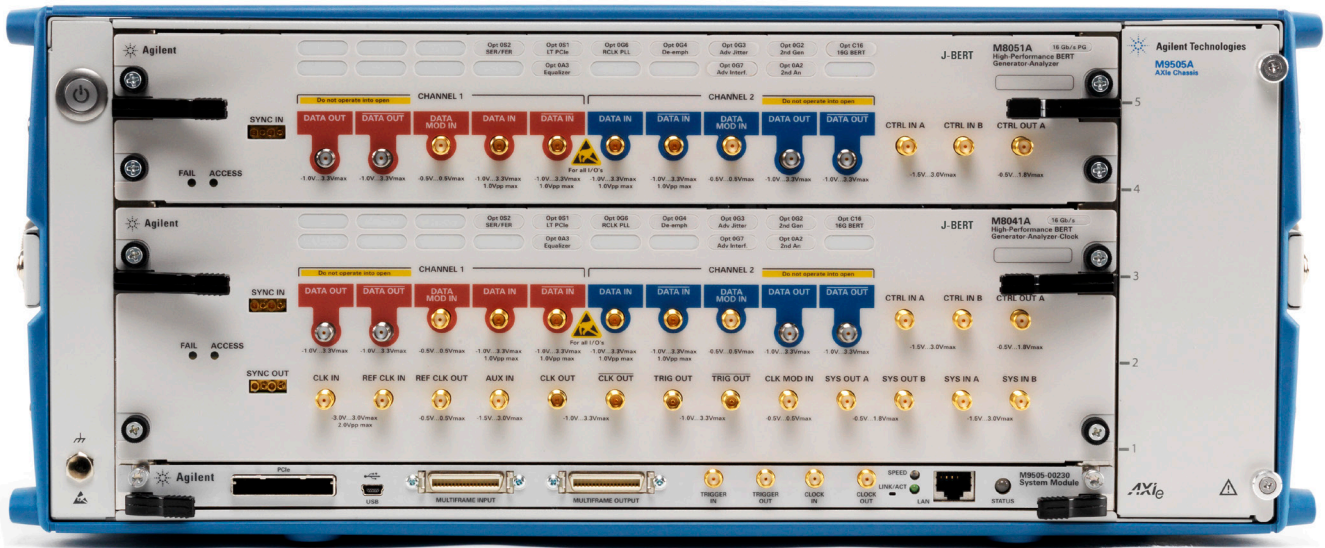


Figure 4. J-BERT M8020A high-performance BERT for accelerated receiver characterization. The configuration shows a 4 channel 16 Gb/s BERT in a 5-slot AXIe chassis consisting of one M8041A module with two BERT channels and clock synthesizer and one M8051A extender module with two additional BERT channels.

## Applications

R&D and test engineers who characterize and verify compliance of chips, devices, boards and systems with serial I/O ports up to 16 Gb/s. The M8020A can be used to test popular serial bus standards, such as PCI Express®, SATA/SAS, DisplayPort, USB Super Speed, MIPI M-PHY, SD UHS-II, Fibre Channel, QPI, memory buses, backplanes, repeaters, active optical cables, Thunderbolt, 10 GbE/SFP+, 100GbE/CFP2.

## Receiver characterization and compliance test

Many multi gigabit serial interfaces use transmitter de-emphasis to compensate for electrical signal degradations caused by printed circuit boards or cables between the transmitter and the receiver ports. R&D and test engineers who need to characterize receiver ports under realistic and worst case conditions require a pattern generator that allows to accurately emulate transmitter de-emphasis and the channel with adjustable multi-tap de-emphasis levels.

## User interface and measurements

The screenshot displays the M8000 graphical user interface. The main window shows a block diagram of a system with various components like 'DATA Jitter 1', 'Data Generation', 'CLK/TRIG Jitter', 'PLL Synthesizer', and 'CDR'. On the right side, there is a 'Properties' panel for 'M1 Channel 2'. The 'Properties' panel includes a table of parameters:

Property	Value	Unit
Location	All	
Functional Block	All	
Property	All	
Unit		dB
Pre-Cursor2	0.00	dB
Pre-Cursor1	3.50	dB
Post-Cursor1	6.00	dB
Post-Cursor2	3.00	dB
Post-Cursor3	0.00	dB
Post-Cursor4	0.00	dB
Post-Cursor5	0.00	dB

Below the table, there is a description for 'Post-Cursor2':  
**Post-Cursor2**  
 Defines the post cursor 2 of a deemphasis signal.

The bottom of the interface includes a 'Module View' tab, a 'Logger' button, a 'Status Indicator' (green dot), and an 'SCPI Panel' button. At the very bottom right, there are three status indicators: 'State' (green), 'RCLK' (grey), and 'CLK1' (green).

Figure 5: The graphical user interface for J-BERT M8020A offers multiple views that can be defined by the user. This example shows the system view on left side and the pattern generator data output parameters at the right. Preliminary GUI screen as of January 2014.

## Accuracy and performance

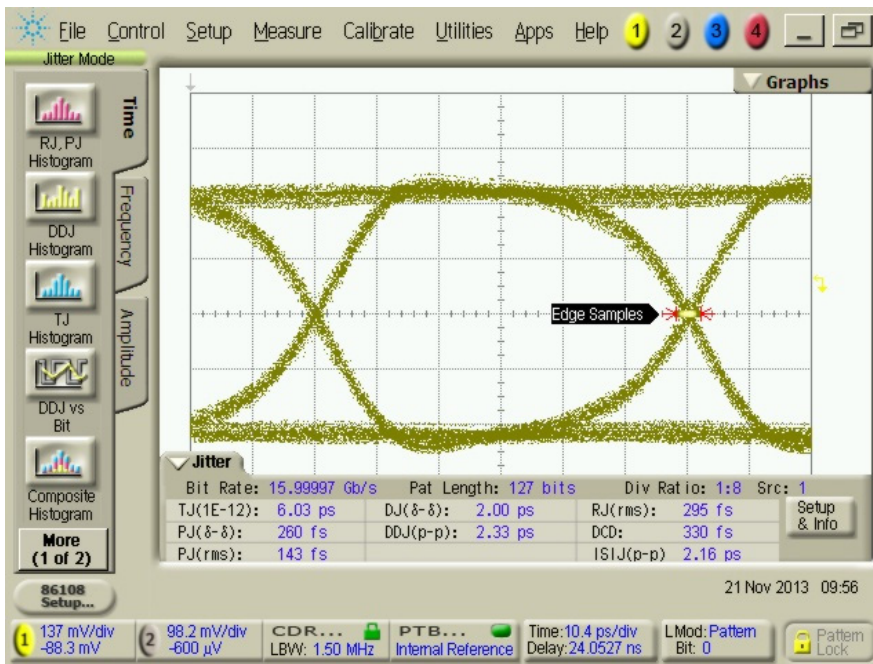


Figure 6. Clean 16.0 Gb/s output signal of J-BERT M8020A with a M8041A 16 Gb/s BERT module using its internal clock source (preliminary).

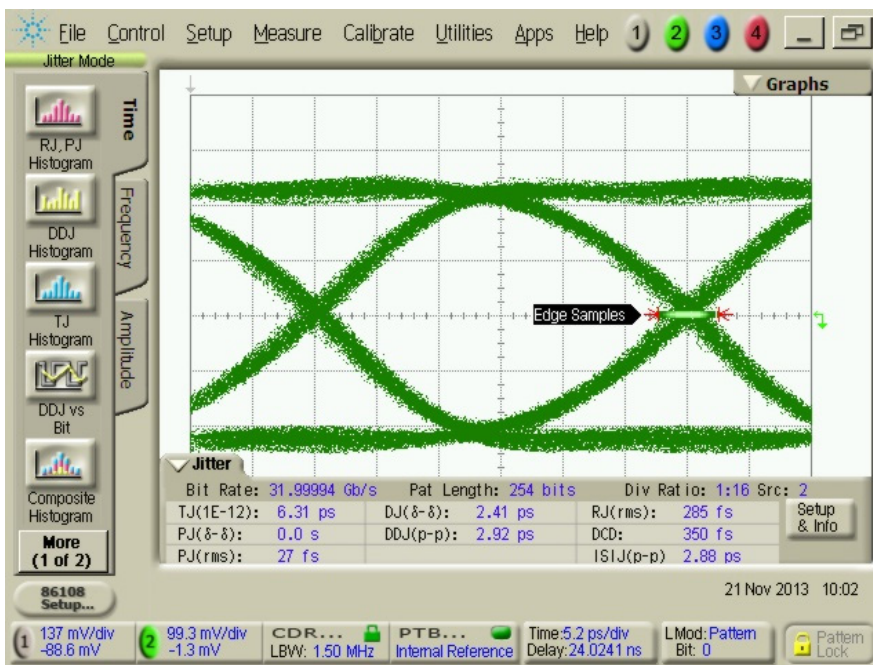


Figure 7. The 32.0 Gb/s output signal shows excellent intrinsic random jitter. This shows the output of the M8061A multiplexer when used with M8041A and its internal clock source (preliminary).

## Specifications for M8041A and M8051A J-BERT high-performance BERT modules

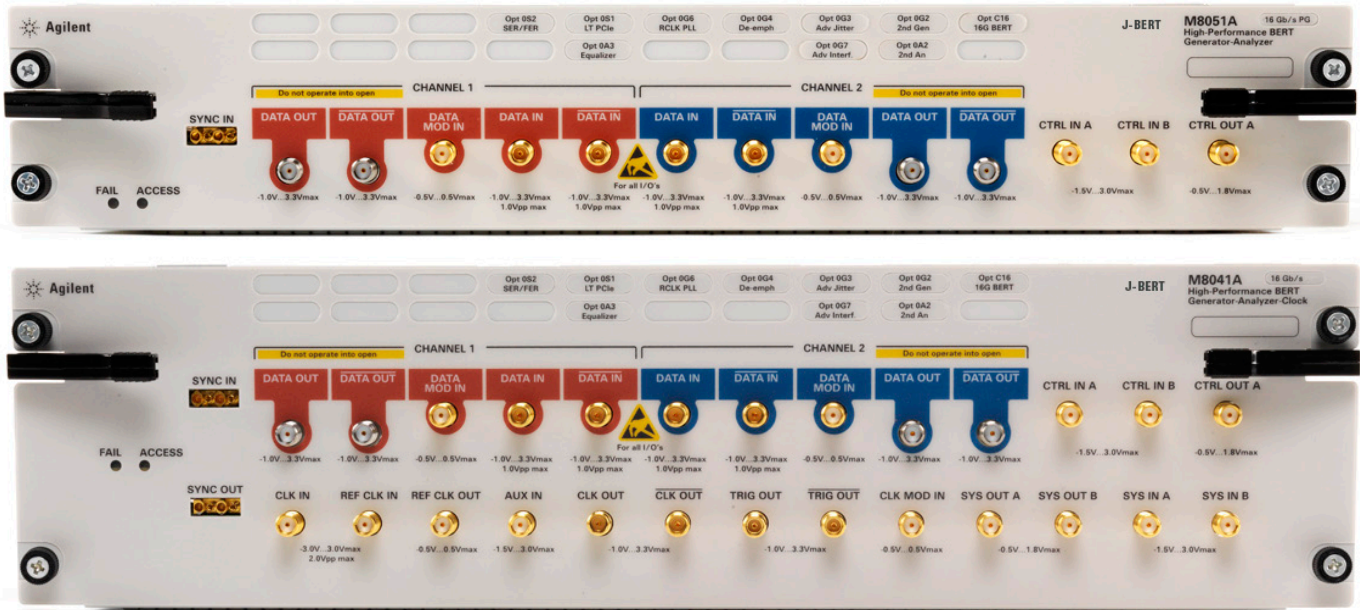


Figure 8: Front panel view of M8041A module (bottom) and M8051A (top).

## Specifications pattern generator

### Data output (DATA OUT 1, DATA OUT 2)

Table 1. Data output characteristics for M8041A and M8051A.

All timing parameters are measured 0.5 V into ground		M8041A	M8051A
Data rate	150 MHz to 8.50 GHz (opt. G08 or C08), 150 MHz to 16.20 GHz (opt. G16 or C16)	X	X
Frequency accuracy	± 15 ppm	X	na
Data format	NRZ	X	X
Channels per module	1 or 2 (second channel requires opt. 0G2)	X	X
Amplitude	50 mV to 1.2 Vpp single ended, 100 mV to 2.4 Vpp differential, 1 mV resolution; addresses LVDS, CML, low-voltage CMOS, others. See table 2 for max. output amplitude	X	X
Amplitude accuracy	5 % ± 5 mV typical (DC)	X	X



Table 1 (CONT'D). Data output characteristics for M8041A and M8051A.

		M8041A	M8051A
Output voltage window	-1 V to +3.0 V	x	x
External termination voltage	-1 V to +3.0 V. For offset > 1.3 V the termination voltage should be $\pm 0.5$ V of offset	x	x
Transition time	15 to 20 ps typical (20%-80%)	x	x
Crossing point	Adjustable from 30% to 70%	x	x
Total intrinsic jitter <sup>1</sup>	8 ps p-p typical	x	x
Random intrinsic jitter <sup>2</sup>	300 fs rms typical	x	x
Data delay range	0 to 10 ns	x	x
Data delay resolution	100 fs	x	x
Electrical idle transition time	Output transitions from full swing signal to 0 V amplitude and vice versa at constant offset within 4 ns typical. Electrical idle can be controlled from sequencer or external input.	x	x
Termination	50 $\Omega$ into GND or external termination voltage. Do not operate into open. Unused outputs must be terminated into termination voltage.	x	x
Termination modes	Balanced/unbalanced DC/AC coupling	x	x
Connectors	3.5 mm, female	x	x

1. At 16 Gb/s PRBS 2<sup>15</sup>-1, BER 10<sup>-12</sup>, with internal clock.

2. At 16 Gb/s and clock pattern.

Table 2. Data output amplitude maximum (single ended) in presence of DMI, CMI, offset voltage.

Offset < 1.9 V	Offset > 1.9 V	CMI	DMI
1.2 Vpp	0.9 Vpp	disabled	disabled
0.9 Vpp	0.675 Vpp	disabled	enabled
0.9 Vpp	0.75 Vpp	enabled	disabled
0.675 Vpp	0.562 Vpp	enabled	enabled
0.8 Vpp	0.666 Vpp	enabled	enabled <sup>1</sup>

1. For DMI < 12.5 % of amplitude.

## De-emphasis (DATA OUT)

M8020A provides built-in de-emphasis with positive and negative cursors based on a finite impulse response (FIR) filter.





Table 3. Specifications for multi-tap de-emphasis (requires option 0G4).

		M8041A	M8051A
De-emphasis taps	8 (requires opt. 0G4) can be adjusted for each channel independently	opt. 0G4	opt. 0G4
Pre-cursor 2	± 6.0 dB	opt. 0G4	opt. 0G4
Pre-cursor 1	± 12.0 dB	opt. 0G4	opt. 0G4
Post-cursor 1	± 20.0 dB	opt. 0G4	opt. 0G4
Post-cursor 2	± 12.0 dB	opt. 0G4	opt. 0G4
Post-cursor 3	± 12.0 dB	opt. 0G4	opt. 0G4
Post-cursor 4	± 6.0 dB	opt. 0G4	opt. 0G4
Post-cursor 5	± 6.0 dB	opt. 0G4	opt. 0G4
De-emphasis tap resolution	± 0.1 dB	opt. 0G4	opt. 0G4
De-emphasis tap accuracy	± 1.0 dB <sup>1</sup>	opt. 0G4	opt. 0G4

1. Sum of all cursors may not exceed  $V_{pp}$  max. The tap accuracy applies for PCIe 3 presets for pre-cursor 1 and post-cursor 1 at 8 Gb/s.

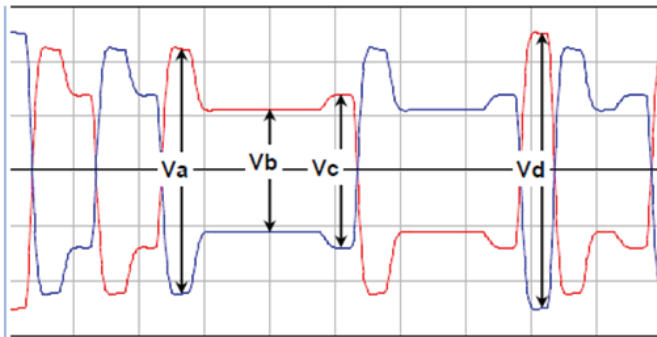

$$\begin{aligned} \text{Post-cursor 1} &= 20\log_{10} V_b/V_a \\ \text{Pre-cursor} &= 20\log_{10} V_c/V_b \\ V_{pp} \text{ nominal} &= 20\log_{10} V_d \end{aligned}$$

Figure 9. Definition of nominal output amplitude and de-emphasis.

## Clock output (CLK OUT)

Table 4. Clock output specifications (M8041A only).

		M8041A	M8051A
Frequency range	150 MHz to 8.50 GHz (opt. G08 or C08), 150 MHz to 16.20 GHz (opt. G16 or C16)	x	no clk
Amplitude	0.1 to 1 V, 5 mV steps, single ended	x	
Output voltage window	-1 V to +3 V <sup>1</sup>	x	
External termination voltage	-1 V to +3.0 V	x	
Transition times	20 ps typical (20%-80%)	x	
Duty cycle	50%, accuracy ± 10%	x	
Clock divider	1, 2, 4, 8, 10, 16, 20, 24, 30, 32, 40, 50, 64, 66, 80. For other dividers use TRG output	x	
Intrinsic random jitter	300 fs rms typical at 16.2 GHz	x	
SSB phase noise	TBD	x	
Termination	50 Ω into GND or external termination voltage. Do not operate into open. Unused outputs must be terminated into termination voltage.	x	
Connectors	3.5 mm, female	x	

1. If  $V_{term}$  is other than 0 V the following applies: high level voltage range =  $V_{term} - 1 V$  to  $3 V$  and low level voltage range =  $-1 V$  to  $V_{term} + 1 V$ .

## Reference clock input (REF CLK IN)

This input on the M8041A module allows locking the system clock to an external reference clock of 10 or 100 MHz instead of the internal oscillator. Output clocks of 8 to 16 GHz.

Table 5. Reference clock input specifications (M8041A only).

		M8041A	M8051A
Input amplitude	0.2 to 1.4 Vpp	x	no
Input frequency	10 MHz to 16.2 GHz	x	
Interface	Single ended. 50 Ω nominal	x	
Connector	SMA, female	x	

Table 6. Predefined settings for reference clock multiplier (M8041A with option 0G6 only).

Ref clock input	Standard	Target data rate	Multiplier	PLL loop BW	M8041A
100 MHz	PCIe 4	16 Gb/s	160	TBD	0G6
100 MHz	PCIe 3	8 Gb/s	80	5 MHz	0G6
100 MHz	PCIe 2	5 Gb/s	50	5 MHz	0G6
100 MHz	PCIe 1	2.5 Gb/s	25	5 MHz	0G6
26 MHz to 52 MHz	SD UHS-II	390 Mb/s to 780 Mb/s	15	2 MHz	0G6
26 MHz to 52 MHz	SD UHS-II	780 MHz to 1.56 Gb/s	30	2 MHz	0G6
52 MHz to 104 MHz	SD UHS-II Gen 2	1.56 Gb/s to 3.12 Gb/s	30	TBD	0G6
52 MHz to 104 MHz	SD UHS-II Gen 2	3.12 Gb/s to 6.24 Gb/s	30	TBD	0G6
19.2 MHz	MIPI M-PHY	1.248/ 1.4592/ 2.496/ 2.9184/ 4.992/ 5.8368 Gb/s	TBD	2 MHz	0G6
26 MHz	MIPI M-PHY	1.248/ 1.456/ 2.496/ 2.912/ 4.992/ 5.824 Gb/s	TBD	2 MHz	0G6
38.4 MHz	MIPI M-PHY	1.248/ 1.4592/ 2.496/ 2.9184/ 4.992/ 5.8368 Gb/s	TBD	2 MHz	0G6
52 MHz	MIPI M-PHY	1.248/ 1.456/ 2.496/ 2.912/ 4.992/ 5.824 Gb/s	TBD	2 MHz	0G6

## Supplementary inputs and outputs of M8041A and M8051A

### Trigger output (TRG OUT)

Table 7. Trigger output specifications (M8041A only).

		M8041A	M8051A
Amplitude	0.1 to 1 V <sub>pp</sub> single ended; 0.2 to 2 V <sub>pp</sub> differential	x	no trg
Output voltage window	-1 to 3 V <sup>1</sup>	x	
External termination voltage	-1 to 3 V	x	
Interface	Differential, 50 Ω	x	
Connector	3.5 mm, female	x	

1. If  $V_{term}$  is other than 0 V the following applies: high level voltage range =  $V_{term} - 1 V$  to 3 V and low level voltage range =  $-1 V$  to  $V_{term} + 1 V$ .

### Reference clock output (REF CLK OUT)

Outputs a 10 MHz clock, 1 V<sub>pp</sub> single ended into 50 Ω. M8041A only.  
Connector: SMA, female.

### Clock input (CLK IN)

For future use. For M8041A only.

### Control input A and B (CTRL IN A, CTRL IN B)

Functionality of each input can be selected as: sequence trigger, error add input.

Table 8. Control input specifications (M8041A and M8051A).

		M8041A	M8051A
Input voltage	-1 V to +3 V	x	x
Termination voltage	-1 V to +3 V	x	x
Threshold voltage	-1 V to +3 V	x	x
Connector	SMA, female	x	x

### Control output A (CTRL OUT A)

Outputs a pulse in case of an error.

Table 9. Control output specifications (M8041A and M8051A).

		M8041A	M8051A
Amplitude <sup>1</sup>	0.1 to 2 V	x	x
Output voltage <sup>1</sup>	-0.5 to 1.75 V	x	x
Connector	SMA, female	x	x

1. When terminated with 50 Ω into GND. Doubles into open.

### Synchronization input and output (SYNC IN, SYNC OUT)

The Sync output on M8041A: clock output to synchronize multiple modules to a common clock.

The Sync input is a clock input on M8051A module to synchronize additional modules to a common clock.

A sync cable is delivered with each M8051A module by default.

## System input A/B and auxiliary input (AUX IN)

Control inputs to synchronize events for the pattern sequencer.  
Auxiliary input: for future use. For M8041A only.

Table 10. System input and auxiliary input specifications (M8041A only)

		M8041A	M8051A
Input voltage	-1 V to +3 V	x	no
Termination voltage	-1 V to +3 V	x	
Threshold voltage	-1 V to +3 V	x	
Connector	SMA, female	x	

## System output A/B (SYS IN A/B and SYS OUT A/B)

Control outputs to synchronize events for the pattern sequencer.

Table 11. System output specifications (M8041A only).

		M8041A	M8051A
Amplitude <sup>1</sup>	0.1 to 2 V	x	no
Output voltage <sup>1</sup>	-0.5 to 1.75 V	x	
Connector	SMA, female	x	

1. When terminated with 50  $\Omega$  into GND. Doubles into open.


## Jitter tolerance test specifications

M8020A provides built-in calibrated jitter sources designed to cover receiver test needs for most of the popular multi-gigabit standards such as: PCIe Express, USB, MIPI, SATA, DisplayPort, CPU frontside buses, CEI, 10GbE, 100GbE, SFP+, QSFP, CFP2/4, etc. M8020A provides automated jitter tolerance measurements. A library of pre-defined compliance curves is provided.

Table 12. Specifications for low frequency sinusoidal jitter (requires option 0G3 advanced jitter sources).

		M8041A	M8051A
Low frequency sinusoidal jitter (LF SJ) (generated by IQ modulator)	Amplitude range	0 to 1000 UI. For frequencies between 10 kHz and 5 MHz see figure 10 for maximum LF SJ. Formula for $f_{mod} > 10$ kHz is TBD.	opt. 0G3
	Frequency	100 Hz to 5 MHz	opt. 0G3
	Jitter amplitude accuracy	$\pm 2\% \pm 1$ ps typical	
	Adjustable	For each data channel independently, same LF SJ for clock and trigger	

### Low frequency sinusoidal jitter

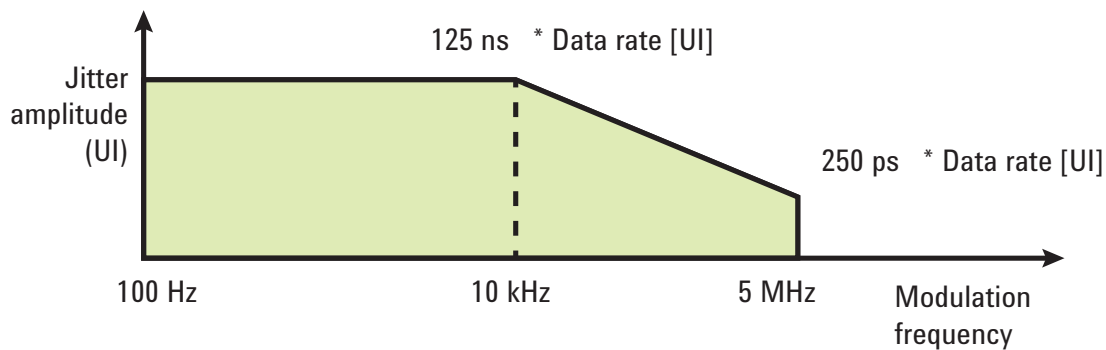

Data rate	Max UI at modulation frequency 100 Hz to 10 kHz	Max UI at modulation frequency 5 MHz
8.1 Gb/s to 16.2 Gb/s	1000 to 2000 UI	2 to 4 UI
4.05 Gb/s to 8.1 Gb/s	500 to 1000 UI	1 to 2 UI
2.025 Gb/s to 4.05 Gb/s	250 to 500 UI	0.5 to 1 UI
1.0125 Gb/s to 2.025 Gb/s	125 to 250 UI	0.25 to 0.5 UI
506.25 Mb/s to 1.0125 Gb/s	62.5 to 1.25 UI	0.125 to 0.25 UI
253.125 Mb/s to 506.25 Mb/s	31.25 to 62.5 UI	0.0625 to 0.125 UI
126.5625 Mb/s to 253.125 Mb/s	15.625 to 31.25 UI	0.03125 to 0.0625 UI

Figure 10. Low frequency sinusoidal jitter maximum depends on data rate and modulation frequency.

Table 13. Specifications for high frequency periodic jitter, random jitter, spectrally distributed random jitter, bounded uncorrelated jitter, Clock/2 jitter (requires option 0G3 advanced jitter sources).

			M8041A	M8051A
High frequency jitter (generated by delay line)	Range	1 UI p-p for data rates > 1 Gb/s note: this is max sum of RJ, HF-PJ1 and HF-PJ, spectral RJ, external delay modulation and BUJ.	opt. 0G3	opt. 0G3
	Adjustable	For each channel independently		
High frequency periodic jitter (HF PJ1 and HF PJ2)	Range	See HF jitter above <sup>1</sup>	opt. 0G3	opt. 0G3
	Frequency	1 kHz to 500 MHz two tone possible. Sweep.		
	Jitter amplitude accuracy	± 10% typical		
	Adjustable	For each channel independently		
Random jitter (RJ)	Range	0 to 72 mUI rms (1 UI p-p max.) <sup>1</sup>	opt. 0G3	opt. 0G3
	Jitter amplitude accuracy	± 10% typical		
	Filters	high-pass: 10 MHz, low-pass: 100 MHz, 500 MHz		
	Adjustable	For each channel independently		
Spectrally distributed RJ according to PCIe 2 (sRJ) <sup>2</sup>	Range	0 to 72 mUI rms (1 UI p-p), <sup>1</sup>	opt. 0G3	opt. 0G3
	Frequency	LF: 0.01 to 1.5 MHz, HF: 1.5 to 100 MHz		
	Jitter amplitude accuracy	± 10 % typical		
	Adjustable	For each channel independently		
Bounded uncorrelated jitter (BUJ)	Range	See HF jitter above <sup>1</sup>	opt. 0G3	opt. 0G3
	PRBS polynomials	TBD		
	Filters	TBD		
	Jitter amplitude accuracy	TBD		
	Adjustable	For each channel independently		
Clock/2 jitter	Range	± 20 ps or ± 0.1 UI typical (whatever is less). Note: this means that first eye can be up to 20 ps longer or shorter than subsequent eye.		
	Adjustable	For each channel independently		

1. 1 UI is the maximum sum of RJ, HF-PJ1 and HF-PJ2, spectral RJ, external delay modulation and BUJ.

2. Spectrally distributed jitter is mutually exclusive with RJ and BUJ.

Table 14. Specifications for Spread Spectrum Clocking (SSC) (requires opt. 0G3: advanced jitter sources).

			M8041A	M8051A
SSC (Spread Spectrum Clock)	Range	± 5000 ppm	opt. 0G3	na
	Frequency	30 kHz to 100 kHz		
	Modulation	Triangular and arbitrary modulation		
	SSC amplitude accuracy	TBD		
	Outputs	Can be turned on/off independently for CLK OUT, DATA OUT 1, DATA OUT 2, TRG OUT		
Residual SSC (@ PCIe2)	Range	0 to 100 ps	opt. 0G3	opt. 0G3
	Frequency	30 to 33 kHz		
	Outputs	Can be turned on/off independently for DATA OUT 1, DATA OUT 2		

Table 15. Specifications for external jitter modulation (DATA MOD IN 1 and 2, CLK MOD IN).

M8041A allows individual jitter injection for data 1, data 2 and clock. M8051A for data 1 and data 2. The option 0G3 is not needed.

			M8041A	M8051A
External jitter - data modulation input 1 and 2	Description	Input for delay modulation for each DATA OUT individually.	x	x
	Range	Up to 1 UI <sup>1</sup> , 1 Vpp max		
	Frequency	Up to 1 GHz		
External jitter - clock modulation input	Description	Input for delay modulation for the TRG OUT and CLK OUT. Affects both.	x	na
	Range	Up to 1 UI, 1 Vpp max		
	Frequency	Up to 1 GHz		
Connectors		SMA, female	x	x

1. 1UI is the maximum sum of RJ, HF-PJ1 and HF-PJ2, spectral RJ, external delay modulation and BUJ.

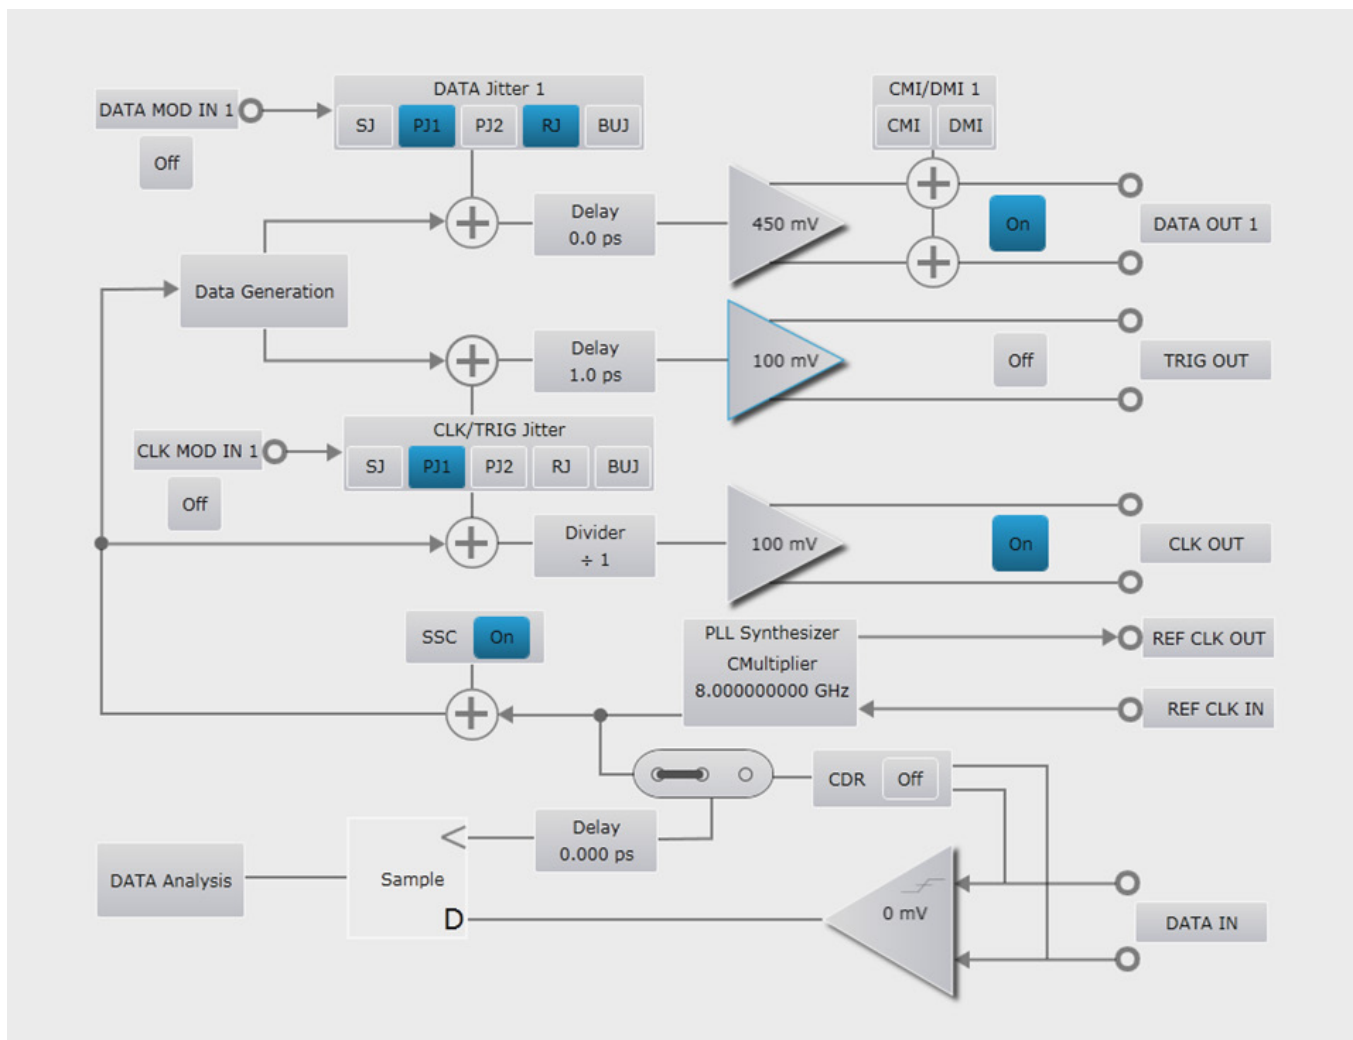


Figure 11. J-BERT M8020A system view for 1 channel, preliminary version.



## ISI channels



External ISI channels are available to emulate channel loss. Agilent offers dedicated compliant ISI channels for DisplayPort, PCIe3, and SATA. M8048A is offered in addition. For detailed specifications see M8048A data sheet.

**M8041A-001 ISI Channels provides four short traces:**

7.7" (196 mm), 9.4" (240 mm), 11.12" (282 mm), 12.8" (324 mm)

**M8041A.002 ISI Channels provides four long traces:**

14.8" (366 mm), 16.1" (408 mm), 24.4" (620 mm), 34.4" (874 mm)

## Level interference injection

Common mode and differential mode level interference can be generated internally to test common mode rejection of a receiver and vertical eye closure tolerance. Simultaneous injection of CMI and DMI is possible.

Table 16. Specifications for sinusoidal interference (CMI, DMI) (requires option 0G7).

			M8041A	M8051A
Differential mode interference (DMI)	Amplitude <sup>2</sup>	Max. 30% of output amplitude <sup>1</sup>	opt 0G7	opt 0G7
	Amplitude accuracy	±10 mV ±10% typ		
Common mode interference (CMI)	Amplitude <sup>2</sup>	Up to 400 mV <sup>1</sup>	opt 0G7	opt 0G7
	Amplitude accuracy	±10 mV ±10% typ		
	Frequency ranges	LF: 10 MHz to 1 GHz, sinusoidal only HF: 1 GHz to 6 GHz, sinusoidal only		
	Simultaneous injection of CMI and DMI	Yes		

1. The maximum output amplitude decreases when CMI or DMI is enabled. See table 2.
2. For each channel independently.

## Pattern, sequencer and interactive link training

Table 17. Specifications for pattern, sequencer and link training.

		M8041A	M8051A
PRBS <sup>1</sup>	2 <sup>n</sup> -1, n= 7, 10, 11, 15, 23, 23p <sup>3</sup> , 31	x	x
PRBS	2 <sup>n</sup> , n = 7, 10, 11, 13, 15, 23	x	x
Mark density	Mark density: PRBS 1/8 to 7/8	x	x
Zero substitution	Yes	x	x
Export/Import	Patterns from N4900 series can be imported	x	x
Pattern library	Yes	x	x
User definable memory	4 Gbit/channel <sup>2</sup> 2 Mbit/channel	x	x
Interactive link training	Link training state machine (LTSSM) for PCIe 2/3 <sup>2</sup> Includes speed and de-emphasis negotiation.	opt. 0S1	na
Coding	8B/10B, 128B/130B, 128B/132B, binary, hex	x	x
Vector/sequence granularity	64/80/130/132 bit	x	x
Pattern capture	Yes <sup>2</sup>	C08/C16	C08/C16
Pattern sequencer	3 counted loop levels, 1 infinite loop, # of blocks: TBD.	x	x

1. Note: polarity is inverted compared to ParBERT and J-BERT N4903A/B and N49xx models.
2. For availability: contact factory. Free software update (interactive link training requires opt. 0S1).
3. Modified compliance pattern for PCIe3.

## Analyzer/error detector

Each analyzer channel includes a clock recovery.

For the following functions a separate module option is required:

- Equalizer CTLE option (option 0A3 for M8041A and M8051A)
- SER/FER analysis (option 0S2 for M8041A only, applies for all analyzers channels in the same clock group): this option provides handling of 8B/10B coded, 128B/130B coded SKPOS. Automatic handling of running disparity changes for 8B/10B coded patterns. Up to 4 filler symbols can be defined. No dead time while filtering filler symbols. Ignores changes of length of 128/130 bit coded Skip Ordered Sets for PCIe. Counters for SER/FER filler symbols.

Table 18. Specifications for analyzer / error detector (Option C08 or C16).

		M8041A	M8051A
Data rate	150 MHz to 8.50 GHz (opt. C08), 150 MHz to 16.20 GHz (opt. C16)	x	x
Channels per module	1 or 2 (opt. 0A2)	x	x
Data format	NRZ, single ended and differential	x	x
Input sensitivity <sup>1</sup>	< 50 mV	x	x
Timing resolution	1 mUI	x	x
Input bandwidth	TBD	x	x
CTLE	Yes	opt. 0A3	opt. 0A3
Clock data recovery	Yes for each input channel	x	x
Adjustable loop bandwidth	Data rate /10000 to data rate/800 (maximum is 20 MHz)	x	x
Sampling point	Manual and automatic. Finds optimum voltage threshold and delay of the sampling point.	x	x
Decision threshold range	TBD	x	x
Phase margin	TBD	x	x
BER	Accumulated	x	x
Symbol/frame error rate	8B/10B, 128B/130B coded and retimed patterns	opt. 0S2	na
Filtering of filler symbols	Automatic removal of filler symbols. See also description above.	opt. 0S2	na
Interface	Differential: 100 Ω, single ended: 50 Ω, DC coupled	x	x
Data input connectors	3.5 mm, female	x	x

1. Measured with PRBS 2<sup>31</sup>-1 at 16 Gb/s single ended, target BER 10<sup>-12</sup>.

Table 18. Specifications for analyzer / error detector (Option C08 or C16).

		M8041A	M8051A
BERT Scan with RJ, DJ separation	Yes	x	x
Accumulated BER	Yes	x	x
Jitter tolerance	Yes	x	x
Eye contour	Yes <sup>1</sup>	x	x
Quick eye diagram	Yes <sup>1</sup>	x	x
Output level and Q factor	Yes <sup>1</sup>	x	x

1. For availability: contact factory. Free software update.

## User interface and remote control

The M8070A system software for the M8000 Series of BER Test Solutions is required to control M8041A, M8051A and M8061A.

Table 18. User interface and remote control interface.

System software	M8070A
Software licensing	Offline version does not require a license. For controlling the hardware you can choose between a transportable, perpetual license (M8070A-0TP) and a network, perpetual license (M8070A-0NP) . The network license is only recommended when using multiple M8020A setups within one company. When ordering M8020A-BU1 the M8070A-0TP license will be pre-installed on the embedded controller.
Controller requirements	<b>Embedded PC:</b> Choose M8020A-BU1 for a pre-installed embedded controller M9536A including pre-installation of M8070A software and module licenses. Otherwise: M9536A 1-slot AXle embedded controller, choose options for Windows 7 or 8, 16 GB RAM, USB <b>External PC:</b> USB connection recommended between external PC and AXle chassis. Minimum of 8 GB RAM recommended. For PCIe connectivity please refer to list of tested PCs for AXle Technical Note, pub no. 5990-7632EN
Operating system	Microsoft Windows 7 (64 bit) SP1, Windows 8 (64 bit)
Controller connectivity with AXle chassis	USB 2.0 (mini) recommended, PCIe 2.0/8x (only for highest data throughput and desktop PC)
Programming language	SCPI. Not compatible with N4900 series and ParBERT 81250A
Remote control interface	Desktop or Laptop PC: LAN M9536A: LAN
Save/Recall	Yes
Software pre-requisites	Microsoft Win 7 SP1 or 8, Agilent IO library rev. 16.3
Software download	See <a href="http://www.agilent.com/find/m8020a">www.agilent.com/find/m8020a</a> for latest version

## General characteristics and physical dimensions

Table 19. General characteristics for M8041A and M8051A modules.

	M8041A	M8051A
Operating temperature	5 °C to 40 °C (-23 °F to + 104 °F)	
Storage temperature	-40 °C to +70 °C (modules) (-65 °F to + 158 °F)	
Operating humidity	15% to 95% relative humidity at 40°C (non-condensing)	
Storage humidity	24% to 90% relative humidity at 65°C (non-condensing)	
Power requirements	350 W	250 W
Physical dimensions for modules (W x H x D)	3- slot AXIe module: 351 x 92 x 315 mm (13.8 x 3.6 x 12.4 inch)	2-slot AXIe module: 351 x 61 x 315 mm (13.8 x 2.4 x 12.4 inch)
Physical dimensions for M8020A-BU1/-BU2 (W x H x D)	Installed in 5-slot AXIe chassis: 463 x 194 x 446 mm (18.2 x 7.6 x 17.6 inch)	
Weight net	M8041A module: 6.6 kg (14.6 lb) With M8020A-BU1: 24 kg (43.9 lb) With M8020A-BU2: 19.9 kg (53 lb)	M8051A module: 5.0 kg (11.0 lb) In bundle with M8041A and in a 5-slot chassis: 24.9 kg (54.9 lb)
Weight shipping	With M8020A-BU1: 37 kg (82 lb) With M8020A-BU2: 32.5 kg (71.7 lb)	N/A
Recommended recalibration period	1 year	
Warranty period	3 years return to Agilent	
Warm-up time	30 minutes	
Cooling requirements	Slot airflow direction is from right to left. When operating the M8041A/51A choose a location that provides at least 80 mm of clearance at rear, and at least 30 mm of clearance at each side. See also start-up guide for M9502A chassis.	
EMC	IEC 61326-1	
Safety	IEC 61010-1	
Quality management	ISO 9001, 14001	

Supplementary specifications for M8061A multiplexer 2:1 when used with M8041A for operation up to 32 Gb/s

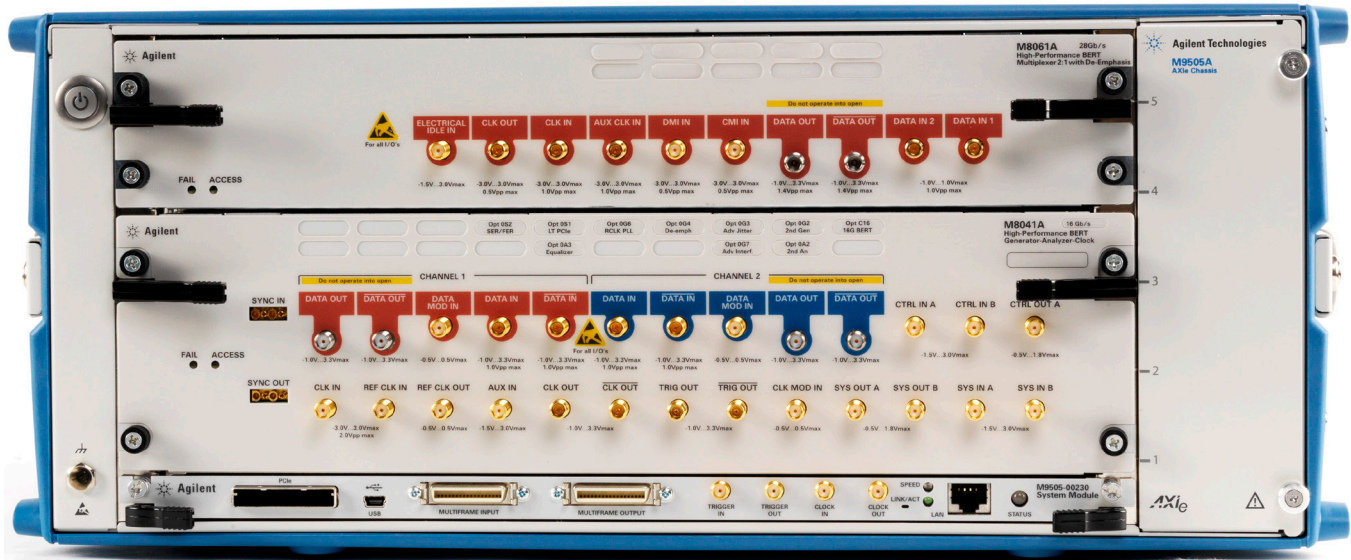


Figure 12: For a 32 Gb/s BERT setup the M8061A multiplexer with de-emphasis option can be used with a two-channel M8041A BERT and the N4877A clock data recovery with de-multiplexer.

The table below lists the supplementary specifications that apply when M8061A is used with M8041A. For all other specifications and features of M8061A please refer to the M8061A datasheet.

Table 20. Supplementary specifications for M8061A multiplexer when used with M8041A.


Data rate	300 MHz to 32.4 GHz
Intrinsic random jitter	350 fs rms typical (@ 28.4 Gbit/s, clock pattern using M8041A as clock source)
DMI, CMI	External DMI and CMI sources are needed
De-emphasis	4 taps (M8061A opt 004) and extension to 8 taps (M8061A opt 008)
Electrical idle	Use M8061A input; SMA connector
Error counting	Full-rate sampling. Needs N4877A 32 Gb/s for 1:2 de-multiplexing and clock recovery. Second analyzer channel of M8041A required. No CTLE.
Measurements	For bit rates > 16.2 Gb/s measurements: receiver measurement only; jitter tolerance, accumulated BER (no BERT Scan with RJ/DJ separation)
Software	Requires M8070A system software for M8000 series
Chassis/connectivity	M8061A module has to be in same chassis as M8041A module. (An external PC is required with just one USB connection to AXIe chassis.)

## Specification assumptions

The specifications in this document describe the instruments warranted performance. Preliminary values are written in *italic*. Non-warranted values are described as typical. All specifications are valid in the specified operating temperature range after the warm-up time and after auto-adjustment. If not otherwise stated all outputs need to be terminated with 50  $\Omega$  to GND. All M8041A and M8051A specifications if not otherwise stated are valid using the recommended cable pair M8041A-801 (2.92 mm, 0.85 m, matched pair).

## Ordering instructions

Please refer to M8020A configuration guide for ordering details.

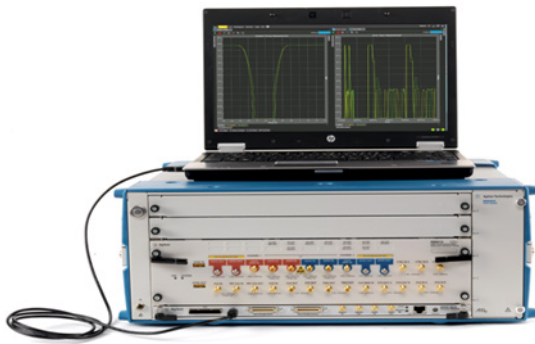


16 Gb/s High-performance BERT, 1-2 channel  
with external PC



with embedded PC



16 Gb/s High-performance BERT, 3-4 channel  
(external PC not shown)

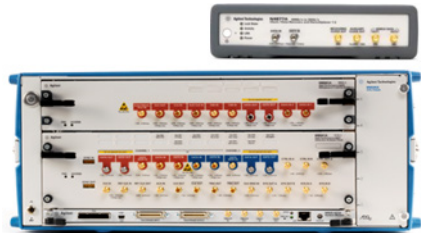

32 Gb/s High-performance BERT, 1 channel  
(external PC not shown) with N4877A CDR

---

Figure 13. Overview of possible J-BERT M8020A configurations.

**Default accessories included with shipment:****M8041A module:** eight 50 Ω terminations, commercial calibration report (“UK6”), certificate of calibration, ESD protection kit.**M8051A module:** four 50 Ω terminations, clock synchronization cable, commercial calibration report (“UK6”), certificate of calibration**M8020A-BU1:** M9505A AXIe chassis with embedded controller, USB cable, getting started guide, AXIe filler panel, power cord**M8020A-BU2:** M9505A AXIe chassis, USB cable, getting started guide, AXIe filler panel, power cord**M8070A:** CD-ROM with M8070A system software**Recommended accessories:**

Matched cable pair, 2.92 mm (f) to 2.92 mm (f), 0.85 m (recommended for each data output of M8041A/51A. This 2.92 mm cable is compatible with 3.5 mm front panel connectors of M8041A/51A.) (two pairs are recommended for connecting M8041A with M8061A)	M8041A-801
ISI channels, four short traces	M8048A-001
ISI channels, four long traces	M8048A-002
Short matched cable pair, SMA (f) to SMA (f) for cascading M8048A ISI channels	M8048A-801
Four SMA cables, unmatched	15442A
Rack-mount kit for AXIe 5-slot chassis M9505A	TBD

**Test automation software with support of M8020A**

Test automation software for PCIe receiver test	N5990A-101
Test automation software for USB receiver test	N5990A-102
Test automation software for SATA receiver test	N5990A-103
PCIe link training suite	N5990A-301

**Warranty, calibration and productivity services:**

Extended 5 year warranty Return-to-Agilent	R1280 (R-51B-001-5Z)
Calibration services (3 and 5 years)	R1282
Productivity assistance	R1380-M8000

## Related Agilent literature

**Data sheets and configuration guides:**

M8048A ISI Channels Data Sheet	5991-3548EN
M8061A Multiplexer with de-emphasis Data Sheet	5991-2506EN
J-BERT N4903B high-performance BERT Data Sheet	5990-3217EN
N4877A and N1075A CDR/Demux Data Sheet	5990-9949EN
M9505A AXIe Chassis 5-slot Data Sheet	5990-6584EN
M8020A Configuration Guide	5991-4032EN

**Application notes:**

Master your MIPI M-PHY receiver test using J-BERT M8020A Application Brief	5991-3959EN
How to pass receiver test according PCI Express CEM specification Application Note	5990-7659EN
Accurate calibration of PCIe 3.0 receiver stress signals Application Note	5990-6599EN
How to test a MIPI M-PHY high-speed receiver Application Note	5991-2848EN



### myAgilent

[www.agilent.com/find/myagilent](http://www.agilent.com/find/myagilent)

A personalized view into the information most relevant to you.



### Three-Year Warranty

[www.agilent.com/find/ThreeYearWarranty](http://www.agilent.com/find/ThreeYearWarranty)

Beyond product specification, changing the ownership experience. Agilent is the only test and measurement company that offers three-year warranty on all instruments, worldwide.



### Agilent Assurance Plans

[www.agilent.com/find/AssurancePlans](http://www.agilent.com/find/AssurancePlans)

Five years of protection and no budgetary surprises to ensure your instruments are operating to specifications and you can continually rely on accurate measurements.



[www.agilent.com/quality](http://www.agilent.com/quality)



Agilent Electronic Measurement Group  
DEKRA Certified ISO 9001:2008  
Quality Management System

### Agilent Channel Partners

[www.agilent.com/find/channelpartners](http://www.agilent.com/find/channelpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with channel partner convenience.

### Agilent Solution Partners

[www.agilent.com/find/solutionpartners](http://www.agilent.com/find/solutionpartners)

Get the best of both worlds: Agilent's measurement expertise and product breadth, combined with solution partner convenience.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:  
[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	(11) 4197 3600
Mexico	01800 5064 800
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 112 929
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 375 8100

### Europe & Middle East

Belgium	32 (0) 2 404 93 40
Denmark	45 45 80 12 15
Finland	358 (0) 10 855 2100
France	0825 010 700*
	*0.125 €/minute
Germany	49 (0) 7031 464 6333
Ireland	1890 924 204
Israel	972-3-9288-504/544
Italy	39 02 92 60 8484
Netherlands	31 (0) 20 547 2111
Spain	34 (91) 631 3300
Sweden	0200-88 22 55
United Kingdom	44 (0) 118 927 6201

For other unlisted countries:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

(BP-01-15-14)

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2014  
Published in USA, February 26, 2014  
5991-3647EN

