




User Manual

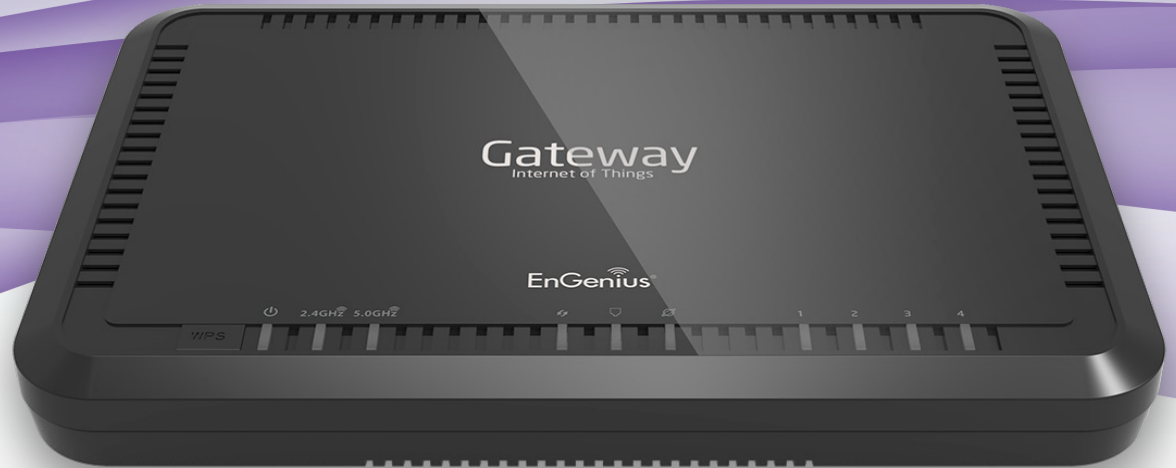

EPG600

version 1.0

IoT Gateway

With High Performance Wi-Fi & Phone Ports

IMPORTANT

To install this Gateway, please refer to the **Quick Start Guide** included in the product packaging.

To activate and use EnShare™, EnTalk™, and EnRoute™ refer to the documents **“Using EnShare™”**, **“Using EnTalk™”**, and **“Using EnRoute™”** also in the product packaging.

Table of Contents

Chapter 1 Product Overview	6	Setting Up Your Internet Connection.....	45
Product Overview	7	Setting Up Your Wireless Security.....	46
Key Features	7	Network Address Translation	47
Applications	10		
Technical Specifications	14	Chapter 4 Cloud Services	48
Software Features	14	EnGenius Cloud Services.....	49
Physical Interface.....	16	EnShare.....	50
Easy Installation.....	17	Setting Up EnShare.....	51
Wall Mounting The Gateway.....	19	EnRoute.....	57
		Setting up EnRoute.....	58
Chapter 2 Web Configuration Interface.....	20	EnRoute Settings.....	59
Logging In	21	Account Settings.....	60
Viewing the Web Configuration Dashboard.....	22	EnTalk.....	61
Home Page	23	EnTalk Setup for Smartphones	62
Web Menus Overview	24	Basic.....	68
Cloud Services.....	24	Account Settings.....	69
EnShare.....	24	Dial Plan Settings	70
EnRoute.....	25		
EnTalk.....	26	Chapter 5 Gateway Management Settings	72
EnViewer	27	System	73
Gateway Management	28	Status	75
System	28	Configuring the LAN (Local Area Network).....	80
Internet.....	29	DHCP Server.....	81
Wireless 2.4 GHz	30	Log	85
Wireless 5 GHz	31	Monitoring Bandwidth Usage	86
Parental Controls	32	Configuring the System Language.....	87
Guest Network.....	33	Configuring IP Cameras	88
IPv6	34	Configuring Internet Settings	90
Firewall	35	Internet	92
VPN.....	36	Status	92
USB Port	37	Configuring Dynamic IP	94
Advanced	38	Configuring Static IP.....	96
Tools	40	Configuring PPPoE	98
Tips.....	42	Configuring PPTP.....	100
		PPTP Settings	101
Chapter 3 Installation Setup Wizard	43	Configuring L2TP	102
Internet Setup Wizard.....	44	L2TP Settings	103

Configuring DS-Lite.....	104
Wireless LAN Setup	105
Configuring Security.....	111
Filters	116
Configuring Wi-Fi Protected Setup.....	118
Configuring the Client List.....	120
Chapter 6 Advanced Settings.....	121
Configuring Advanced Settings.....	122
Setting Up Parental Controls	125
Web Monitor	130
Guest Network.....	131
Enabling the Guest Network	131
Configuring DHCP Server Settings	132
Viewing the DHCP Client List.....	133
IPv6	134
Enabling IPv6 Settings	134
Viewing the IPv6 Connection Status.....	135
Configuring Static IPv6	136
Autoconfiguration	138
Configuring PPPoE	140
Configuring 6to4.....	143
Viewing Local Connections.....	144
Firewall	145
Configuring Basic Settings.....	145
Configuring Advanced Settings	146
Configuring Demilitarized Zone	147
Configuring Denial of Service	148
VPN	149
Configuring a VPN Tunnel Profile	149
Profile Settings	150
Configuring User Settings.....	153
VPN Wizard.....	155
USB Port	161
File Sharing.....	162
Viewing the File Server.....	163
Guest Account.....	165
Viewing DLNA	166
Advanced Network Settings	167
NAT Setup.....	167

Port Mapping Setup	168
Port Forwarding Setup	170
ALG Setup	175
UPnP Setup	176
IGMP Setup.....	177
QoS Setup	178
Routing Setup	181
Tools Setup	184
Configuring the Administrator Account.....	184
System Time Settings.....	186
Unique Identifier (UID).....	188
DDNS Setup.....	189
Diagnosis	191
Upgrading The Gateway's Firmware	192
Backing Up The Gateway's Settings.....	194
Reset to default / Reboot the Gateway.....	195

Glossary	196
-----------------------	------------

Appendix.....	203
Federal Communication Commission Interference Statement	204
Europe - EU Declaration of Conformity	206


How to setup VPN function?	209
VPN Wizard.....	210
Introduction.....	210
VPN Basics.....	210
VPN Profile & Users Setting.....	214
VPN Wizard: IPSec Site-to-Site.....	219
Site A Configuration.....	220
Site B Configuration.....	225
VPN Wizard: IPSec Client to Site.....	231
Site Configuration.....	232
Client Configuration	236
VPN Wizard: L2TP over IPSec.....	242
VPN Server (Gateway Side)	243
VPN Client.....	248
Windows XP	248
Windows Vista.....	260

Windows 7	271
Windows 8	282
VPN Wizard: L2TP	291
VPN Server (Gateway Side)	292
VPN Client.....	297
Windows XP	297
Windows Vista	310
Windows 7	324
Windows 8	337
PPTP	349
VPN Server (Gateway Side)	350
VPN Clients.....	355
Windows XP	355
Windows Vista	368
Windows 7	379
Windows 8	388
VPN Manual Setup (Server Side Only).....	397
IPsec	403
Site A Configuration	404
L2TP over IPsec	409
Site B Configuration	414
Client-to-Site	419
PPTP	429
How to use EnShare function?	434
EnShare.....	435
Guest Account.....	437
File Sharing (EnShare & Samba)	439
Web Browser.....	441
Administrator Access	441
Guest Access	456
How to use FTP function?	459
File Server (FTP).....	460
File Server Configuration.....	461
Client: Windows	462
Client: FileZilla.....	466

How to setup DLNA function?	473
DLNA	474
How to setup Port forwarding function?.....	477
Configuring your Gateway /Router for Port Forwarding.....	478
Setup Overview.....	478
Configuring Port Forwarding	480

Chapter 1

Product Overview

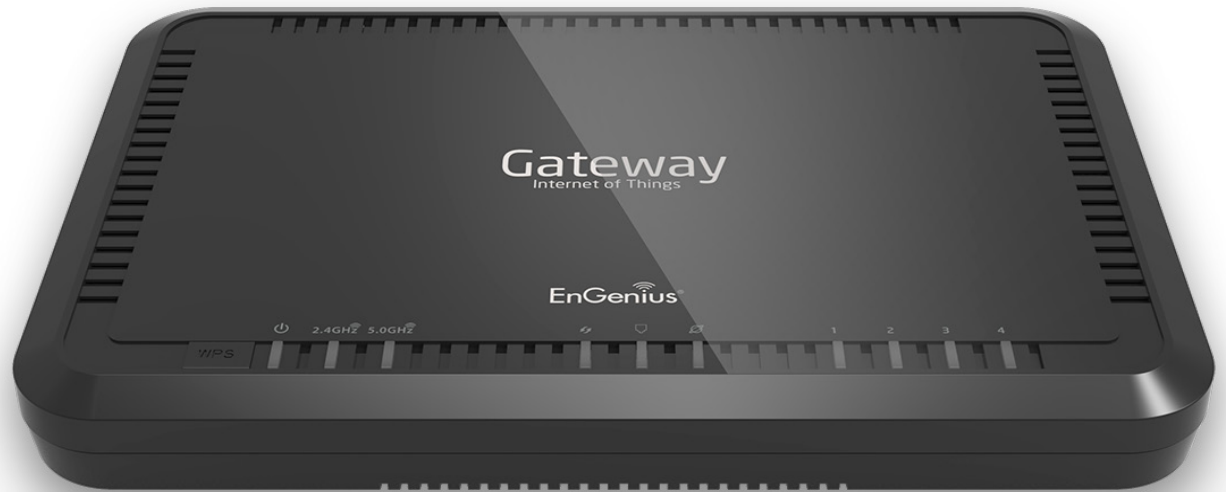

Product Overview


Key Features

- Smartphone (iPhone® & Android™) Home Extension
- Supports up to 10 SIP Accounts
- Easy Installation with Plug and Play
- Toll Saving
- Call Features such as Call Hold/Mute, Call Transfer, Caller ID, Call Waiting, and Speakerphone
- Make new calls during a conversation
- Make and receive intercom calls with other smartphones
- Make and receive 2G/3G calls and PSTN calls simultaneously
- Supports EnGenius EnShare™, EnTalk™, and EnRoute™ (iPhone®/ iPad®/ Android™) apps
- Fully featured Gateway capabilities

Robust and Reliable Wireless Performance

As part of the EnGenius Fusion Solution Series of Gateways, lifestyle apps, media bridges, and IP cameras specifically designed for home and small business, the EPG600 provides a unique cost-saving communication solution. The EPG600 is a Dual-band Wireless N600 IoT

Maximum data rates are based on IEEE 802.11 standards. Actual throughput and range may vary depending on many factors including environmental conditions, distance between devices, radio interference in the operating environment, and mix of devices in the network. EnGenius Technologies, Inc. EnShare™ supports both FAT32 and NTFS USB formats. Transfer speeds of data from your Gateway-attached USB storage device to a remote/mobile device may vary based on Internet uplink and downlink speeds, bandwidth traffic at either send or receive locations, the data retrieval performance of the attached storage device or other factors. EnGenius does not guarantee compatibility with all USB drives. EnGenius does not warrant its products or EnShare from loss of data or loss of productivity time. Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. For United States of America: Copyright ©2014 EnGenius Technologies, Inc. All rights reserved.

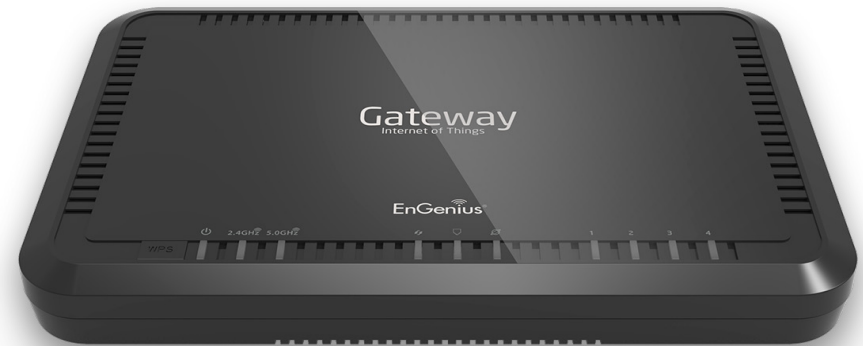


Gateway with a built-in 4-port Gigabit Ethernet Switch. This cost effective intelligent Gateway can connect to DSL or cable modems to provide high performance Internet access for desktop or laptop computers, tablets, smartphones and a wide variety of home entertainment devices, like HDTVs, set top boxes, Blu-ray players and game consoles. Its calling capabilities are a cost effective way to utilize your smartphone when traveling overseas, supporting up to 10 SIP accounts for convenience and the EnTalk, Enshare and EnRoute apps.

The Gateway's concurrent Dual-band design enables users to connect numerous wireless devices to it, giving them the option to use the less congested 5 GHz frequency for bandwidth intensive applications like streaming HD video throughout the home from one device to another. The EPG600 is an Xtra Range IoT Gateway that provides enhanced wireless signal coverage throughout the home.

A Media Sharing Platform

The EPG600 is designed to access and share media for devices on the home network. In addition to connecting home entertainment components to any of its available Gigabit Ethernet ports, the EPG600 also includes a USB port for attaching a USB storage device so wireless devices in the home or away from the home can access media content wherever there is an available Internet connection through EnShare™ - Your Personal Cloud.

EnShare is available as an Internet portal for accessing stored media connected to the USB port of the Gateway (See the Using EnGenius Cloud Service document in the product packaging). EnShare will also be available as an app for Apple iOS devices (iPads and iPhones) and Android-based devices (smartphones, tablet PCs, and other mobile readers) soon. The apps will be available through the Apple® Store and Google Play™ Store respectively.

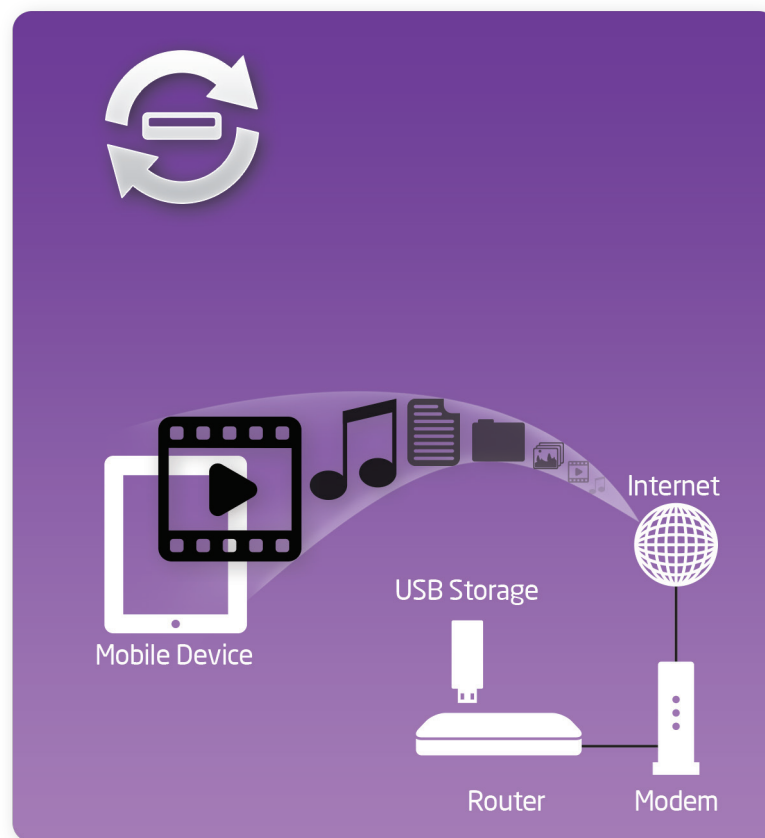

Industry-standard Wireless Security

The Gateway supports a variety of security features and mechanisms including industry-standard WPA/WPA2 wireless encryption to prevent unauthorized access to your network. It also includes a built-in SPI (Stateful Packet Inspection) firewall to help prevent attacks from malicious software (malware) from the Internet. The Gateway also supports IPv6.

More Guest Access Options

The EPG600 allows the option to assign 8 SSIDs (4 on each band) for the home network so friends or visitors can access the user's Internet connection without accessing personal data stored on networked computers in the home.

View Multiple Live Video Feeds with an EnGenius IP Camera

With the EnViewer app, users can view multiple live video feeds from connected EnGenius IP Cameras and receive alert messages when triggered by the camera's motion-detection feature straight to users' iPhone, iPad or Android smartphones and tablets to stay synced with family or personnel.



Connecting your Smartphone with VoIP Capabilities

The EPG600 IoT Gateway lets you manage calls through your smartphone from around the world, wherever you may be. Call from abroad using your home PTSN line as a local call to save on roaming charges.



Track Family and Friends for Peace of Mind

With the EnGenius EnRoute app, you can track other EnRoute enabled devices to keep track of family and friends when they are on the go or traveling. Great for parents wishing to make sure their children are safe, tracking lost or stolen devices, or employers making sure employees are utilizing company devices properly, the EnGenius EnRoute app gives you the peace of mind when you or someone you care about is out and about with GPS tracking, location sharing, and parental controls for easy utilization.



View and Share Photos, Videos, and more with Else

Share media content in the office, home or away from the office or home to and from mobile devices such as smartphones or tablets and laptop computers with the free EnShare app for iPhone, iPad or Android smartphones and tablets.




Applications

There are many applications for your EPG600 Intelligent Phone Gateway. From saving money on overseas business trips, to holding calls for up to 10 SIP accounts, the EPG600 is a smart choice for travelers and business professionals connecting around the world.


Easily Save Hundreds of Dollars When Traveling Overseas

The EPG600 Wireless N600 Intelligent Phone Gateway enables you to call from foreign locations as local calls, thus saving on tremendous international roaming bills, even if the recipient does not have Internet access available.

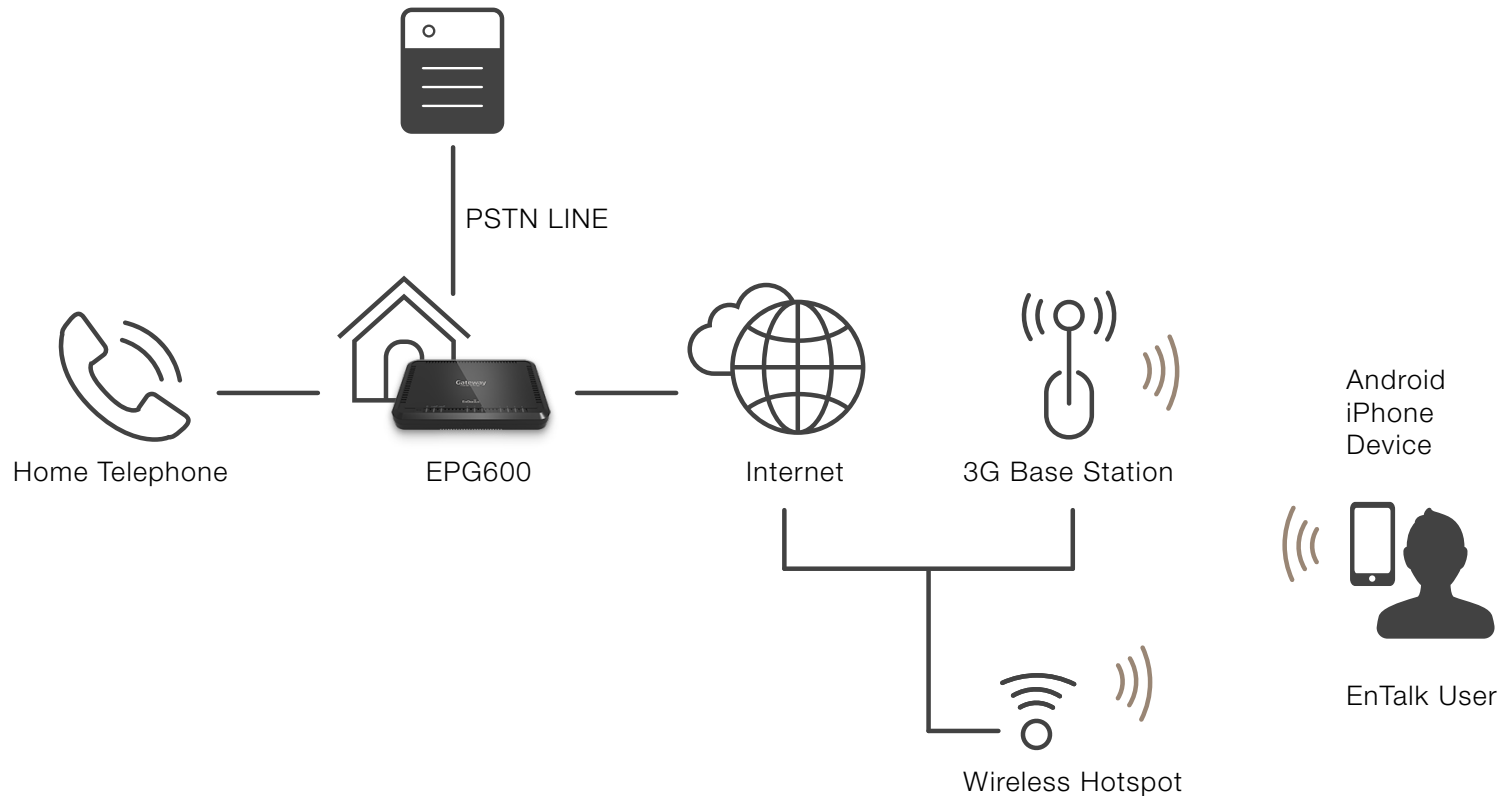


No More Cordless Phones

Wherever you are, the EPG600 enables you to make and receive calls on your landline via your smartphone; your smartphone now becomes your cordless phone, eliminating the need for a cordless phone. It allows up to 10 (max.) users to enjoy its advantages. All calls among the 10 users are intercom calls without any charges. If you're not making a wireless to wireless call, you simply use your normal local minutes.

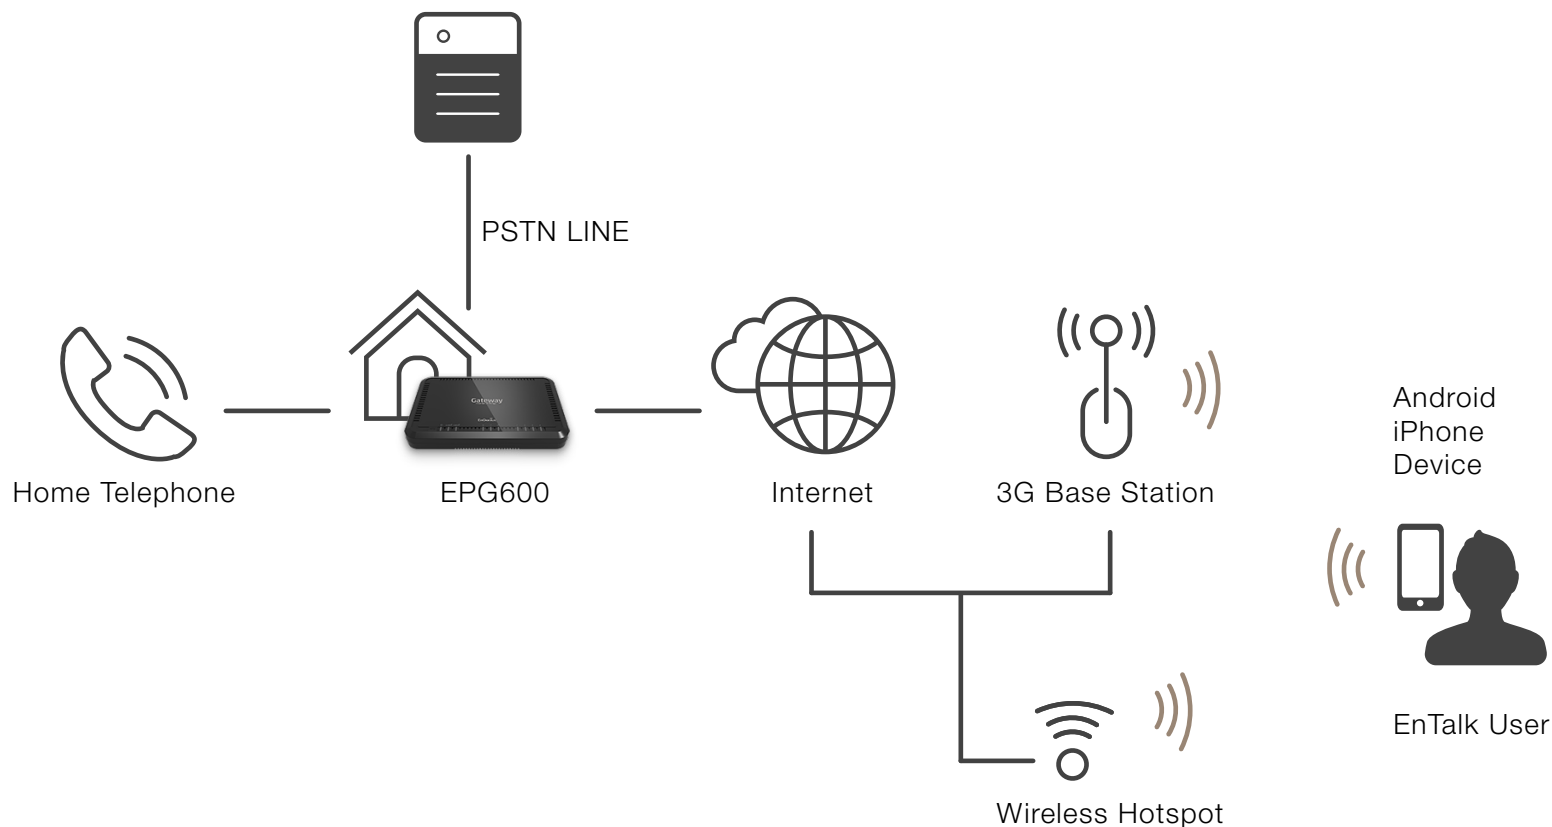


Use your Telephone Line Anywhere

When you are away from home (whether on a business trip or vacation), the EPG600 still enables you to receive and place calls on your home telephone line via your smartphone from anywhere. With the EPG600, you will never lose an important call again.

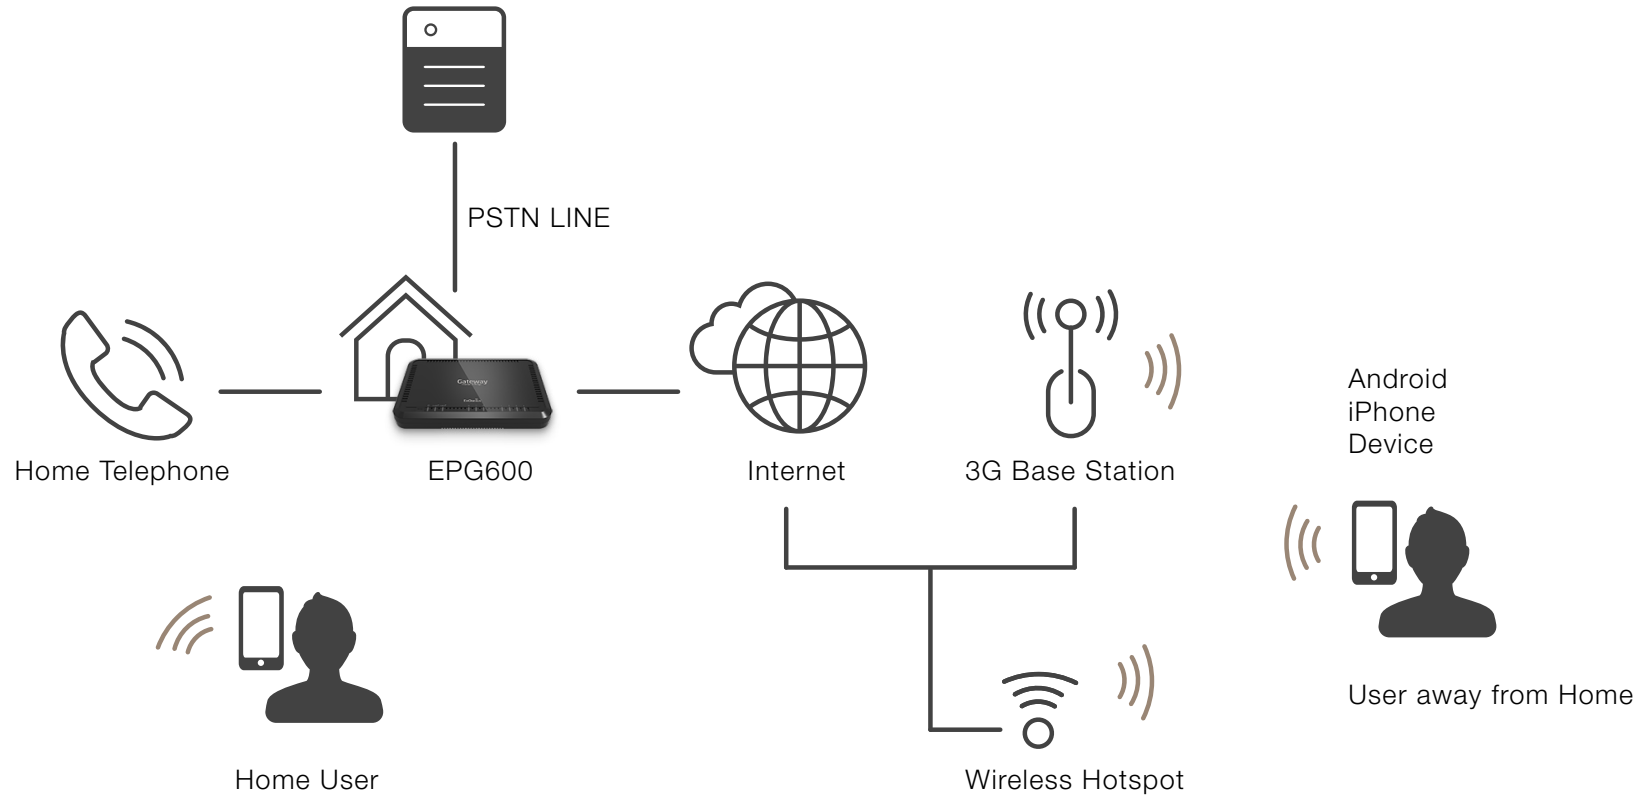

Make Local Calls with Different Telecom Operators

Users registered in different telecom operating areas can make any call as a local call, saving tremendous charges on telephone bills. Great for traveling abroad or connecting to friends and family around the globe.

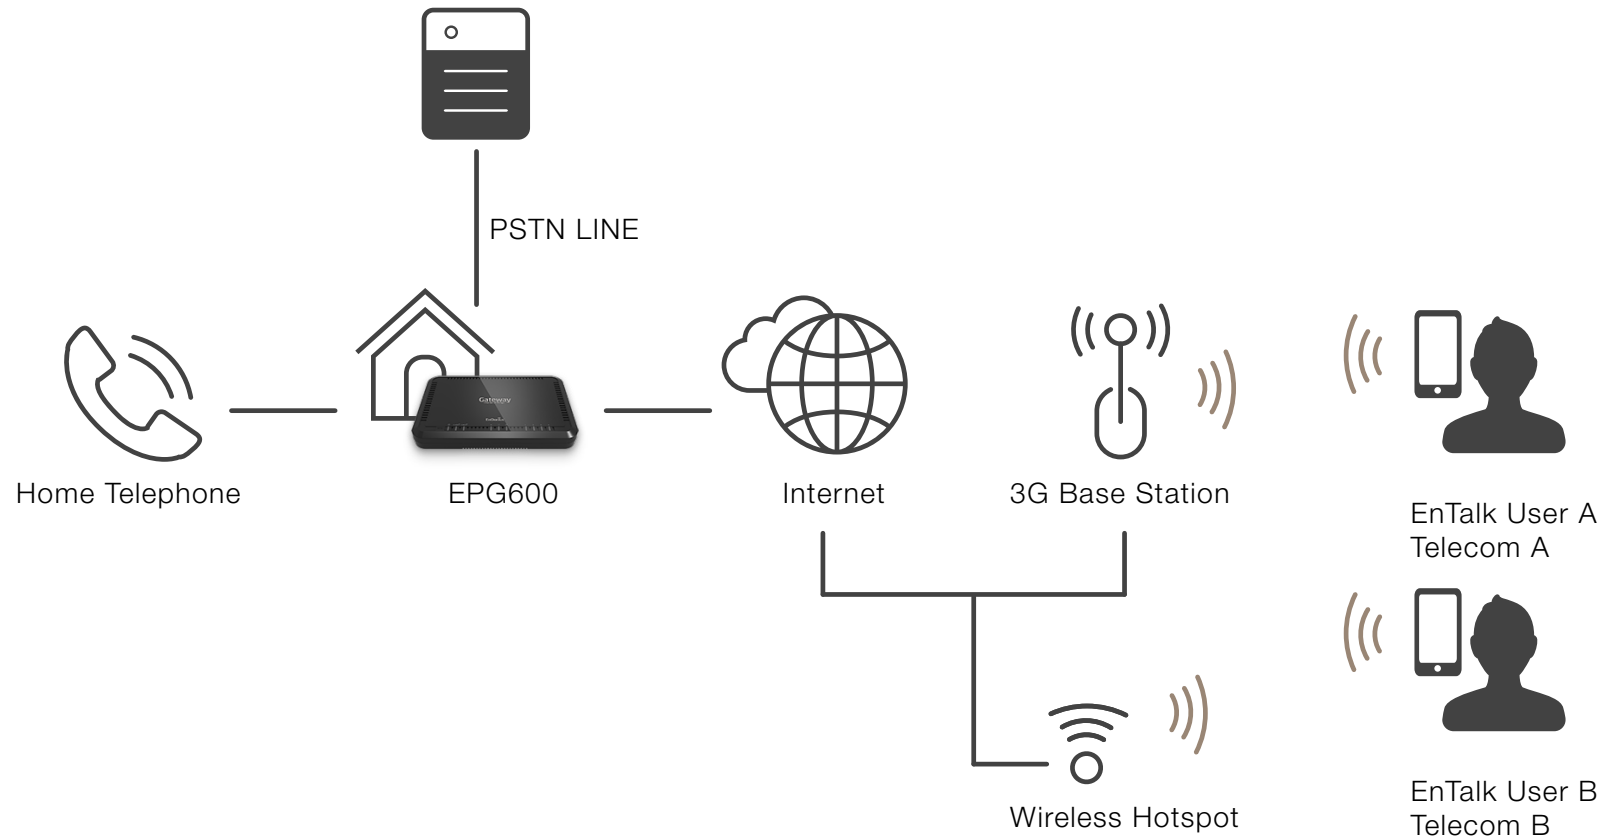

Technical Specifications

Device Interface

1 x 10/100/1000 Mbps WAN Port
4 x 10/100/1000 Mbps LAN Port
1 x Line Port (FX0)
1 x Tel Port (Fake FXS)
1 x USB Host Port
1 x WPS Button
1 x Reset Button
1 x REG Button
DC Jack

IEEE Standards

802.11a/b/g/n
Up to 600 Mbps wireless speed
with both the 2.4 and 5 GHz frequency bands (300 Mbps each)
802.3i/u/ab

LED Indicators

5 GHz Wireless
2.4 GHz Wireless
Power LED
WAN LED (Internet connection)
WPS LED
Line LED

Package Contents

EPG600 IoT Gateway
Power Adapter (12V 1.25A)
Quick Start Guides
RJ45 Ethernet Cable

RJ11 Line Cable

Power Specification

External Power Adapter
DC In, 12V 1.25A

Certifications

FCC/CE

Physical/Environmental Conditions

Operating Temperature: 32°~104° Fahrenheit, 0°~40° Celsius
Humidity: 90% or less (non-condensing)
Storage Temperature: -4°~140° Fahrenheit, -20°~60° Celsius
Humidity: 95% or less (non-condensing)

Software Features

Frequency Bands

2.400~2.484 GHz (11b/11g/11n)
5.18~5.82 GHz (11a/11n)

Operating Mode

AP Gateway/WDS

Wireless Features

Auto Channel Selection
WiFi On/Off

Output Power Control

WMM (Wireless Multimedia)

MSSID (Multiple SSID)

Security

WEP/WPA-PSK/WPA2-PSK

TKIP/AES

Hidden SSID

MAC Address Filtering

802.1X Authentication

DDoS

DHCP Server/Client

SPI (Stateful Packet Inspection) Firewall/Anti-DoS Attack

NAT

Port Forwarding

DMZ

Port Mapping/Triggering

VPN Server (PPTP/L2TP)

VPN Client (PPTP/L2TP)

VPN Pass-through (PPTP/L2TP/IPSec)

Rule Based (IP Address Ranges, Port Block ICMP)

VPN Tunnel (Maximum 5)

VPN server: with PPTP/L2TP/IPSec/L2TP over IPSec Supported

ALG

QoS (Mac/IP/Port Based)

URL/IP/Port/ICMP Filtering

DDNS/DNS/EnGenius DDNS Service

NTP/Sync with Computer

UPnP/UPnP NAT Traversal

DLNA

IGMP Proxy

Local Firmware Upgrades

Emergency Recovery Page (System Failure)

Backup/Restore Settings

Auto Power Saving

IPv6 Pass-through

Clone MAC

Traffic Monitor

WAN Type: PPPoE/DHCP/Static IP


USB Features: FTP Server/SAMBA/File Sharing

VoIP Features & Specifications

Supports 10x SIP Accounts (5x Concurrent SIP Calls)

Make or Receive PSTN Calls

Physical Interface

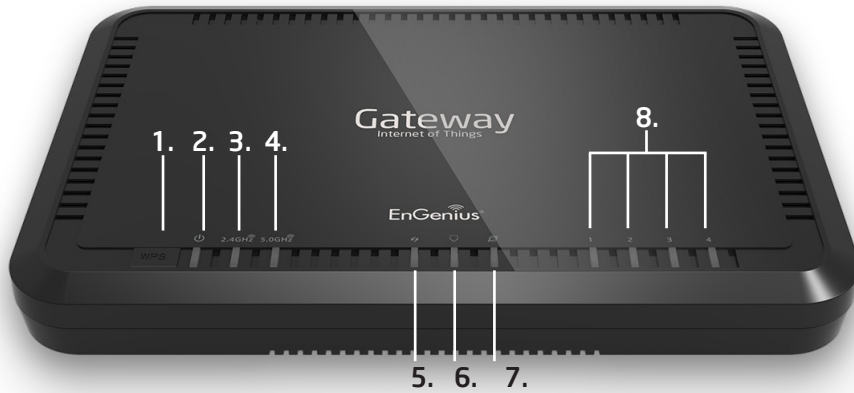

Dimensions

Width: 5.43" Length: 8.58" Height: 1.26"



When considering the placement of the Gateway remember the following:


- It must be close to an electrical outlet.
- For optimal wireless connectivity, place the Gateway near the center of the room at a higher level if possible.



Other electronic devices and some architectural construction materials or impediments may interfere with the wireless signal(s) of the Gateway and reduce its range or coverage. Try to minimize the number of walls or floors that the Gateway's signal needs to penetrate to connect to other wireless devices.


9. **USB Port** - Used for connecting a USB Storage Device.
10. **Reset Button** - For resetting the Gateway to its factory default settings by pressing button for more than 11 seconds or until the Power LED starts flashing.
11. **REG Button** - This button will register your Smartphone device automatically by depressing the button and holding for 2 seconds and clicking **Auto Registration** on your Smartphone. Your Smartphone will now be registered to the EPG600.
12. **DC Power Jack** - Connects the EPG600 to its DC power adapter.
13. **LAN Ports (1 - 4)** - For connecting home entertainment components, computers or other Ethernet-enabled devices using Ethernet cables.
14. **WAN Port** - Connects the EPG600 to a cable or DSL modem to access the user's Internet connection.
15. **Tel Ports**

1. **WPS Button** - Used to associate another WPS-enabled client device (computer, wireless media bridge, USB adapter, etc.). Press the WPS button for 2 - 5 seconds on the while also pressing the WPS button on the end device.
2. **Power LED**
3. **WLAN 2.4 GHz LED**
4. **WLAN 5 GHz LED**
5. **WPS (Wireless Protected Setup) LED** - works when WPS function is enabled.
6. **Telephone LED indicator** -
(A) **FLASH** - When user presses the REG button, LED will keep flashing at a 1 second interval.
(B) **Solid Light** - PSTN line is in use
7. **WAN Port/(Internet) Status LED** - Works when WAN port is connected.
8. **LAN Port LEDs (1-4)**

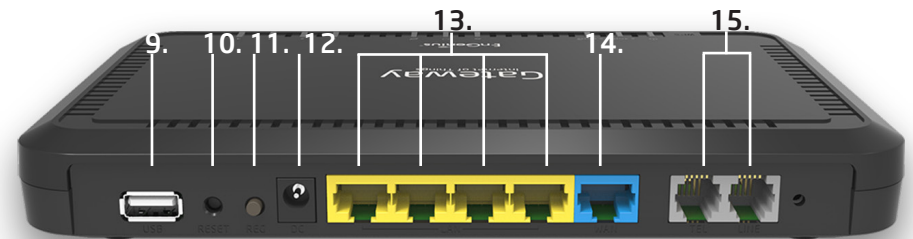


Easy Installation


1. Plug the telephone line to the **LINE** port and the other RJ-11 port to your Tel port. (Optional)

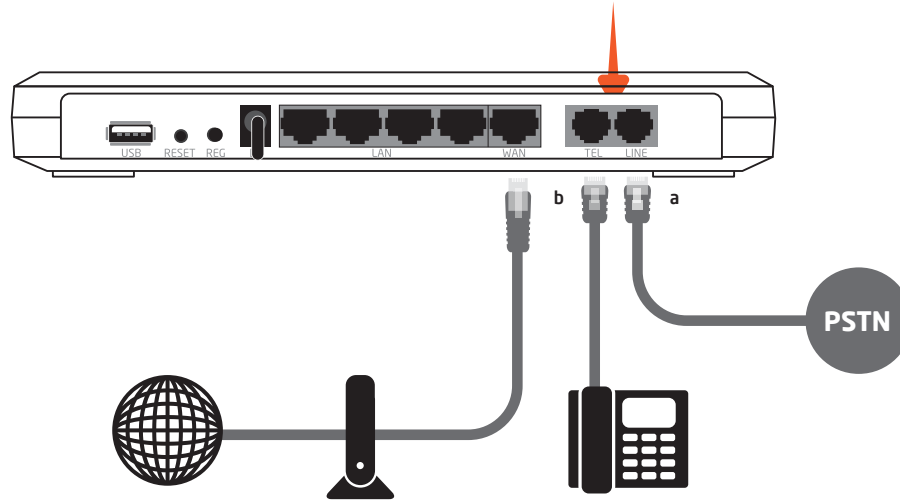

2. Plug in the AC power adapter to the **DC JACK**.

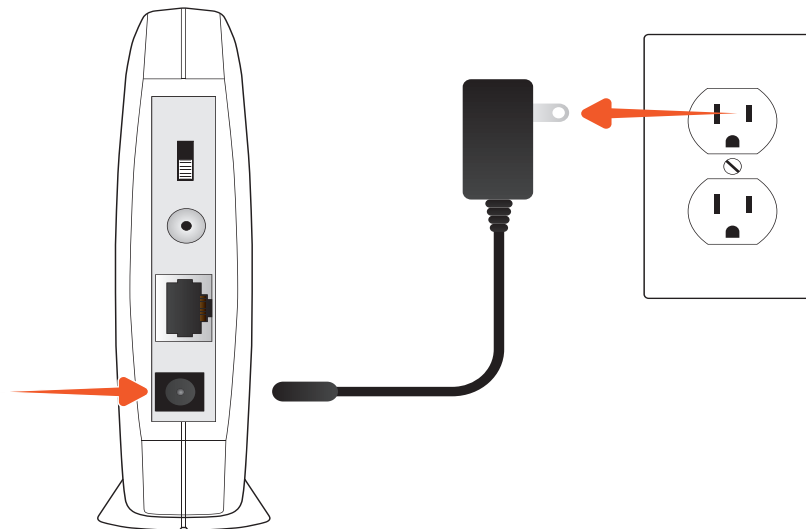

3. Connect the MODEM to **WAN**. Next, connect your modem to the WAN port. Now the EPG600 is ready for smartphone registration.

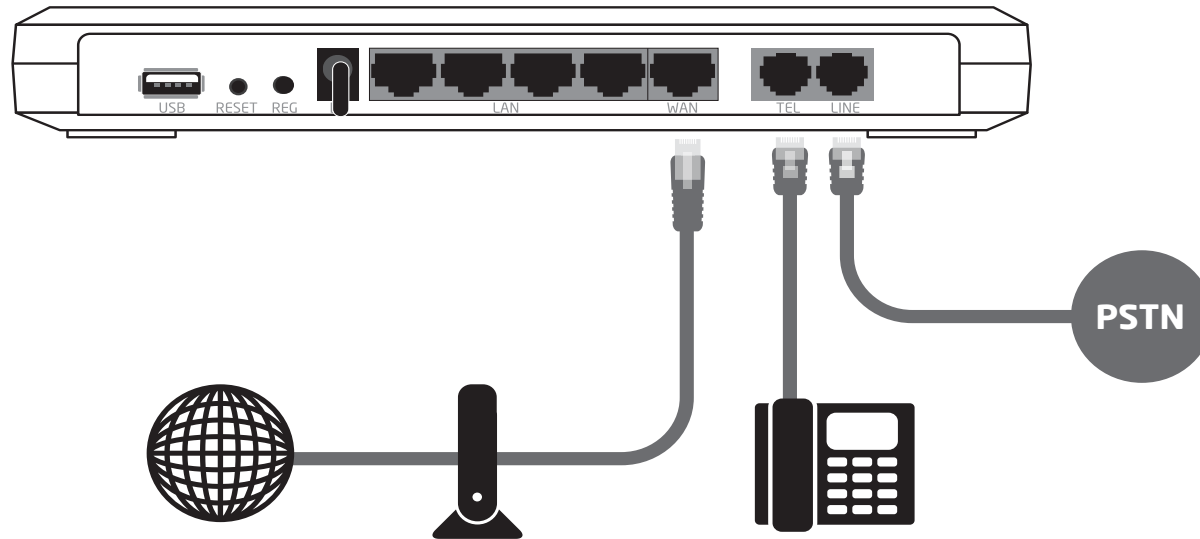

4. If needed, you can still connect the TEL to a EnGenius long range cordless phone as a wireless extension, in case you are unable to pick up calls via a smartphone.

Wall Mounting The Gateway

The following are instructions for mounting the Gateway on a wall.



Note: Choose a location that is within reach of an electrical outlet for the AC adapter and the DSL or Cable modem.


To mount the device on the wall please follow the steps below:

1. Measure the distance from the middle of each mounting screw hole.
2. Mark the locations of the screw holes on the wall.
3. Drill a hole for each marked location and insert a screw in each.




Note: Make sure to leave enough of the screw head above the wall surface to secure the Gateway.

4. Install the Gateway on the wall.

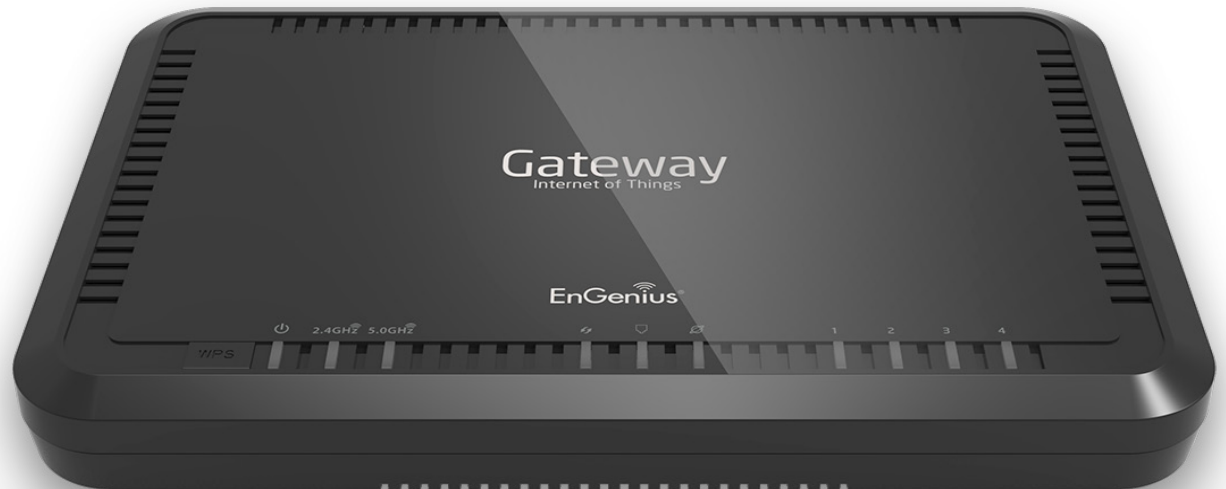

Chapter 2

Web Configuration Interface

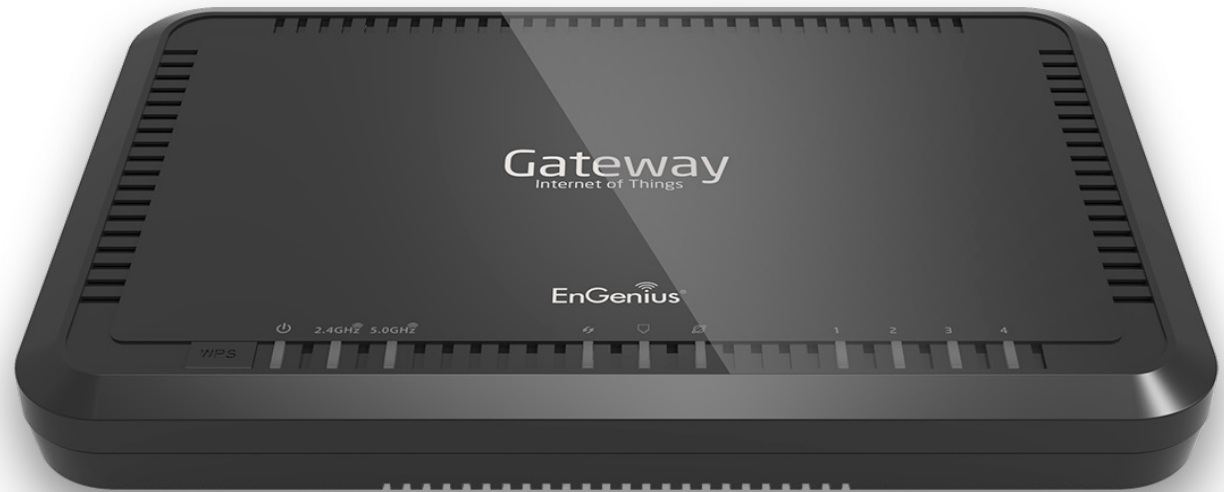


Logging In

During the **Quick Start Guide** procedure, you should have successfully logged into the Gateway's **Web Configuration User Interface** (essentially the Gateway's operating system that controls how it operates) and established some initial settings and controls for the Gateway.

If you wish to change the Gateway's settings (such as establish a new username and password for the person who manages and maintains the Gateway, set Parental Controls, establish a Guest Access-SSID setting for visitors, or any number of other settings) This can also be done at this time on your computer or tablet device.

To do this, enter the Gateway's default IP address of **192.168.0.1** into your browser's address window.

1. At the login screen enter your username and a password.
2. Click Login to continue.

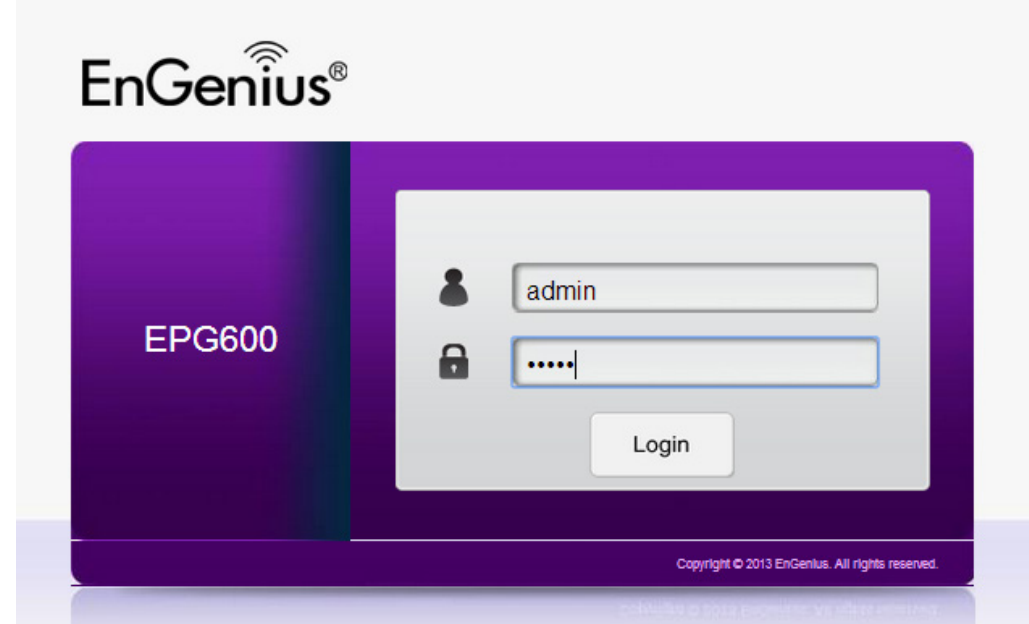

The default login settings are:

username: **admin**

password: **admin**

It's highly recommended that if you haven't done so already, to change these default names to something more unique so your Gateway and the devices connected to it on your home network are more secure.

Viewing the Web Configuration Dashboard

The Home Page screen of the Web Configuration interface, or dashboard, provides access to the Gateway's settings and controls.

EnGenius®

EPG600IoT Gateway

Logout

Language

IP Cam Viewer

USB Storage Sharing

Network Settings

Setup Wizard

Home

Application Version1.0.1

Hardware Version1.0.0

Serial Number147335813

MAC Address88:DC:96:23:91:01

Attain IP ProtocolPPPoE

IP Address114.37.30.212

Subnet Mask255.255.255.255

Default Gateway168.95.98.254

IPv6 Connection TypeLink Local

IPv6 WAN Default Gateway

LAN IPv6 Link-Local AddressFE80::8ADC:96FF:FE23:9130

DHCP-PDDisabled

Wireless 2.4GHz :
SSID_1E600_2.4G

Security TypeWPA Pre-Shared key

Wireless 5GHz :
SSID_1E600_5G

Security TypeWPA Pre-Shared key

Status

WAN Connected

WAN Cable Connected

Wireless 2.4GHz On
Wireless 5GHz On

Device List

android-ff808e408fc90bf7

22

Home Page

The **Home Page** displays the areas within the Web Configuration to which you can navigate: **Cloud Services**, **Setup Wizard**, **Network Settings**, **USB Storage Sharing**, **IP Cam Viewer**, **Language**, and **Logout**.

Cloud Services

The Cloud Services page lets you scan a QR code which can take you to the Google Play Store or Apple App Store for downloading EnShare, EnRoute, and EnTalk. Download these apps to fully utilize your EPG600.

Home

The Home link takes you back to the dashboard screen no matter where you are in the Web Configuration interface.

Setup Wizard

The Setup Wizard link starts the wizard that assists you into setting up your Gateway.

Network Settings

The Network Settings link displays the menus to manually configure the Gateway.

USB Storage Sharing

The USB Storage Sharing link displays the menus to access shared storage devices connected to the Gateway.

IP Cam Viewer

The IP Cam Viewer link displays the menus to view IP cameras connected to the network.

Language

The Language link displays the menu to set the OSD language.

Logout

The Logout link closes the Gateway's Web Configuration interface from any screen.



Download NOW !

moving your workforce and enjoyment toward a mobile lifestyle.

Android



iOS (for iPhone and iPad)



Web Menus Overview

Cloud Services

EnShare

View and edit settings for the EnShare app.

Enshare

View and access content from the USB storage.

 Cloud Services	
	<i>EnShare</i>
<i>EnShare</i>	
	<i>EnRoute</i>
	<i>EnTalk</i>
	<i>EnViewer</i>
 Device Management	
	<i>System</i>
	<i>Internet</i>
	<i>Wireless 2.4GHz</i>
	<i>Wireless 5GHz</i>
	<i>Parental Control</i>
	<i>Guest Network</i>
	<i>IPv6</i>
	<i>Firewall</i>
	<i>VPN</i>
	<i>USB Port</i>
	<i>Advanced</i>

EnRoute

EnRoute

View and edit settings for the EnRoute app.

Account Setting

View and edit account settings for the EnRoute app.

 Cloud Services	
	EnShare
	EnRoute
	EnRoute
	Account Setting
	EnTalk
	EnViewer

 Device Management	
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port

EnTalk

View and edit settings for the EnTalk app.

Basic

View and configure basic settings for the EnTalk app.

Account Setting

View and configure account settings for the EnTalk app.

Dial Plan Setting

View and configure Dial Plan settings for the EnTalk app.



 *EnShare*

 *EnRoute*

 *EnTalk*

Basic

Account Setting

DialPlan Setting

 *EnViewer*



**Device
Management**

 **System**

 *Internet*

 *Wireless 2.4GHz*

 *Wireless 5GHz*

 *Parental Control*

 *Guest Network*

 *IPv6*

 *Firewall*

 *VPN*

EnViewer

View and edit settings for the Smart Recording page.

IP Camera

From here you can view information about IP cameras connected to the EPG600.

 Cloud Services

 *EnShare*

 *EnRoute*

 *EnTalk*

 *EnViewer*

IP Camera

 Device Management

 *System*

 *Internet*

 *Wireless 2.4GHz*

 *Wireless 5GHz*

 *Parental Control*

 *Guest Network*

 *IPv6*

 *Firewall*

 *VPN*

 *USB Port*

 *Advanced*

Gateway Management

System

View and edit settings that affect system functionality.

Status

Displays the summary of the current system status.

LAN

From here you can configure the LAN settings for the EPG600.

DHCP

From here you can configure the DHCP settings and enable static IP addresses.

Log

View recorded system information for the EPG600.

Monitor

View the current network traffic bandwidth usage.

Language

From here you can configure the application menu and GUI language.

	Device Management
	System
	Status
	LAN
	DHCP
	Log
	Monitor
	Language
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools

Internet

View and edit settings that affect network connectivity.

Status

Displays a summary of the Internet status and type of connection.

Dynamic IP

From here you can setup a dynamic IP connection to your ISP (Internet Service Provider).

Static IP

From here you can setup a static IP connection to your ISP.

PPPoE

From here you can setup a PPPoE connection to your ISP.

PPTP

From here you can setup a PPTP connection to your ISP.

L2TP

From here you can setup a L2TP connection to your ISP.

DS-Lite

From here you can configure DS-Lite settings for the EPG600.



**Device
Management**

	<i>System</i>
	<i>Internet</i>
	<i>Status</i>
	<i>Dynamic IP</i>
	<i>Static IP</i>
	<i>PPPoE</i>
	<i>PPTP</i>
	<i>L2TP</i>
	<i>DS-Lite</i>
	<i>Wireless 2.4GHz</i>
	<i>Wireless 5GHz</i>
	<i>Parental Control</i>
	<i>Guest Network</i>
	<i>IPv6</i>
	<i>Firewall</i>
	<i>VPN</i>
	<i>USB Port</i>
	<i>Advanced</i>

Wireless 2.4 GHz

View and edit settings for 2.4 GHz wireless network connectivity.

Basic

From here you can configure the minimum settings required to setup a wireless network connection.

Advanced

From here you can configure advanced network settings.

Security

From here you can configure wireless network security settings.

Filter

From here you can establish a list of client devices (computer, tablets, smartphones, printers, etc.) based on MAC (Media Access Control) address numbers that are allowed to wirelessly connect to the 2.4 GHz network.

WPS

WPS is a system that simplifies the process to established wireless security connection.

Client List

View the 2.4 GHz wireless devices currently connected to the network.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Basic
	Advanced
	Security
	Filter
	WPS
	Client List
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools

Wireless 5 GHz

View and edit settings for 5 GHz wireless network connectivity.

Basic

From here you can configure the minimum settings required to setup a wireless network connection.

Advanced

From here you can configure the advanced network settings.

Security

From here you can configure the wireless network security settings.

Filter

From here you can establish a list of client devices (computer, tablets, smartphones, printers, etc.) based on MAC (Media Access Control) address numbers that are allowed to wirelessly connect to the 5 GHz network.

WPS

WPS is a system that simplifies the process to established wireless security connection.

Client List

View the 5 GHz wireless devices currently connected to the network.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Basic
	Advanced
	Security
	Filter
	WPS
	Client List
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools

Parental Controls

View and edit settings for Parental Controls.

Wizard

Click to enable or disable the Parental Controls feature. The menu also provides information for configuring Parental Control policies.

Web Monitor

The menu provides a log of the events for defined Parental Control policies.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Wizard
	Web Monitor
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools

Guest Network

View and edit settings for a Guest Network.

Selection

Click to enable or disable the Guest Network feature.

DHCP Server Setting

From here you can configure the Guest Network DHCP server settings.

DHCP Client List

From here you can configure the Guest Network client list.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	Selection
	DHCP Server Setting
	DHCP Client List
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools

IPv6

View and edit settings for the IPv6 protocol.

Basic

Allows you to enable or disable the IPv6 and IPv6 Pass-through functions.

Status

View the current configurations and other information for the IPv6 protocol.

Static IPv6

From here you can configure the IPv6 protocol.

Auto Configuration

From here you can configure the IPv6 network by obtaining the information through the ISP (Internet Service Provider).

PPPoE

From here you can configure the PPPoE network protocol and obtain information from your ISP.

6to4

Allows IPv6 packets to be transmitted over an IPv4 network.

Link Local

From here you can configure the IPv6 link local address.



Device
Management



System



Internet



Wireless 2.4GHz



Wireless 5GHz



Parental Control



Guest Network



IPv6

Basic

Status

Static IPv6

Auto Configuration

PPPoE

6to4

Link Local



Firewall



VPN



USB Port



Advanced

Firewall

View and edit settings for the network firewall.

Basic

Click to enable or disable the network firewall.

Advanced

From here you can configure virtual private network (VPN) packets.

DMZ

The DMZ feature redirect packets from the WAN port IP address to a particular IP address on the LAN.

DoS

Click to enable or disable blocking of DoS (Denial of Service) attacks.

ACL

This feature allows parents to control Internet access time and web content filtering by setting up schedules and policies.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	Basic
	Advanced
	DMZ
	DoS
	ACL
	VPN
	USB Port
	Advanced
	Tools

VPN

View and edit settings for VPN tunnelling.

Status

View the current configurations for VPN tunnelling on the Gateway.

Profile Settings

From here you can manually configure VPN tunnels.

User Settings

From here you can configure users, user ID and password combinations, and assign access to specific VPN tunnels.

Wizard

From here you can automatically configure VPN tunnels with guidance from the setup Wizard.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	Status
	Profile Setting
	User Setting
	Wizard
	USB Port
	Advanced
	Tools

USB Port

For viewing and editing settings for storage sharing.

File Sharing

From here you can enable or disable the Samba sharing feature.

File Server

From here you can enable and configure the File Server feature.

Guest Account

From here you can add and configure guest accounts on the Gateway. Note that guest accounts do not have full access rights.

DLNA

DLNA enables the discovery of DLNA devices (some HDTVs, gaming consoles, some set top boxes/media players, Blu-ray players, some smartphones, and network attached storage devices) on the home network.



Device
Management

	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	File Sharing
	File Server
	Guest Account
	DLNA
	Advanced
	Tools

Advanced

View and configure advanced system and network settings for the Gateway.

NAT

From here you can enable or disable Network Address Translation (NAT) feature.

Port Mapping

Re-direct a range of service port numbers to a specified LAN IP address.

Port Forwarding

From here you can configure server applications to send and receive data from specific ports on the network.

Port Triggering

From here you can configure applications that require multiple connections and different inbound and outbound connections.

ALG

From here you can configure the Application Layer Gateway (ALG), a security component that augments a firewall or NAT employed within a network.

UPnP

From here you can enable or disable Universal Plug and Play (UPnP) functionality. UPnP is a protocol that permits networked devices to seamlessly discover each other's presence on the network.

	Device Management
	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	NAT
	Port Mapping
	Port Forwarding
	Port Triggering
	ALG
	UPnP
	IGMP

IGMP

From here you can enable or disable the Internet Group Multicast Protocol (IGMP).

QoS

From here you can configure the network quality of service (QoS) setting by prioritizing the uplink and downlink bandwidth.

Routing

From here you can configure static routing.

WOL (Wake On LAN)

From here you can configure the Wake on LAN feature to turn on a computer over the network.

TTL

From here you can configure the TTL=1 packet setting for some special network environment.

	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	NAT
	Port Mapping
	Port Forwarding
	Port Triggering
	ALG
	UPnP
	IGMP
	QoS
	Routing
	WOL
	TTL
	Tools

Tools

Use the Tools section for viewing and configuring the Gateway’s operating system and network tools settings.

Admin

From here you can set the administrator’s password used to log into the Gateway.

Time

From here you can configure the system time on the Gateway.

UID/DDNS

UID service is the login value required for accessing EnGenius APPs. DDNS service maps a static domain name to a dynamic IP address for the Gateway.

Diagnosis

The Diagnosis feature performs a Ping test to verify whether a specific device is connected to the LAN.

Firmware

This section lets you update the Gateway’s firmware, , and you can also receive new firmware notification whan a newer firmware version is available.

	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools
	Admin
	SNMP
	Time
	UID/DDNS
	Diagnosis
	Firmware
	Back-up
	Reset to Default/Reboot

Backup

The Backup feature is used for loading or saving the configuration settings to or from a backup file.

Reset to Default / Reboot

The Reset feature restore the Gateway to its factory default settings, and the Reboot feature reboots the Gateway.

	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	USB Port
	Advanced
	Tools
	Admin
	SNMP
	Time
	UID/DDNS
	Diagnosis
	Firmware
	Back-up
	Reset to Default/Reboot

Tips

At the right side of the Network Settings page, you will find helpful tips regarding the specific section you are on. If you are stuck or are unsure about the nature of the section you are browsing, please refer to these tips. In the event that your issue still persists, you can contact EnGenius tech support via phone or email:

USA Technical Support


Monday - Friday from 8:00 am - 4:00 pm (Pacific Time)

Toll-Free: 888-735-7888

Local: 714-432-8668


Technical Forum

www.engeniusforum.com

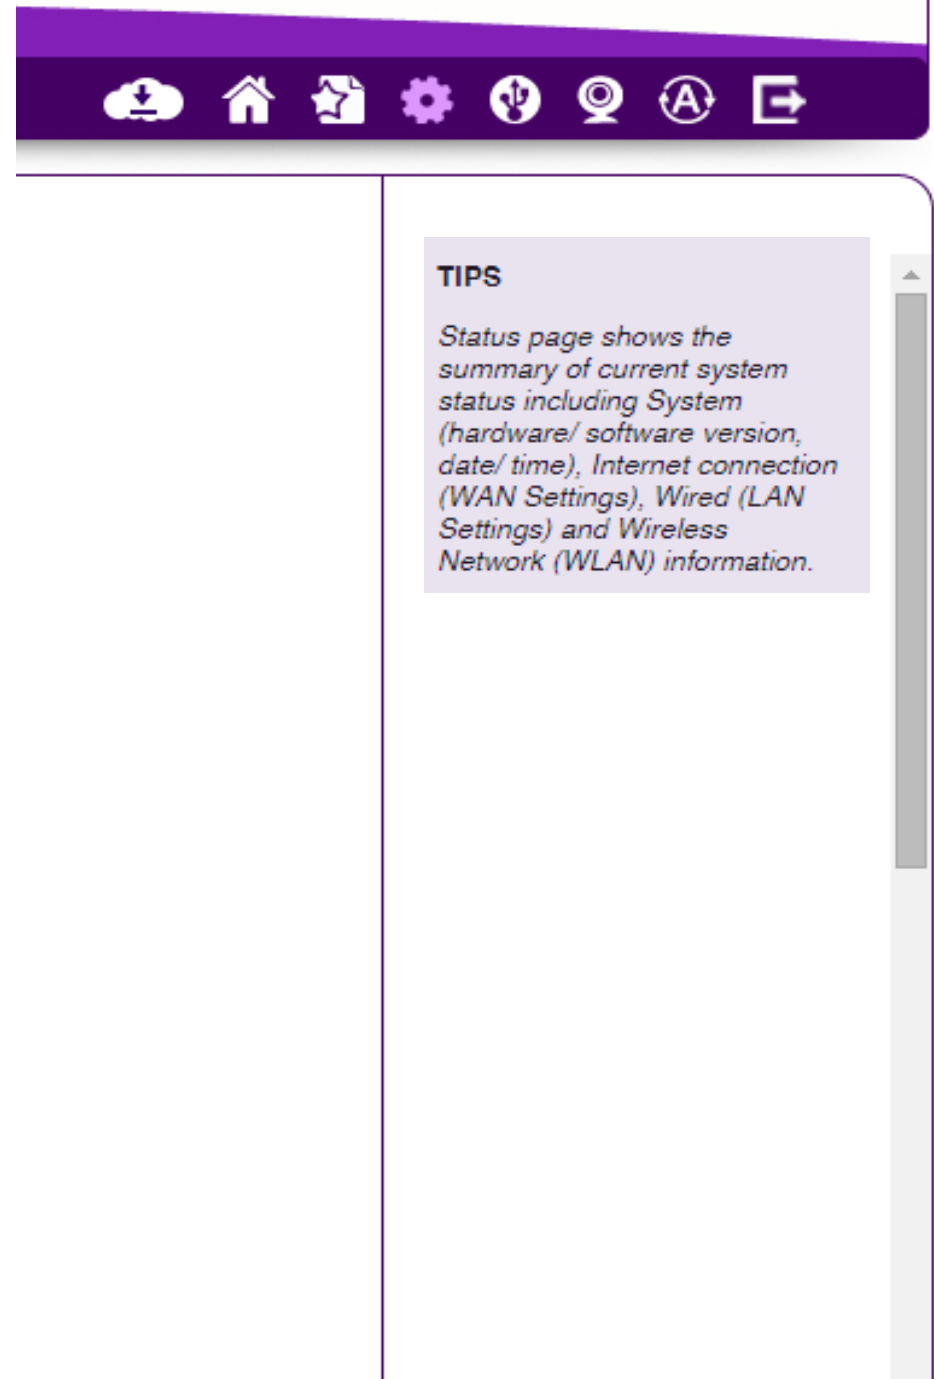

Chapter 3

Installation Setup Wizard

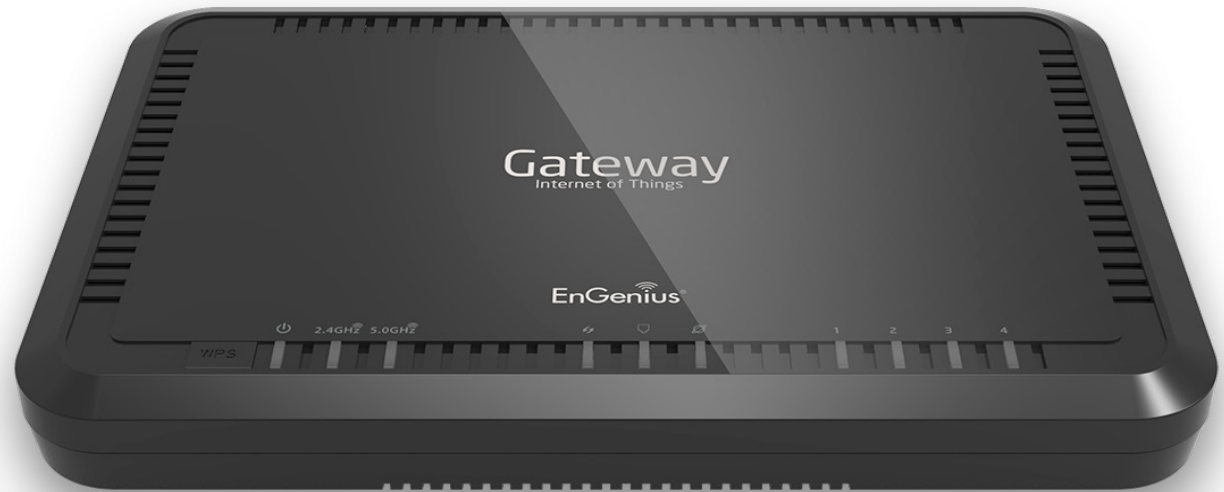


Internet Setup Wizard

Use the Wizard to detect and set up the type of Internet connection you need to set up a secure wireless connection, to create an administrator password to secure the device, or set the Gateway's date and time properties.

To use the Internet Setup Wizard, follow these steps:

- 1. Click the **Wizard** button to show the Wizard start screen.
- 2. Click **Next** to continue with the setup procedure.

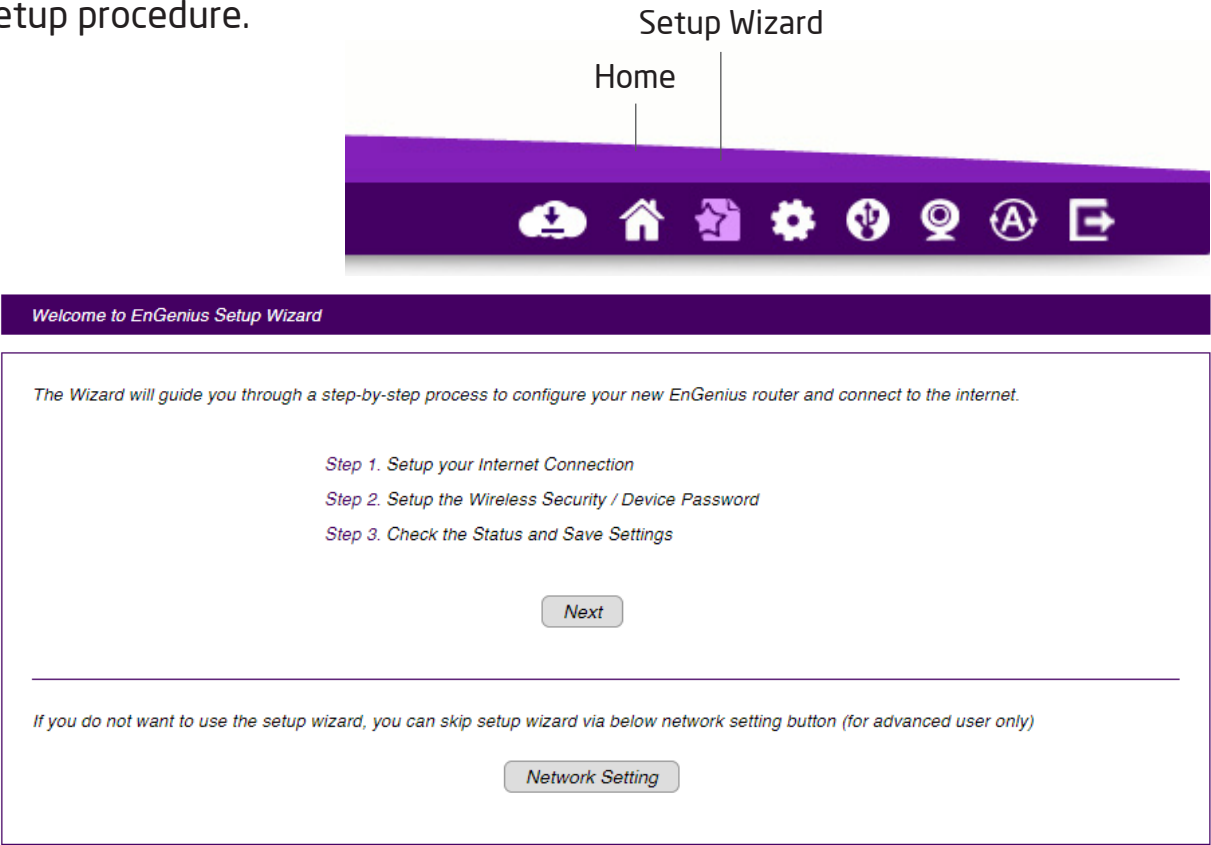

Setting Up Your Internet Connection


1. Decide how you wish to set up the Internet connection.



Note: It is recommended to let the device setup the Internet connection automatically.

- Select **Auto Detect** to let the Wizard set up the Internet connection.
- Select **Manual Setup** to set the properties yourself.

2. Click **Next** to continue or **Prev** to return to the previous screen.

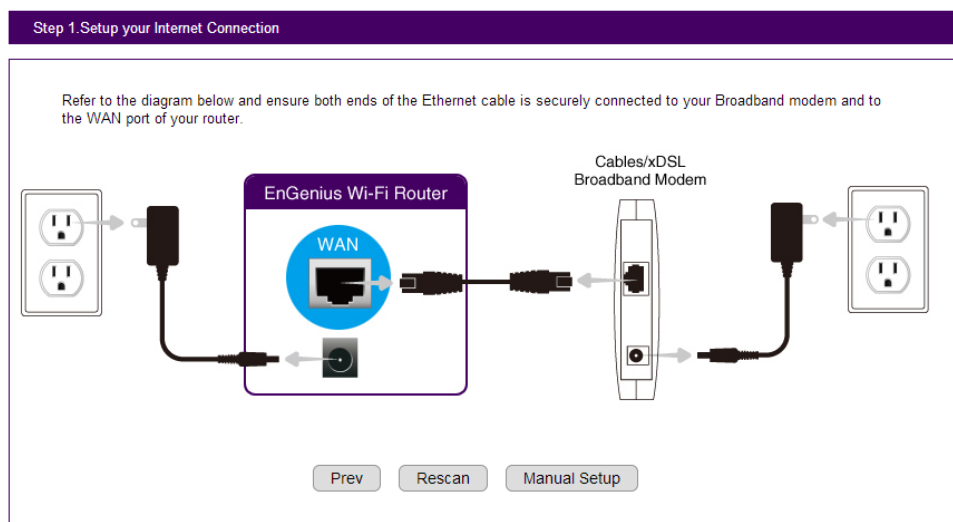

If you selected **Manual Setup**, please follow these steps:

3. Select the Internet connection type you wish to use and enter the connection properties.



Note: The connection types available are: **Static IP, PPPoE, Dynamic IP, PPTP, and L2TP.**

4. Click **Next** to continue, **Prev** to return to the previous screen, or **Cancel** to halt the procedure.

Step 1. Setup your Internet Connection

Choose the WAN Type. You may need to obtain the WAN setting information from your Internet Service Provider (ISP) or Network Administrator.

My Internet Connection: Dynamic IP ▼

Dynamic IP Connection Type

Host Name

MAC Clone MAC

Prev Next

Setting Up Your Wireless Security

From here you can set the wireless encryption features for the 2.4 GHz and 5 GHz networks. To encrypt the wireless signals for either or both of the frequency bands for the EPG600, please follow these steps:



Important: To ensure the network is secure, it is recommended to select High for an encryption level.

1. Enter the Gateway name in the wireless Name (SSID) text field.
2. Select the security level from the Encryption dropdown list.

3. Enter a unique password in the Encryption Key text field.
4. Repeat steps 1 through 3 to encrypt the 5 GHz band.
5. Click **Next** to continue, **Prev** to return to the previous screen, **Skip** to skip this procedure , or **Cancel** to halt the procedure.

Step 2.Setup the Wireless Security / Device Password

Create the Service Set Identifier(SSID) for your network.

To enforce the network security, it's highly suggested to enable the encryption for your network and avoid malicious intrusion.

Wireless Security: 2.4GHz

Wi-Fi Name(SSID):

Encryption:

Encryption Key:

Wireless Security: 5GHz

Wi-Fi Name(SSID):

Encryption:

Encryption Key:

Create a password to login and access your router

Note: This is not the password provided by Internet Service Provider (ISP).

New Password

Repeat New Password

Prev

Next

Network Address Translation

From here, you can set up the Network Address Translation (NAT) feature for the EPG600. A NAT is used for modifying network address information in Internet Protocol (IP) datagram packet headers while in transit across a traffic routing device. This is to remap one IP address space into another. With this feature, you can use the EnGenius Cloud service in your home even with an ADSL Gateway connected to the network.


There are four types of NATs:

1. Full Cone NAT- The most common type on the SOHO Gateway
2. Restricted Cone NAT
3. Port Restricted Cone NAT
4. Symmetric NAT - The most complex type of NAT

 Cloud Services  EnShare  EnRoute  EnTalk  EnViewer  Device Management  System  Internet  Wireless 2.4GHz  Wireless 5GHz  Parental Control  Guest Network  IPv6  Firewall  VPN  USB Port  Advanced NAT	NAT ☒ Enable ☐ Disable Network Turbine boosts network performance Network Turbine ☒ Enable ☐ Disable Apply Cancel	TIPS NAT(Network Address Translation) involves re-writing the source and/or destination addresses of IP packets as they pass through a Router or firewall. NAT enable multiple hosts on a private network to access the Internet using a single public IP address.
--	---	---

Chapter 4

Cloud Services

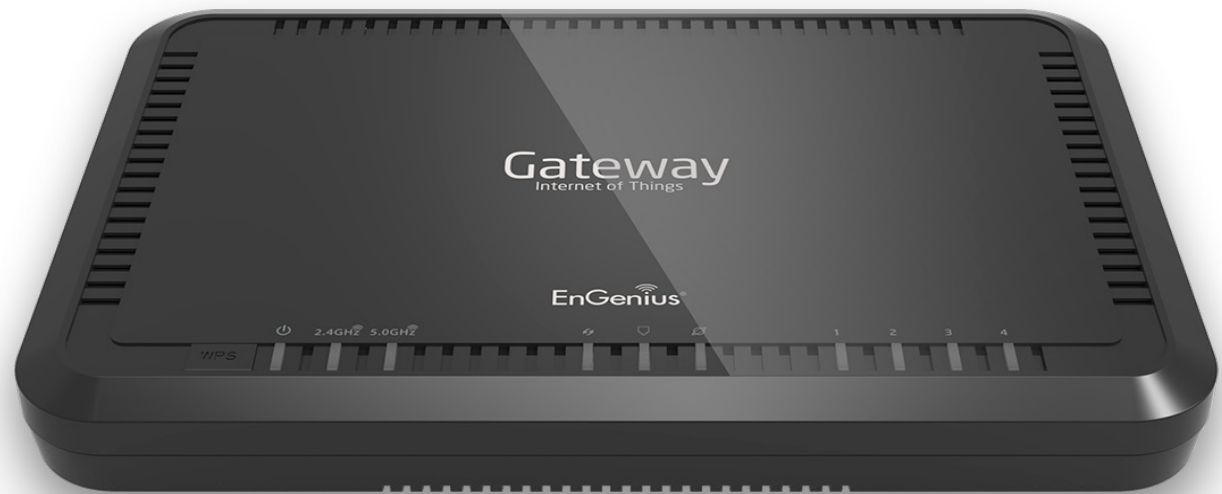

EnGenius Cloud Services

The EPG600 includes a Cloud Services feature to help you manage your EnGenius apps. Available through the Apple Store and Google Play Store, the EPG600 is compatible with EnShare, EnRoute, and EnTalk to help you get the most out of your EPG600.




Download NOW !

moving your workforce and enjoyment toward a mobile lifestyle.

Android



iOS (for iPhone and iPad)

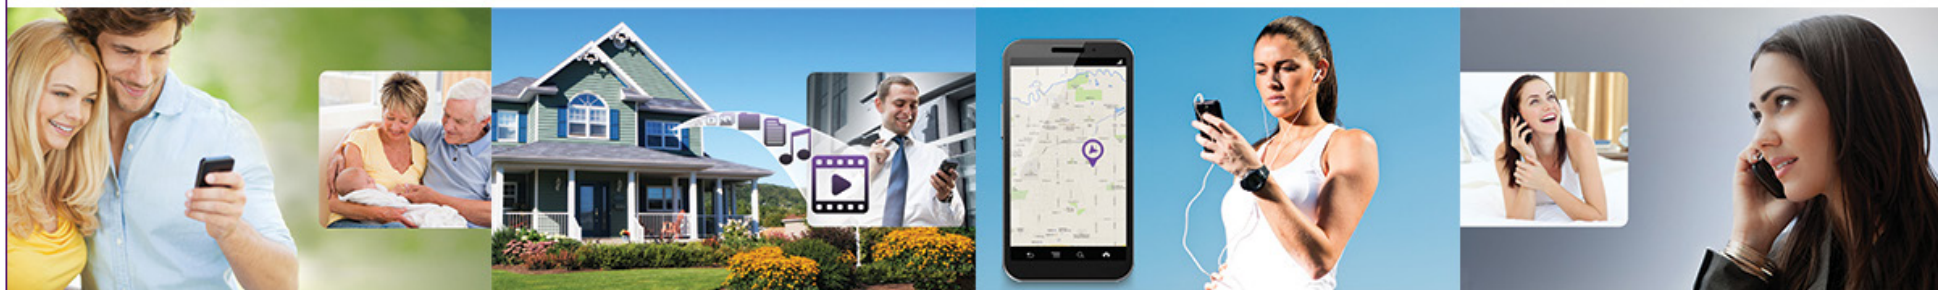

EnShare

EnShare allows you to access content from your USB storage device connected to the Gateway. Access saved music, video, files and more easily.



Note: You must be connected to the Internet in order to use EnShare. Please ensure you've completed the initial wireless Gateway setup before proceeding to EnShare™ setup.



UID Login



To setup EnShare web service, you will need to access DDNS. Please refer to page 185 to setup the UID/DDNS service for the Gateway.





Setting Up EnShare

Access EnShare Services Through the Device Host Name (DDNS)/QR Code

1. Your Gateway will have a unique default domain name located on the device label on the bottom of it. You may also access the EnShare page by scanning the unique QR code located on the bottom of your Gateway with your smartphone. Please skip to step 2 if you are using this method to access EnShare. To set up EnShare using a Static IP Address, refer to the **UID/DDNS** section on page 185 under **Tools**.

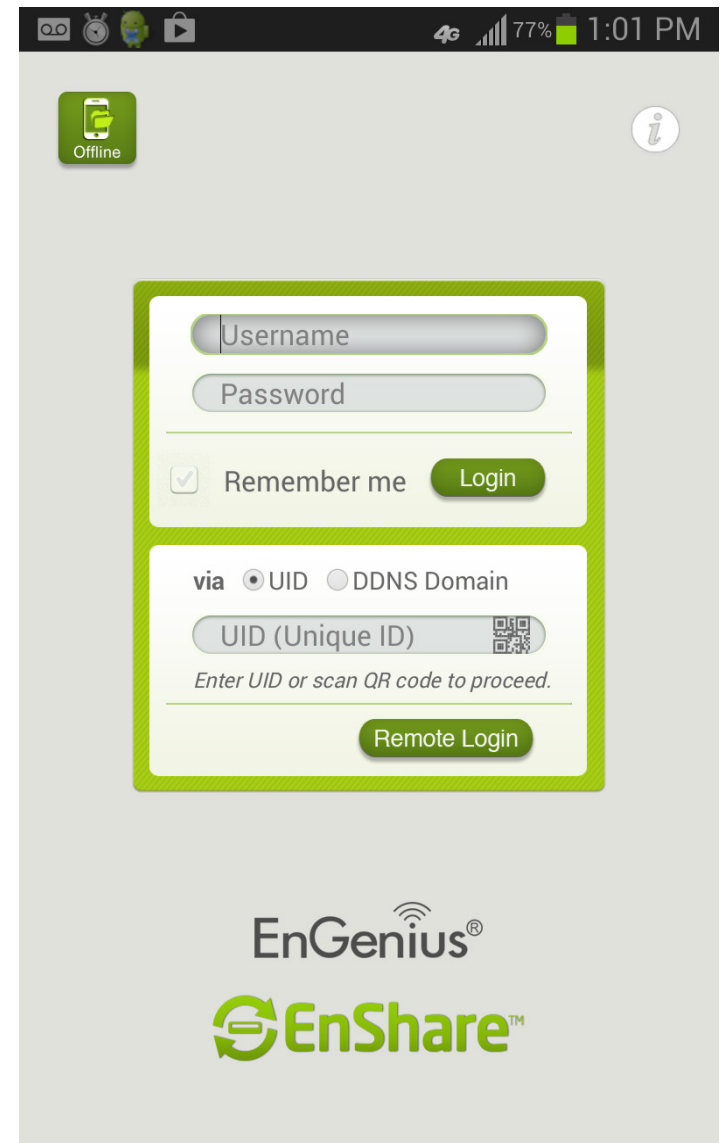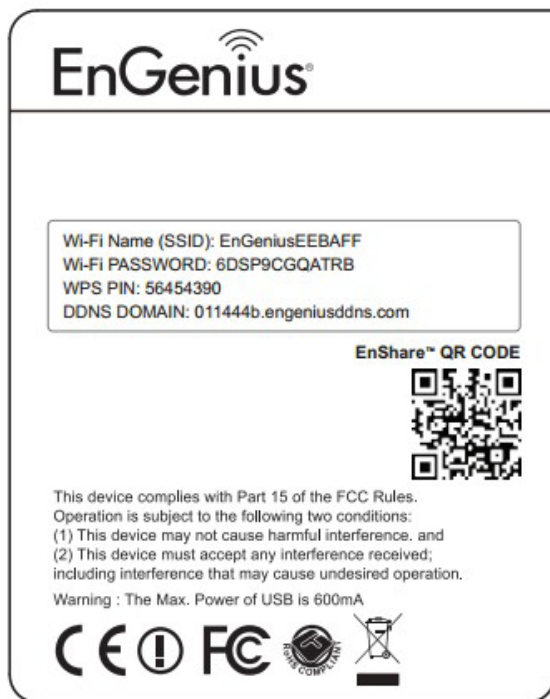

2. You must attach a USB storage device to the USB port of the Gateway. Open an Internet Browser (IE, Firefox or Chrome) and type in the DDNS DOMAIN address located on the bottom of your Gateway. Depending on the ISP (Internet Service Provider), you can access the EnShare service through the Port 9000 or alternative Port 80 as shown below.

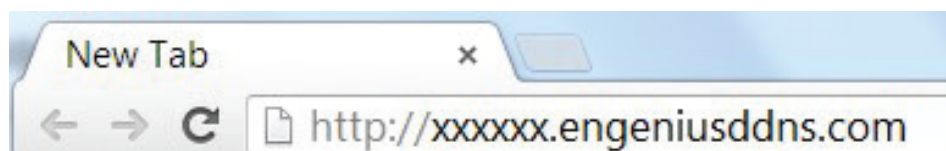

Example: http://xxxxxx.engeniusddns.com: 9000

or http://xxxxxx.engeniusddns.com, where "xxxxxx" refers to the unique DDNS Domain account information located on the bottom of your Gateway.




IMPORTANT: If you are not able to access the EnShare service, the service port may be blocked by your ISP. Please contact your Internet Service Provider directly to find out what port is acceptable to use; or see the Tools/Admin section of the User Manual.


Guest Folders

A Guest folder is present by default for your convenience. The username is: **guest** and password is: **guest**.

3. Select Storage Sharing.

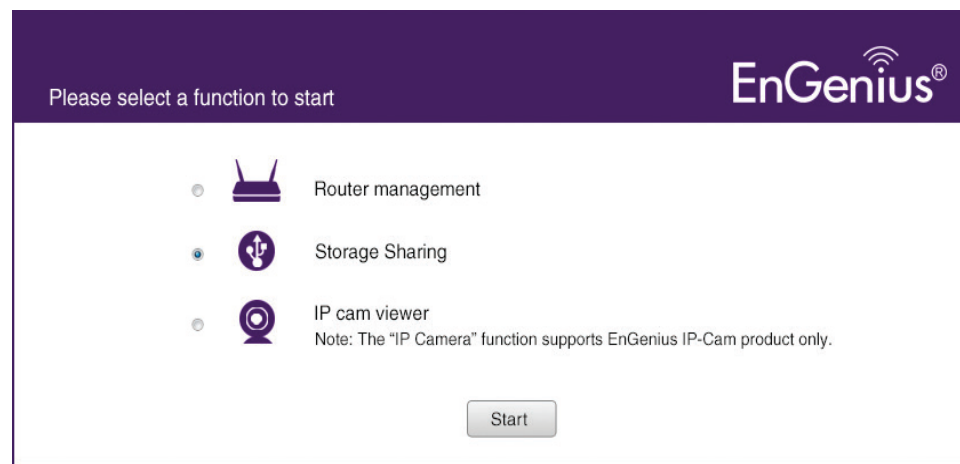

Next, enter the username and password configured in the Wizard from your Gateway setup.

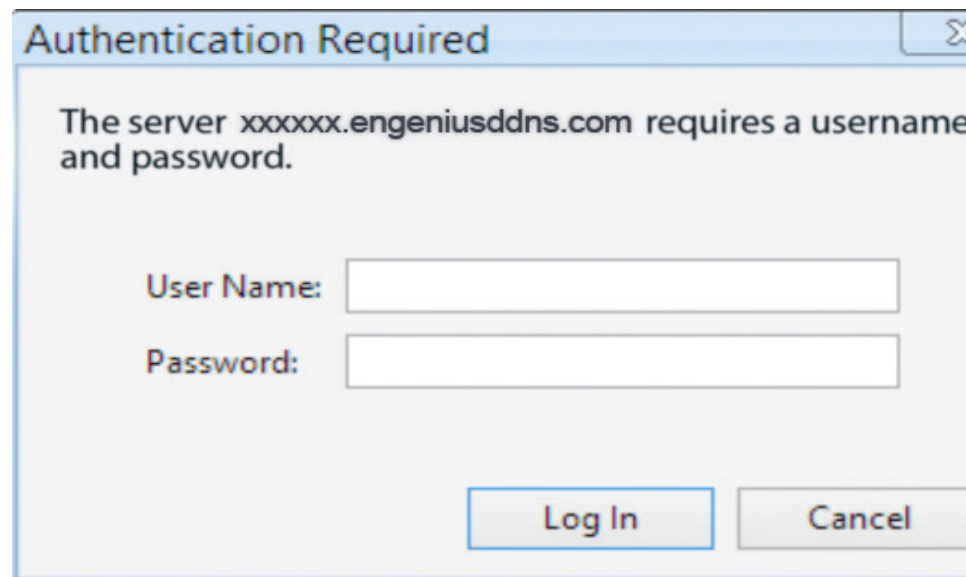

Select the USB device.

EnShare Web Access

Please select the USB device icon to login your USB device.



,1.516G / 2G

You may now access the files on your USB drive.


Index of /usb2/

Name	Last Modified	Size	Type
Parent Directory		-	Directory
EnGenius 2013 CES DATASHEETS	2013-Jan-04 10:52:52	-	Directory
EnGenius CES Press Releases	2013-Jan-04 15:13:42	-	Directory
EnGenius CES Product Photos	2013-Jan-04 10:52:28	-	Directory
video	2013-Mar-15 17:55:20	-	Directory
CES 2013 EnGenius Attendee Handbook.doc	2013-Jan-04 14:04:56	4.1M	application/octet-stream
EnGenius 2013 CES SLIDESHOW.pptx	2013-Jan-04 06:08:52	2.2M	application/octet-stream

File Upload:

How to Enable/Disable EnShare™

1. Enter **http://192.168.0.1** into a web browser as shown below.

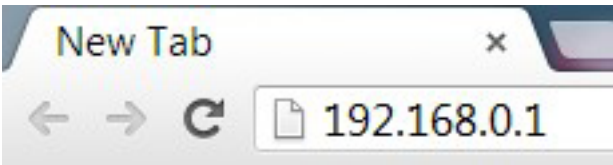

2. You may enable or disable EnShare by selecting **Cloud Service** then **EnShare** as shown below.

System Internet Wireless 2.4GHz Wireless 5GHz Parental Control Guest Network IPv6 VoIP Firewall VPN USB Port EnShare EnRoute File Sharing File Server Guest Account DLNA Advanced Tools	EnShare Remote Access ☒ Enable ☐ Disable Apply	TIPS Enable or Disable the EnShare remote access function. User will not be allowed to access the EnShare service from the Internet (WAN) when the function is disabled. The default setting is enabled.
---	--	--



Advanced Setup

Access EnShare^T Services Through a Static IP

1. You may also access EnShare if you are using a Static IP Address.


2. You must attach a USB storage device to the USB port of the Gateway. Open an Internet Browser (IE, Firefox or Chrome) and type in the Static IP address of your Gateway. Depending on the ISP (Internet Service Provider), you can access the EnShare service through the Port 9000 or alternative Port 80 as shown below.

Example: 99.125.71.80:10000 or 99.125.71.80

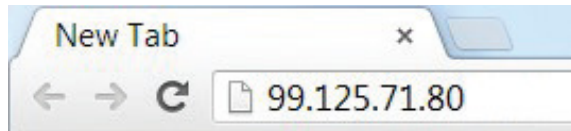


IMPORTANT: If you are not able to access the EnShare service, the service port may be blocked by your ISP. Please contact your Internet Service Provider directly to find out what port is acceptable to use; or refer to the Tools/Admin section of this manual.


3. Select **Storage Sharing**.

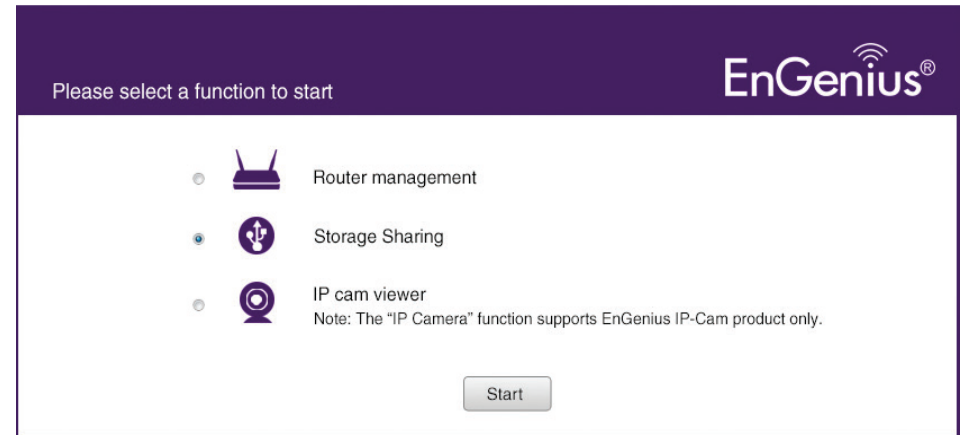


4. Enter the username and password used for configuration in the Wizard setup process.

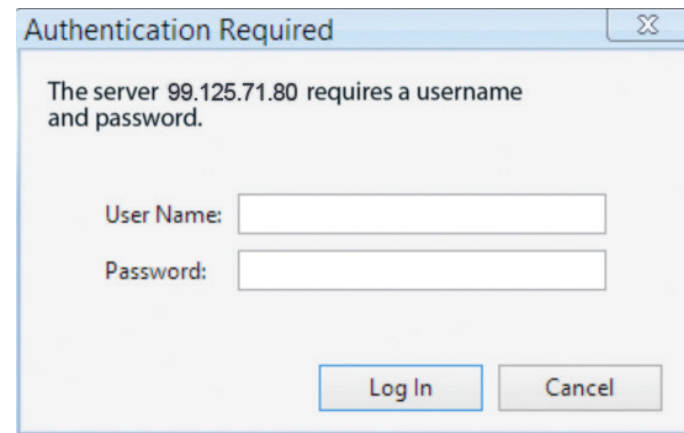

5. Next, select the USB device you wish to use.

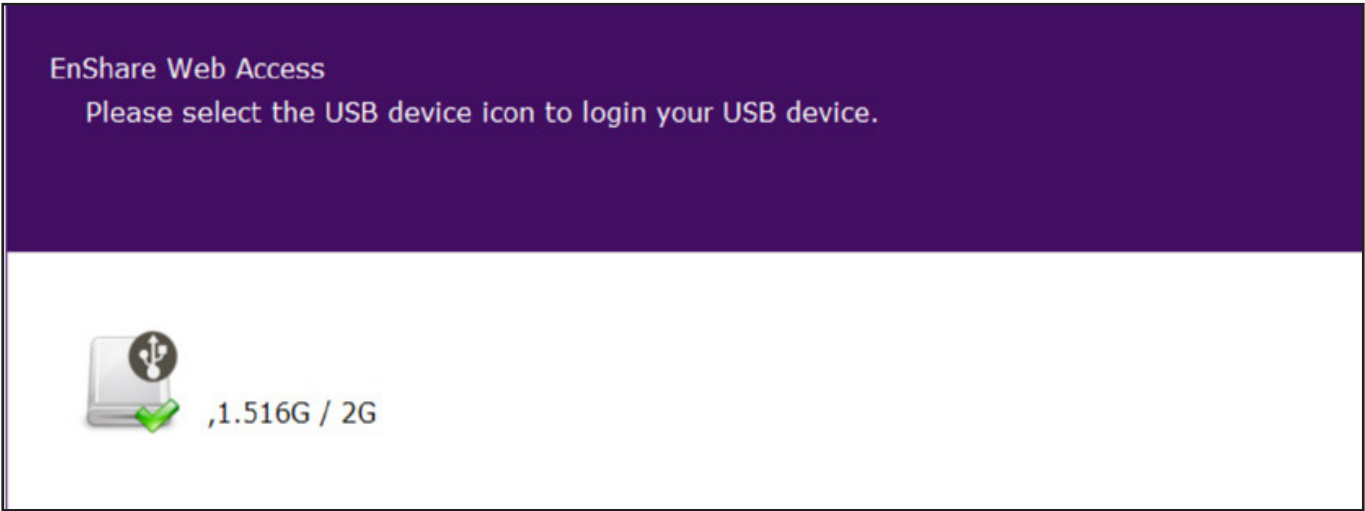

You may now access the files on your USB drive.

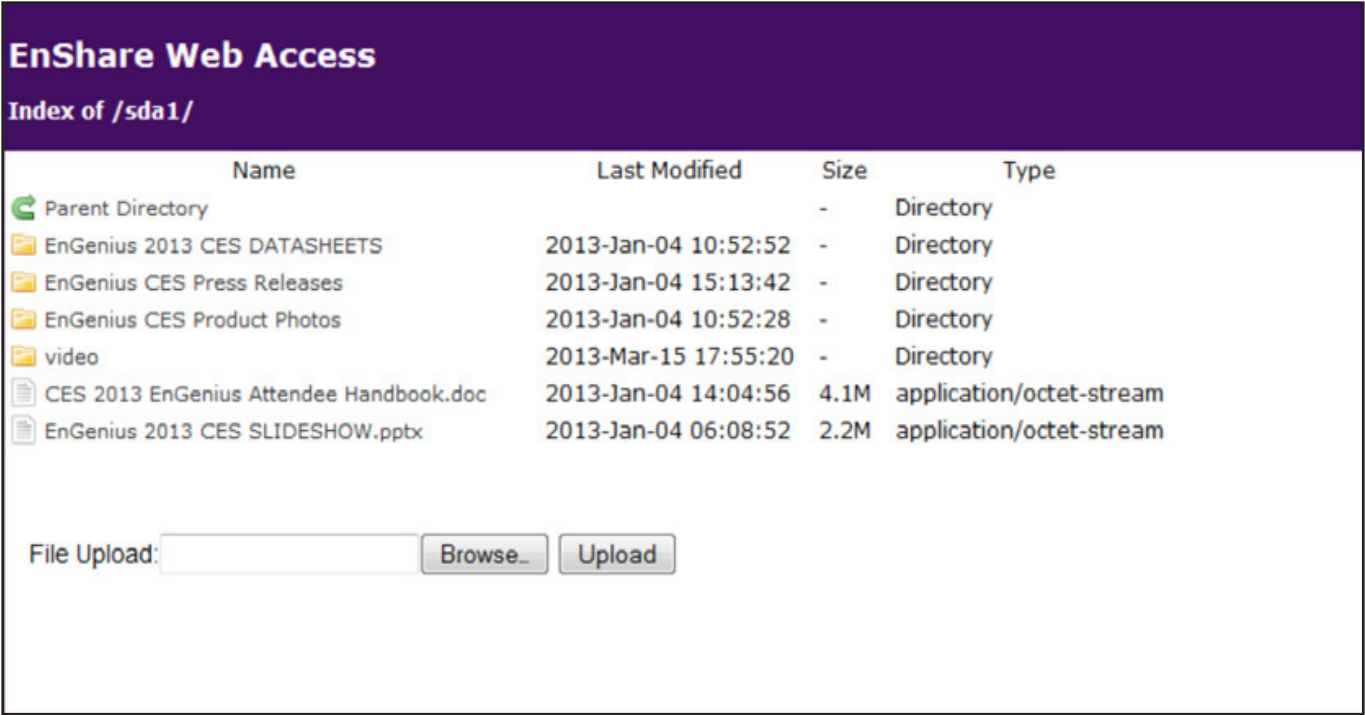

EnRoute

The EnGenius EnRoute app provides an added level of security and peace-of-mind for friends and family members. The EnRoute app includes GPS tracking, location sharing, and parental controls for your convenience. Never lose track of friends or family again.

EnGenius Cloud Services

EnShare

EnRoute

EnRoute

Account Setting

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network


IPv6

Firewall

VPN

USB Port

Please enter the folder name to store EnRoute user data:

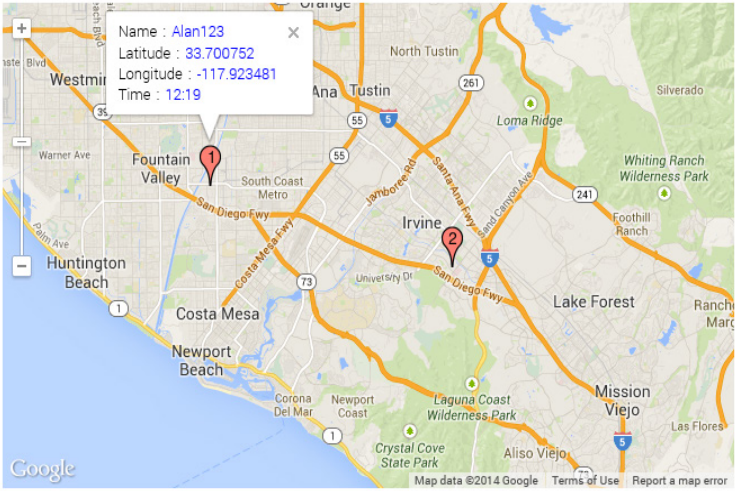

Google Map data ©2014 Google Terms of Use Report a map error

TIPS

EnRoute feature allow router administrator can keep track the location of business colleagues or family members which belongs to a registered user of this router.

MAP:

This is the map to indicate all of the EnRoute user location. Admin can click one of the location icon to display the detail user info in the pop-up dialog.



Setting up EnRoute

To set up EnRoute, download the EnRoute app from the Google Play store or Apple store by clicking on Cloud Services and using the QR code to go to the corresponding store or via the app on your mobile device and follow the directions below:



1. Open the app.
2. Fill in username and password of your EPG600.
3. Fill in the DDNS name or the IP Address of your Gateway.
4. You can either login locally or remotely.



Note: You may only have one EnRoute account on your phone. If you forget what E-mail or password you used to register with, if you try to reregister a new account on your phone, it will display warning message "Oops! Signup failed. Please contact your service manager". Please keep this information in a safe place and use a unique username and password that is easy to remember.

EnRoute Settings

EnRoute allows administrators to keep track of the location of business colleagues or family members who belong to a registered account on a device such as a smartphone or tablet. Please note that EnRoute will need a USB storage device connected and Internet access to work.

Map

This map indicates all of the registered and connected users' location. The admin can click one of the location icons to display detailed user info.

User Info

Displays user information including name, latitude, longitude, and time they were at the specific location.

Name

Displays the EnRoute username for the account.

Latitude


Displays user latitude.

Longitude

Displays user longitude.

Time

Display the timestamp record via its current location.

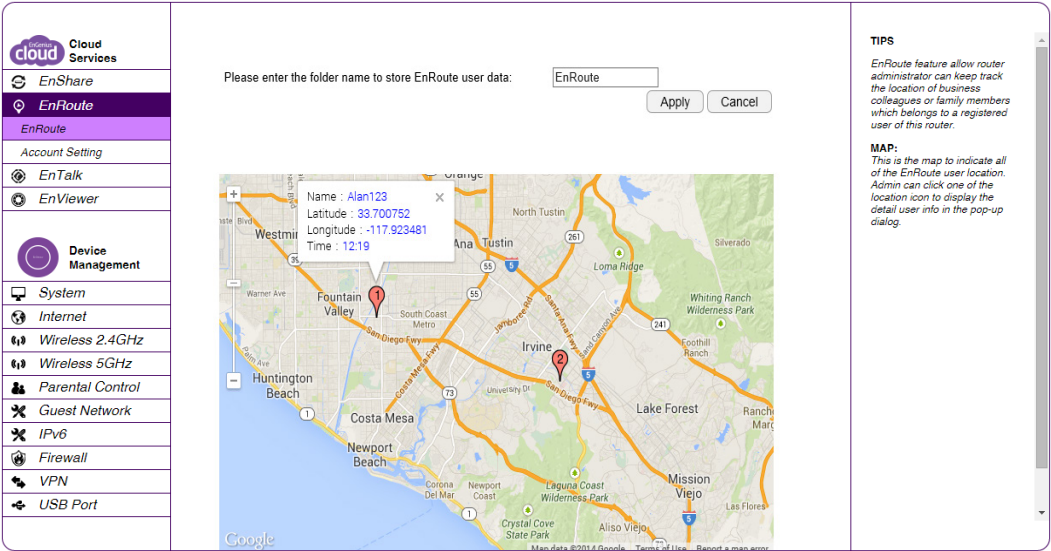

Account Settings

The Account settings page lets you manage accounts that have been registered to the EPG600 for use with the EnRoute app. Click **Edit** to edit a user account and **Delete** to delete an existing user account from the list. A total of ten (10) devices can be registered at a time to the EPG600.

 Cloud Services

 EnShare

 EnRoute

 EnRoute

 Account Setting

 EnTalk

 EnViewer

 Device Management

 System

 Internet

 Wireless 2.4GHz

 Wireless 5GHz

 Parental Control

 Guest Network

 IPv6

 Firewall

 VPN

 USB Port

User List

Nickname	Email	Action
New iPad	ipad@senao.com	<button>Edit</button> <button>Delete</button>
IPhone5s01	5s01@senao.com	<button>Edit</button> <button>Delete</button>
IPhone5s02	5s02@senao.com	<button>Edit</button> <button>Delete</button>
HTCnewone	htc@senao.com	<button>Edit</button> <button>Delete</button>
Samsung	sam@senao.com	<button>Edit</button> <button>Delete</button>
Sonypad	Sony@senao.com	<button>Edit</button> <button>Delete</button>

TIPS

EnGenius EnRoute APP enables user to register smartphone APP to EnGenius Intelligent Cloud Router, which supports to record user's location and travel path and keep the history in EnGenius Intelligent Cloud Router.

Router administrator can manage EnRoute user account in this page.

Nickname

This is the display name of EnRoute service, it will displayed on the EnRoute APP and EnRoute Web GUI. Router administrator can modify the info in Edit function.

Email

This is the EnRoute login account info. Router administrator can modify the info in Edit function.

Action

Edit - To edit the EnRoute account setting

Delete - Delete this EnRoute user account.

EnTalk

The EnGenius EnTalk app turns existing smartphones into cordless phone extensions with unlimited range, enabling each user to make and receive calls associated with a home telephone line to save on long distance and international phone calls. The EPG600 supports up to 10 smartphones registered to the Gateway and can make or receive calls anywhere in the world with an Internet connection.

With the EnTalk app, you can:

- Save on international calling
- Make calls as local calls among different telecom users, saving on international fees
- Forward calls from your telephone to your smartphone automatically



EnTalk Setup for Smartphones


The EnGenius EnTalk app lets you connect to your EPG600 as well as other EnTalk enabled smartphones from anywhere. Please follow these steps to setup your EnTalk SIP account for your smartphone (iOS/Android).

1. Download the EnTalk app from the Google Play store or Apple store.




Google Play Store

The EnTalk App will appear like this  on the Google Play store.

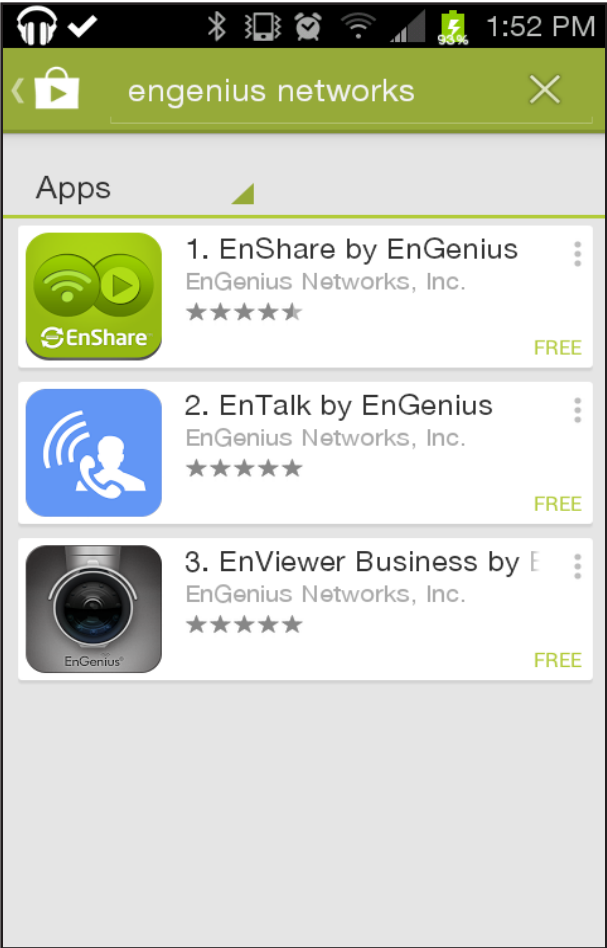


Apple Store


The EnTalk App will appear like this  on the Apple store.

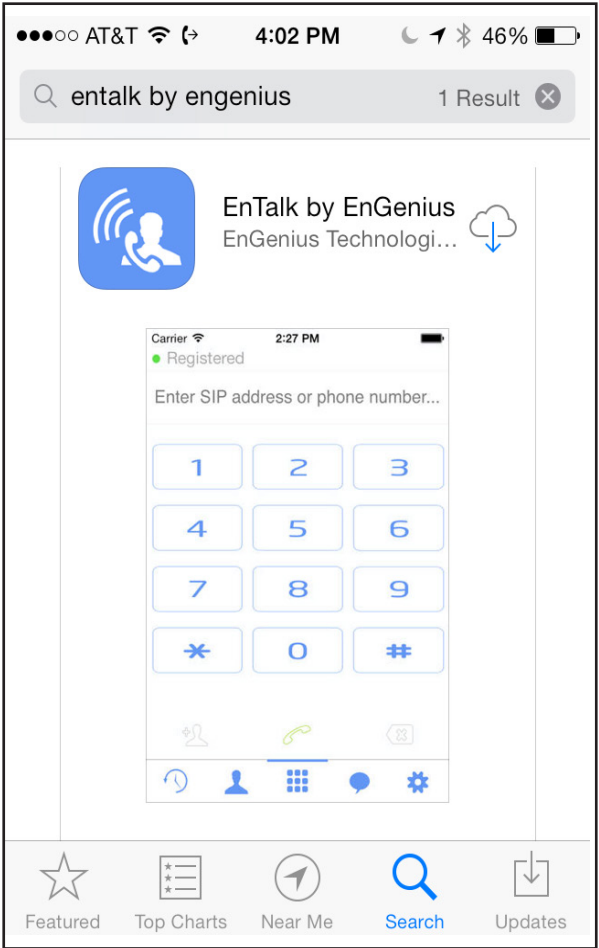


2. Make sure your mobile device is connected to EPG600.
Open the EnTalk™ App in your smartphone.

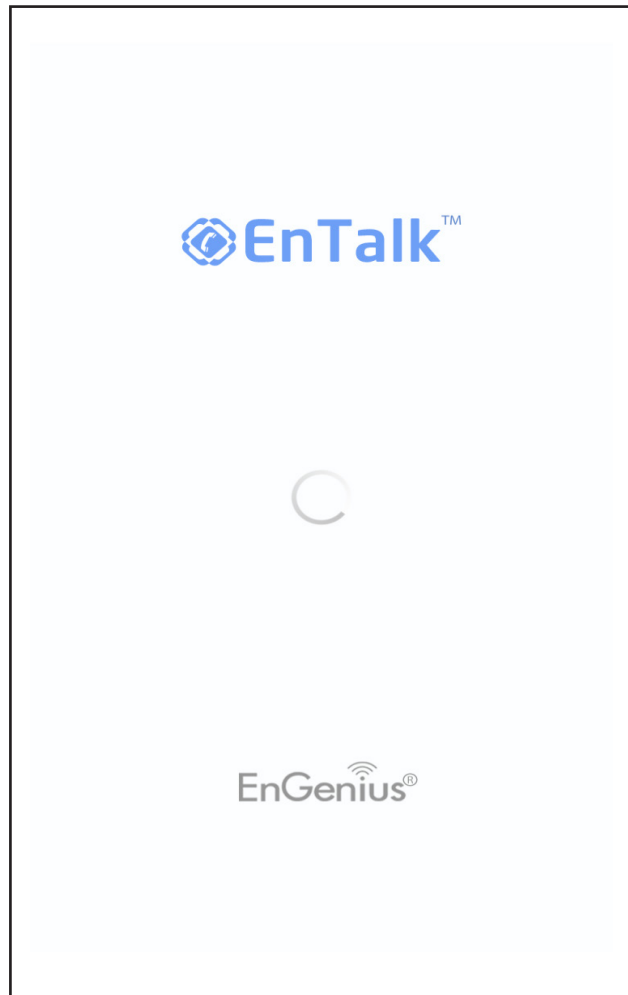


3. Please follow the assistant steps to complete registration for your smartphone. Press the **Next** button to continue or the **Cancel** button to quit the application at any time.

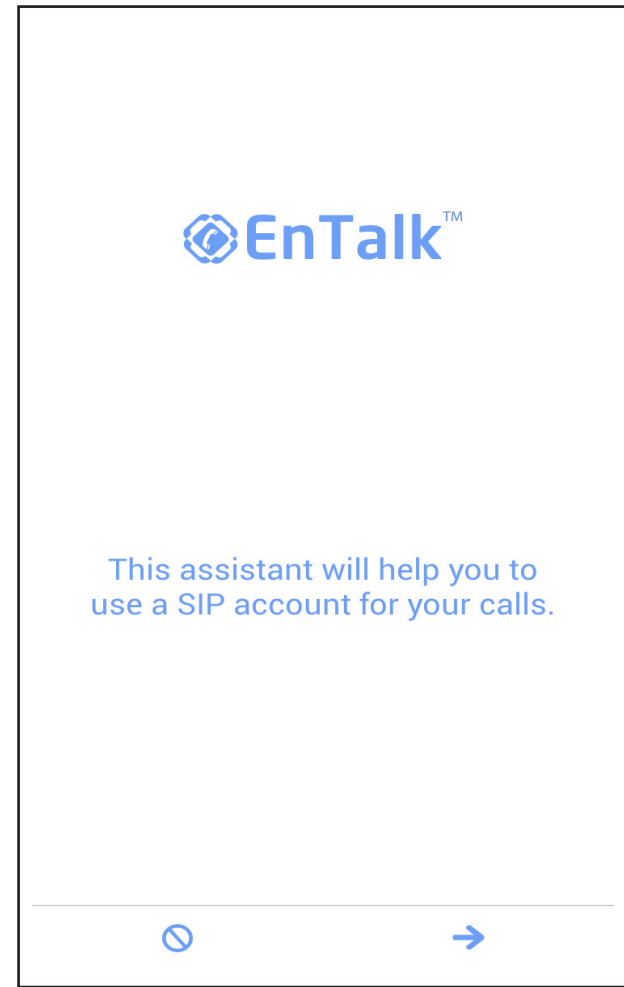


4. Choose how you would like to register the EnTalk app. You can either choose to manually register or through Auto Registration. Press the **Back** button to go back a step or the **Cancel** button to quit the application. It is recommended that you use the Auto Registration feature.

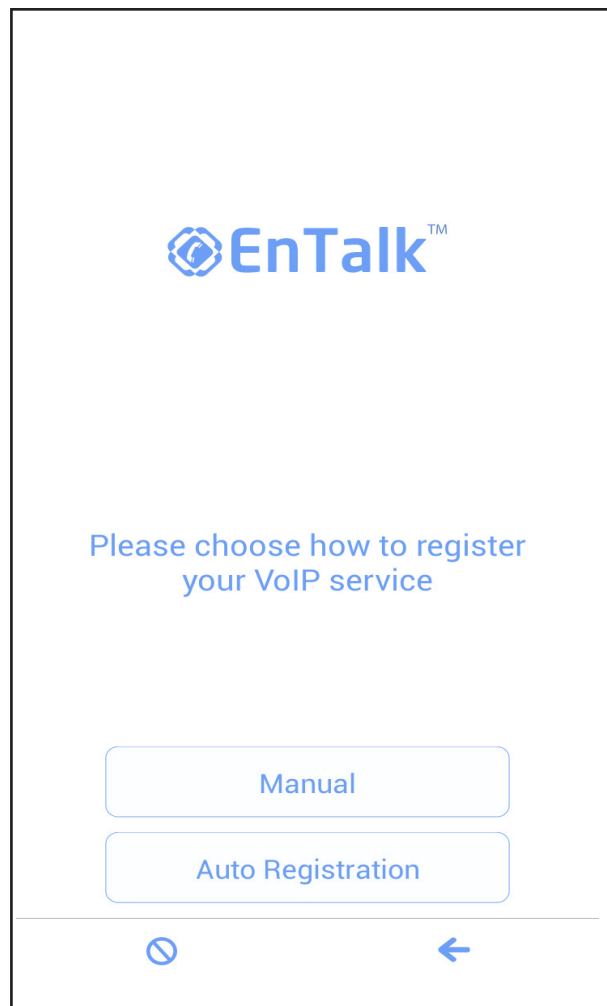

5. You can choose between a local or remote registry. To register automatically, press the **REG** button on the EPG600 for 2 or more seconds and press the corresponding **Auto Registration** button on the EnTalk app. Your Smartphone is now registered to the EPG600.

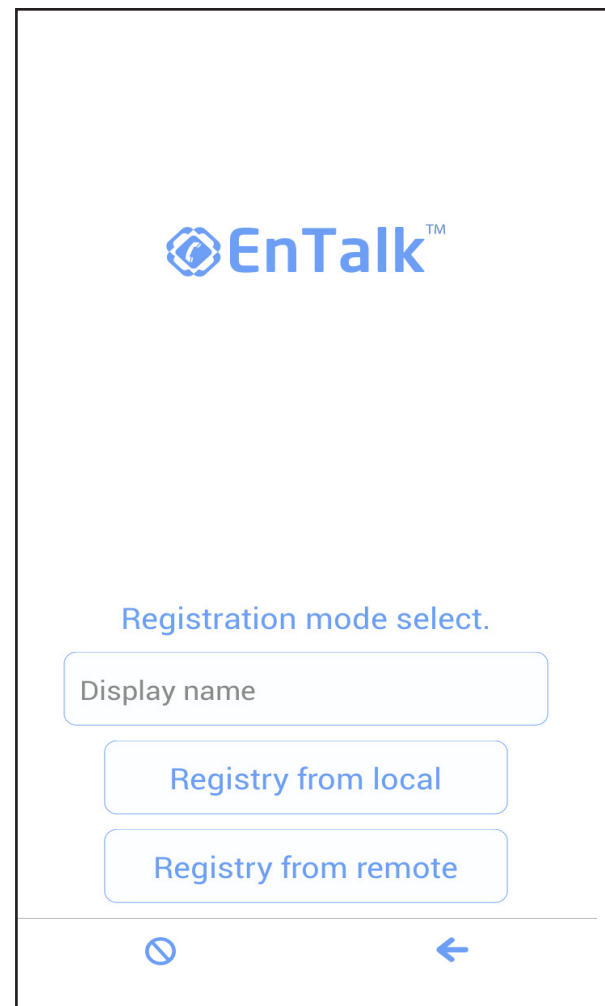


6. To manually register, enter your VoIP information here, including your username, password, and host name. To auto register, enter your desired user name and click on **Registry** from Remote (Internet). Enter the Gateway's log-in information and IP or DDNS name. Click **Apply** and you will be registered to the Gateway immediately.

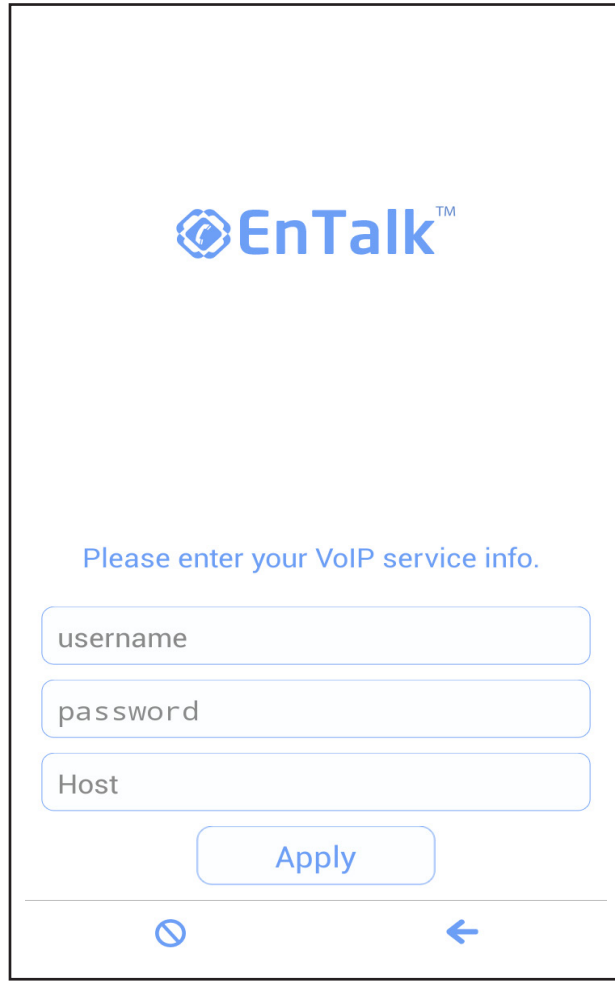


The image shows a registration screen for EnTalk. At the top is the EnTalk logo. Below it, the text "Please enter your VoIP service info." is displayed. There are three input fields: "username", "password", and "Host". Below these fields is an "Apply" button. At the bottom of the screen, there are two navigation icons: a circle with a diagonal line and a back arrow.

7. Once finished registering, the main menu page will appear. Enter phone numbers or addresses you would like to connect with. You can connect up to 10 other EnTalk enabled SIP accounts per EPG600. Your menu options are History list, Contacts, Numberpad, Chat history, and Settings.

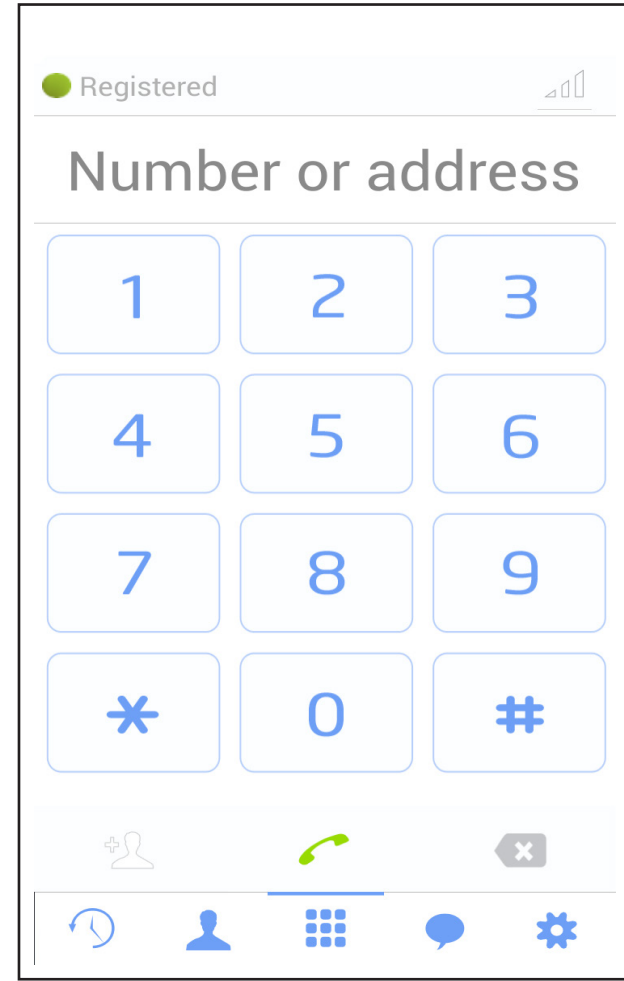

The image shows the main menu page of the EnTalk application. At the top, it says "Registered" with a green dot and a signal strength indicator. Below this is a section titled "Number or address" with a numeric keypad (1-9, *, 0, #). At the bottom, there is a navigation bar with five icons: a clock (History list), a person (Contacts), a grid (Numberpad), a speech bubble (Chat history), and a gear (Settings).

From your smartphone screen, the EnTalk app shortcut will look like this. You have now successfully installed and registered EnTalk.

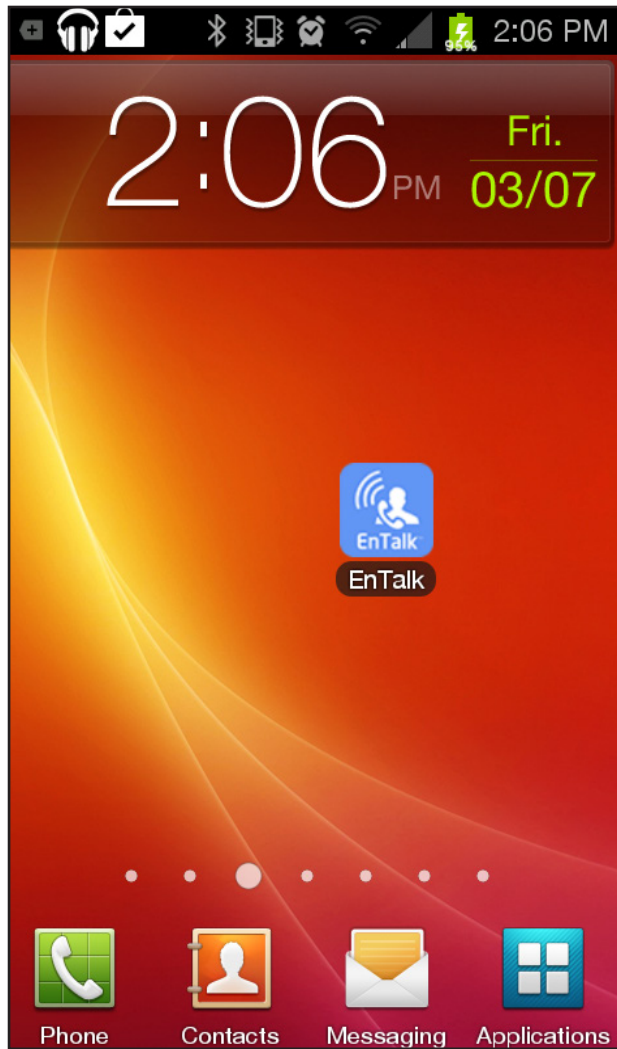

Basic

The Basic section lets you view and manage basic settings for the EnTalk app.

VoIP Server Port

Enter the port number for VoIP services on the EPG600. The default port for VoIP service is 5060.

EnGenius

cloud

Cloud Services

EnShare

EnRoute

EnTalk

Basic

Account Setting

DialPlan Setting

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

VoIP Server Port

5060

(1-65535)

Apply

Cancel

TIPS

VoIP Server Port:
This is the port used for VoIP service.
The default port for VoIP service is 5060.

Account Settings

The Account Settings page lets you manage and configure registered accounts connected to the EPG600. After downloading the EnTalk app and registering a smartphone, you can manage settings per account or for all registered users. Click **Edit** to manage a registered account and click **Release** to disconnect the account from the EPG600.

Display Name

Shows the account user name displayed on the VoIP user's SIP contact list.

Status

Shows the user's connection status.

Paired

This item displays the VoIP account's behavior. **Available** means this account is able to register with the EPG600. **Manual** means this account has been manually registered. **Pair Success** means this account has been registered via the Auto Registration button. **Account Active** shows the account status as active.

Action


Click **Edit** to manage the VoIP settings for the selected account.

Protocol

Display the SIP account VoIP protocol.

Operator

Operator feature allows you to designate one or several of your EnTalk-registered users to be an "operator" who will take all in-coming calls.

 Cloud Services										
 EnShare										
 EnRoute										
 EnTalk										
Basic										
Account Setting										
DialPlan Setting										
 EnViewer										
 Device Management										
 System										
 Internet										
 Wireless 2.4GHz										
 Wireless 5GHz										
 Parental Control										
 Guest Network										
 IPv6										
 Firewall										
 VPN										

User List									
SIP Number	Display Name	Status	Paired	Account Active	Action		Protocol	Operator	
10	Newone	Offline	Pair Success	Enable	Edit	Release	TCP ▼	☒	
11	VINNN	Offline	Pair Success	Enable	Edit	Release	TCP ▼	☐	
12	BB	Offline	Pair Success	Enable	Edit	Release	TCP ▼	☐	
13	Pad	Offline	Pair Success	Enable	Edit	Release	TCP ▼	☐	
14	14	Offline	Available	Enable	Edit	Release	TCP ▼	☐	
15	15	Offline	Available	Enable	Edit	Release	TCP ▼	☐	
16	16	Offline	Available	Enable	Edit	Release	TCP ▼	☐	
17	17	Offline	Available	Enable	Edit	Release	TCP ▼	☐	
18	18	Offline	Available	Enable	Edit	Release	TCP ▼	☐	
19	19	Offline	Manual	Enable	Edit	Release	UDP ▼	☐	

TIPS

The VoIP account users can make free calls with other SIP account users. User can also call telephone / mobile phone users if device have registered to PSTN telephone network. User can simply registered their mobile phone via auto registration procedure. Please follow QSG steps to apply VoIP account service.

Display Name:
This is the account user name displayed on VoIP user's SIP contact list. Administrator can modify the display name in this page.

Status:
This item displayed the VoIP user connected status.

Paired:
This item displayed the VoIP account registration behavior. "Available" means this account is able to register. "Manual" means this account is manually registration. "Pair Success" means this account is registered by auto register button.

Account Active:
This item displayed the account active status.

Dial Plan Settings

The Dial Plan settings page lets you setup the prefix number for PSTN calls for regisrerted smartphones connected to the EPG600 for the EnTalk app.

Description

Shows the description for the given Dial Plan rule.

Pattern/Attach Pattern

Shows how the system will transfer the number for all outgoing telephone calls. For example, If a user sets up the pattern as 01, it will attach the pattern as 1906. When the number is transmitted with entering 01123456, the system will replace it with 1906123456.

Action

Click **Edit** to manage the Dial Plan setting. Click **Release** to delete the given Dial Plan setting.

Cloud Services

EnShare

EnRoute

EnTalk

Basic

Account Setting

DialPlan Setting

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

DialPlan List

No.	Description	Pattern	Attach Pattern	Edit	Delete
1				Edit	Release
2				Edit	Release
3				Edit	Release
4				Edit	Release
5				Edit	Release

TIPS

The Dial Plan list enable user to set up the prefix number for PSTN calls.

Description:
The description of this dial plan rule.


Pattern/Attach Pattern:
The system will transfer the number for all outgoing telephone call.

For example:
If user setup the pattern as 01, attach pattern as 1906. When transit the number with 01123456, the system will replace it with 1906123456.

Action:
Edit - To edit the Dial Plan setting
Release - Delete this Dial Plan setting.

Chapter 5

Gateway Management Settings

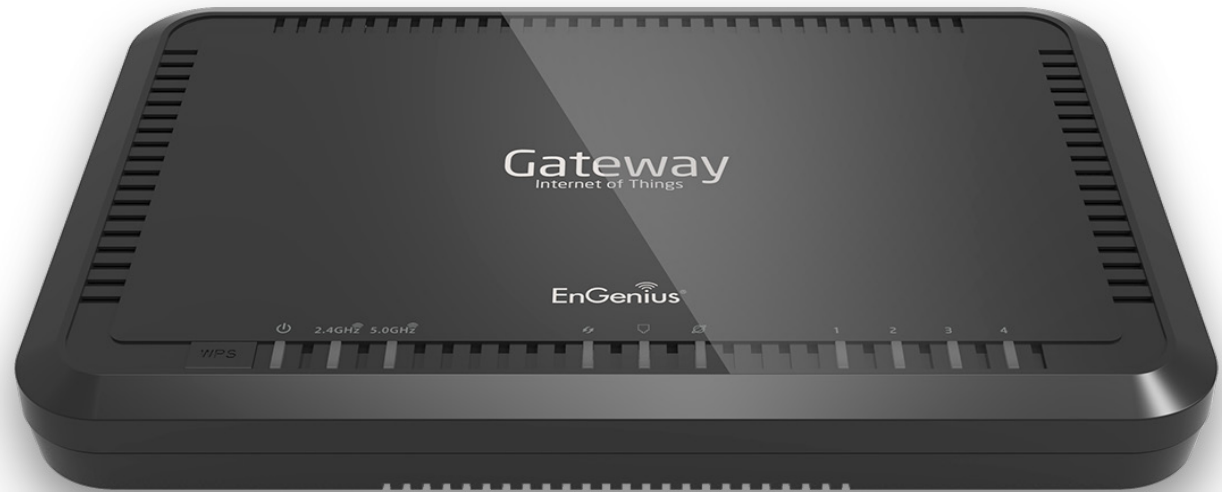

System

Viewing the System Status

To see a more detailed view of the Gateway's status than the information displayed on the Home page of the Web Configuration interface, click on **Network Settings** in the upper navigation bar from the dashboard.



EnShare
EnRoute
EnTalk
EnViewer

**Device
Management**
System
Internet
Wireless 2.4GHz
Wireless 5GHz
Parental Control
Guest Network
IPv6
Firewall
VPN
USB Port
Advanced
Tools
System

<i>Model</i>	<i>EPG600</i>
<i>Mode</i>	<i>AP Router</i>
<i>Uptime</i>	<i>19 hours 43 min 53 sec</i>
<i>Current Date/Time</i>	<i>2014/10/08 15:52:10</i>
<i>Hardware Version</i>	<i>1.0.0</i>
<i>Serial Number</i>	<i>147335813</i>
<i>Application Version</i>	<i>1.0.1</i>
<i>Default UID</i>	<i>1dc6efe</i>
<i>Default EnGenius DDNS Name</i>	<i>1dc6efe.engeniussdns.com</i>

WAN Settings

<i>Attain IP Protocol</i>	<i>PPPoE</i>
<i>IP Address</i>	<i>114.37.30.212</i>
<i>Subnet Mask</i>	<i>255.255.255.255</i>
<i>Default Gateway</i>	<i>168.95.98.254</i>
<i>MAC Address</i>	<i>88:DC:96:23:91:01</i>
<i>Primary DNS</i>	<i>168.95.192.1</i>
<i>Secondary DNS</i>	<i>168.95.1.1</i>

LAN Settings
TIPS

Status page shows the summary of current system status including System (hardware/ software version, date/ time), Internet connection (WAN Settings), Wired (LAN Settings) and Wireless Network (WLAN) information.



Note: If a feature or function does not apply to all modes, a note indicates which modes are applicable. Otherwise, it is assumed the feature or function applies to all modes.

Status

On the **Status** page, you can view a summary of the current Gateway system status including the Gateway's hardware/software version, date/time, wired network (LAN), and wireless network (WLAN) information.

Model

The model name of the EPG600 Series Gateway.

Mode

The operating mode for the EPG600.

Uptime

The amount of time the Gateway has been connected for the current session.

Current Date/Time

The current system date and time.

Hardware Version

The hardware version number of the Gateway.

Serial Number

The serial number of the Gateway (*this is required for customer service or support).

Application Version

The version of the Gateway's firmware.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Status

LAN

DHCP

Log

Monitor

Language

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

System

Model

EPG600

Mode

AP Router

Uptime

19 hours 46 min 47 sec

Current Date/Time

2014/10/08 15:55:04

Hardware Version

1.0.0

Serial Number

147335813

Application Version

1.0.1

Default UID

1dc6efe

Default EnGenius DDNS Name

1dc6efe.engeniustech.com

WAN Settings

Attain IP Protocol

PPPoE

IP Address

114.37.30.212

Subnet Mask

255.255.255.255

Default Gateway

168.95.98.254

MAC Address

88:DC:96:23:91:01

Primary DNS

168.95.192.1

Secondary DNS

168.95.1.1

LAN Settings

TIPS

Status page shows the summary of current system status including System (hardware/ software version, date/ time), Internet connection (WAN Settings), Wired (LAN Settings) and Wireless Network (WLAN) information.



Note: To update the Gateway's firmware, visit www.engeniustech.com and go to the product page for your Gateway, then select the Downloads tab at the bottom of the web page to see if a newer version of the firmware is available.

WAN Settings

Attain IP Protocol

Displays the IP protocol in use for the Gateway. It can be a dynamic or static IP address.

IP Address

The Gateway’s IP address as designated by an ISP (Internet Service Provider).

Subnet Mask

The Gateway’s WAN Subnet mask as designated by an ISP provider.

Default Gateway

The Gateway’s Gateway address as designated by an ISP provider.

MAC Address

The Gateway’s WAN MAC (Media Address Control) address.
The Gateway’s MAC address is located on the label on the bottom panel of the Gateway and is unique for each Gateway.

Primary DNS

The primary DNS of an ISP provider.

Secondary DNS

The secondary DNS of an ISP provider.

WAN Settings

Attain IP Protocol	Dynamic IP Address
IP Address	---
Subnet Mask	---
Default Gateway	---
MAC Address	00:AA:BB:CC:DD:11
Primary DNS	---
Secondary DNS	---

LAN Settings

IP Address

Shows the Gateway's local IP address. The default LAN IP address is **http://192.168.0.1**. To access the Web Configuration Interface for the Gateway, type this address into the address (URL) field of your web browser. This can only be done in the same physical location where the Gateway resides (your home network).

Subnet Mask

Shows the Gateway's local Subnet mask.

DHCP Server

Shows the DHCP setting status. It is enabled by default. The DHCP (Dynamic Host Control Protocol) is a software mechanism in your Gateway that assigns IP addresses to wired and wireless devices on your network. For example, a computer, printer, tablet, or HDTV on your network may be assigned an IP address of http://192.168.0.104. Note how the address is essentially an extension or addition of your Gateway's IP address.

MAC Address

Shows the Gateway's unique MAC address.

LAN Settings

IP Address	192.168.0.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled
MAC Address	00:AA:BB:CC:DD:10

WLAN Settings

Channel

Shows the communications channel used by all stations or computing devices on the network.

ESSID

This is the ID value of a set of one or more interconnected basic service sets (BSSs).

Security

Shows the security setting status (Default: Disabled).

BSSID

The unique ID of the BSS using the above channel value on this

Gateway. The ID is the MAC address of the BSSs access point.

Associated Clients

The number of clients associated (actively linked to the Gateway via a wireless or wired/Ethernet connection) with this SSID.

SSID_1	
ESSID	E600_5G
Security	WPA2 Pre-Shared key
BSSID	88:DC:96:23:91:31
Associated Clients	0
Guest Network Setting	
Guest Network	Disabled

Guest Network Settings

Guest Network

Shows the guest network status. It is disabled by default.

IP Address

Shows the Guest Network’s LAN IP address.

Subnet Mask

Shows the Guest Network’s local Subnet mask.

DHCP Server

Shows the Guest Network DHCP setting status (Default: Enabled).

Guest Network Interface

Shows the SSID (Service Set Identifier) of the Guest Network.

Guest Network Setting

Guest Network	Enabled
IP Address	192.168.169.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled
Guest Network Interface	SSID_2

Configuring the LAN (Local Area Network)

The settings on this page allow you to configure the wired network settings. Devices connected to the Gateway's Ethernet ports comprise its LAN. The Gateway's IP is defined in the **IP Address** field. The default setting of the DHCP server is set to **Enabled** so that networked clients (computers, home entertainment components, printers, etc.) will automatically be assigned IP addresses by the Gateway.

More advanced users may wish to configure the DNS server settings to meet their specific requirements. Changing the settings in this section are not necessary for most situations.

To view the LAN settings, click **System**, then click **LAN**.



Note: Keep the Gateway's default values if you are uncertain of the settings values.

LAN IP

IP Address

192.168.0.1

IP Subnet Mask

255.255.255.0

802.1d Spanning Tree

Disabled ▼

LAN IP

IP Address

For configuring the Gateway's LAN IP address.

IP Subnet Mask

For configuring the Gateway's LAN Subnet Mask

802.1d Spanning Tree

The Spanning Tree is disabled by default. When enabled, the Spanning Tree protocol prevents network loops so that transmissions won't pass the same node twice or several times to reach the destination.



Note: The default device IP address is: 192.168.0.1

DHCP Server

The DHCP server assigns IP addresses to the devices on the LAN.

DHCP Server

From here you can enable or disable the DHCP server. It is enabled by default.

Lease Time

From here you can configure the amount of time each allocated IP address can be used by a client.

Start IP

The first IP address in the range of addresses assigned by the Gateway.

End IP

The last IP address in the range of addresses assigned by the Gateway.

Domain Name

Shows the domain name of the Gateway.

DHCP Server

DHCP Server

Enabled ▼

Lease Time

One Day ▼

Start IP

192.168.0.100

End IP

192.168.0.200

Domain Name

engeniusrouter

Configuring Dynamic Host Configuration Protocol

This page allows you to view and configure Dynamic Host Configuration Protocol (DHCP) addresses.



WARNING! Do not modify the settings in this section without a thorough understanding of the parameters.

To view the DHCP settings, click **System** then click **DHCP**.

DHCP Client Table

Displays the connected DHCP clients whose IP addresses are assigned by the DHCP server of the Gateway.

IP Address

Displays the IP address of the static DHCP client device in the table.

MAC Address

Displays the MAC address of the static DHCP client device in the table.

Expiration Time

Shows the date and time when the current DHCP address is no longer valid.

Click **Refresh** to update the table.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Status

LAN

DHCP

Log

Monitor

Language

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

DHCP Client Table

IP Address	MAC Address	Expiration Time
192.168.0.100	E8:8D:28:31:89:19	0 Days 02:53:56
192.168.0.111	70:3E:AC:C0:6B:B5	0 Days 21:27:35

Refresh

☒ Enable Static DHCP IP

IP Address

MAC Address

Add

Reset

Current Static DHCP Table

No.	IP Address	MAC Address	Select
-----	------------	-------------	--------

Delete Selected

Delete All

Reset

Apply

Cancel

TIPS

DHCP Client Table:
This table shows all the IP addresses that are currently being used. Each IP is assigned to a device which can be identified by MAC address. You can obtain the latest IP assignment by clicking [Refresh].

Enable Static DHCP IP:
This feature allows for static leases to be assigned to a client based on a MAC address. Usually, you do not need to make any changes on this section. Please keep the default value if you are uncertain about these settings.

Enabling Static DHCP IP

There are reasons why you may wish to enable a static IP address on a client device on your Gateway's network. On occasion, if there are power outages or if you've reconfigured the settings on your EPG Gateway and reboot it to apply the new settings, the previous IP address that the Gateway's DHCP server assigned to one or more devices on the network may have changed. Some client devices on your network may also have web configuration interfaces (set top boxes, Network Attached Storage, etc.) that are accessible from the Gateway's assigned IP address from its DHCP server, so the client device can be managed. Thus if the client device's IP address changes from time to time, it may be difficult linking to it unless you find its new address through the Gateway's DHCP Client Table. If you wish to avoid this, then the **Enable Static DHCP IP** option allows you set a static (essentially a permanent) address for given client devices on your network. To do so, select the **Enable Static DHCP IP** option.

IP Address

Enter the IP address of the device you wish to add as a static DHCP client.

MAC Address

Enter the MAC address of the device you wish to add as a static DHCP client.

Click **Add** to add the device to the static DHCP client table or **Reset** to return the table to its previous state.

☐ Enable Static DHCP IP

IP Address

MAC Address

Add

Reset

Current Static DHCP Table

From here you can view the active static DHCP IP addresses that have been manually assigned to client devices with their corresponding MAC addresses.

No. (Number)

Displays the ID of the static DHCP client device in the table.

IP Address

Displays the IP address of the static DHCP client device in the table.

MAC Address

Displays the MAC address of the static DHCP client device in the table.

Select

Click to select static DHCP client devices you wish to be deleted. Click **Delete Selected** to remove a selected address. Click **Delete All** to remove all addresses from the table. Click **Reset** to return the table to its previous state. Click **Apply** to save the settings or **Cancel** to discard changes.

Current Static DHCP Table

No.	IP Address	MAC Address	Select
1	192.168.0.99	00:02:6F:FD:8D:C5	☒

Delete Selected

Delete All

Reset

Apply

Cancel

Log


The logging service records and displays important system information and activity on the network. The events are stored in a memory buffer with older data overwritten by newer when the buffer is full. To view the Log settings, click **System** then click **Log**.

SysLog Settings - Log Message List

Select **Enable Logging to Syslog Server**. Next, click **Save** to start logging information to the system.


Log Message Window

The Log Message Window shows the current system operations and network activity. Click **Save** to save the message list to a text file, **Clear** to discard the message from the memory buffer, or **Refresh** to clear previous messages and write new messages to the memory buffer. When finished with configuration, click **Apply** to save the changes.

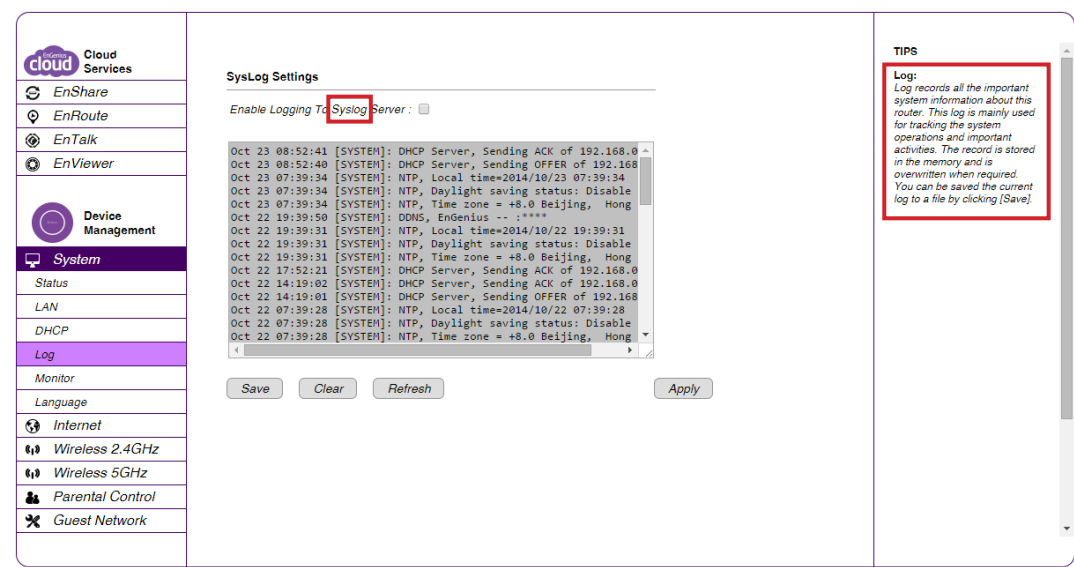


Monitoring Bandwidth Usage

This tool allows you to view real-time bandwidth usage for WAN (Wide Area Network - or Internet), LAN (Local Area Network) and WLAN (Wireless Local Area Network) traffic. For the EPG600, it shows both the bandwidth traffic in both the 2.4 and 5 GHz frequency bands. To view the Bandwidth Monitor settings, click **System**, then click **Monitor**. The screens display the active bandwidth usage for both the LAN and WLAN networks as well as the bandwidth being used on the WAN connection.

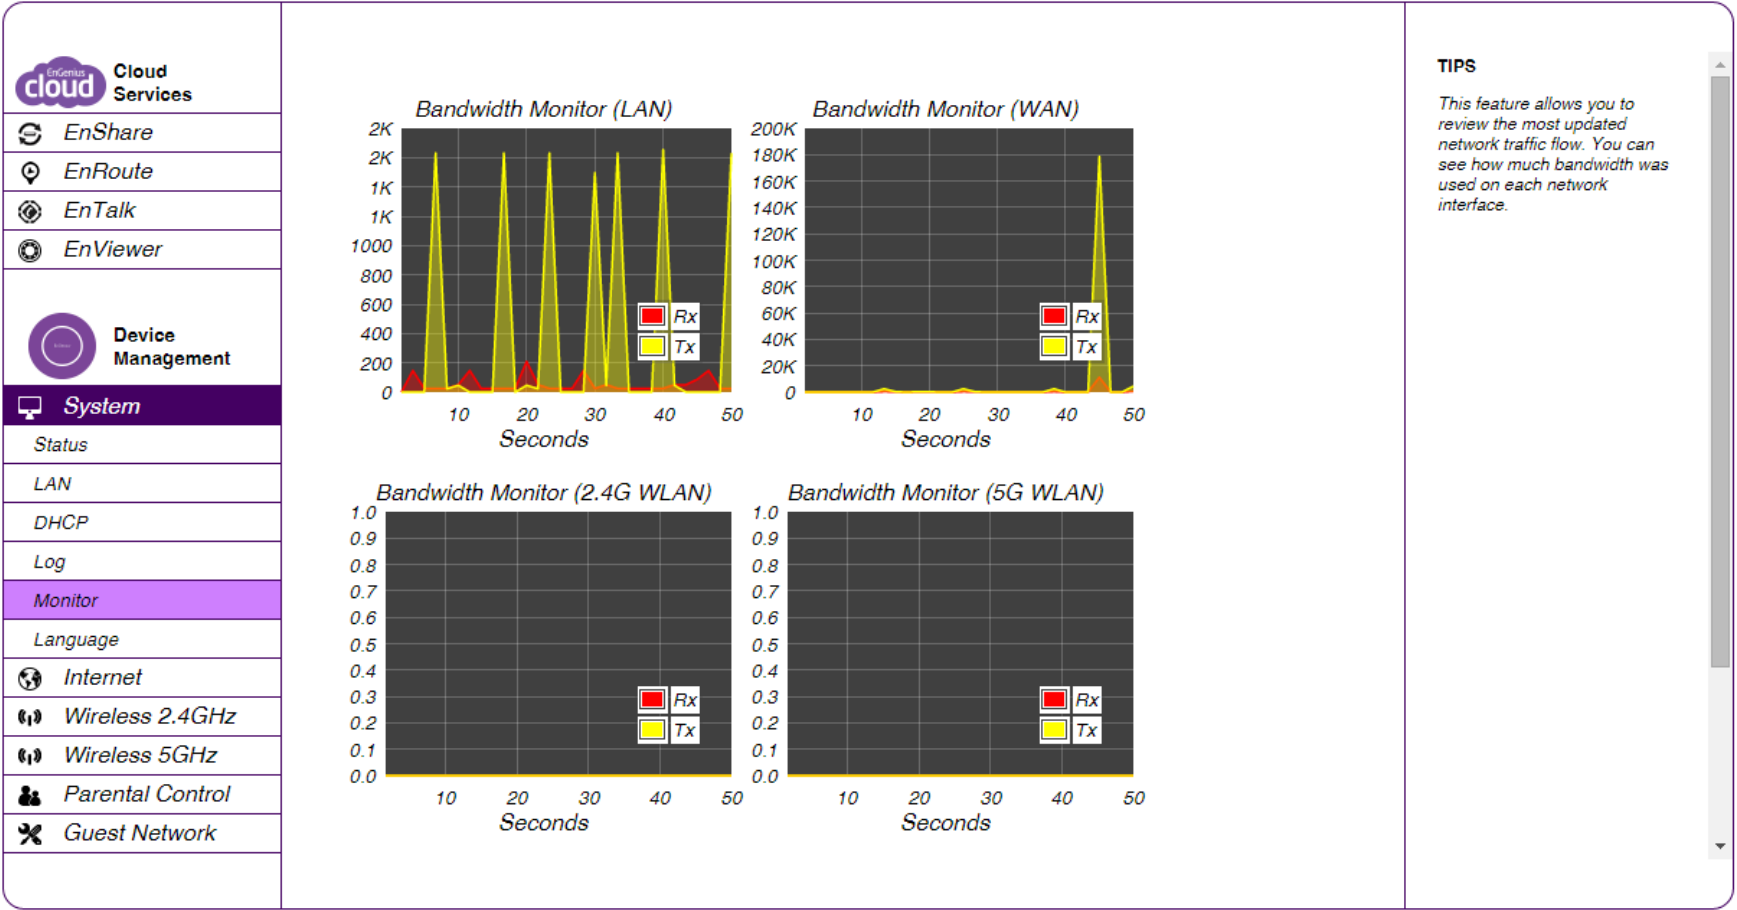

Configuring the System Language

The Gateway's Web Configuration interface supports multiple languages for your convenience. To view the language settings, click **System**, then click **Language** or via the Language icon in the top right corner of the dashboard. Select the language you wish to use from the drop-down menu.

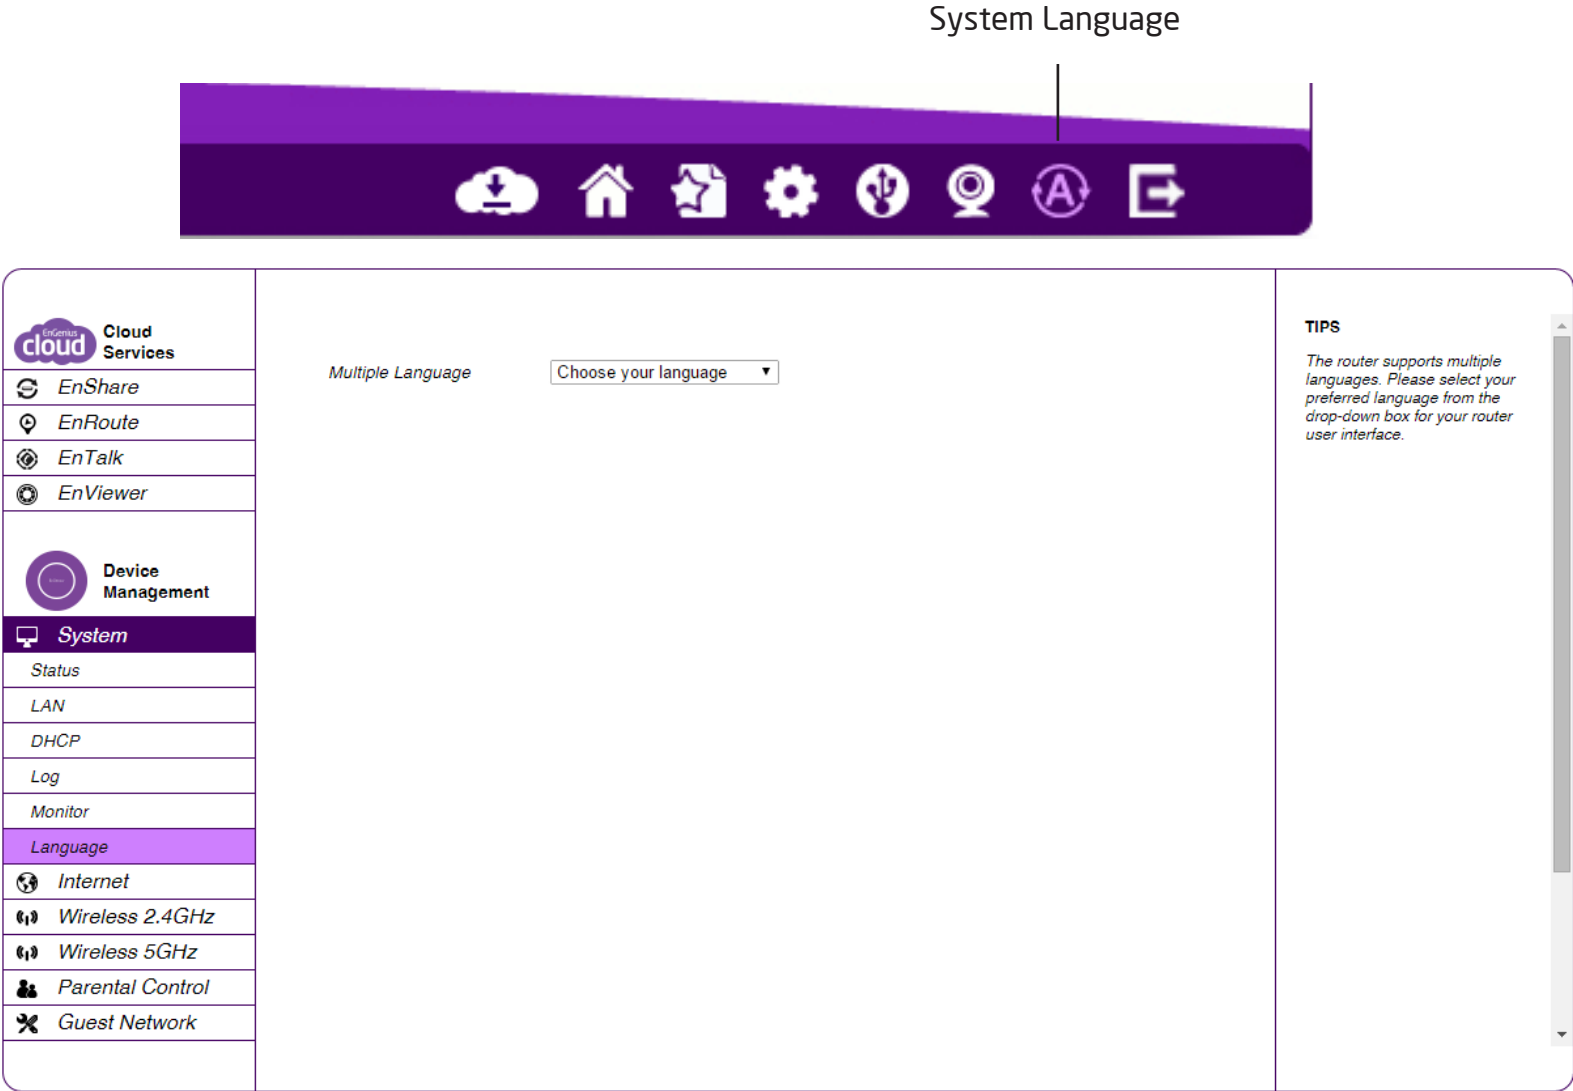

Configuring IP Cameras

This Gateway supports up to ten (10) EnGenius IP Cameras. If no IP Camera is detected, please check that the IP Camera's IP address and UPnP client are configured correctly.

To view the IP Camera settings, click **System**, then click **IP Camera** or the IP camera icon from the top right corner of the dashboard.

Before starting this procedure, you must connect your EnGenius IP camera to the network. Please make sure the camera is powered on.

Click the **Refresh** button to view a listing of available devices.



Note: The IP Camera function supports EnGenius IP Camera products only.



IP Cam Viewer



When you click on the IP Cam Viewer icon on the dashboard, you will be redirected to the IP Cam login screen. This page will show a list of all cameras that have been connected to the Gateway. You can view the current status or add profiles for selected cameras. Please note that you cannot view multiple cameras simultaneously via the Gateway's UI. Click **Add Profile** to add a user profile for a camera or **Refresh** to refresh the page.



NOTE: The connected EnGenius IP cameras support the free Enviewer™ app for your mobile device to help you keep track of your home or office while on the go. You can download it from the Apple or Google Play Store.

EnGenius Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

IP Camera

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

IP Camera Client Table

Refresh

Current IP-Camera Profile

Select	Profile Name	IP Address	MAC	Schedule Recording	Motion Detection	Audio Detection	Overwrite	Folder Name	Storage Size (GB)
--------	--------------	------------	-----	--------------------	------------------	-----------------	-----------	-------------	-------------------

Edit

Delete Selected

Delete All

Sync with IP-Camera

TIPS

The "IP Camera" function supports EnGenius IP-Cam product only.

If no IP-Cam is detected, please check the IP-Cam IP and UPnP client is configured correctly.

Configuring Internet Settings

View Internet Status

The WAN Settings, or Internet Status page shows a summary of the current Internet connection information. This section is also shown on the **System Status** page. To view the Status settings, click **Internet**, then click **Status**.

WAN Settings

To view the WAN Settings, click **Internet**, then select **Status**.

Attain IP Protocol

Display the IP Protocol type used for the Gateway (Dynamic IP Address or Static IP Address).

IP Address

Shows the Gateway's WAN IP address.

Subnet Mask

Shows the Gateway's WAN Subnet mask.

Default Gateway

Shows the ISP's Gateway IP address.

MAC Address

Shows the Gateway's WAN MAC address. The Gateway's MAC address is located on the label on the back side of the Gateway.

Primary DNS

This is the IP Address of the Domain Name System. This allows the recognition of domain names such as www.yahoo.com instead of 98.139.183.24, which is more difficult to remember. This is provided by your ISP.

Secondary DNS

Shows the secondary DNS address of an ISP provider.

EnGenius Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Hostname

MTU

MAC Address

DNS Servers

DNS Servers Type

Primary DNS

Secondary DNS

1500

(512<=MTU Value <=1500)

000000000000

Clone MAC

From ISP

168.95.192.1

168.95.1.1

Apply

Cancel

TIPS

Clone MAC:
Some ISPs require you to register the MAC address of your network interface card (NIC), which was connected directly to your cable or DSL modem during installation. Clone MAC will mask the router's MAC address with the MAC address of your NIC. Enter the MAC address of the NIC and click the Clone MAC button. Now, the correct MAC address is used for communication to the ISP.

DNS Servers:
Usually, the best choice is [From ISP]. However, you are allowed to define two DNS servers if you choose other options.

Internet

Status

The Status section shows the current WAN settings for the EPG600. To refresh the page, click **Renew**.

WAN Settings

Attain IP Protocol

Displays the IP protocol in use for the Gateway. It can be a dynamic or static IP address.

IP Address

The Gateway's IP address as designated by an ISP (Internet Service Provider).

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

WAN Settings

Attain IP Protocol

IP Address

Subnet Mask

Default Gateway

MAC Address

Primary DNS

Secondary DNS

PPPoE

114.25.66.121

255.255.255.255

168.95.98.254

88:DC:96:23:91:01

168.95.192.1

168.95.1.1

Connect

Disconnect

TIPS

WAN Settings (Internet Status) page shows the summary of current Internet connection information. This section is also shown on the System Status page.

Subnet Mask

The Gateway’s WAN Subnet mask as designated by an ISP provider.

Default Gateway

The Gateway’s Gateway address as designated by an ISP provider.

MAC Address

The Gateway’s WAN MAC (Media Address Control) address.
The Gateway’s MAC address is located on the label on the bottom panel of the Gateway and is unique for each Gateway.

Primary DNS

The primary DNS of an ISP provider.

Secondary DNS

The secondary DNS of an ISP provider.

WAN Settings	
Attain IP Protocol	Dynamic IP Address
IP Address	---
Subnet Mask	---
Default Gateway	---
MAC Address	00:AA:BB:CC:DD:11
Primary DNS	---
Secondary DNS	---

Configuring Dynamic IP

Dynamic IP addressing assigns a different IP address each time a device connects to an ISP (Internet Service Provider) and are most commonly used by cable ISPs. To view the Dynamic IP, click **Internet** then select **Dynamic IP**.

Dynamic IP

Hostname

From here you can assign a name for the Internet connection type. This field can be blank.

MTU (Maximum Transmission Unit)

This section allows you to configure the MTU. The MTU specifies the largest packet size permitted for an internet transmission. The factory default MTU size for Dynamic IP (DHCP) is: **1500**. The MTU size can be set between 512 and 1500.

Clone MAC

Enter the MAC address of your computer's (or tablet's) twork embedded Network Interface Card (NIC) in the MAC address field and click **Clone MAC**.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Hostname

MTU

MAC Address

DNS Servers

DNS Servers Type

Primary DNS

Secondary DNS

From ISP

168.95.192.1

168.95.1.1

Apply

Cancel

TIPS

Clone MAC:
Some ISPs require you to register the MAC address of your network interface card (NIC), which was connected directly to your cable or DSL modem during installation. Clone MAC will mask the router's MAC address with the MAC address of your NIC. Enter the MAC address of the NIC and click the Clone MAC button. Now, the correct MAC address is used for communication to the ISP.

DNS Servers:
Usually, the best choice is [From ISP]. However, you are allowed to define two DNS servers if you choose other options.



Note: Some ISP providers require registering the MAC address of the Network Interface Card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the Gateway's MAC address with the MAC address of the computer's NIC.

DNS Servers

The DNS server translates a domain or website name into a URL (Uniform Resource Locator), or Internet address. There are two options to choose from: **From ISP** or **User-Defined**. Select From ISP to retrieve the DNS address value from the ISP; select User-Defined to assign a custom DNS server address.

DNS Server

From here you can configure the type of DNS server. From ISP is enabled by default.

First DNS Server

Configure the first (primary) DNS server.

Second DNS Server

Configure the second (secondary) DNS server.

Click **Apply** to save the settings or **Cancel** to discard the changes.

DNS Servers

DNS Servers Type

From ISP ▼

Primary DNS

0.0.0.0

Secondary DNS

0.0.0.0

Apply

Cancel

Configuring Static IP

Setting a static IP address allows an administrator to set a specific IP address for the Gateway and guarantees that it can not be assigned a different address. To view the Static IP settings, click **Internet**, then click **Static IP**.

Static IP

IP Address

Shows the Gateway's WAN IP address.

Subnet Mask

Shows the Gateway's WAN Subnet mask.

Default Gateway

The WAN Gateway address.

Primary DNS

Shows the primary DNS server address.

Secondary DNS

Shows the secondary DNS server address.

MTU (Maximum Transmission Unit)

The MTU specifies the largest packet size permitted for an internet transmission. The factory default MTU size for static IP is: **1500**. The MTU size can be set between 512 and 1500.

MAC Address

Shows the Gateway's MAC address.

Click **Apply** to save the settings or **Cancel** to discard the changes.

MTU (Maximum Transmission Unit)

The MTU specifies the largest packet size permitted for an internet transmission. The factory default MTU size for static IP is: **1500**. The MTU size can be set between 512 and 1500.

MAC Address

Shows the Gateway's MAC address.

Click **Apply** to save the settings or **Cancel** to discard the changes.

EnGenius cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

IP Address

IP Subnet Mask

Default Gateway

Primary DNS

Secondary DNS

MTU

MAC Address

1500

(512<=MTU Value <=1500)

000000000000

Clone MAC

Apply

Cancel

TIPS

Static IP:
If your ISP requires the use of a static IP address, select Internet - Static IP, and enter the information which is provided by the ISP into the appropriate fields.

Configuring PPPoE

Point-to-Point Protocol over Ethernet (PPPoE) is used mainly by ISPs that provide DSL modems to connect to the Internet. To view your PPPoE settings, click **Internet**, then click **PPPoE**.

Username

Enter the username assigned by an ISP.

Password

Enter the password assigned by an ISP.

Service Name

Enter the service name of an ISP (optional).

MTU (Maximum Transmission Unit)

Enter the Maximum Transmission unit (MTU). The MTU specifies the largest packet size permitted for an internet transmission (the PPPoE default is: **1492**). The MTU size can be set between 512~1492.

Authentication Type

Select the type of authentication provided by the ISP: **Auto**, **PAP**, or **CHAP**. If unsure of the best setting, select **Auto** or check with your Internet Service Provider.

Type

Configure the connection type between the Gateway and the ISP. Select one of the following: **Keep Connection**, **Automatic Connection** or **Manual Connection**.

Idle Timeout

Configure the maximum idle time allowed for an inactive connection. The range is from 1 to 1,000 minutes

Enter the MAC address of the devices' Network Interface Card (NIC) in the MAC address field and click **Clone MAC**.



Note: Some ISP providers require registering the MAC address of the Network Interface Card (NIC) connected directly to the cable or DSL modem. A Clone MAC masks the Gateway's MAC address with the MAC address of the computer's NIC.

Click **Apply** to save the settings or **Cancel** to discard the changes.

EnGenius cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Username

74883606@hinet.net

Password

Service Name

MTU

1492

(512<=MTU Value <=1492)

Authentication Type

Auto

Type

Keep Connection

Idle Timeout

10

(1-1000 Minutes)

MAC Address

000000000000

Clone MAC

Apply

Cancel

TIPS

If your Internet is PPPoE based, your ISP will provide you with the user name and password. Please obtain this data from the ISP and enter the information into the appropriate fields. Usually Username and Password are the only two fields you need to enter. Please keep the other fields if you are uncertain about them.

MTU:
Maximum Transmission Unit (MTU) is the largest packet size permitted for internet transmission.

Authentication Type:
Please select the authentication type (Auto / PAP / CHAP) provided by your ISP.

Type:
This is the type of connection between the router and ISP.

Configuring PPTP

Point-to-Point Tunnelling Protocol (PPTP) is used in association with Virtual Private Networks (VPNs). There are two parts to a PPTP connection: the WAN interface settings and the PPTP settings. To view the PPTP settings, click **Internet**, then click **PPTP**.

WAN Interface Settings

WAN Interface Type

Select Dynamic IP Address to assign an IP address provided by an ISP.

Hostname

Enter a host name of an ISP (optional).

Clone MAC

Enter the MAC address of the computer's (or tablet's) embedded Network Interface Card (NIC) in the MAC address field and click **Clone MAC**.

Note: Some ISP providers require registering the MAC address of the Network Interface Card (NIC) connected directly to the cable or DSL modem. A Clone MAC masks the Gateway's MAC address with the MAC address of the computer's NIC.



cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

WAN Interface Settings

WAN Interface TypeDynamic IP Address

Hostname

MAC Address000000000000Clone MAC

PPTP Settings

Username

Password

Server Domain Name

Connection ID0(Optional)

MTU1400(512<=MTU Value <=1400)

TypeKeep Connection

Idle Timeout10(1-1000 Minutes)

ApplyCancel

TIPS

Your ISP will provide you with the user name and password. Please enter them accordingly.

WAN Interface Type: Select either Dynamic IP Address or Static IP address provided by your ISP.

Service IP Address: This is your ISP's PPTP server IP address. Contact your ISP for more information.

MTU: Maximum Transmission Unit (MTU) is the largest packet size permitted for internet transmission. Note: This setting should be only changed by experienced users.

Type: This is the type of connection between the router and ISP.

PPTP Settings

User Name

Enter the username assigned by your ISP.

Password

Enter the password assigned by your ISP.

Service IP Address

Enter the PPTP server IP address provided by your ISP.

Connection ID

Enter the connection ID provided by your ISP (optional).

MTU (Maximum Transmission Unit)

Enter MTU. The MTU specifies the largest packet size (Default: **1462**) permitted for an Internet transmission. The MTU size can be set between 512 and 1492.

Type

Configure the connection type between the Gateway and the ISP. Select one of the following: **Keep Connection**, **Automatic Connection** or **Manual Connection**.

Idle Timeout

Configure the maximum amount of time, in minutes, allowed for inactive Internet connection. The Internet connection will be dropped when the maximum idle time is reached. Valid values are between one and one thousand.

Click **Apply** to save the settings or **Cancel** to discard the changes.

Configuring L2TP

Layer 2 Tunneling Protocol (L2TP) is used in association with Virtual Private Networks (VPNs). There are two parts to a L2TP connection:

- 1. The WAN interface settings
- 2. The L2TP settings.



Note: Some ISP providers require registering the MAC address of the network interface card (NIC) connected directly to the cable or DSL modem. Clone MAC masks the Gateway's MAC address with the MAC address of the computer's NIC.

To view the L2TP settings, click **Internet**, then click **L2TP**.

WAN Interface Settings

WAN Interface Type

Select Dynamic IP Address to assign an IP address provided by an ISP.

Hostname

Enter a host name of an ISP (optional).

Clone MAC

Enter the MAC address of your computer's embedded network Interface Card (NIC) in the MAC address field and click **Clone MAC**.

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

WAN Interface Settings

WAN Interface Type

Dynamic IP Address

Hostname

MAC Address

000000000000

Clone MAC

L2TP Settings

Username

Password

Server Domain Name

MTU

1400

(512<=MTU Value <=1400)

Type

Keep Connection

Idle Timeout

10

(1-1000 Minutes)

Apply

Cancel

TIPS

L2TP is a WAN type through which some Internet Service Provider (ISP) may use for the Internet service. Please enter the Username and Password provided by your ISP to be authenticated. Do not change any other settings unless specific requested by your ISP.

Clone MAC:
You may need to use [Clone MAC] if your ISP requires your PC/Laptop MAC address as part of authentication. The router will clone your PC/Laptop MAC address to login.

L2TP Settings

Username

Enter the username assigned by an ISP.

Password

Enter the password assigned by an ISP.

Service IP Address

Enter the L2TP server IP address provided by an ISP.

Connection ID

Enter the connection ID provided by an ISP (optional).

MTU (Maximum Transmission Unit)

Enter MTU. The MTU specifies the largest packet size (Default: **1460**) permitted for an Internet transmission. The MTU size can be set between 512 and 1492.

Type

Configure the connection type between the Gateway and the ISP. Select one of the following: **Keep Connection**, **Automatic Connection** or **Manual Connection**.

Idle Timeout

Configure the maximum amount of time, in minutes, allowed for an inactive Internet connection. The Internet connection will be dropped when the maximum idle time is reached. Valid values are between one and one thousand (1~100000).

Click **Apply** to save the settings or **Cancel** to discard the changes.

L2TP Settings

Username

Password

Service IP Address

MTU

1400

(512<=MTU Value <=1400)

Type

Keep Connection

Idle Timeout

10

(1-1000 Minutes)

Apply

Cancel

Configuring DS-Lite

Dual-Stack Lite (DS-Lite), allows ISPs to stop IPv4 addresses from reaching a user’s network devices and uses IPv6 exclusively. To view the DS-Lite settings, click **Internet**, then click **DS-Lite**.

DS-Lite Configuration

Select **DS-Lite DHCPv6 Option** or **Manual Configuration**.

AFTR IPv6 Address

Enter the AFTR IPv6 connection type.

B4 IPv4 Address

Enter an optional B4 IPv4 address.

WAN IPv6 Address

Enter the WAN IPv6 address.

IPv6 WAN Default Gateway

Enter the IPv6 WAN default Gateway address.

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Status

Dynamic IP

Static IP

PPPoE

PPTP

L2TP

DS-Lite

Wireless 2.4GHz

Wireless 5GHz

Parental Control

DS-Lite Configuration

DS-Lite DHCPv6 Option

Manual Configuration

AFTR IPv6 Address

192.0.0.2

(optional)

WAN IPv6 Address

FE80::8ADC:96FF:FE23:9101

IPv6 WAN Default Gateway

Apply

Cancel

TIPS

AFTR Address Internet Connection Type:
Enter the information provided by your Internet Service Provider (ISP).

Click **Apply** to save the settings or **Cancel** to discard the changes.

Wireless LAN Setup

To view the Wireless Basic settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **Basic**.

Radio

Click to enable or disable the wireless radio. If the wireless radio is disabled, wireless Access Points are not available.

Mode

Select the wireless operating mode for the Gateway. Two modes are available: **Access Point** or **Wireless Distribution System (WDS)** mode.

AP (Access Point)

Provides a connection Access Point for wireless devices.

WDS (Wireless Distribution System)

Allows the wireless network to be expanded using multiple Access Points without wired connections.

Click **Apply** to save the settings or **Cancel** to discard changes.

The screenshot displays the 'Wireless 2.4GHz' settings page. On the left is a sidebar menu with options: Cloud Services (EnShare, EnRoute, EnTalk, EnViewer), Device Management (System, Internet, **Wireless 2.4GHz**, Basic, Advanced, Security, Filter, WPS, Client List), Wireless 5GHz, Parental Control, and Guest Network. The main content area is titled 'Radio' and contains the following settings: 'Radio' (radio buttons for 'Enable' and 'Disable', with 'Enable' selected), 'Mode' (a dropdown menu set to 'AP'), 'Band' (a dropdown menu set to '2.4 GHz (802.11b/g/n)'), 'Enable SSID#' (a dropdown menu set to '1'), 'SSID1' (a text input field containing 'E600_2.4G'), 'Auto Channel' (radio buttons for 'Enable' and 'Disable', with 'Enable' selected), and 'Check Channel Time' (a dropdown menu set to 'Half Day'). At the bottom right of the settings area are 'Apply' and 'Cancel' buttons. On the far right, a 'TIPS' section provides additional information: 'Mode: Select AP/Router mode or WDS mode for the wireless network connection. Note: AP is AP/Router mode. And WDS is Wireless Distribution System (WDS) mode.'; 'Enable SSID#: The router supports up to 4 SSIDs, allowing you to secure your private local network by assigning a different SSID to each group of users. For example, guests may be placed on a secondary SSID.'; and 'SSID: This is the broadcasted wireless network name.'

Access Point Mode

These instructions apply to both the 2.4 GHz and 5 GHz frequency bands. The Gateway by default is already configured in Access Point Mode. For optimum connectivity to a number of different wireless client devices, it's recommended that you keep the Gateway in its default wireless settings. You can choose to have the Gateway associate only with certain iterations (IEEE standards) and by doing so this will either positively or negatively affect the Gateway's speed and throughput performance.

Band

Select a wireless standard for the network from the following options:

- 2.4 GHz (IEEE 802.11b)
- 2.4 GHz (IEEE 802.11n)
- 2.4 GHz (IEEE 802.11b/g)
- 2.4 GHz (IEEE 802.11g)
- 2.4 GHz (IEEE 802.11b/g/n)

- 5 GHz (IEEE 802.11a)
- 5 GHz (IEEE 802.11n)
- 5 GHz (IEEE 802.11a/n)

Enable SSID#

Select the number of wireless groups, between 1~4 available on the network.

SSID[#]

Enter the name of the wireless network(s).

Auto Channel

Click to enable or disable having the Gateway automatically select a channel for the wireless network. Auto Channel is enabled by default. Select **Disable** to manually assign a specific channel.

Check Channel Time

When Auto Channel is enabled, select a time period that the system checks the appropriate channel for the Gateway.

Channel

When Auto Channel is disabled, select a channel to assign to the wireless network. The valid values are from 1~11 in the US and 1~13 in the EU.

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Basic

Advanced

Security

Filter

WPS

Client List

Wireless 5GHz

Parental Control

Guest Network

Radio

Enable

Disable

Mode

AP

Band

2.4 GHz (802.11b/g/n)

Enable SSID#

1

SSID1

E600_2.4G

Auto Channel

Enable

Disable

Check Channel Time

Half Day

Apply

Cancel

TIPS

Mode:
Select AP/Router mode or WDS mode for the wireless network connection. Note: AP is: AP/Router mode. And WDS is Wireless Distribution System (WDS) mode.

Enable SSID#:
The router supports up to 4 SSIDs, allowing you to secure your private local network by assigning a different SSID to each group of users. For example, guests may be placed on a secondary SSID.

SSID:
This is the broadcasted wireless network name.

Wireless Distribution System Mode

From here you can configure the Gateway's wireless settings for WDS (Wireless Distribution System) mode.

Channel

Select a channel to assign to the wireless network. Valid values are from 1~11 in the US and 1~13 in the EU.

MAC Address

Enter the MAC address(es) for the wireless Access Point(s) that are part of the WDS.

WDS Data Rate

Select the data rate for the WDS.

Set Security

Click **Set Security** to set up the WDS security settings screen.

Radio ☒ Enable ☐ Disable

Mode

WDS ▼

Band

2.4 GHz (802.11b/g/n) ▼

Enable SSID#

1 ▼

SSID1

EnGenius887710

Channel

1 ▼

MAC Address 1

000000000000

MAC Address 2

000000000000

MAC Address 3

000000000000

MAC Address 4

000000000000

WDS Data Rate

300M ▼

Set Security

Set Security

Apply

Cancel

WDS Security Settings

Select the type of WDS encryption you wish to use: **WEP** or **WPA** (Pre-Shared Key), or **Disable** for the wireless network.

Wired Equivalent Privacy (WEP)

Key Length

Select between a 64-bit and 128-encryption.

Key Format

Select the type of characters used for the WEP Key: **ASCII** (5 characters) or **Hexadecimal** (10 characters).

Default Key

Select the default encryption key for wireless transactions.

Encryption Key

Enter the encryption key(s) used to encrypt the data packets during data transmission.

This page allows you setup the WDS security.

Encryption :	WEP ▼
Key Length :	64-bit ▼
Key Format :	ASCII (5 characters) ▼
Default key :	Key 1 ▼
Encryption Key 1 :	
Encryption Key 2 :	
Encryption Key 3 :	
Encryption Key 4 :	

Apply

Cancel

Wi-Fi Protected Access (WPA Pre-Shared Key)

WPA Type

Select the type of WPA encryption you would like to use. Your choices are WPA (TKIP) and WPA (AES).

Pre-Shared Key Format

Select the key format you would like to use.

Pre Shared Key

Enter the encryption key you would like to use.

This page allows you setup the WDS security.

Encryption :

WPA Pre-Shared key ▾

WPA Type :

☒ WPA(TKIP)

☐ WPA2(AES)

Pre-Shared Key Format :

Passphrase ▾

Pre-Shared Key :

BF5NZA58YDBE

Apply

Cancel

This page allows you setup the WDS security.

Encryption :

Disable ▾

Apply

Cancel

Click **Apply** to save the settings or **Cancel** to discard changes.

Configuring Security

From here you can enable security options on the wireless network to prevent intrusions to systems on the wireless network. To view the security settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **Security**.

SSID Selection

Select the wireless network group in which you wish to change wireless security settings.

Broadcast SSID

Click to enable or disable the broadcast SSID. Choose whether or not the wireless group is visible to other members.

Wi-Fi Multimedia (WMM)

Click to enable or disable Quality of Service (QoS) to optimize the streaming for bandwidth sensitive data such as HDTV video streaming, online gaming, VoIP, videoconferencing, and etc.

Encryption

Select the encryption type for the Gateway. First, enable 802.1X

Authentication. Next, enable or disable 802.1X authentication.

Click **Apply** to save the settings or **Cancel** to discard the changes.

The screenshot displays a configuration interface with a sidebar on the left and a main settings area on the right. The sidebar includes sections for 'Cloud Services' (EnShare, EnRoute, EnTalk, EnViewer), 'Device Management', and a list of network types: System, Internet, Wireless 2.4GHz (highlighted), Basic, Advanced, and Security (highlighted). The main settings area is for the 'Wireless 2.4GHz' network and includes the following options: 'SSID Selection' set to 'E600_2.4G', 'Broadcast SSID' set to 'Enable', 'WMM' set to 'Enable', 'Encryption' set to 'WPA Pre-Shared key' (highlighted with a red box), 'WPA Type' with radio buttons for WPA(TKIP), WPA2(AES) (selected), and WPA2 Mixed; 'Pre-Shared Key Type' set to 'Passphrase'; and 'Pre-Shared Key' set to '12345678'. At the bottom right are 'Apply' and 'Cancel' buttons.

SSID Selection	E600_2.4G
Broadcast SSID	Enable
WMM	Enable
Encryption	WPA Pre-Shared key
WPA Type	☐ WPA(TKIP) ☒ WPA2(AES) ☐ WPA2 Mixed
Pre-Shared Key Type	Passphrase
Pre-Shared Key	12345678

Apply Cancel

Encryption Type

Enabling encryption on the EPG600 is strongly encouraged as unauthorized parties within range of your Gateway's wireless signal may attempt to access your wireless network and then gain access to private information on devices on your network. It's highly recommended that you encrypt your Gateway with WPA2 (AES) for optimal security and throughput performance. Always select a strong passphrase greater than 8 characters long and comprised of letters, numbers, and symbols. Please make note of the passphrase and keep it in a secure location somewhere in your home in case you need to retrieve it.

Click **Apply** to save the settings or **Cancel** to discard the changes.



IMPORTANT! WPA2 (AES) offers much stronger security than WEP (Wired Equivalent Privacy) which has been and can be compromised.

SSID Selection	EnGenius887710 ▼
Broadcast SSID	Enable ▼
WMM	Enable ▼
Encryption	WPA Pre-Shared key ▼
WPA Type	☐ WPA(TKIP) ☒ WPA2(AES) ☐ WPA2 Mixed
Pre-Shared Key Type	Passphrase ▼
Pre-Shared Key	BF5NZA58YDBE

Apply Cancel

WPA Pre-Shared Key

WPA Type

Select the type of WPA from the following:

- **WPA2 Advanced Encryption Standard (AES): RECOMMENDED:** Government standard packet encryption which is stronger than TKIP.
- **WPA Temporal Key Integrity Protocol (TKIP):** Generates a 128-bit key for each packet.
- **WPA2 Mixed:** Mixed mode allows client devices to first associate to the Gateway using WPA2, and if they fail to connect, then they are connected via WPA (TKIP).

Pre-Shared Key Type

Select the type of pre-shared key as **Passphrase** (ASCII) or **Hexadecimal**.

Pre-Shared Key

Enter the Pre-Shared Key value.

SSID Selection	EnGenius887710 ▼
Broadcast SSID	Enable ▼
WMM	Enable ▼
Encryption	WPA Pre-Shared key ▼
WPA Type	☐ WPA(TKIP) ☒ WPA2(AES) ☐ WP
Pre-Shared Key Type	Passphrase ▼
Pre-Shared Key	BF5NZA58YDBE

Ap

WPA RADIUS

Use a RADIUS server to authenticate wireless stations and provide a session key to encrypt data during communications.

WPA Type

Select the type of **Wireless Protected Access (WPA)** from the following:

- **WPA2 Advanced Encryption Standard (AES): RECOMMENDED** – Government standard packet encryption which is stronger than TKIP.
- **WPA Temporal Key Integrity Protocol (TKIP)**: Generates a 128-bit key for each packet.
- **WPA2 Mixed**: Mixed mode allows client devices to first associate to the Gateway using WPA2, and if they fail to connect, then they are connected via WPA (TKIP).

RADIUS Server IP Address

Enter the IP address of the server.

RADIUS Server Port

Enter the port number of the server.

RADIUS Server Password

Enter the password of the server.

Encryption

WPA RADIUS

WPA Type

☐ WPA(TKIP)

☒ WPA2(AES)

☐ WPA2 Mixed

RADIUS Server IP Address

RADIUS Server port

1812

RADIUS Server password

Apply

Cancel

Wired Equivalent Privacy (WEP)

Authentication Type

Select the type of authentication from the following:

- **Open System:** Wireless stations can associate with the Gateway without WEP encryption.
- **Shared Key:** Devices must provide the corresponding WEP key(s) when connecting to the Gateway.
- **Auto:** The Gateway automatically detects whether Open System or Shared Key is being used.

Key Length

Select between 64-bit and 128-encryption.

Key Type

Select the type of characters used for the WEP Key: **ASCII** (5 characters) or **Hexadecimal** (10 characters).

Encryption Key [#]

Enter the encryption key(s) used to encrypt the data packets during data transmission.

Enable 802.1x Authentication

Enable or disable 802.1X authentication.

SSID Selection	EnGenius887711 ▼
Broadcast SSID	Enable ▼
WMM	Enable ▼
Encryption	WEP ▼
Authentication Type	☒ Open System ☐ Shared Key ☐ Auto
Key Length	64-bit ▼
Key Type	ASCII (5 characters) ▼
Default key	Key 1 ▼
Encryption Key 1	*****
Encryption Key 2	*****
Encryption Key 3	*****
Encryption Key 4	*****
☐ Enable 802.1x Authentication	

Apply

Cancel

Filters



WARNING! Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

When **Enable Wireless Access Control** is selected, only wireless clients with MAC addresses listed in the table are allowed to connect to the wireless network. To view the Filter settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **Filter**.

Enabling Wireless Access Control

Select **Enable Wireless Access Control**.

Description

Enter a description of the device allowed to connect to the network.

MAC Address

Enter the MAC Address of the wireless device.

Click **Add** to append a new device to the list or **Reset** to discard changes.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Basic

Advanced

Security

Filter

WPS

Client List

Wireless 5GHz

Parental Control

Guest Network

☐ Enable Wireless Access Control

Description

MAC Address

Add

Reset

MAC Address Filtering Table

No.

Description

MAC Address

Select

Delete Selected

Delete All

Reset

Apply

Cancel

MAC Address Filtering Table

No. (Number)

Shows the sequence number of the device.

Description

Shows the description of the device.

MAC Address

Shows the MAC address of the device.

Select

Indicates the device(s) that can have actions performed on them.

Click **Delete Selected** to remove selected devices from the list. Click **Delete All** to remove all devices from the list. Click **Reset** to discard changes. Click **Apply** to save the settings or **Cancel** to discard changes.

MAC Address Filtering Table

NO.	Description	MAC Address	Select
-----	-------------	-------------	--------

Delete SelectedDelete AllReset

ApplyCancel

Configuring Wi-Fi Protected Setup

Wi-Fi Protected Setup (WPS) is an quick and easy way to associate a new wireless client device to the encrypted Gateway using a PIN or the WPS buttons on each device. To view the WPS settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **WPS**.

WPS

Click to enable or disable WPS for the Gateway.

WPS Current Status

Displays whether or not the wireless security is configured.

Self Pin Code

An 8-digit PIN which is required when configuring the Gateway for the first time in Windows 7 or Vista.

SSID

The name of the wireless network.

Authentication Mode

The current security settings for the corresponding SSID (wireless network).

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Basic

Advanced

Security

Filter

WPS

Client List

Wireless 5GHz

Parental Control

Guest Network

WPS☒ Enable

Wi-Fi Protected Setup Information

WPS Current Status

Configured

Release Configuration

Self Pin Code

23309289

SSID

E600_2.4G

Authentication Mode

WPA2 Pre-Shared key

Passphrase Key

12345678

WPS Via Push Button

Start to Process

WPS via PIN

Start to Process

Passphrase Key

A randomly generated key created by the Gateway during the WPS process.

WPS via Push Button

Click **Start to Process** to activate WPS.

WPS via PIN

Enter the **PIN** of a wireless device click **Start to Process** to activate WPS.

WPS	☒ Enable
Wi-Fi Protected Setup Information	
WPS Current Status	Configured Release Configuration
Self Pin Code	89433768
SSID	EnGenius887710
Authentication Mode	WPA2 Pre-Shared key
Passphrase Key	BF5NZA58YDBE
WPS Via Push Button	Start to Process
WPS via PIN	Start to Process

Configuring the Client List

View the wireless devices currently connected to the Gateway. To view the Client List settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **Client List**.

Interface

The type of network connected to the device.

MAC Address

Shows the MAC address of the device connected to the network.

Signal

Shows the signal strength of the device connected to the network.

Idle Time

The amount of time the connected device has been inactive on the network.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Basic

Advanced

Security

Filter

WPS

Client List

Wireless 5GHz

Parental Control

Guest Network

WLAN Client Table

Interface	MAC Address	Signal (%)	Idle Time
No client connecting to the Router.			

Refresh


WLAN Client Table

Interface	MAC Address	Signal (%)	Idle Time
No client connecting to the Router.			

Refresh

Chapter 6

Advanced Settings

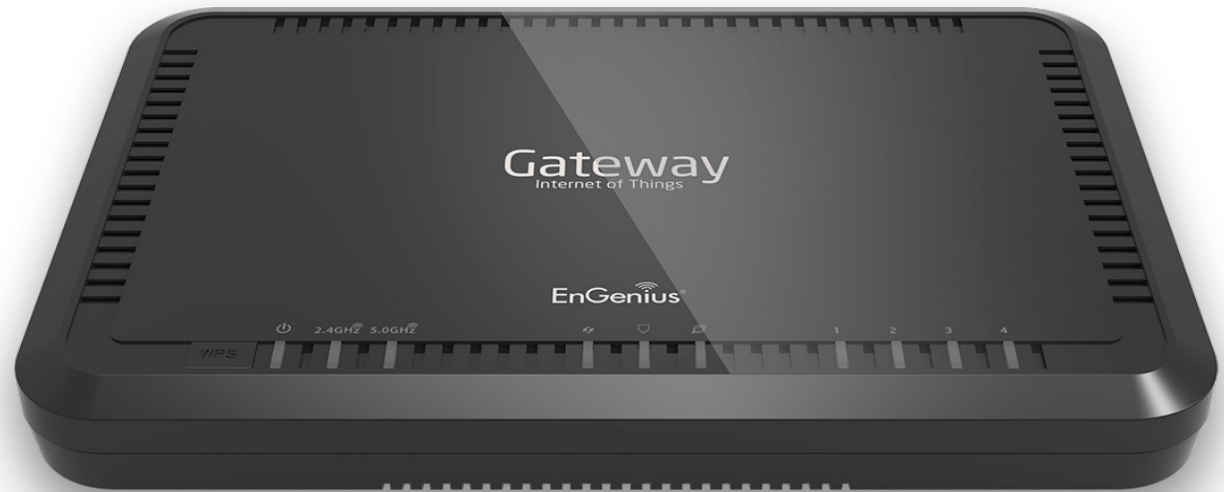

Configuring Advanced Settings

This section allows you to define the Advanced Settings available on the Gateway. To view the Advanced settings, click **Wireless 2.4 Ghz** or **Wireless 5 Ghz** then select **Advanced**.



WARNING! Incorrectly changing these settings may cause the device to stop functioning. Do not modify the settings in this section without a thorough understanding of the parameters.

Fragment Threshold

Enter the maximum size of a packet during data transmission. Please take note that a lower value can lead to a lower performance.

RTS Threshold

Enter the RTS threshold. If the packet size is smaller than the RTS threshold, the Gateway does not use RTS/CTS to send the data packet.

cloudCloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Basic

Advanced

Security

Filter

WPS

Fragment Threshold

2346

(256-2346)

RTS Threshold

2347

(1-2347)

Beacon Interval

100

(20-1000 ms)

DTIM Period

1

(1-255)

Data Rate

Auto

N Data Rate

Auto

Channel Bandwidth

Auto 20/40 MHZ

20 MHZ

Preamble Type

Long Preamble

Short Preamble

CTS Protection

Auto

Always

None

Tx Power

100 %

Adaptive mode

Enable

Disable

TIPS

Usually, you do not need to make any changes on this section. Please keep the default value if you are uncertain about these settings.

Fragment Threshold:
This is the packet size for each fragment.

RTS Threshold:
When the packet size is smaller than the RTS Threshold, then the packet will be sent without RTS/CTS handshake.

Beacon Interval:
This is the time interval that the router broadcasts a beacon. The beacon is used to inform about the AP existence.

Tx Power:
It defines how strong wireless signal will be

Apply

Cancel

Beacon Interval

Enter the beacon interval. This is the amount of time that the Gateway sets to synchronize the network.

Delivery Traffic Indication Message (DTIM) Period

Enter the DTIM period. The DTIM is a countdown period informing clients of the next point of broadcast and multicast of messages over the network. Valid values are between 1~255.

N Data Rate

Select the N data rate. This is the rate in which the Gateway will transmit data packets to wireless N compatible devices.

Channel Bandwidth

Select the channel bandwidth. The factory default is: **Auto 20/40MHz**. This default setting provides the best performance by auto selecting channel bandwidth.

Fragment Threshold	2346	(256–2346)
RTS Threshold	2347	(1-2347)
Beacon Interval	100	(20-1000 ms)
DTIM Period	1	(1-255)
Data Rate	Auto ▼	
N Data Rate	Auto ▼	
Channel Bandwidth	☒ Auto 20/40 MHz ☐ 20 MHz	
Preamble Type	☒ Long Preamble ☐ Short Preamble	
CTS Protection	☒ Auto ☐ Always ☐ None	
Tx Power	100 % ▼	

Preamble Type

Select the preamble type. A Long Preamble provides better LAN compatibility and a Short Preamble provides better wireless performance.

CTS Protection

Select the type of CTS protection you wish to use. Using CTS Protection can lower the data collisions between Wireless B (802.11b) and Wireless G (802.11g) devices, which in turn lower data throughput.

Tx Power

Select the wireless signal strength level. Valid values are between 25%~100%.

Click **Apply** to save the settings or **Cancel** to discard changes.

Setting Up Parental Controls

Offensive web content can be blocked when a parent specifies keywords. Parents can also limit Internet access within a specified time and day, with a **Schedule**. A **Policy** is a rule profile which describes the keyword filter and Internet access schedule. Parents can apply the policy to multiple users or **Policy Members**. The Parental Controls tool will screen policy members based on applied policies.



Note: By default, everyone is allowed to view all the contents without any limitation and filter.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Wizard

Web Monitor

Guest Network

IPv6

Firewall

VPN

USB Port

☒ Enable Parental Control (Access Control)

Add Policy

Policy Table

Enable	Policy Name	Target Device	Schedule	Logged	Modify
☒	Web Monitor	---	Always	Yes	 
☒	weekday		From 12:00 To 22:00---Mon, Tue, Wed, Thu, Fri	Yes	 
☒	weekend		From 06:00 To 22:00---Sat, Sun	Yes	 

Apply Cancel

TIPS

Parental Control is a feature that allows parents to filter out and control the Internet access. By adding keywords, the parental control engine checks the web contents and make sure it does not contain the specified content. Also, parents can limit the Internet access within the specified time and day (this is known as Schedule). Policy is a rule profile which describes the keyword filter and Internet access schedule. For example, a policy can be created to filter out the pages containing "XXX" or "SEX". You can apply the policy to multiple users. Those users are known as the policy member. Parental control engine will screen these member user(s) based on the applied policie(s). Note: by default, everyone is allowed to view all the contents without any limitation and filter.

Adding a Control Policy

To learn how to create and add a policy to the access control list, refer to **Adding a Control Policy**. To view the **Wizard settings**, click **Parental Control** then select **Wizard**.

Enable Parental Controls (Access Control)

Click to enable the Parental Control feature.

Add Policy

Click to add a new control policy to the network.

Policy Table

Shows the control policies available on the network.

The Gateway provides a wizard to guide you through setting up a new Access Control Policy. To start the procedure, click the **Add Policy** button. Click **Next** to continue the procedure or **Cancel** to stop the procedure. The procedure consists of the following steps:

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Wizard

Web Monitor

☒ Enable Parental Control (Access Control)

Add Policy

Policy Table

Enable	Policy Name	Target Device	Schedule	Logged	Modify
☒	Web Monitor	---	Always	Yes	
☒	weekday		From 12:00 To 22:00---Mon, Tue, Wed, Thu, Fri	Yes	
☒	weekend		From 06:00 To 22:00---Sat, Sun	Yes	

Apply

Cancel

TIPS

Parental Control is a feature that allows parents to filter out and control the Internet access. By adding keywords, the parental control engine checks the web contents and make sure it does not contain the specified content. Also, parents can limit the Internet access within the specified time and day (this is known as Schedule). Policy is a rule profile which describes the keyword filter and Internet access schedule. For example, a policy can be created to filter out the pages containing "XXX" or "SEX". You can apply the policy to multiple users. Those users are known as the policy member. Parental control engine will screen these member user(s) based on the applied policie(s). Note: by default, everyone is allowed to view all the contents without any limitation and filter.

1. Choose Policy Name: Enter a unique name for your policy in the Policy Name text field. Click **Prev** to return to the previous screen, **Next** to continue the procedure, or **Cancel** to stop the procedure.

Step 1: Choose Policy Name

Choose a unique name for your policy.

Policy Name

PrevNextSaveCancel

2. Select Target Device: Select a device you wish to set parental controls on via its MAC address or its IP address. Click **Add** to add a policy to the access control policy list. To add a device, continue to step 3.

Step 2: Select Target Device

Specify a device with its IP or MAC address.

Filtering Type ☒ MAC ☐ IP

Member List

Description	MAC Address	
		Add

PrevNextSaveCancel

Client List

Description	MAC Address	
FA1650	00:23:18:FC:37:87	

Cancel

To add a device to the Member List, follow these steps:

- a. Click **MAC** or **IP** from the **Filter Type** option.
- b. Click **Add** to show the add client dialog.
- c. Enter the name of the device in the **Device Name** text field.

Client List

Description	MAC Address	
FA1650	00:23:18:FC:37:87	
		

- d. Enter either a MAC address or an IP address in the **Address** field depending upon which filter type you chose.
- e. Click the **Add Device Button**  to close the screen and add the device to the Member List.

Click **Prev** to return to the previous screen, **Next** to continue the procedure, **Save** to save the changes, or **Cancel** to stop the procedure.

3. Select Schedule: From here, you can set up a schedule for the Gateway services for the selected device.

Step 3: Select Schedule

You can use the Schedule page to Start/Stop the Services regularly. The services will start at the time in the following Schedule Table or it will stop.

Before making change on this, please check if your system time is being set up to your local time correctly first.

Schedule ☐ Deny ☒ Allow

Days ☐ Every Day
☐ Mon ☐ Tue ☐ Wed ☐ Thu ☐ Fri ☐ Sat ☐ Sun

Time of day ☐ All Day (use 24-hour clock)
From : To :

To set up a **Service Schedule**, follow these steps:

- a. Select **Allow** from the **Schedule** option.
- b. Click the days that the schedule will be active.
- c. Enter the time period that the schedule will be active.

Click **Prev** to return to the previous screen, **Next** to continue the procedure, **Save** to save the changes, or **Cancel** to stop the procedure.

4. **Web Keyword Filter:** Setup a keyword and URL filter list.

Step 4: Web/Keyword Filter

You can block access to certain Web sites for a particular PC by entering either a full URL address or just a keyword of the Web site

Filtering

☐ Deny ☒ Allow

URL/Keyword

Add

URL List

No.	URL/Keyword
☐	Enable Application Filter

Prev

Next

Save

Cancel

To set up a keyword/URL filter list, follow these steps:

- a. Select **Allow** from the Filtering option.
- b. Enter a keyword or URL in the **URL/Keyword text field**.
- c. Click the **Add** button to add the filter to the list.
- d. Repeat steps **a through c** for each filter.

5. Click **Enable Application Filter** to filter software applications.

6. **Configure Web Access Logging:** Select **Enable** to save the web access information to a log file or **Disable** to ignore the information.

Step 6: Configure Web Access Logging

Web Access Logging

☒ Disabled ☐ Enabled

Prev

Next

Save

Cancel

Web Monitor

Viewing Parental Policies

Available parental control policies are shown in a table where each policy can be enabled, disabled, edited, and/or deleted. To view the Web settings, click **Parental Control** then select **Web Monitor**.

Enable

Click to enable or disable the control policy.

Policy Name

Shows the control policy name.

Target Device

Shows the target device MAC address or IP address.

Schedule

Shows the control policy schedule.

Logged

Shows whether the control policy is storing log information.

Modify

Edit a policy by clicking the **Edit Button**.



Delete a policy by clicking the **Delete Button**.



Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Wizard

Web Monitor

Guest Network

IPv6

Firewall

VPN

USB Port

Block	Time	URL	PC
☐	Oct 23 08:52:45	www.appleiphonecell.com/55NTX w ...	101467deiPhone
☐	Oct 22 17:52:23	www.thinkdifferent.us/tLOi81U1 ...	101467deiPhone
☐	Oct 22 14:22:15	static.ess.apple.com:80/conne...c	Tony-iPhone
☐	Oct 22 14:22:13	static.ess.apple.com:80/conne...c	Tony-iPhone
☐	Oct 22 14:19:16	init-p01st.push.apple.com/bag	Tony-iPhone
☐	Oct 22 14:19:06	static.ess.apple.com:80/conne...c	Tony-iPhone

Block Selected

Save

Clear

Refresh

First Page

previous

1/1

Next

Last Page

Guest Network

The Guest Network function enables you to offer Internet connectivity to visitors or guests while keeping other networked devices (computers and hard drives) and sensitive personal or company information private and secure. The Guest Network is controlled by the Wireless SSID function. When the Guest Network function is enabled, the Guest SSID can only receive the internet connection from WAN, but can not reach the client from the LAN port.

Enabling the Guest Network

To view the Selection settings, click **Guest Network** then select **Selection**.

Guest Network

Enable or **Disable** the Guest Network function.

Client Isolation

Guest clients are isolated and cannot communicate with each other.

SSID

Choose a SSID for the Guest Network used. The SSID can be defined from the Wireless setting page.

Click **Apply** to save the settings or **Cancel** to discard changes.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

Selection

DHCP Server Setting

DHCP Client List

IPv6

Firewall

VPN

Wireless 2.4GHz

Guest Network

SSID

Disabled

E600_2.4G

Wireless 5GHz

Guest Network

SSID

Disabled

E600_5G

Apply

Cancel

Configuring DHCP Server Settings

The Guest Network SSID should be on a different subnet from the Gateway’s DHCP server. To view the DHCP Server Settings, click **Guest Network** then select **DHCP Server Settings**.

Gateway IP address

Define the Gateway’s IP address for the Guest network.

Default Subnet Mask

Define the Subnet mask IP address for the Guest network.

Start IP

Used to define the Guest network DHCP server start IP.

End IP

Used to define the Guest network DHCP server End IP.

Click **Apply** to save the settings or **Cancel** to discard changes.

cloudCloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

Selection

DHCP Server Setting

DHCP Client List

IPv6

Firewall

VPN

Router IP Address

192.168.169.1

Default Subnet Mask

255.255.255.0

Start IP

192.168.169.100

End IP

192.168.169.200

Apply

Cancel

TIPS

Setup your Guest Network DHCP server. The Guest Networks SSID should be different subnet from the router DHCP server.

Viewing the DHCP Client List

The DHCP Client list page shows the list of guest clients registered on the network. To view the DHCP Client List settings, click **Guest Network** then select **DHCP Client List**.

DHCP Client Table

Shows the IP address, MAC address, and expiration time of each of the registered clients on the list.

IP Address

The IP address of the guest client.


MAC Address

The MAC address of the guest client.

Expiration Time

The time that the guest client’s DHCP address will expire and must be renewed.

Click **Refresh** to refresh the view of the list.

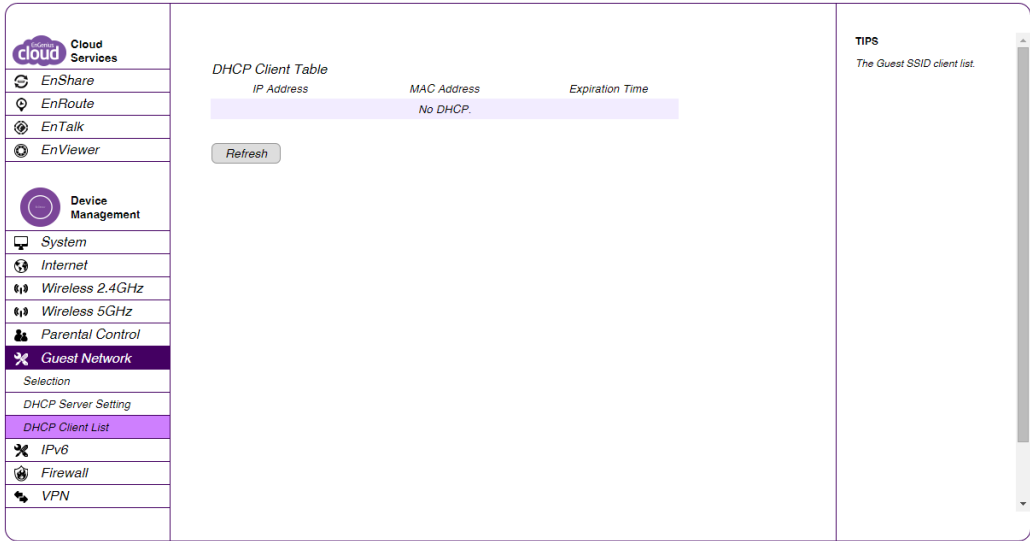

IPv6

There are several connection types to choose from: **Auto Detection**, **Static IPv6**, **Autoconfiguration (SLAAC/DHCPv6)**, **PPPoE**, **IPv6 in IPv4 Tunnel**, **6to4**, and **Link-local**. If you are unsure of your connection method, please contact your IPv6 Internet Service Provider.



Note: If you are using the PPPoE option, you will need to ensure that any PPPoE client software on your computers has been removed or disabled.

Enabling IPv6 Settings

To view the Basic settings, click **IPv6** then select **Basic**.


Before using or configuring the IPv6 protocol or IPv6 passthrough on the EPG600, you must enable it.

IPv6

Select **Enable** to configure the IPv6 protocol on the Gateway.

IPv6 Passthrough

Select **Enable** to allow IPv6 passthrough functionality. IPv6 must be disabled to enable this feature.

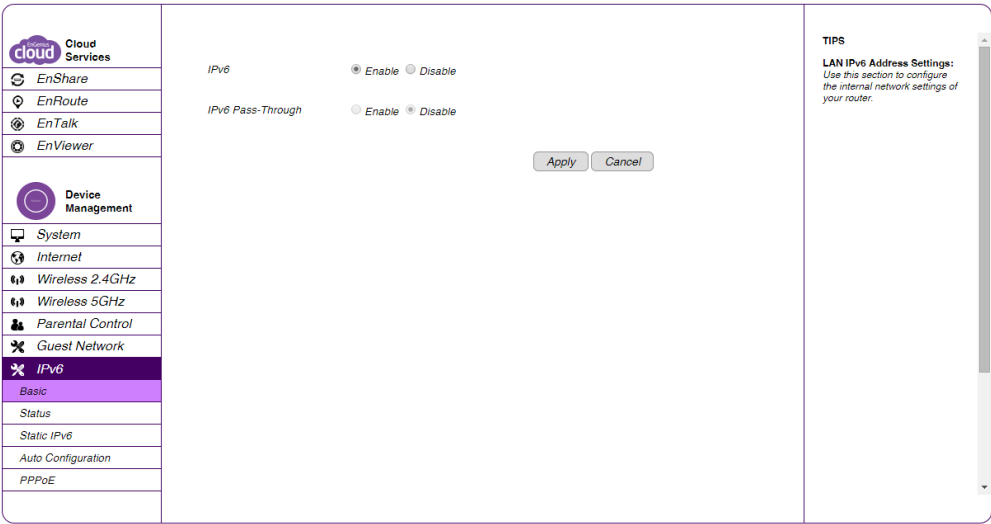

Click **Apply** to save the settings or **Cancel** to discard changes.

Viewing the IPv6 Connection Status

To view the Status information, click **IPv6** then select **Status**.

IPv6 Connection Information

Shows the IPv6 connection type, the LAN IPv6 link-local address, and the DHCP-PD.

LAN IPv6 Computers List

Shows a list of network computers and their IPv6 connection information.

EnGenius Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Basic

Status

Static IPv6

Auto Configuration

PPPoE

IPv6 Connection Information

IPv6 Connection Type

Link-local only

LAN IPv6 Link-Local Address

FE80::8ADC:96FF:FE23:9130

DHCP-PD

Disabled

LAN IPv6 Computers

Name (if any)

MAC

IPv6 Address

TIPS

All of your IPv6 LAN connection details are displayed here.

Configuring Static IPv6

To view the Static IPv6 settings, click **IPv6** then select **Static IPv6**.

Use Link-Local Address

Click to enable or disable the LAN link-local address.

IPv6 Address

Enter the LAN (local) IPv6 address for the Gateway.

Subnet Prefix Length

Enter the subnet prefix length.

Default Gateway

Enter the default Gateway.

Primary IPv6 DNS Address

Enter the primary IPv6 DNS address.

Secondary IPv6 DNS Address

Enter the secondary IPv6 DNS address.

LAN IPv6 Address

Enter the LAN IPv6 address.

LAN IPv6 Link-Local Address

Enter the LAN IPv6 link-local address.

Enable Automatic IPv6 Address Assignment

Click to enable or disable automatic IPv6 address assignment.

Autoconfiguration Type

Enter the autoconfiguration type. The default setting is: **LAAC+RDNSS**.

Autoconfiguration Type

Enter the autoconfiguration type. The default setting is: **LAAC+RDNSS**.

Gateway Advertisement Lifetime

Enter the IPv6 Address Lifetime (in minutes).

Click **Apply** to save the settings or **Cancel** to discard changes.

Cloud Services EnShare EnRoute EnTalk EnViewer Device Management System Internet Wireless 2.4GHz Wireless 5GHz Parental Control Guest Network IPv6 Basic Status Static IPv6 Auto Configuration PPPoE	Use Link-Local Address ☒ IPv6 Address FE80::8ADC:96FF:FE23:9101 Subnet Prefix Length 64 Primary IPv6 DNS Address Secondary IPv6 DNS Address LAN IPv6 Address /64 LAN IPv6 Link-Local Address FE80::8ADC:96FF:FE23:9130 Enable Automatic IPv6 Address Assignment ☒ Autoconfiguration Type SLAAC + RDNSS ▼ Router Advertisement Lifetime 1440 (minutes) Apply Cancel		TIPS WAN IPv6 Address Settings: Enter the IPv6 address information provided by your Internet Service Provider (ISP). LAN IPv6 Address Settings: Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again. Address Autoconfiguration Settings: Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.
---	--	--	---

Autoconfiguration

To view the Auto Configuration settings, click **IPv6** then select **Auto Configuration**.

Obtain A DNS Server Address Automatically

Click to enable or disable obtaining a DNS server automatically.

Primary IPv6 DNS Address

Enter the primary IPv6 DNS address.

Secondary IPv6 DNS Address

Enter the secondary IPv6 DNS address.

Enable DHCP-PD

Click to enable or disable DHCP-prefix delegation (PD).

LAN IPv6 Address

Enter the LAN IPv6 address.

LAN IPv6 Link-Local Address

Enter the LAN IPv6 link-local address.

Enable Automatic IPv6 Address Assignment

Click to enable or disable automatic IPv6 address assignment.

Autoconfiguration Type

Enter the autoconfiguration type. (Default: **SLAAC+RDNSS**)

Gateway Advertisement Lifetime

Enter the IPv6 Address Lifetime (in minutes).

Click **Apply** to save the settings or **Cancel** to discard changes.

 Cloud Services  EnShare  EnRoute  EnTalk  EnViewer  Device Management  System  Internet  Wireless 2.4GHz  Wireless 5GHz  Parental Control  Guest Network  IPv6 Basic Status Static IPv6 Auto Configuration PPPoE	Obtain A DNS Server Address Automatically ☒ Enable ☐ Disable		TIPS IPv6 DNS SETTINGS: Obtain a DNS server address automatically or enter a specific DNS server address. LAN IPv6 Address Settings: Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your <u>PC</u> network settings to access the network again. Address Autoconfiguration Settings: Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.
	Primary IPv6 DNS Address		
	Secondary IPv6 DNS Address		
	Enable DHCP-PD	☒	
	LAN IPv6 Address	/64	
	LAN IPv6 Link-Local Address	FE80::8ADC:96FF:FE23:9130	
	Enable Automatic IPv6 Address Assignment	☒	
	Autoconfiguration Type	SLAAC + RDNSS ▼	
	Router Advertisement Lifetime	1440 (minutes)	
	Apply Cancel		

Configuring PPPoE

To view the PPPoE settings, click **IPv6** then select **PPPoE**.

Address Mode

Select **Static** if your ISP assigned you the IP address, Subnet mask, Gateway, and DNS server addresses. In most cases, select **Dynamic**.

IP Address

Enter the IP address (Static PPPoE only).

User Name

Enter your PPPoE user name.

Password

Enter your PPPoE password.

Verify Password

Retype the your PPPoE password.

Service Name

Enter the ISP Service Name (optional).

Reconnect Mode

Select either **Always-on**, **On-Demand**, or **Manual**.

Maximum Idle Time

Enter a maximum idle time during which the Internet connection is maintained during inactivity. To disable this feature, enable **Auto-reconnect**.

Obtain A DNS Server Address Automatically

Click to enable or disable obtaining a DNS server automatically.

Primary IPv6 DNS Address

Enter the primary IPv6 DNS address.

MTU

Maximum Transmission Unit - you may need to change the MTU for optimal performance with your specific ISP. The default MTU is **1492**.

Obtain A DNS Server Address Automatically

Click to enable or disable obtaining a DNS server automatically.

Primary IPv6 DNS Address

Enter the primary IPv6 DNS address.

Secondary IPv6 DNS Address

Enter the secondary IPv6 DNS address.

Enable DHCP-PD

Click to enable or disable DHCP-prefix delegation (PD).

LAN IPv6 Address

Enter the LAN IPv6 address.

LAN IPv6 Link-Local Address

Enter the LAN IPv6 link-local address.

Enable Automatic IPv6 Address Assignment

Click to enable or disable automatic IPv6 address assignment.

Autoconfiguration Type

Enter the autoconfiguration type. (Default: **SLAAC+RDNSS**)

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Basic

Status

Static IPv6

Auto Configuration

PPPoE

Address Mode

☒ Dynamic IP ☐ Static IP

IP Address

User Name

Password

Verify Password

Service Name

 (optional)

Reconnect Mode

☒ Always on ☐ On demand ☐ Manual

Maximum Idle Time

5 (minutes, 0,infinite)

MTU

1492 (bytes)

Obtain A DNS Server Address Automatically

☒ Enable ☐ Disable

Primary IPv6 DNS Address

Secondary IPv6 DNS Address

Enable DHCP-PD

☒

LAN IPv6 Address

/64

LAN IPv6 Link-Local Address

FE80::8ADC:96FF:FE23:9130

Enable Automatic IPv6 Address Assignment

☒

TIPS

PPPoE:
Enter the information provided by your Internet Service Provider (ISP).

IPv6 DNS SETTINGS:
Obtain a DNS server address automatically or enter a specific DNS server address.

LAN IPv6 Address Settings:
Use this section to configure the internal network settings of your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Address Autoconfiguration Settings:
Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Gateway Advertisement Lifetime

Enter the IPv6 Address Lifetime (in minutes).

Click **Apply** to save the settings or **Cancel** to discard changes.

Address Mode	☒ Dynamic IP ☐ Static IP
IP Address	
User Name	
Password	
Verify Password	
Service Name	(optional)
Reconnect Mode	☒ Always on ☐ On demand ☐ Manual
Maximum Idle Time	5 (minutes, 0,infinite)
MTU	1492 (bytes)
Obtain A DNS Server Address Automatically	☒ Enable ☐ Disable
Primary IPv6 DNS Address	
Secondary IPv6 DNS Address	
Enable DHCP-PD	☒
LAN IPv6 Address	/64
LAN IPv6 Link-Local Address	FE80::202:6FFF:FE88:7710
Enable Automatic IPv6 Address Assignment	☒
Autoconfiguration Type	SLAAC + RDNSS ▼
Router Advertisement Lifetime	1440 (minutes)

Configuring 6to4

To view and configure the 6to4 settings, click **IPv6** then select **6to4**.

6to4 Address

Enter the 6to4 IP address.

Primary IPv6 DNS Address

Enter the primary IPv6 DNS address.

Secondary IPv6 DNS Address

Enter the secondary IPv6 DNS address.

LAN IPv6 Address

Enter the LAN IPv6 address.

LAN IPv6 Link-Local Address

Enter the LAN IPv6 link-local address.

Enable Automatic IPv6 Address Assignment

Click to enable or disable automatic IPv6 address assignment.

Autoconfiguration Type

Enter the autoconfiguration type. The default type is: **SLAAC+RDNSS**

Gateway Advertisement Lifetime

Enter the IPv6 Address Lifetime (in minutes).

Click **Apply** to save the settings or **Cancel** to discard changes.

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Basic

Status

Static IPv6

Auto Configuration

PPPoE

6to4

Link Local

Firewall

VPN

USB Port

Advanced

6to4 Address2002:7219:4279::7219:4279

Primary IPv6 DNS Address

Secondary IPv6 DNS Address

LAN IPv6 Address2002:7219:4279::0001::1/64

LAN IPv6 Link-Local AddressFE80::8ADC:96FF:FE23:9130

Enable Automatic IPv6 Address Assignment☒

Autoconfiguration TypeSLAAC + RDNSS

Router Advertisement Lifetime1440 (minutes)

ApplyCancel

your router. If you change the LAN IPv6 Address here, you may need to adjust your PC network settings to access the network again.

Address Autoconfiguration Settings:
Use this section to setup IPv6 Autoconfiguration to assign IP addresses to the computers on your network.

Viewing Local Connections

To view the Link Local settings, click **IPv6** then select **Link Local**.

LAN IPv6 Link-Local Address

Enter the LAN IPv6 Link-Local address.

Click **Apply** to save the settings or **Cancel** to discard changes.

 **Device Management**

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Basic

Status

Static IPv6

Auto Configuration

PPPoE

6to4

Link Local

Firewall

VPN

USB Port

Advanced

LAN IPv6 Link-Local Address

FE80::8ADC:96FF:FE23:9130

Apply

Cancel

Firewall

Configuring Basic Settings

To view the Basic settings, click **Firewall** then select **Basic**. The EPG600 firewall automatically detects and blocks Denial of Service (DoS) attacks. URL blocking, packet filtering, and stateful packet inspection (SPI) are also supported. The details of the attack and the timestamp are recorded in the security log.

Firewall

Click to enable or disable the firewall for the EPG600.



Note: This section applies to Client Gateway mode.

Click **Apply** to save the settings or **Cancel** to discard changes.

cloud Cloud Services EnShare EnRoute EnTalk EnViewer Device Management System Internet Wireless 2.4GHz Wireless 5GHz Parental Control Guest Network IPv6 Firewall Basic Advanced DMZ DoS	Firewall Enable Disable Apply	TIPS Firewall automatically detects and blocks Denial of Service (DoS) attacks. URL blocking, packet filtering and SPI (Stateful Packet Inspection) are also supported. The hackers attack will be recorded associated with timestamp in the security logging area.
---	---	---

Configuring Advanced Settings

The Gateway supports VPN pass-through, which allows virtual private networking (VPN) packets to pass through the firewall. To view advanced settings, click **Firewall** then select **Advanced**.

VPN L2TP Pass-through

Click **Select** to allow an L2TP connection method over a VPN.



Note: VPN L2TP Pass-through, VPN PPTP Pass-through, and VPN IPSec Pass-through are enabled by factory default.

VPN PPTP Pass-through

Click **Select** to allow a PPTP connection method over a VPN.

VPN IPSec Pass-through

Click **Select** to allow an IPSec connection method over a VPN.

IPv6 Pass-through

Click **Select** to allow IPv6 packets to pass through the firewall.

PPPoE Pass-through

Click **Select** to allow a PPPoE packets to pass through the firewall.

Click **Apply** to save the settings or **Cancel** to discard changes.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

Basic

Advanced

DMZ

DoS

Description	Select
VPN L2TP Pass-Through	☒
VPN PPTP Pass-Through	☒
VPN IPSec Pass-Through	☒
PPPoE Pass-Through	☐

Apply Cancel

TIPS

VPN Pass-Through:
This router supports VPN pass-through which allows VPN (Virtual Private Network) packets to pass through the Firewall. If you are not using VPN, the options can be disabled.

Configuring Demilitarized Zone

Configuring a device on the LAN as a Demilitarized Zone (DMZ) host allows unrestricted two-way Internet access for Internet applications such as online video games to run from behind the NAT firewall. The DMZ function allows the Gateway to redirect all packets going to the WAN port IP address to a particular IP address on the LAN. The difference between the virtual server and the DMZ function is that a virtual server redirects a particular service or Internet application, such as FTP, to a particular LAN client or server, whereas a DMZ redirects all packets, regardless of the service, going to the WAN IP address to a particular LAN client or server. A DMZ host allows a computer to have all its connections and ports completely open during data transmission.



WARNING! The PC or computer defined as a DMZ host is not protected by the firewall and is vulnerable to malicious network attacks. Do **not** store or manage sensitive information on the DMZ host.

To view the DMZ settings, click **Firewall** then select **DMZ**.

Enabling DMZ

Click **Enable DMZ** to activate DMZ functionality.

Local IP Address

Enter an IP address of a device on the LAN.

Click **Apply** to save the settings or **Cancel** to discard changes.

cloudCloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

Basic

Advanced

DMZ

DoS

☐ Enable DMZ

Local IP Address < Please select a PC.

ApplyCancel

TIPS

DMZ:
The Demilitarized Zone (DMZ) is an exposed portion of the network which allows one local user to be exposed to the Internet without being inside of the firewall. Note: Enabling DMZ hosting forwards all the ports to the DMZ client.

Configuring Denial of Service

To enable blocking of Denial of Service (DoS) attacks, select the **DoS** option in the **Firewall** section. DoS attacks can flood the Internet connection with the continuous transmission of data. Blocking these attacks ensures that the Internet connection is always available. To view the DoS settings, click **Firewall** then select **DoS**.


Block DoS

Click to enable or disable the blocking of DoS attacks.

Discard Ping on WAN

ICMP (ping) packages are blocked while **Block DoS** is enabled. Enable **Discard Ping** on WAN if the WAN port is required.

Click **Apply** to save the settings or **Cancel** to discard changes.

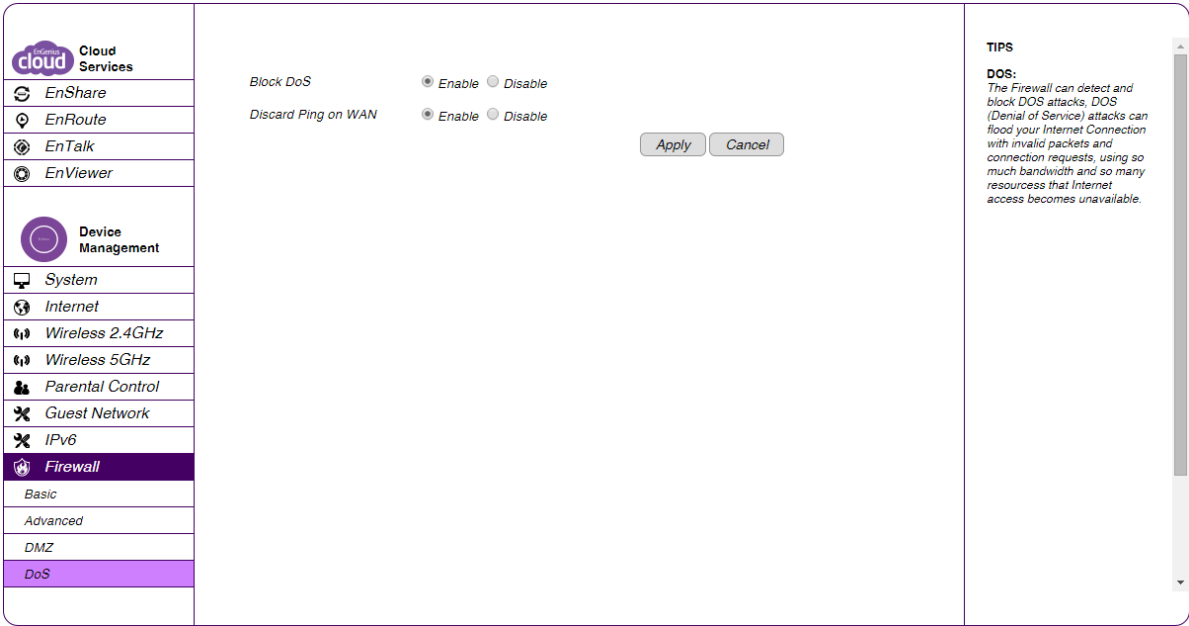

VPN

Configuring a VPN Tunnel Profile

To view the Status settings, click **VPN** then select **Status**. From here, you can manually configure a VPN tunnel profile.

Creating a Profile

- Click **Add** to create a new VPN tunnel profile.
- Click **Edit** to edit the settings of the selected profile.
- Click **Delete Selected** to delete the selected profile.
- Click **Delete All** to delete all current profiles.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

No.	Name	Type	Gateway/Peer IP address	Transmit Packets	Received Packets	Uptime	Select
Connect Disconnect							

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

Profile Settings

From here, you can manually configure a VPN tunnel profile.

Name

Enter the name for this profile.

Connection Type

Click the drop-down menu to select the connection type. Your choices are: **PPTP**, **L2TP**, **IPSec**, and **L2TP over IPSec**.

Connection Type

Click the drop-down menu to select the connection type.

L2TP

Set the authentication type and add a user. Click the check box to enable the feature.

Shared Key

Enter the shared key to be used for this profile.

Confirm

Enter the shared key a second time to confirm the shared key.

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

Status

Profile Setting

User Setting

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All								
Apply Cancel								

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

General

If under connection type you select L2TP, please add the connection type by user.

General

SA

Network

Advanced

Name

Connection Type

IPSec

Authentication Type

pre-shared key

Shared Key

Confirm

Local ID Type

IP Address

Local ID

Peer ID Type

IP Address

Peer ID

Apply

Cancel

SA

If under profile settings you select SA as a connection type then select the **SA** tab, please select the IKE(Phase 1)Proposal settings and the IPSec(Phase 2)Proposal settings by user you wish to apply.

General

SA

Network

Advanced

IKE(Phase 1)Proposal

Exchange

Main Mode

DH Group

Group 2

Encryption

3DES

Authentication

SHA1

Life Time

28800

(1080-86400 Secs)

IPSec(Phase 2)Proposal

Protocol

ESP

Encryption

3DES

Authentication

SHA1

Perfect Forward Secrecy

Enable

Disable

DH Group

Group 2

Life Time

28800

(1080-86400 Secs)

Apply

Cancel

Network

If under profile settings you select L2TP as a connection type then select the **Network** tab, please select the Server IP and Remote IP range you would like.

General

SA

Network

Advanced

Security Gateway Type

IP Address

Security Gateway

Local Network

Local Address

Local Netmask

Remote Network

Remote Address

Remote Netmask

Apply

Cancel

Advanced

If under profile settings you select L2TP as a connection type then select the **Advanced** tab, please click to enable or disable the NAT Traversal and the Dead Peer Detection features.

General

SA

Network

Advanced

NAT Traversal

Enable

Disable

Dead Peer Detection

Enable

Disable

Apply

Cancel

Configuring User Settings

The User Settings feature allows you to create user profiles in order to setup login access to the VPN service.

Name

Enter the name of the new user profile.

Password

Enter the password for the user name.

Confirm

Enter the password a second time to confirm the setting.

Add

Click **Add** to accept the profile and add it to the Current VPN User Table.

Reset

Click **Reset** to clear the new settings.

Current VPN User Table

Displays the User ID, User Name, and Selection status.

Delete Selected

Click to delete the selected user profile.

Delete All

Click to delete all the current user profiles.

Reset

Click to clear the selections from the Current VPN User Table.

Apply

Click to accept and save the new settings.

Cancel

Click to clear the new changes.

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

Status

Profile Setting

User Setting

Name

Password

Confirm

Add

Reset

Current VPN User Table

No.	User Name	Select
Delete Selected Delete All Reset		

Apply

Cancel

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

VPN Wizard

Follow these step to setup a simple VPN connection for the Gateway.

cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

Status

Profile Setting

User Setting

Wizard

Setup Wizard

VPN Wizard will guide you through the setup process for building a simple VPN connection.

Next

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

1. Enter the VPN Policy name you wish for the VPN connection. Click **Next** to continue, **Back** to return to the previous setp, or **Cancel** to cancel the VPN Wizard setup.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name

(eg:OfficeVPN)

Back

Next

Cancel

TIPS

VPN Policy is a record which keeps VPN settings for a particular VPN connection. You can give a meaningful name to it. You can have up to 5 policies.

2. Select the VPN connection type you wish to utilize. Your options are: **IPSec**, **L2TP over IPSec**, **L2TP**, and **PPTP**. Click **Next** to continue, **Back** to return to the previous setp, or **Cancel** to cancel the VPN Wizard setup.

Step2: VPN Connection Type

Please choose VPN connection type

- ☒ **IPSec** *Choose this if you are using other 3rd party VPN client software, or gateway*
- ☐ **L2TP over IPSec** *Choose this if you are using Windows VPN client for connection*
- ☐ **L2TP** *Choose this if you are using L2TP client for connection*
- ☐ **PPTP** *Choose this if you are using PPTP client for connection*

Back

Next

Cancel

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

3. Select the VPN IPSec mode. Your options are **Client to Site** or **Site to Site**. Click **Next** to continue, **Back** to return to the previous setp, or **Cancel** to cancel the VPN Wizard setup.

Step3: VPN IPSec Mode

Please choose the IPSec Mode

- ☒ Client to Site Choose this if you are setting up for Telwork or home to office connection
- ☐ Site to Site Choose this if you are setting up a VPN connection between two dedicated VPN servers

Back Next Cancel

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

4. Enter the shared key for the VPN connection. For security purposes, please choose something unique. Click **Next** to continue, **Back** to return to the previous setp, or **Cancel** to cancel the VPN Wizard setup.

SA

Shows the Security Association number for the IPSec.

Step4: Shared Key

Please enter the shared key for the VPN

SA

ESP-3DES-SHA1

Shared Key

(eg.apple123)

Back Next Cancel

TIPS

Shared key is the
PASSWORD for VPN
connection. This password
should be the same among all
VPN members for this policy
setting.

5. Click **Enable** to enable the policy immediately when the Gateway is on. Click **Apply** to apply the setup configurations to the Gateway. You have now successfully setup a simple VPN connection for the Gateway.

Setup Successfully

☒ Enable this policy immediately.

Back

Apply

Cancel

TIPS

VPN allows you to establish private connections over Internet as if it is under private domain. This is especially useful when you have servers that are only accessible inside your private network. For example, your server is located under a LAN. However, there are occasions that you need to get access to it over the Internet; this is where VPN comes into play. VPN comprises with VPN server and VPN client. This router has VPN server embedded. VPN client is usually a software program which can be configured to the VPN server. Please refer to the manual for VPN configuration.

USB Port

The EPG600 is equipped with a USB port for connecting a hard drive so media content can be accessed or transferred to other devices in the home or devices away from home.

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

File Sharing

File Server

Samba Service

☒ Enable ☐ Disable

Apply

Cancel

TIPS

User can use this page to setup file sharing to windows users.

160

File Sharing

The File Sharing function allows you to provide users the ability to share files over the network through the Samba service. By default this EnShare feature is enabled. To view the File Sharing settings, click **USB Port** then select **File Sharing**.

1. Select **Enable** to enable the Samba Service function.
2. Click **Apply** to save the new settings, or click **Cancel** to delete the changes.

Samba Service

☒ Enable ☐ Disable

Apply

Cancel

TIPS

User can use this page to setup file sharing to windows users.

Viewing the File Server

The File Server feature allows you to provide network users FTP access to shared USB stored files. To view the File Server settings, click **USB Port** then select **File Server**.

Enable FTP Service

Select this to enable the FTP service to share files on the USB device

Port Number

Define the port number (default: **21**) to open for the FTP service.

Login Timeout

Define the period of inactivity (default: **90**) before a user is logged out.

Stay Timeout

Define the lockout period (default: **90**) before a user is allowed to attempt a login.

Login User

Define the number of concurrent users to access the service (Max: **20 users**)

Share Mode

Define the type of share privilege: **Read/Write** or **Read only**.

Use Anonymous Login

Select this to allow anonymous user logins.

User Name

Enter the user name to login to the FTP service.

Password

Enter the password to login to the FTP service.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

File Sharing

File Server

☒ Enable FTP Service

Port Number

21

Login Timeout

90

Stay Timeout

90

Login Users

5

(Max Users : 20)

Share Mode

Read/Write ▾

☒ Use anonymous login

FTP Remote Access

☐ Enable

☒ Disable

Apply

Cancel

TIPS

User can use FTP server to share USB storage's files in the networks.

FTP Remote Access

To access the Internal FTP Server from the remote side. The function default is disabled.

Guest Account

The guest account page allows you to configure an account for visitors to access the network while blocking access to folders to protect sensitive or make unauthorized changes to the network. There is only one “Administrator” user who can access all folders on the network. The Guest Account is only available for USB related file sharing functions (EnShare, File Sharing and File Server). Click to enable or disable the Guest Account feature.

Login Name

Enter the login name you wish to use for the guest account.

Old Password

Enter the old password you wish to use for the guest account.

New Password

Enter the new password you wish to use for the guest account.

Repeat New Password

Enter the new password again for verification.

Guest Folder Name

Enter a name you wish to use for the guest folder.

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

File Sharing

File Server

Guest Account

RT M4

Enable

Disable

Login Name

Old Password

New Password

Repeat New Password

Guest Folder Name

guest

Guest

Apply

Cancel

The purpose of the "Guest Account" is to separate the "administrator" and "guest" users.

The guest account visitors can make free with download, upload, rename and move any file in this folder through the EnShare, File Sharing and File Server service, but they will not allowed to access the other folder.

There is only the "Administrator" user can access all the folders. The "Guest Account" is only available for the USB related file sharing functions (EnShare, File Sharing and File Server).

When the "Guest Account" function is enabled (default is disabled), the router will create a "Guest" folder automatically. You can change the default folder name as your favorite. The visitor needs to type in the "account name" and "password" to access the "Guest" folder.

Viewing DLNA

The DLNA Media Server feature allows you to transfer photos, music, and video between networked devices through the EPG600. To view the DLNA settings, click **USB Port** then select **DLNA**.

- 1. Select **Enable** to enable the DLNA Media Server function.
- 2. In the Share Folder Name, enter the name of the shared folder.
- 3. Click **Apply** to save the new settings, or **Cancel** to clear the changes.

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

File Sharing

File Server

Guest Account

DLNA

Advanced

Tools

☒ Enable DLNA Media Server

Share Folder Name

video

Apply

Cancel

TIPS

The media server allows user sharing multi media files on local networks.

Advanced Network Settings

NAT Setup

Network Address Translation (NAT) allows users on the LAN to access the Internet through a single public IP Address or multiple public IP Addresses. NAT provides firewall protection from hacker attacks and allows for mapping LAN IP addresses to WAN IP addresses with key services such as websites, FTP, and video game servers. To view the NAT settings, click **Advanced** then select **NAT**.

NAT

Click to enable or disable the NAT feature.

Network Turbine

Click to enable or disable the network turbine.


Click **Apply** to save the settings or **Cancel** to discard changes.



Note: The network turbine is designed to improve the Gateway's performance. There is about 20~30% improvement when the network turbine is enabled.



Note: The network turbine may cause problems with the Internet connection. Disable the network turbine function if you experience connection issues.

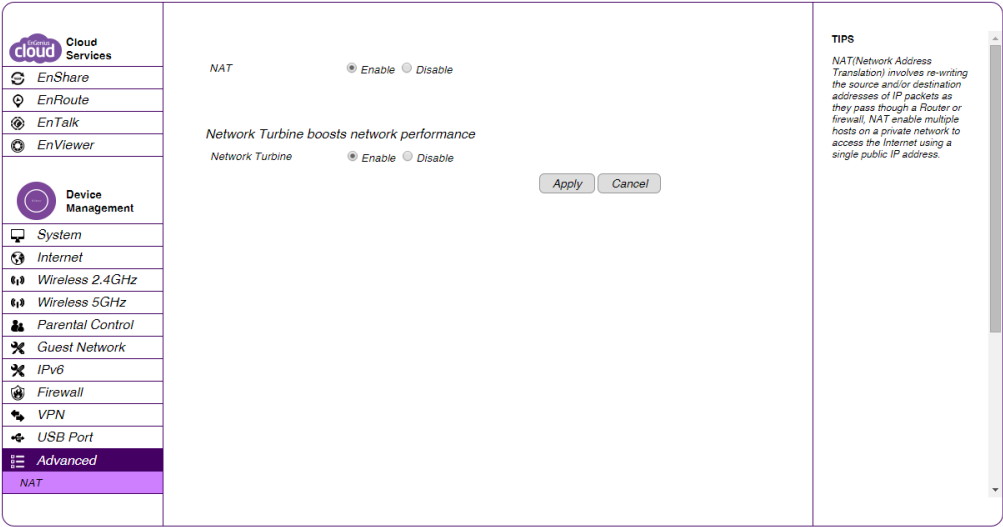

Port Mapping Setup

Port Mapping allows you to redirect a particular range of service port numbers from the WAN to a particular LAN IP address. To view the Port Mapping settings, click **Advanced** then select **Port Mapping**.

Enable Port Mapping

Click **Enable Port Mapping** to activate port mapping.

Description

Enter notes or details about the mapped port range configuration.

Local IP

Enter the local IP address of the server behind the NAT firewall.

Protocol

Select the protocol to use for mapping from the following: **TCP**, **UDP**, or **Both**.

Port Range

Enter the range of ports to be forwarded.

Click **Add** to append a new device to the list or **Reset** to discard changes.

Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

Port Mapping

☐ Enable Port Mapping

Description

Local IP

Protocol

Port Range

Add

Reset

Both

Current Port Mapping Table

No.	Description	Local IP	Type	Port Range	Select
Delete SelectedDelete AllReset					

Apply

Cancel

Local IP:

The Local IP is the internal IP address of the device which requires a forwarded port or ports.

Protocol:

Select TCP, UDP or Both as the protocol of the port to be forwarded.

Current Port Mapping Table

Displays a list of mapped port ranges in use on the network.

No. (Number)

The sequence number of the mapped port range.

Description

Notes or details about the mapped port range.

Local IP

Shows the IP address of the server for the mapped port range.

Type

The protocol used to communicate with the WAN ports and LAN server.

Port Range

Shows the range of mapped ports.

Select

Indicates the device(s) that can have actions performed on them.

Click **Delete Selected** to remove selected devices from the list. Click **Delete All** to remove all devices form the list or **Reset** to discard changes. Next, click **Apply** to save the settings or **Cancel** to discard changes.

☐ Enable Port Mapping

Description

Local IP

Protocol

Port Range

Both ▼

~

Add

Reset

Current Port Mapping Table

No.	Description	Local IP	Type	Port Range	Select
Delete Selected Delete All Reset					

Apply

Cancel

Port Forwarding Setup

Port forwarding enables multiple server applications on a LAN to serve clients on a WAN over a single WAN IP address. The Gateway accepts incoming client packets, filters them based on the destination WAN, or public port and protocol and forwards the packets to the appropriate LAN, or local port. Unlike the DMZ feature, port forwarding protects LAN devices behind the firewall. To view the Port Forwardung settings, click **Advanced** then select **Port Forwarding**.

Enable Port Forwarding

Click **Enable Port Forwarding** to activate port forwarding.

Description

Enter notes or details about the forwarded port configuration.

Local IP

Enter the local IP address of the server behind the NAT firewall.

Protocol

Select the protocol to use for mapping from the following: **TCP**, **UDP** or **Both**.

Local Port

Enter the LAN port number that WAN client packets will be forward to.

Public Port

Enter the WAN port number that clients will send their packets to.

Click **Add** to append a new configuration to the table or **Reset** to discard changes.

cloudCloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

Basic

Advanced

DMZ

DoS

Enable Port Forwarding

Description

Local IP

Protocol

Local Port

Public Port

Both

Add

Reset

Current Port Forwarding Table

No.	Description	Local IP	Local Port	Type	Public Port	Select
Delete Selected Delete All Reset						

Apply

Cancel

TIPS

Firewall automatically detects and blocks Denial of Service (DoS) attacks. URL blocking, packet filtering and SPI (Stateful Packet Inspection) are also supported. The hackers attack will be recorded associated with timestamp in the security logging area.

Current Port Forwarding Table

This section shows the current port forwarding table configurations for the Gateway. Click **Delete Selected** to remove selected devices from the list. Click **Delete All** to remove all devices form the list or **Reset** to the discard changes. Next, click **Apply** to save the settings or **Cancel** to discard changes.

Current Port Forwarding Table

No.	Description	Local IP	Local Port	Type	Public Port	Select
Delete Selected		Delete All	Reset			
				Apply	Cancel	

Port Triggering Setup

Some applications, such as online games, videoconferencing, and VoIP telephony, require multiple ports for inbound and outbound traffic. If an application requires simultaneous use of incoming and an outgoing ports, you can configure port triggering to map a local port or range of ports to a specific public port. Sending packets out over the local port triggers the Gateway to open an incoming local port that is mapped to the same public port and application as the outgoing local port(s). The local application can communicate over the incoming and outgoing ports without the need for creating a fixed address. To view the Port Triggering settings, click **Advanced** then select **Port Triggering**.

Enable Port Triggering

Click **Enable Trigger Port** to activate port triggering.

Description

Enter notes or details about the port triggered configuration.

Popular Applications

Select a default application or add a new one.

Trigger Port

Enter the application’s outbound port number(s).

Trigger Type

Select the protocol to use for port triggering from the following:
TCP, UDP, or Both.

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

Port Mapping

Port Forwarding

Port Triggering

ALG

UPnP

IGMP

☐ Enable Trigger Port

Description

Popular Applications

Trigger Port

Trigger Type

Public Port

Public Type

Add

Reset

Current Trigger-Port Table

No.	Trigger Port	Trigger Type	Public Port	Public Type	Name	Select
Delete SelectedDelete AllReset						

Apply

Cancel

TIPS

You can allow inbound traffic to arrive at a specific LAN host, using ports different than those used for the outbound traffic. The outbound traffic triggers to which ports inbound traffic is directed.

Popular applications: Select an application which you desire to enable port triggering for.

Public Port: This is the inbound (incoming) port for the selected application.

Public Port

Enter the inbound port(s) for the application in the following format: **2300-2400** or **47624**.

Public Type

Select the protocol you wish to use for the inbound port from the following: **TCP**, **UDP**, or **Both**.

Click **Add** to append a new configuration to the table or **Reset** to discard changes.

Current Port Triggering Table

This table shows the list of current port triggering configurations. Click **Delete Selected** to remove selected devices from the list, **Delete All** to remove all devices form the list, or **Reset** the discard changes. Click **Apply** to save the settings or **Cancel** to discard changes.

Current Trigger-Port Table

No.	Trigger Port	Trigger Type	Public Port	Public Type	Name	Select
Delete Selected			Delete All		Reset	
				Apply	Cancel	

ALG Setup

The Application Layer Gateway (ALG) serves as a window between correspondent application processes so that they may exchange information on an open environment. To view the ALG settings, click **Advanced** then select **ALG**. Select the listed applications that need ALG support to have the Gateway authorize them to pass through the NAT Gateway. Click **Apply** to save the settings or **Cancel** to discard changes.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

Description

Select

TFTP	☐
IPsec	☐
FTP	☐
SIP	☐
RTSP	☐

Apply

Cancel

TIPS

The ALG (Application Layer Gateway) serves the purpose of a window between correspondent application processes so that they may exchange information on the open environment.

UPnP Setup

Universal Plug and Play (UPnP) helps internet devices such as gaming and videoconferencing to access the network and connect to other registered UPnP devices. UPnP is designed to support zero-configuration, “invisible” networking, and automatic discovery for a range of devices from a wide range of vendors. With UPnP, a device can dynamically join a network, obtain an IP address and learn about the presence and capabilities of other devices automatically. Devices can the subsequently communicate with each other directly. To view the UPnP settings, click **Advanced** then select **UPnP**. Click to enable or disable to activate or deactivate the UPnP feature.

Click **Apply** to save the settings or **Cancel** to discard changes.

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

UPnP

Enable

Disable

Apply

Cancel

TIPS

Universal Plug and Play is designed to support zero-configuration, “invisible” networking, and automatic discovery for a range of device from a wide range of vendors. With UPnP, a device can dynamically join a network, obtain an IP address and learn about the presence and capabilities of other devices all automatically. Devices can subsequently communicate with each other directly.

IGMP Setup

Internet Group Multicast Protocol (IGMP) is a network-layer protocol used to establish membership in a multicast group. To view the IGMP settings, click **Advanced** then select **IGMP**. Click to **enable** or **disable** to activate or deactivate IGMP for the Gateway. Click **Apply** to save the settings or **Cancel** to discard changes.



Note: Disabling the Multicast function may cause IP based multimedia devices, such as an IP-STB or OTT box, to lose connectivity with the media streaming server.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

Multicast Settings

Multicast

☒ Enable

☐ Disable

Apply

Cancel

TIPS

IGMP (Internet Group Multicast Protocol) is a network-layer protocol used to establish membership in a Multicast group.

QoS Setup

Quality of Service (QoS) can prioritize bandwidth use such as video streaming, online gaming, VoIP telephony and videoconferencing to ensure stable and efficient network performance. To view the QoS settings, click **Advanced** then select **QoS**.

Total Bandwidth Settings

Uplink


Select the maximum bandwidth speed for outbound traffic.

Downlink

Select the maximum bandwidth speed for inbound traffic.

Note

Click **Disabled** if you do not wish to prioritize any data or protocol.

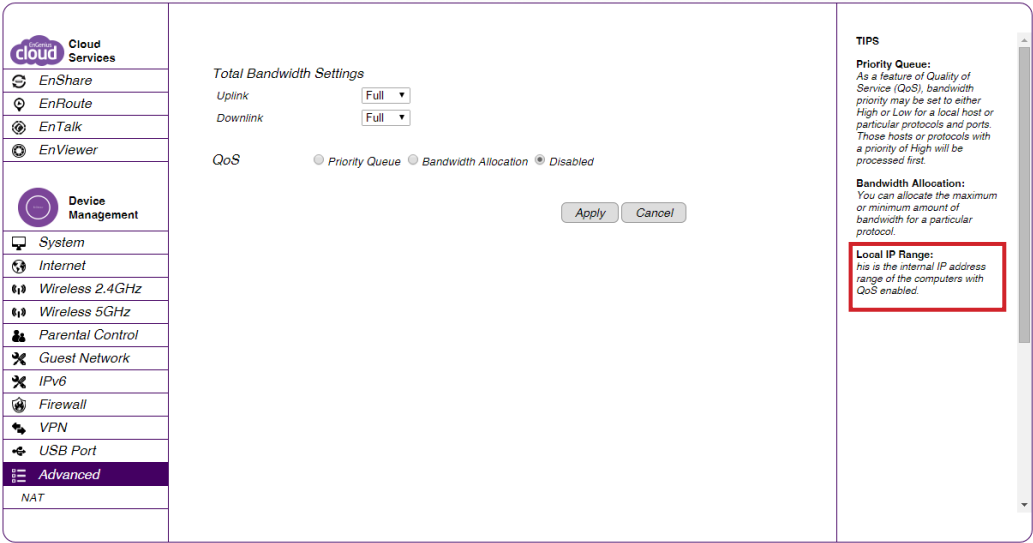

Priority Queue

Set network resource usage based on specific protocols or port ranges. Incoming packets are processed based on the protocols' position within the queue.

Unlimited Priority Queue

Local IP Address

Enter the local IP address of a device on the network. This device's activity is not restricted by the QoS feature.

High/Low Priority Queue

Specify the priority for different protocols. Additional protocols and port ranges can be added.

Click **Apply** to save the settings or **Cancel** to discard changes.

Unlimited Priority Queue

Local IP Address

Description

The IP address will not be bounded in the QoS limitation

High/Low Priority Queue

Protocol	High Priority	Low Priority	Specific Port
FTP	☐	☒	20,21
HTTP	☐	☒	80
TELNET	☐	☒	23
SMTP	☐	☒	25
POP3	☐	☒	110
Name	☐	☒	Both ~
Name	☐	☒	Both ~
Name	☐	☒	Both ~

Apply

Cancel

Bandwidth Allocation

From here you can set network resource usage for inbound and outbound traffic based on local IP and port ranges.

Type

Select **Download** or **Upload** to specific the direction of packet traffic.

Local IP Range

Enter the local IP range of the current configuration.

Protocol

Select the protocol to manage for the current configuration.

Port Range

Enter the local port range of the current configuration.

Policy

Select **Min** or **Max** to specify the type of configuration policy.

Rate (bps)

Select the bandwidth rate in bits per second (bps) of the current configuration.

Click **Add** to save the settings and list the configuration in the Current QoS table or **Reset** the discard changes. Click **Apply** to save the settings or **Cancel** to discard changes.

QoS ☐ Priority Queue ☒ Bandwidth Allocation ☐ Disabled

TypeDownload

Local IP range~

ProtocolALL

Port Range~

PolicyMin

Rate(bps)Full

AddReset

Current QoS Table							
No.	Type	Local IP range	Protocol	Port Range	Policy	Rate(bps)	Select
Delete Selected		Delete All		Reset			

ApplyCancel

Routing Setup

Typically, static routing does not need to be setup because the Gateway has adequate routing information after it has been configured for Internet access. Static routing is only necessary if the Gateway is connected to a network under a different set of subnets. To view the routing settings, click **Advanced** then select **Routing**.



Note: To enable a static routing, NAT must be disabled. If the Gateway is connected with a network under the different subnet, the routing setup allows the network connection within two different subnets.

Enable Static Routing

Enable Static Routing

Click **Enable Static Routing** to activate the feature.

Destination LAN IP

Enter the LAN IP address of the destination device.

Subnet Mask

Enter the Subnet mask of the destination device.

Default Gateway

Enter the default Gateway IP address for the destination device.

Hops

Enter the maximum number of hops within the static routing that a packet is allowed to travel.

Interface

Select LAN or WAN as the interface.

cloudCloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

☐ Enable Static Routing

Destination LAN IP

Subnet Mask

Default Gateway

Hops

Interface

Add

Reset

Current Static Routing Table

No.	Destination LAN IP	Subnet Mask	Default Gateway	Hops	Interface	Select
Delete SelectedDelete AllReset						

ApplyCancel

TIPS

If the router is connected with a network under the different subnet, the routing setup allows the network connection in two different subnets.

Destination LAN IP:
This is the LAN IP address of the destination.

Subnet Mask:
This is the Subnet Mask of the destination.

Default Gateway:
This is the IP address of the Default Gateway for this destination LAN IP address and Subnet.

Hops:
This is the maximum number of hops in the static routing that a packet is allowed to travel.

Current Static Routing Table

Click **Add** to save the settings and list the configuration in the Current Static Routing table or **Reset** to discard the changes. Click **Delete Selected**, **Delete All** to remove devices from the table, or Click **Reset** to stop. Click **Apply** to save the settings or **Cancel** to discard changes.

Current Static Routing Table

No.	Destination LAN IP	Subnet Mask	Default Gateway	Hops	Interface	Select
Delete Selected Delete All Reset Apply Cancel						

Wake on LAN Setup

Wake on LAN setup (WOL) allows the administrator to activate a computer over the network. To view the WOL settings, click **Advanced** then select **WOL**.

Enabling WOL over WAN

Click **Enable WOL over WAN** to activate the feature.

Server Port

Enter the server port of the device to activate.

Wake MAC Address

Enter the MAC address of the device to activate.

Click **Start** to activate the device. Click **Apply** to save the settings or **Cancel** to discard changes.

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

NAT

☐ Enable WOL over WAN

Server Port

9

Wake On LAN

Wake MAC Address

Start

Apply

Cancel

TIPS

Wake on LAN (WOL) is a way to switch on a computer that is connected to a network. You make use this router to wake up a WOL-enabled computer using this feature. Enter the MAC address of the PC/Laptop and then click on [Start] to wake up the computer under sleeping mode. Your target PC/laptop motherboard must support WOL in order to use this function.

Tools Setup

Configuring the Administrator Account

From here, you can Change the Gateway's system password as well as setup a device to remotely configure the settings. To view the Admin settings, click **Tools** then select **Admin**.

Login Name

Keep or change the existing login name.

Old Password

Enter the existing administrator password.

New Password

Enter the new administrator password.

Repeat New Password

Re-type the new administrator password.

Graphical Authentication

Enables or disables CAPTCHA authentication.

Remote Management

Host Address

Enter the designated host IP Address.



Note: To access the settings of the EPG600 remotely, enter the Gateway’s WAN IP address and port number.

Port

Enter the port number for remote accessing of the management web interface. The default number is: **8080**.

Enable

Select to enable remote management.

Click **Apply** to save the settings or **Cancel** to discard changes.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

Login Name

admin

Old Password

New Password

Repeat New Password

Graphical Authentication

EnableDisable

EnShare Service Portal

EnGenius Service Port

10000

Router Management Port

Host Address

0.0.0.0

port

8080

Enable

Note:

To login the EnGenius service through the port 80 or port 10000.
Port range: 10000~65000

Example:

http://1dc6efe.engeniusddns.com:10000 or http://1dc6efe.engeniusddns.com

ApplyCancel

TIPS

You can change the password that you use to access the router, this is not your ISP account password.

Graphical Authentication
Enable this feature to have CAPTCHA login in the router login page.

EnShare Service Portal
EnShare service port: The default EnShare service port is port 80 and port 10000, but the service port can be changed when it's blocked by the ISP or user owned demand.
The EnShare Service supports the following functions:
Router Management
Host Name: Leave this field blank to allow any host to perform remote management. Otherwise, specify a Host Address to allow only one host to access remote management on the router.
port: This is the port used for Router remote management. The default port is 8080.
Enable checkbox: By enabling the remote management, users can access the Web-based management interface for remote manage Router setting. The default is disabled.

System Time Settings

Change the system time of the EPG600 and setup automatic updates through a network time (NTP) protocol server or through a computer. To view the Time Settings, click **Tools** then select **Time**.

Synchronizing with an NTP Server

Time Setup

Select how the Gateway obtains the current time.

Click **Apply** to save the settings or **Cancel** to discard changes.

Time Zone

Select the time zone for the Gateway.

NTP Time Server

Enter the domain name or IP address of an NTP server.

Enabling Daylight Savings

Click to enable or disable daylight savings time.

Start Time

Select the date and time when daylight savings time starts.

End Time

Select the date and time when daylight savings time ends.

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

Time Setup

Synchronize with the NTP Server

Time Zone

(GMT+08:00)Beijing, Hong Kong

NTP Time Server

pool.ntp.org

Enable Daylight Saving

Start Time

January

1st

Sun

12 am

End Time

January

1st

Sun

12 am

Apply

Cancel

TIPS

NTP Time Server:
Enter the address of the
Network Time Protocol (NTP)
Server to automatically
synchronize with a time server
on the Internet.

Synchronizing with a Computer

From here, you can setup the date and time synchronization on the EPG600 with a computer. To synchronize date and time settings with a computer, please follow these steps:

- 1. Select **Synchronize with PC** (computer) from the **Time Setup** dropdown list. The date and time values are shown in the **PC Date and Time** text field.
- 2. Click **Prev** to return to the previous screen, **Apply** to save the settings, or **Cancel** to stop the procedure.

 Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

 Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

Time Setup

Synchronize with PC

PC Date and Time

10/27/2014, 4:03:36 PM

☐

Enable Daylight Saving

Start Time

January

1st

Sun

12 am

End Time

January

1st

Sun

12 am

Apply

Cancel

TIPS

NTP Time Server:

Enter the address of the Network Time Protocol (NTP) Server to automatically synchronize with a time server on the Internet.

Unique Identifier (UID)

From here, you can configure the Unique Identifier (UID) settings for the EPG600. The UID is an EnGenius proprietary feature that allows Gateways to be connected by EnGenius mobile apps regardless if they is situated behind another Gateway or not. This is accomplished through the implementation of NAT passthrough. Under the Tools section, click on **UID/DDNS**. Please follow the steps below to setup your UID login:

- 1. Click the bubble to enable the UID/Dynamic DNS feature.
- 2. Click the **Use Default UID/EnGenius DDNS Services** bubble to automatically receive a static domain name for a dynamic IP address.
- 3. Enter an Alias DDNS name and click **Availability Check** to see if the name is free or in use.
- 4. Select the **Refresh Time** interval. This will refresh the UID/DDNS service based on how often you specify.
- 5. Click **Apply** to save the configuration.

Default UID

Displays the default UID in use.

UID Status

Displays the current connection status for the UID service.

Default DDNS Name

Displays the default name for the DDNS address.

Alias DDNS Name

The common name for the DDNS address. Similar to how a URL is easier to remember than an IP address, but represent the same destination.

Refresh Time

Specifies how often the UID/DDNS service will refresh. Your options are: **24 hr**, **12 hr**, **9 hr**, **6 hr**, and **3 hr** increments.

DDNS Status

Displays the current connection status for the DDNS service.

UID/Dynamic DNS

☒ Enable ☐ Disable

☒ Using Default UID/EnGenius DDNS Services

Default UID

0111159

UID Status

Connected

Default DDNS Name

0111159.engeniusddns.com

Alias DDNS Name

.engeniusddns.com

Availability Check

DDNS Setup

The most common use for Dynamic Domain Name Service (DDNS) is in allowing an Internet domain name to be assigned to a computer with a varying (dynamic) IP address. This makes it possible for other sites on the Internet to establish connections to the machine without needing to track the IP address themselves. To view the DDNS settings, click **Tools** then select **UID/DDNS**.

Use Other DDNS Services

Click to enable or disable alternate DDNS services for the EPG600.

Server Address

Select the server address. Your options are: **3322 (qdns)**, **DHS**, **DynDNS**, **Zone Edit**, or **Cyber Gate**

Host Name

Enter the host name.

Username

Enter a username for the host service.

Password

Enter a password for the host service.

cloud

Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

UID/Dynamic DNS

Enable

Disable

Using Default UID/EnGenius DDNS Services

Default UID

1dc6efe

UID Status

Connected

Default DDNS Name

1dc6efe.engeniusddns.com

Alias DDNS Name

e600demo

engeniusddns.com

Availability Check

Refresh Time

24HR

DDNS Status

Connected

Use Other DDNS services

Server Address

3322(qdns)

Host Name

Username

Password

Apply

Cancel

TIPS

DDNS allows users to map a static domain name to a dynamic IP address. You must get an account, password and your static domain name from the DDNS service provider.

Click **Apply** to save the settings or **Cancel** to discard changes.

188

The EnGenius DDNS feature is easy to use:

- 1. Users can find the default DDNS value under the device label.
- 2. The DDNS service is free.
- 3. The DDNS name can be changed to a custom name if you wish.

Dynamic DNS

☒ Enable ☐ Disable

☒ Default EnGenius DDNS service

Default DDNS Name07788ed.engeniusddns.com

Domain Name.engeniusddns.com

Check Available

Refresh Time

24HR

Status

Disconnected

☐ Use Other DDNS services

Server Address

3322(qdns)

Host Name

Username

Password

Apply

Cancel

Diagnosis

The Diagnosis feature allows the administrator to verify that a client device is available on the network and is accepting request packets. If the ping results return “alive”, it means a device is connected. Please note that this feature does not work if the target device is behind a firewall or has security software installed. To view the Diagnosis settings, click **Tools** then select **Diagnosis**.

Diagnosing a Network Connection Problem

Address to Ping

Enter the IP address of the device you wish to ping.

Ping Frequency

Select the interval, in seconds that the ping message is to be sent out.

Click **Start** to begin the diagnosis.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

Address to Ping

Ping Result

Start

TIPS

This feature allows you to Ping the other device for response. This is mostly used for checking if a specific user is on-line. You can type in the IP address (eg:192.168.0.100) into [Address to Ping] and press [Start]. If you get a Ping Result "alive" it means the user is on line. However, this feature does not if the target device has firewall or security software installed.

Upgrading The Gateway's Firmware

Firmware is the Gateway's system software that operates and allows the administrator to interact with it. To view the Firmware settings, click **Tools** then select **Firmware**.



WARNING! Upgrading firmware through a wireless connection is not recommended. Firmware upgrading must be performed while connected to an Ethernet (LAN port) with all other clients disconnected.

To update the firmware version, please follow these steps:

Manual Firmware Upgrade:

1. Download the appropriate firmware approved from an EnGenius web site such as **www.engeniustech.com**. See the **Downloads** tab on the product page for this product. For new products, new firmware may not be readily available.
2. Click **Choose File**.
3. Browse the file system and select the firmware file.
4. Click **Apply**.

cloud Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

Firmware

Manual Firmware Upgrade

You can upgrade the firmware of the router in this page. Ensure, the firmware you want to use is on the local hard drive of your computer. Click on Browse to browse and locate the firmware to be used for your update.

File Upload:

Choose File

 No file chosen

Apply

Cancel

Auto Firmware Upgrade ☒ Enable ☐ Disable

TIPS

Firmware is the core-function software that runs on your router. Usually, you are not required to upgrade your firmware. This section allows you to upgrade firmware released on EnGenius official web site. Warning: upgrading firmware under unstable environment may damage the device and result in malfunction. DO NOT upgrade firmware wirelessly to avoid accidental interference or disconnection during the process. It is always safer to upgrade firmware over Ethernet (LAN port) with all other clients disconnected.

Auto Firmware Upgrade:

Enable the Auto Firmware Upgrade function, and the latest update firmware information will be shown. Click **Release Note** to check the update details and click Upgrade to proceed the firmware upgrade immediately.



WARNING! Do not turn off the device in the middle of upgrade process. Terminating the device during the process will damage the device and may cause the device to fail.

EnGenius cloud Cloud Services EnShare EnRoute EnTalk EnViewer Device Management System Internet Wireless 2.4GHz Wireless 5GHz Parental Control Guest Network IPv6 Firewall VPN USB Port Advanced Tools	Firmware Manual Firmware Upgrade You can upgrade the firmware of the router in this page. Ensure, the firmware you want to use is on the local hard drive of your computer. Click on Browse to browse and locate the firmware to be used for your update. File Upload: Choose File No file chosen Apply Cancel Auto Firmware Upgrade ☒ Enable ☐ Disable	TIPS Firmware is the core-function software that runs on your router. Usually, you are not required to upgrade your firmware. This section allows you to upgrade firmware released on EnGenius official web site. Warning: upgrading firmware under unstable environment may damage the device and result in malfunction. DO NOT upgrade firmware wirelessly to avoid accidental interference or disconnection during the process. It is always safer to upgrade firmware over Ethernet (LAN port) with all other clients disconnected.
--	---	--

Backing Up The Gateway's Settings

Save your current Gateway's settings as a configuration file on your computer. To view the Back-up settings, click **Tools** then select **Back-up**.

Backup Settings

Click **Save** to save the current configuration on the Gateway to a *.dlf file.

Restore Settings

To restore saved settings, follow the steps below:

- 1. Click **Choose File**.
- 2. Browse the file system for location of the settings file (*.dlf).
- 3. Click **Upload**.



Reset to default / Reboot the Gateway

This feature allows you to reboot the Gateway in the event of a system hangup or other disruption to the network. To view the reset settings, click **Tools** then select **Reset**. Click **Apply** to reset the device.

Restoring to the Gateway's Factory Default Settings

Click **Reset** to restore the EPG600 to its factory default settings.

EnGenius Cloud Services

EnShare

EnRoute

EnTalk

EnViewer

Device Management

System

Internet

Wireless 2.4GHz

Wireless 5GHz

Parental Control

Guest Network

IPv6

Firewall

VPN

USB Port

Advanced

Tools

All the devices settings will be restore to the factory default. Please remember to back-up all your settings before to reset the device.

Reset to Default


In the event the system stops responding correctly or stops functioning, you can perform a reset. Your settings will not be changed. To perform the reset, click on the "Reboot the Device" button.

Reboot the Device

TIPS

This feature allows you to reboot the router. If you encounter any unstable connection you may resolve it by resetting the device to release all the occupied system resource.

Glossary

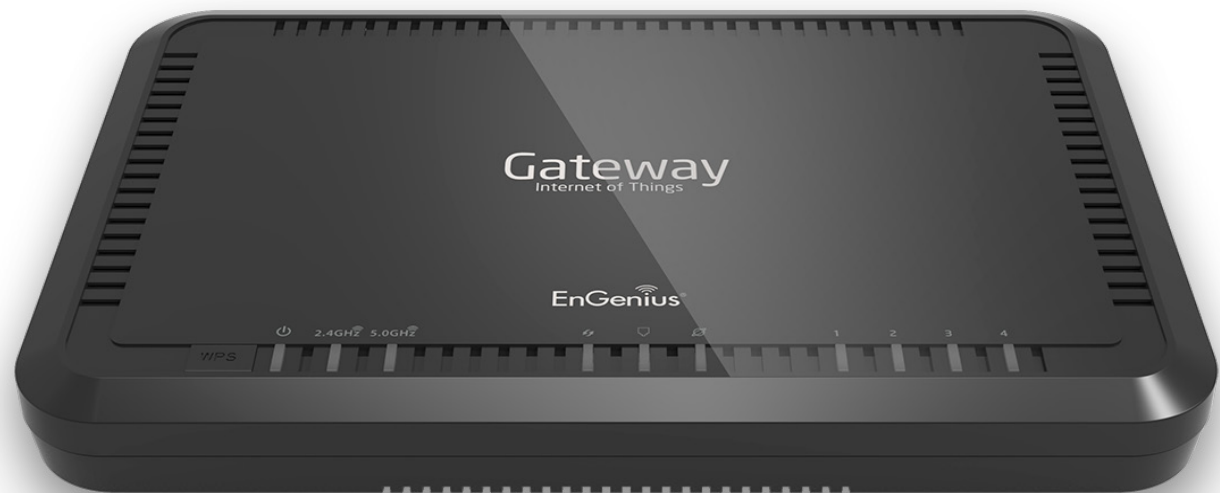

6to4	6to4 allows IPv6 packets to be transmitted over an IPv4 network.
ACL	The Access Control List specifies which users or processes are granted access to objects, as well as which operations are allowed.
Access Point Mode	In Access Point mode, the EPG600 allows wireless devices to connect to a wired network using Wi-Fi, or other related standards. You can choose to have the Gateway associate only with certain iterations (IEEE standards) and by doing so this will either positively or negatively affect the Gateway's speed and throughput performance.
ALG	Application Layer Gateway serves as a window between correspondent application processes so that they may exchange information on an open environment.
Backup	A copy of a set of files made for replacement purposes in case the original set is damaged or lost.
Bandwidth	Bandwidth refers to the information-carrying capacity of a network or component of a network expressed in bits per second.
Bit Rate	The rate at which bits are transmitted or received during communication, expressed as the number bits in a given amount of time, usually one second.
Boot	A computer's startup operation.
Community String	A text string that acts as a password and is used to authenticate messages sent between a management station and a Gateway containing a SNMP agent. The community string is sent in every packet between the manager and the agent.
Default Gateway	A Default Gateway is the device that passes traffic from the local subnet to devices on other subnets. It is usually the IP address of the Gateway to which your network is connected.
DHCP	The Dynamic Host Configuration protocol is used for dynamically distributing network configuration parameters, such as IP addresses for interfaces and services.
Dial Plan	A Dial Plan establishes an expected sequence of digits dialed on subscriber devices, such as telephones, in private branch exchange (PBX) systems, or in other telephone switches.
DDNS	Dynamic Domain Name Service (DDNS) allows for an Internet domain name to be assigned to a computer with a varying (dynamic) IP address.
DLNA	The Digital Living Network Alliance DLNA is a nonprofit collaborative trade organization that is responsible for defining interoperability guidelines to enable the sharing of digital media between multimedia devices. Some HDTVs, Gaming Consoles, and other media devices adhere to DLNA guidelines.
Diagnostic	A test or the data from a test which indicates the condition of the state of a computer or network's health.

DMZ	A Demilitarized Zone allows unrestricted two-way Internet access for Internet applications such as online video games to run from behind the NAT firewall. DMZ allows the Gateway to redirect all packets going to the WAN port IP address to a particular IP address on the LAN.
DNS	A Domain Name System is a hierarchical distributed naming system for computers, services, or any resource connected to the Internet or a private network. This allows the recognition of domain names such as www.yahoo.com instead of 98.139.183.24, which is more difficult to remember.
Domain	A portion of the spanning hierarchy tree that refers to general groupings of networks based on organization type or geography.
DoS	Denial of Service is an interruption in an authorized user's access to a computer network and is typically caused with malicious intent. Although the process and targets of a DoS attack vary, it generally consists of efforts to temporarily or indefinitely interrupt or suspend services of a host connected to a network.
Download	The transfer of a file from a remote computer to a local computer.
DS-Lite	Dual Stack-Lite uses IPv6-only links between the networks while maintaining the IPv4 (or dual-stack) hosts in a network by encapsulating an IPv4 packet in an IPv6 packet for transport into the provider network.
Dynamic IP	An IP address that is assigned and changed periodically. Dynamic IP addresses can change each time you connect to the Internet, while static IP addresses are reserved for you statically and don't change over time.
Encryption	The application of a specific algorithm to data so as to alter the appearance of the data making it incomprehensible to those who are not authorized to see the information.
Firewall	A Gateway or access server, or several Gateways or access servers designated as a buffer between any connected public networks and a private network. A firewall Gateway uses access lists and other methods to ensure the security of the private network.
Firmware	A collection of programmed routines and instructions that is implemented in a computer chip or similar hardware form instead of a software form. Please check www.engeniustech.com for firmware updates.
FTP	An application protocol that uses the TCP/IP protocols. It is used to exchange files between computers/devices on networks.
Gateway	A Gateway is a point in a network that acts as an entry point to another network. In a corporate network for example, a computer server acting as a Gateway often also acts as a proxy server and a firewall server. A Gateway is often associated with both a Gateway, which knows where to direct a given packet of data that arrives at the Gateway, and a Switch, which furnishes the actual path in and out of the Gateway for a given packet.


Guest Network	A guest network is a section of an computer network designed for use by temporary visitors. This subnetwork often provides full Internet connectivity, but also strictly limits access to any internal Web sites or files.
GUI	Graphical User Interface. User environment that uses pictorial as well as textual representations of the input and output of applications and the hierarchical or other data structure in which information is stored.
IGMP	The Internet Group Multicast Protocol is a protocol that provides the means for a host to inform its attached Gateway that an application running wants to join a specific multicast group.
IP	The Internet Protocol is a method transmitting data over a network. Data to be sent is divided into individual and completely independent "packets." Each computer (or host) on the Internet has at least one address that uniquely identifies it from all others, and each data packet contains both the sender's address and the receiver's address. The Internet Protocol ensures that the data packets all arrive at the intended address. As IP is a connectionless protocol, (which means that there is no established connection between the communication end-points) packets can be sent via different routes and do not need to arrive at the destination in the correct order. Once the data packets have arrived at the correct destination, another protocol, Transmission Control Protocol (TCP) puts them in the right order.
IP Address	An IP address is simply an address on an IP network used by a computer/device connected to that network. IP addresses allow all the connected computers/devices to find each other and to pass data back and forth. To avoid conflicts, each IP address on any given network must be unique. An IP address can be assigned as fixed, so that it does not change, or it can be assigned dynamically (and automatically) by DHCP. An IP address consists of four groups (or quads) of decimal digits separated by periods, e.g. 130.5.5.25. Different parts of the address represent different things. One part represent the network number or address, and other part represents the local machine address.
IPv6	IPv6 provides an identification and location system for computers on networks and routes that traffic across the Internet.
L2TP	The Layer 2 Tunneling Protocol is used to support VPNs or as part of the delivery of services by ISPs.
LAN	A communication infrastructure that supports data and resource sharing within a small area that is completely contained on the premises of a single owner.
MAC Address	Standardized data link layer address that is required for every port or device that connects to a LAN. Other devices in the network use these addresses to locate specific ports in the network and to create and update routing tables and data structures. MAC addresses are 6 bytes long and are controlled by the IEEE.

MAC Address Filtering	Mac Address Filtering permits and denies network access to specific devices based on a device's MAC address.
MTU	Maximum Transmission Unit. A specification in a data link protocol that defines the maximum number of bytes that can be carried in any one packet on that link.
NAT	Network Address Translation is a methodology of modifying network address information in Internet Protocol (IP) datagram packet headers while they are in transit across a traffic routing device.
NTP Sevrer	The Network Time Protocol is used for clock synchronization between computer systems.
Packet	A discrete chunk of communication in a pre-defined format.
Port Forwarding	Port Forwarding allows remote computers to connect to a specific computer or service within a private LAN.
Port Mapping	Port Mapping allows you to redirect a particular range of service port numbers from the WAN to a particular LAN IP address
Port Triggering	Port Triggering lets you map a local port or range of ports to a specific public port. Sending packets out over the local port triggers the Gateway to open an incoming local port that is mapped to the same public port and application as the outgoing local port(s). The local application can communicate over the incoming and outgoing ports without the need for creating a fixed address.
PPPoE	Point-to-Point Protocol over Ethernet (PPPoE) is a network protocol for encapsulating PPP frames inside Ethernet frames. PPPoE can be used to have an office or building-full of users share a common DSL, cable modem, or wireless connection to the Internet.
PPTP	A protocol that allows corporations to extend their own corporate network through private "tunnels" over the public Internet. In this way a corporation can effectively use a WAN as a large single LAN.
Priority Queue	A Priority queue is a queue where an element with a high priority is served before an element with low priority. If two elements happen to have the same priority, they are served according to their order in the queue.
QoS	Quality of service is the ability to provide different priority to different applications, users, or data flows, or to guarantee a certain level of performance to a data flow. It is especially important for applications like multimedia streaming and VoIP.
RADIUS	Remote Authentication Dial In User Service is a networking protocol that provides centralized authentication, authorization, and accounting management for users that connect and use a network service.

RAM	Random Access Memory. A group of memory locations that are numerically identified to allow high speed access by a CPU. In random access, any memory location can be accessed at any time by referring to its numerical identifier as compared to sequential access, where memory location 6 can only be accessed after accessing memory locations 1-5.
Reboot	A user activity where the user starts a computing device without interrupting its source of electrical power.
Server	In general, a server is a computer program that provides services to other computer programs within the same or other computers. A computer running a server program is also frequently referred to as a server. In practice, the server may contain any number of server and client programs. A web server is the computer program that supplies the requested HTML pages or files to the client (browser).
Gateway	A device that determines the next network point to which a packet should be forwarded to on its way to its final destination. A Gateway creates and/or maintains a special routing table that stores information on how best to reach certain destinations. A Gateway is sometimes included as part of a network Switch.
Static IP	An IP address that is unchanging. It is more reliable when dealing with VoIP, online gaming, and VPNs.
SSID	A Service Set Identifier is a set consisting of all the devices associated with a WLAN.
Subnet Mask	A representation of a user's Internet address where all of the bit positions corresponding to the user's network and subnetwork id are 1's and the bit corresponding to the user's host id are 0's.
Throughput	Rate of information arriving at, and possibly passing through, a particular point in a network system.
Time-Out	Event that occurs when one network device expects to hear from another network device within a specified period of time, but does not. The resulting time-out usually results in a retransmission of information or the dissolving of the session between the two devices
TKIP	Temporal Key Integrity Protocol is a stopgap security protocol used in IEEE 802.11 wireless networking standards used to replace WEP.
UID	A Unique Identifier is a unique reference number used as an identifier.
Upload	The activity of transferring a file from a user's computer system to a remote system
UPnP	Universal Plug n Play is a protocol that permits networked devices to seamlessly discover each other's presence on the network.
USB	A plug-and-play interface between a computer and peripheral devices, e.g. scanners, printers, etc.

VoIP	Voice over IP is a technology used for the delivery of voice communications and multimedia sessions over IP networks rather than a PSTN line.
VPN	A Virtual Private Network creates a secure "tunnel" between the points within the VPN. Only devices with the correct "key" will be able to work within the VPN. The VPN network can be within a company LAN (Local Area Network), but different sites can also be connected over the Internet in a secure way. One common use for VPN is for connecting a remote computer to the corporate network, via e.g. a direct phone line or the Internet.
VPN Tunnel	VPN Tunneling is a link which connects a network directly to another network. The connection between the complementary links is called a VPN tunnel. VPN comprises with a VPN server and a VPN client. A VPN client is usually a software program which can be configured to the VPN server.
WAN	A Wide Area Network is a network that covers a broad area over long distances using private or public network transports between different LANs, MANs and other localised computer networking architectures.
WDS Mode	Wireless Distribution System Mode is a MAC address-based system enabling the wireless interconnection of Access Points in an IEEE 802.11 network.
WEP	Wired Equivalent Privacy is a security protocol for wireless networks that encrypts transmitted data.
WLAN	A Wireless LAN is a LAN that links two or more devices using some wireless distribution method. This gives users the ability to move around within a local coverage area and still be connected to the network.
WOL	Wake on LAN allows a computer to be turned on or awakened by a network message.
WPA / WPA2	Wi-Fi Protected Access and Wi-Fi Protected Access II are security protocols and security certification programs used to secure wireless computer networks. They are recommended over WEP.

Appendix

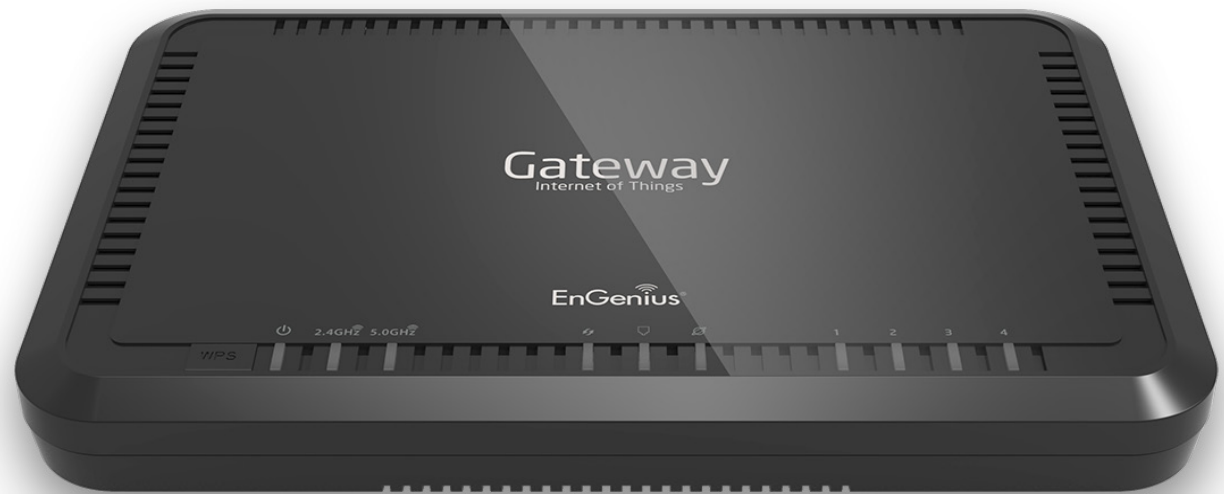

Federal Communication Commission Interference Statement

This equipment complies with Part 68 of the FCC rules and the requirements adopted by the ACTA. On the bottom of this equipment is a label that contains, among other information, a product identifier in the format US: SNIT01BEPG600. If requested, this number must be provided to the telephone company.

The REN is used to determine the number of devices that may be connected to a telephone line. Excessive RENs on a telephone line may result in the devices not ringing in response to an incoming call. In most but not all areas, the sum of RENs should not exceed five (5.0). To be certain of the number of devices that may be connected to a line, as determined by the total RENs, contact the local telephone company. For products approved after July 23, 2001, the REN for this product is part of the product identifier that has the format US: SNIT01BEPG600. The digits represented by 01 are the REN without a decimal point (e.g., 03 is a REN of 0.3). For earlier products, the REN is separately shown on the label.

A plug and jack used to connect this equipment to the premises wiring and telephone network must comply with the applicable FCC Part 68 rules and requirements adopted by the ACTA. A compliant telephone cord and modular plug is provided with this product. It is designed to be connected to a compatible modular jack that is also compliant. See installation instructions for details.

If this equipment causes harm to the telephone network, the telephone company will notify you in advance that temporary discontinuance of service may be required. But if advance notice isn't practical, the telephone company will notify the customer as soon as possible. Also, you will be advised of your right to file a complaint with the FCC if you believe it is necessary.

The telephone company may make changes in its facilities, equipment, operations or procedures that could affect the operation of the equipment. If this happens, the telephone company will provide advance notice in order for you to make necessary modifications to maintain uninterrupted service.

If trouble is experienced with this equipment, for repair or warranty information, please contact:

Company: EnGenius Technologies, Inc.

Address: 1580 Scenic Avenue Costa Mesa, CA 92626 USA

Tel no.: 1-714-432-8668



If the equipment is causing harm to the telephone network, the telephone company may request that you disconnect the equipment until the problem is resolved.



Connection to party line service is subject to state tariffs. Contact the state public utility commission, public service commission or corporation commission for information.

If your home has specially wired alarm equipment connected to the telephone line, ensure the installation of this equipment does not disable your alarm equipment. If you have questions about what will disable alarm equipment, consult your telephone company or a qualified installer.

Europe – EU Declaration of Conformity

This device complies with the essential requirements of the R&TTE Directive 1999/5/EC. The following test methods have been applied in order to prove presumption of conformity with the essential requirements of the R&TTE Directive 1999/5/EC:

- **EN60950-1**
Safety of Information Technology Equipment
- **EN50385**
Generic standard to demonstrate the compliance of electronic and electrical apparatus with the basic restrictions related to human exposure to electromagnetic fields (0 Hz - 300 GHz)
- **EN 300 328**
Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband Transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using spread spectrum modulation techniques; Harmonized EN covering essential requirements under article 3.2 of the R&TTE Directive
- **EN 301 893**
Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN; Harmonized EN covering essential requirements of article 3.2 of the R&TTE Directive
- **EN 301 489-1**
Electromagnetic compatibility and Radio Spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements
- **EN 301 489-17**
Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 17: Specific conditions for 2,4 GHz wideband transmission systems and 5 GHz high performance RLAN equipment

This device is a 5 GHz wideband transmission system (transceiver), intended for use in all EU member states and EFTA countries, except in France and Italy where restrictive use applies.

In Italy the end-user should apply for a license at the national spectrum authorities in order to obtain authorization to use the device for setting up outdoor radio links and/or for supplying public access to telecommunications and/or network services.

This device may not be used for setting up outdoor radio links in France and in some areas the RF output power may be limited to 10 mW EIRP in the frequency range of 2454 - 2483.5 MHz. For detailed information the end-user should contact the national spectrum authority in France.

CE 0560 

Česky [Czech]	[Jméno výrobce] tímto prohlašuje, že tento [typ zařízení] je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 1999/5/ES.
Dansk [Danish]	Undertegnede [fabrikantens navn] erklærer herved, at følgende udstyr [udstyrets typebetegnelse] overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
Deutsch [German]	Hiermit erkläre [Name des Herstellers], dass sich das Gerät [Gerätetyp] in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.
Eesti [Estonian]	Käesolevaga kinnitab [tootja nimi = name of manufacturer] seadme [seadme tüüp = type of equipment] vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
English	Hereby, [name of manufacturer], declares that this [type of equipment] is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Español [Spanish]	Por medio de la presente [nombre del fabricante] declara que el [clase de equipo] cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.
Ελληνική [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ [name of manufacturer] ΔΗΛΩΝΕΙ ΟΤΙ [type of equipment] ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.

Français [French]	Par la présente [nom du fabricant] déclare que l'appareil [type d'appareil] est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Italiano [Italian]	Con la presente [nome del costruttore] dichiara che questo [tipo di apparecchio] è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latviski [Latvian]	Ar šo [name of manufacturer / izgatavotāja nosaukums] deklarē, ka [type of equipment / iekārtas tips] atbilst Direktīvas 1999/ 5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo [manufacturer name] deklaruoja, kad šis [equipment type] atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.
Nederlands [Dutch]	Hierbij verklaart [naam van de fabrikant] dat het toestel [type van toestel] in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.
Malti [Maltese]	Hawnhekk, [isem tal-manifattur], jiddikjara li dan [il-mudel tal-prodott] jikkonforma mal-ħtiġijiet essenzjali u ma provvedimenti oħrajn relevanti li hemm fid-Dirrettiva 1999/5/EC.
Magyar [Hungarian]	Alulírott, [gyártó neve] nyilatkozom, hogy a [...] típus] megfelel a vonatkozó alapvető követelményeknek és az 1999/5/EC irányelv egyéb előírásainak.
Polski [Polish]	Niniejszym [nazwa producenta] oświadczam, że [nazwa wyrobu] jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 1999/5/EC.
Português [Portuguese]	[Nome do fabricante] declara que este [tipo de equipamento] está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.
Slovensko [Slovenian]	[Ime proizvajalca] izjavlja, da je ta [tip opreme] v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 1999/5/ES.
Slovensky [Slovak]	[Meno výrobcu] týmto vyhlasuje, že [typ zariadenia] spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Suomi [Finnish]	[Valmistaja = manufacturer] vakuuttaa täten että [type of equipment = laitteen tyyppimerkintä] tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Svenska [Swedish]	Härmed intygar [företag] att denna [utrustningstyp] står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

How to setup VPN function?

VPN Wizard

Introduction

VPN Basics

A Virtual Private Network (VPN) provides a secure connection between two remote private network users over the public Internet. It provides authentication to secure the encrypted data communicated between the two remote endpoints.


There are two types of components in a VPN setup: VPN Server and VPN Client.

VPN server is in charge of encapsulating and encrypting the passing traffic of its local domain so that the local traffic can be hidden inside a normal packet to be routed over the Internet. VPN server plays the security role that ensures only legitimate personnel can get access to the private network that sits behind. EPG600 is a VPN server.

VPN Client is a software that allows a user to establish a secured tunnel with a specific VPN server so that a private network can be accessible over the Internet. The VPN client needs to provide a legitimate username and password for security check. There are many commercial software VPN Clients such as TheGreenBow. However, the most accessible and convenient way is by using the Windows native VPN client.


EPG600 supports two types of VPN setups: **Client-to-Site** and **Site-to-Site**. The “Site” can be regarded as a private network that holds important resources only accessible to legitimate client users in a VPN setup.

Client to Site

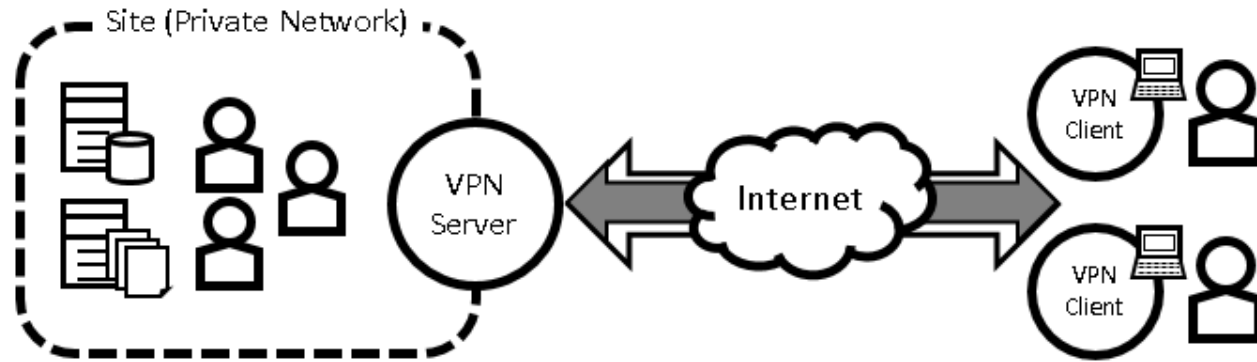

Single VPN server sits in front of the private network. The users use VPN client software to gain access to the private network. For example, the sales on business travel can get remotely access company's confidential file stored in headquarter (private network). Multiple clients/users can connect to VPN server concurrently.

Site to Site

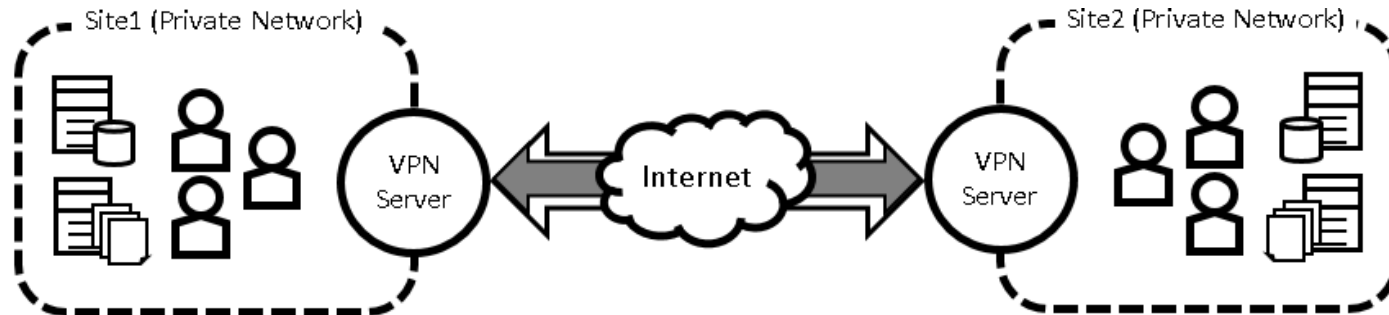

Two VPN servers, each in charges of its own private network. The users use VPN client software to gain access to the private network. The users under these two LANs are allowed to the EPG600 can then exchange the data securely using the VPN tunnel. For example, headquarter can establish a VPN over the Internet with a branch office at a remote site so that users of both sides can link to each other as if they are under the same local network.

EPG600 supports 4 types of VPN tunnels

1. IPSec (Internet Protocol Security)
2. L2TP over IPSec (Layer 2 Tunneling Protocol over Internet Protocol Security)
3. L2TP (Layer 2 Tunneling Protocol)
4. PPTP (Point to Point Tunneling Protocol)

DDNS / WAN IP address / LAN IP address

Users are recommended to use the free DDNS address printed on the label at the back of the Gateway. This is because ISP often leases dynamic WAN IP address that changes from time to time. DDNS domain name will always be the same even if the WAN IP address changes. The domain name can also be found on your **DDNS** configuration page located under **Tools** section. As shown in the snapshot below, the DDNS domain name used for the example is **0f9e76a.engeniusddns.com**.



Dynamic DNS ☒ Enable ☐ Disable

☒ Default EnGenius DDNS service

Default DDNS Name **0f9e76a.engeniusddns.com**

Domain Name .engeniusddns.com

Refresh Time 3HR ▼

Status Connected

☐ Use Other DDNS services

Server Address 3322(qdns) ▼

Host Name

Username

Password

For users who really need to know the current **WAN IP address** and **LAN/Gateway IP address** on your Gateway. The IP Addresses can be found at the **Network Setting** page after Gateway login. For example, as shown on the snapshot below, the WAN IP address is **1.172.111.142** and the LAN/Gateway IP address is **192.168.0.1**.



Note: Administrator access to the operating system is required for client interface configuration.

EnGenius Wireless Router ESR1750

Serial Number 137295134
Application Version 1.2.1

WAN Settings

Attain IP Protocol	PPPoE
IP Address	1.172.111.142
Subnet Mask	255.255.255.255
Default Gateway	168.95.98.254
MAC Address	88:DC:96:06:18:95
Primary DNS	168.95.1.1
Secondary DNS	168.95.192.1

LAN Settings

IP Address	192.168.0.1
Subnet Mask	255.255.255.0
DHCP Server	Enabled
MAC Address	88:DC:96:06:18:BA

Network Setting

VPN Profile & Users Setting

Profile Setting

A VPN setting is stored as a profile. That is, a profile is a representation of VPN tunnel configuration.

VPN profile can be viewed under **Profile Setting**. **You won't be needed to create profile here if using VPN Wizard.**

VPN
Status
Profile Setting
User Setting
Wizard

If this is the first time you configure VPN on this Gateway, the profile list should be empty as shown below. User is allowed to **Add**, **Edit** and **Delete** the selected profiles. Please refer to **VPN manual Setup** chapter for more detail.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

The VPN profiles can be enabled or disabled dynamically. Click on the checkboxes under **Enable** column to set enable or disable the profile.

Then, most importantly, click **Apply** button to apply the settings.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
Add Edit Delete Selected Delete All Apply Cancel								

User Setting

EPG600 (VPN server) is responsible for user authentication. A list of users must be created before creating VPN profile. For each profile, users must be assigned to the profile.

VPN
Status
Profile Setting
User Setting
Wizard

The following example shows how to add a user named **"peter"** with a password **"ax123456"**.
Click on **User Setting** under VPN section.
Type in **peter** for Name
Type in password **ax123456**

Click **Add** to add the user to the user table.

Name

Password

Confirm

Add

Reset

Current VPN User Table

No.	User Name	Select
Delete Selected Delete All Reset		

Apply

Cancel

In this example, two users are added. Now select all the users by clicking on the **check boxes** beside **User Name**. Click **Apply** to make is user table active for VPN profiles. This list of users will become available for selection when creating VPN profiles.

Name

Password

Confirm

Add

Reset

Current VPN User Table

No.	User Name	Select
1	peter	☒
2	john	☒

Delete Selected

Delete All

Reset

Apply


Cancel

VPN Wizard: IPSec Site-to-Site

IPSec Site-to-Site VPN tunnels are used for connecting two remote sites (LANs). Under each site, there may be multiple devices that need to exchange confidential data while direct connection is not possible because of the fact that they are under different domain. By establishing an IPSec Site-to-Site VPN tunnel the data is encapsulated and handled by the VPN servers on each site so that the communication becomes possible.

Two EnGenius VPN compatible Gateways are **required** to establish a Site-to-Site VPN tunnel. You can set up the VPN profile by either using a friendly, point-and-click Wizard or entering profile settings manually. To set up your VPN profile in the quickest way possible, use the Wizard. If you are a technical user and prefer to set up your VPN profile manually.

The following diagram illustrates the example given in this section. This example consists of two VPN Gateways (servers) with unique DDNS 0f9e76**a** and 0f9e76**b**. IPSec site-to-site VPN tunnel will enable the PCs under these two sites to communicate despite of the different LANs (192.168.1.X and 192.168.2.X) they are under.

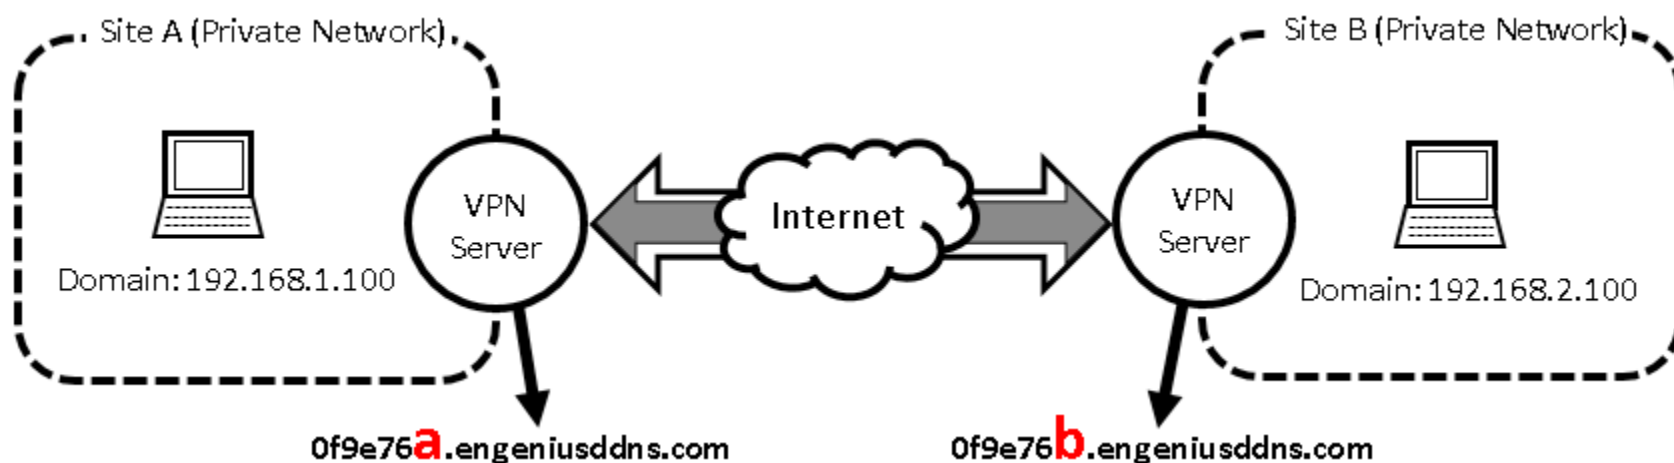

Site A Configuration

Login into Gateway 0f9e76a.engeniusddns.com and use VPN Wizard. Click **Next** to start.

	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	Status
	Profile Setting
	User Setting
	Wizard

VPN Wizard will guide you through the setup process for building a simple VPN connection.

Next

Enter a name for VPN policy name; for this example we enter SiteB (meaning that it is used to connect to SiteB). Click **Next** to continue.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name (eg: OfficeVPN)

Select **IPSec** and click **Next** to continue.

Step2: VPN Connection Type

Please choose VPN connection type

- ☒ IPSec Choose this if you are using other 3rd party VPN client software, or gateway
- ☐ L2TP over IPSec Choose this if you are using Windows VPN client for connection
- ☐ L2TP Choose this if you are using L2TP client for connection
- ☐ PPTP Choose this if you are using PPTP client for connection

Select **Site to Site** and click **Next** to continue.

Step3: VPN IPSec Mode

Please choose the IPSec Mode

- ☐ Client to Site Choose this if you are setting up for Telwork or home to office connection
- ☒ Site to Site Choose this if you are setting up a VPN connection between two dedicated VPN servers

Security Gateway Type: Select **Domain Name**

Security Gateway: enter the counter-site DDNS. In this case we enter **0f9e76b.engeniusddns.com** which is the remote site VPN server that SiteA needs to communicate with.

Enter Remote Address: enter the counter-site domain. In this case we enter **192.168.2.0** which is the SiteB LAN domain.

Remote Netmask: enter the netmask of the counter-site netmask. In this case we enter **255.255.255.0**.

Once completed, click **Next** to continue.

Step4: VPN Network

Please enter the IPSec gateway or the destination network for this VPN tunnel

Security Gateway Type	Domain Name
Security Gateway	0f9e76b.engeniusddns.com (eg:69.100.100.100 or www.google.com.tw)
Remote Network	
Remote Address	192.168.2.0 (eg: 192.168.2.0)
Remote Netmask	255.255.255.0 (eg: 255.255.255.0)
Back Next Cancel	

Enter the Shared Key (note: both sites MUST have the exact same key password). In this case, we enter “**11112222**”. This key will be used when configuring the VPN client for authentication purpose.
Note: You should use more sophisticated key to enhance security.

Click **Next** to continue.

Step5: Shared Key

Please enter the shared key for the VPN

SA

ESP-3DES-SHA1

Shared Key

(eg: apple123)

Back


Next

Cancel

Make sure the checkbox "**Enable this policy immediately**" is selected.
Click **Apply** to create and enable this policy.

Setup Successfully

☒ Enable this policy immediately.




Site B Configuration

Login into Gateway 0f9e76b.engeniusddns.com and use VPN Wizard. Click **Next** to start.

	System
	Internet
	Wireless 2.4GHz
	Wireless 5GHz
	Parental Control
	Guest Network
	IPv6
	Firewall
	VPN
	Status
	Profile Setting
	User Setting
	Wizard

VPN Wizard will guide you through the setup process for building a simple VPN connection.



Enter a name for VPN policy name; for this example we enter **SiteA** (meaning that it is used to connect to Site A). Click **Next** to continue.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name

SiteA

(eg: OfficeVPN)

Back

Next

Cancel

Select **IPSec** and click **Next** to continue.

Step2: VPN Connection Type

Please choose VPN connection type

- ☒ IPSec Choose this if you are using other 3rd party VPN client software, or gateway
- ☐ L2TP over IPSec Choose this if you are using Windows VPN client for connection
- ☐ L2TP Choose this if you are using L2TP client for connection
- ☐ PPTP Choose this if you are using PPTP client for connection

Back Next Cancel

Select **Site to Site** and click **Next** to continue.

Step3: VPN IPSec Mode

Please choose the IPSec Mode

- ☐ Client to Site Choose this if you are setting up for Telwork or home to office connection
- ☒ Site to Site Choose this if you are setting up a VPN connection between two dedicated VPN servers

Back Next Cancel

Security Gateway Type: Select **Domain Name**

Security Gateway: enter the counter-site DDNS. In this case we enter **0f9e76a.engeniusddns.com** which is the remote site VPN server that Site B needs to communicate with.

Enter Remote Address: enter the counter-site domain. In this case we enter **192.168.1.0** which is the Site A LAN domain.

Remote Netmask: enter the netmask of the counter-site netmask. In this case we enter **255.255.255.0**.

Once completed, click **Next** to continue.

Step4: VPN Network

Please enter the IPSec gateway or the destination network for this VPN tunnel

Security Gateway Type	Domain Name
Security Gateway	0f9e76a.engeniusddns.com (eg: 69.100.100.100 or www.google.com.tw)
Remote Network	
Remote Address	192.168.1.0 (eg: 192.168.2.0)
Remote Netmask	255.255.255.0 (eg: 255.255.255.0)
Back Next Cancel	

Enter the Shared Key (note: both sites MUST have the exact same key password). In this case, we enter "**12345678**". This key will be used when configuring the VPN client for authentication purpose.
Note: You should use more sophisticated key to enhance security.

Click **Next** to continue.

Step5: Shared Key

Please enter the shared key for the VPN

SA

ESP-3DES-SHA1

Shared Key

(eg: apple123)

Back


Next

Cancel

Make sure the checkbox "**Enable this policy immediately**" is selected.
Click **Apply** to create and enable this policy.


Setup Successfully

☒ Enable this policy immediately.



VPN Wizard: IPSec Client to Site

The following diagram illustrates the example given in this section. This example consists of a VPN Gateway (servers) with unique DDNS 0f9e76a. A client device (PC or laptop) with the VPN-client software TheGreenBow installed.

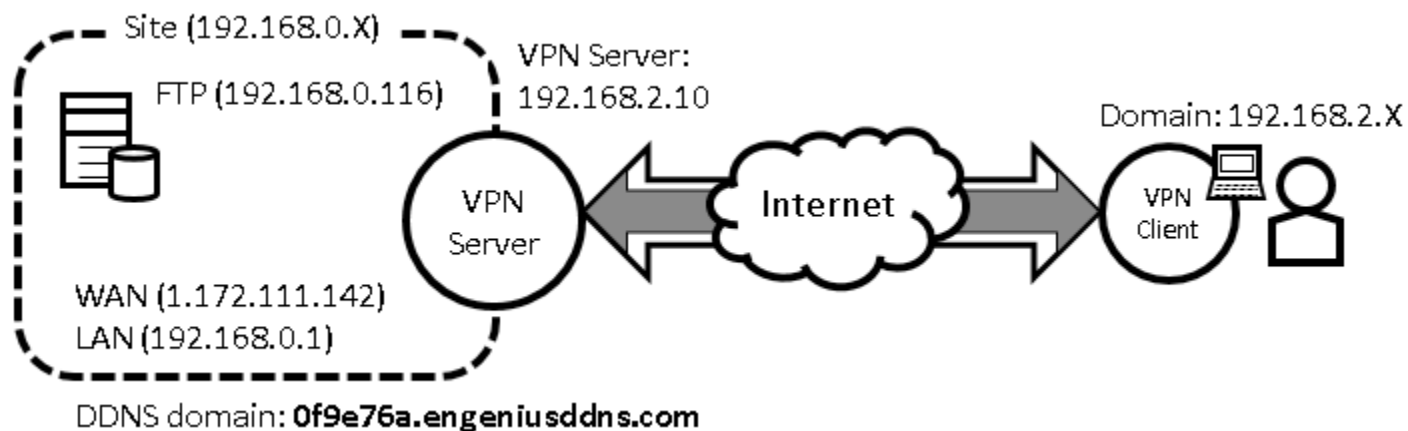

Site Configuration

Under **VPN section**, choose **Wizard**.

 VPN
Status
Profile Setting
User Setting
Wizard

Assign a VPN profile name by typing **homeVPN (or any other preferable name)**.

Click Next to proceed.

Step1: VPN Policy Name
Please enter the policy name

VPN policy name

Name

(eg:OfficeVPN)

Back

Next

Cancel

Select **IPSec** and click **Next**

Step2: VPN Connection Type

Please choose VPN connection type

- ☒ IPSec Choose this if you are using other 3rd party VPN client software, or gateway
- ☐ L2TP over IPSec Choose this if you are using Windows VPN client for connection
- ☐ L2TP Choose this if you are using L2TP client for connection
- ☐ PPTP Choose this if you are using PPTP client for connection

Back

Next

Cancel

Select **Client to Site** and click **Next**

Step3: VPN IPSec Mode

Please choose the IPSec Mode

- ☒ Client to Site Choose this if you are setting up for Telwork or home to office connection
- ☐ Site to Site Choose this if you are setting up a VPN connection between two dedicated VPN servers

Back

Next

Cancel

Enter the shared key for your profile; for this example, enter “**11112222**”
This key will be used when configuring the VPN client for authentication purpose.



Note: You should use more sophisticated key to enhance security.

Step4: Shared Key

Please enter the shared key for the VPN

SA

ESP-3DES-SHA1

Shared Key

(eg: apple123)

Back

Next

Cancel

Click **Apply** to complete the server side configuration.

Setup Successfully

☒ Enable this policy immediately.

Back


Apply

Cancel

Client Configuration


IPSec Client-to-Site VPN tunnel requires additional 3rd-party VPN client (TheGreenBow) with EnGenius VPN Gateway. This is one of the most popular IPSec VPN client software downloadable on the Internet. Please download the software from TheGreenBow official web site <https://www.thegreenbow.com/>. Please note that you will have to purchase a license after the trial period.

Start the application. First, we need to create a new tunnel.

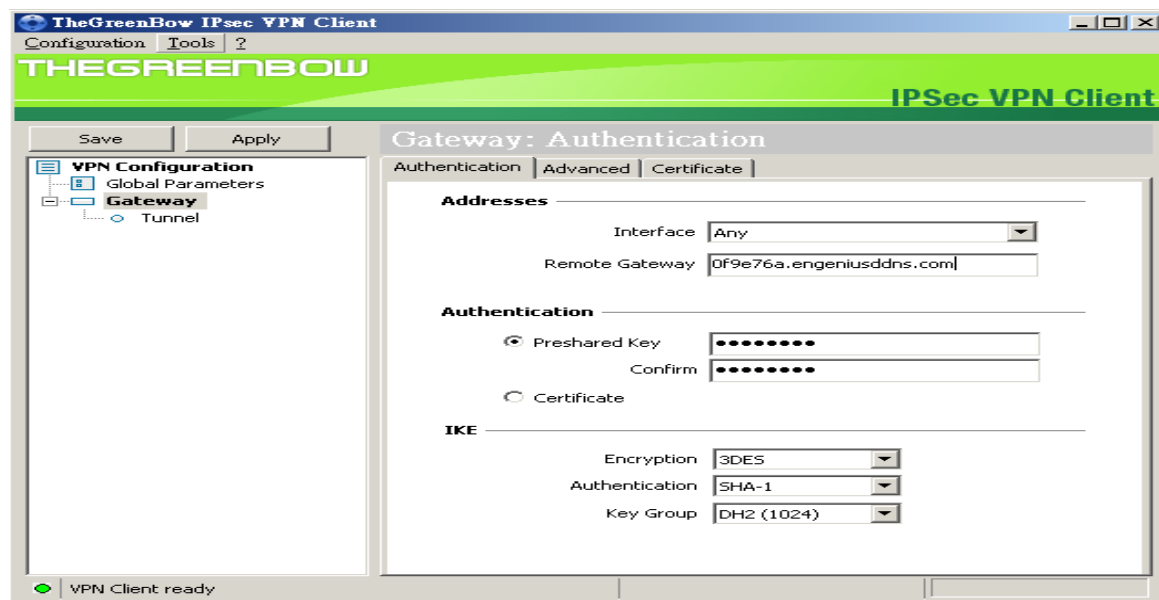


Right-Click on **VPN Configuration** to get the pop-up menu.

Select **New Phase 1** to create.

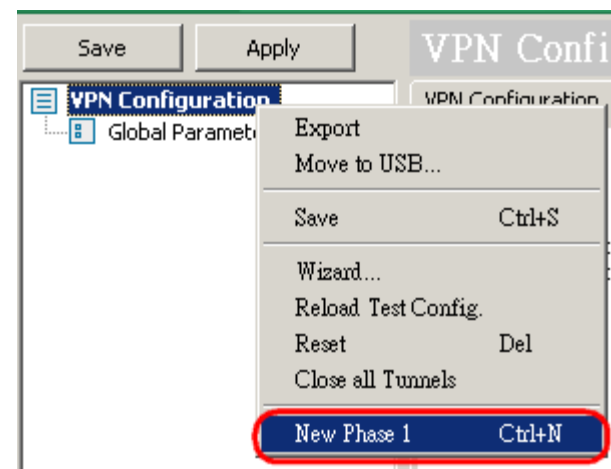


The new item **Gateway** is now created.

Right Click on **Gateway** and click on **New Phase 2** to create Phase 2.

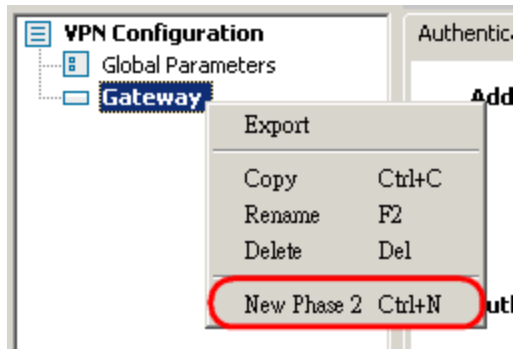

Once completed, you should see something like the following. We will now start configuring the newly created items.

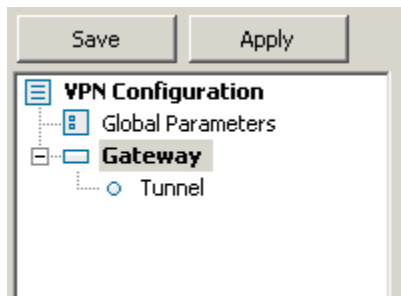

Click on **Gateway** on the left and then click on Authentication tab.

Select the network interface you will use to connect to the Internet. Then, enter the **VPN Gateway DDNS**. In this example we enter **0f9e76a.engeniusddns.com**.

As for the pre-shared Key we enter **11112222** (you may have a different shared-key, please type yours accordingly).

By default, the IKE setting does not require any modification; however, you should check if you have the same setting. Please change it if it's not the same as shown below.

Encryption: 3DES

Authentication: SHA-1

Key Group: DH2 (1024)

Click on **Save** button when done.

Save Apply

VPN Configuration

- Global Parameters
- Gateway**
- Tunnel

Authentication Advanced Certificate

Addresses

Interface Any

Remote Gateway 0f9e76a.engeniusddns.com

Authentication

☒ Preshared Key

Confirm

☐ Certificate

IKE

Encryption 3DES

Authentication SHA-1

Key Group DH2 (1024)

Click on **Gateway** on the left and then click on **IPSec** tab.

VPN Client address: **0.0.0.0**.

Address type: **select Subnet address**

Remote LAN address: **192.168.0.0**

Subnet mask: **255.255.255.0**

Encryption: **3DES**

Authentication: **SHA-1**

Model: **Tunnel**

Make sure PFS is **un-checked**.

Click **Save** when done.

Save Apply

VPN Configuration

- Global Parameters
- Gateway
- Tunnel**

Tunnel: IPSec

IPSec Advanced Scripts Remote Sharing

Addresses

VPN Client address 0 . 0 . 0 . 0

Address type Subnet address

Remote LAN address 192 . 168 . 0 . 0

Subnet mask 255 . 255 . 255 . 0

ESP

Encryption 3DES

Authentication SHA-1

Mode Tunnel


PFS

☒ PFS

Group

We have now completed the IPSec VPN-client setup.
To establish the tunnel, right-click on **Tunnel**.

Click Open tunnel to start.

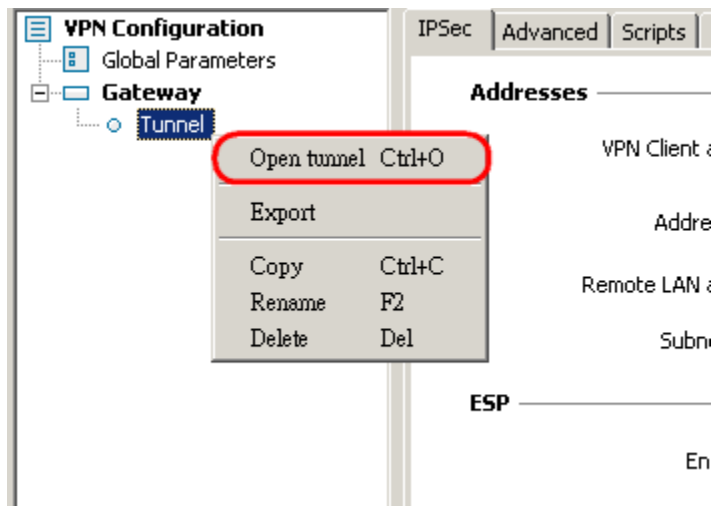


Please pay attention to your system tray on the bottom right corner of your screen. It may take a few seconds for the connection.



When successfully connected, the message "**Tunnel opened**" will appear.

VPN Wizard: L2TP over IPSec

The following diagram illustrates the example given in this section. A user, "**peter**", has already been created in the **User Setting**.

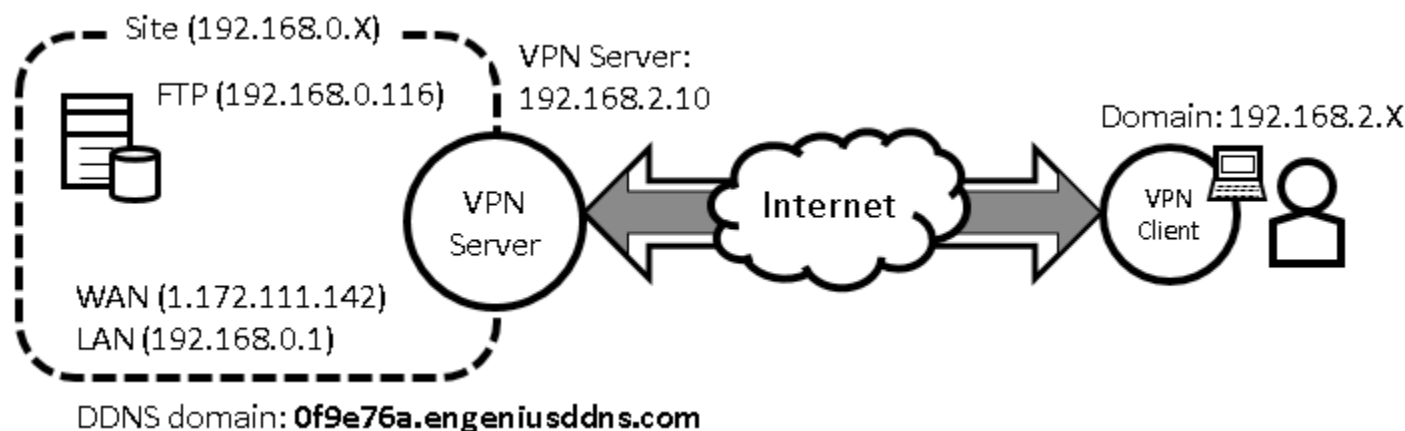

VPN Server Side Information:

Private Network domain: **192.168.0.X**

Domain net mask: **255.255.255.0**

DDNS domain: **0f9e76a.engeniusddns.com**

LAN IP: **192.168.0.1**

Pre-shared key: **11112222**

User Name: **peter**

Password: **ax123456**


VPN Server Address: **192.168.2.10**

Client Side:

VPN Client will be assigned with an IP address **192.168.2.X** address when the tunnel is established.

VPN Server (Gateway Side)

Under **VPN section**, choose **Wizard**.

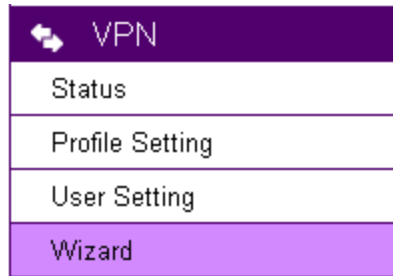

Assign a VPN profile name by typing **homeVPN (or any other preferable name)**.

Click Next to proceed.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name (eg:OfficeVPN)

[Back](#) [Next](#) [Cancel](#)

Select **L2TP over IPSec** and click **Next to proceed.**

Step2: VPN Connection Type

Please choose VPN connection type

- ☐ IPSec Choose this if you are using other 3rd party VPN client software,or gateway
- ☒ L2TP over IPSec Choose this if you are using Windows VPN client for connection
- ☐ L2TP Choose this if you are using L2TP client for connection
- ☐ PPTP Choose this if you are using PPTP client for connection

[Back](#) [Next](#) [Cancel](#)

Select a user (which created earlier in **User Setting** section) from the user list. In this example “**peter**” is selected.
VPN Server IP is given to the VPN server on EPG600. In this case, please type in **192.168.2.10**.
Type in **192.168.2.100** and 200 into the Remote IP range fields.

Click Next to continue.

Step3: VPN L2TP Setting

Please enter the setting of L2TP

L2TP Settings

Authentication

MSCHAP_V2 ▼

User Name

☒ User List

peter ▼

peter

john

 (eg: guest)

password

..... (eg: nk9543)

VPN Server IP Setting

Server IP

192.168.2.10 (eg: 10.0.174.45)

Remote IP range

192.168.2.100 - 200 (eg: 10.0.174.66 -100)

Back

Next

Cancel



Note1: Server IP and Remote IP Range should be under the same domain. The server will be listening to the traffic for from 192.168.2.X.

Note2: Remote IP range is the range of IP addresses space reserved for VPN the connecting VPN clients.

Enter **11112222** for the Shared Key.

This key will be used when configuring the VPN client for authentication purpose.



Note: You should use more sophisticated key to enhance security.

Click **Next** to continue.

Step4: Shared Key

Please enter the shared key for the VPN

SA

ESP-3DES-SHA1

Shared Key

(eg: apple123)

Back

Next

Cancel

At this very last page, click **Apply to enable the policy immediately.**

Setup Successfully

☒ Enable this policy immediately.

It takes about 15 seconds for the Gateway to activate the VPN profile.

Module is reloading, please wait **13** seconds

Once the Gateway is ready, the page will be redirected to **Profile Setting** section where the new profile homeVPN is shown.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
Add Edit Delete Selected Delete All								
Apply Cancel								

VPN Client


You will need a PC or Laptop running VPN enabled operating system. The following sections demonstrate how to use built-in VPN client to establish a VPN tunnel with the VPN server.

Windows XP

Please ensure you have updated your Windows XP with latest service pack.


Before adding a new VPN connection to your XP system, we have to add a new registry to your system.

On the Start Menu, click **Run...**

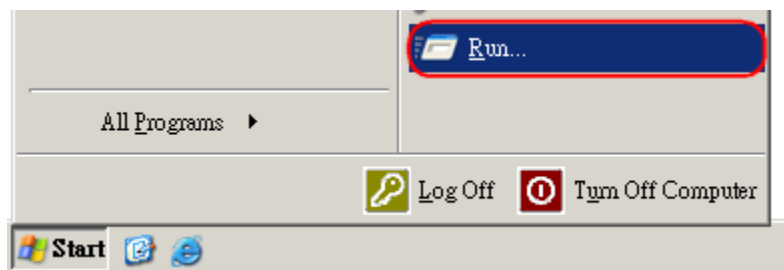

Type in **regedit** to start the Registry Editor

Press **Enter** or click on **OK**

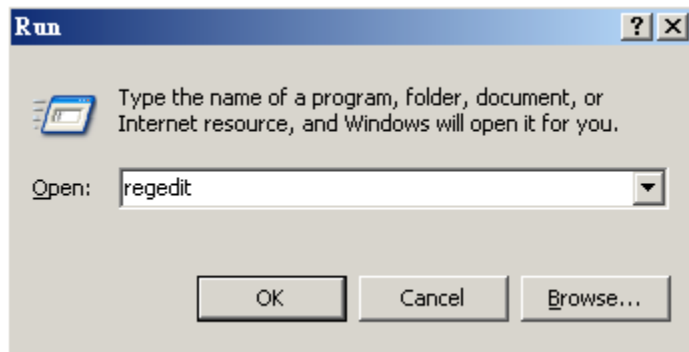


You have to add a new registry value to your XP system to enable L2TP over IPSec.

Locate the registry **HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Rasman\Parameters** and add **the following registry value to this key:**

Value Name: **ProhibitIpSec**


Data Type: **REG_DWORD**

Value: **1**

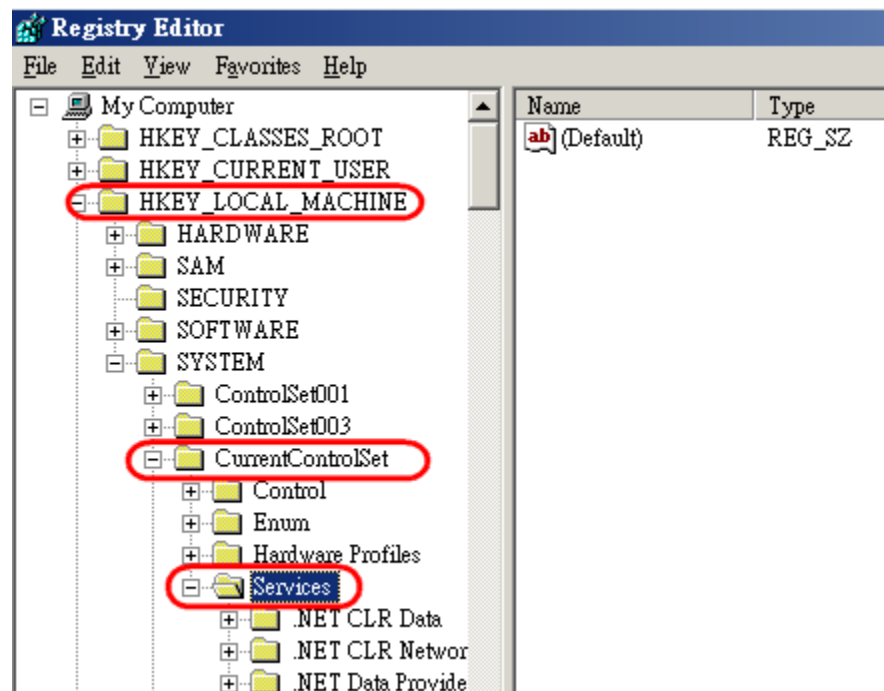


Right-click on the last node, "**Parameters**".

On the pop-up menu, select **New** and then **DWORD Value**.

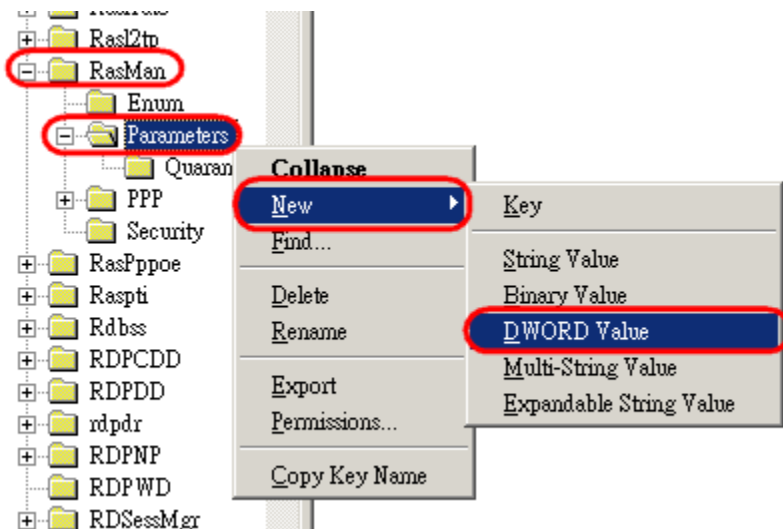


Type in **ProhibitIpSec** and press **Enter**

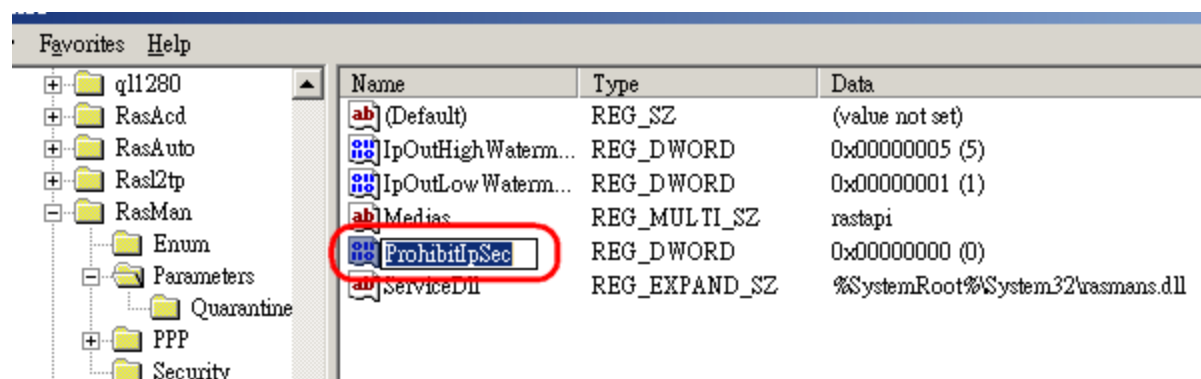


Double click on **ProhibitIpSec**.

In the pop-up window, enter **1** for Value data.

Click **OK** to complete.

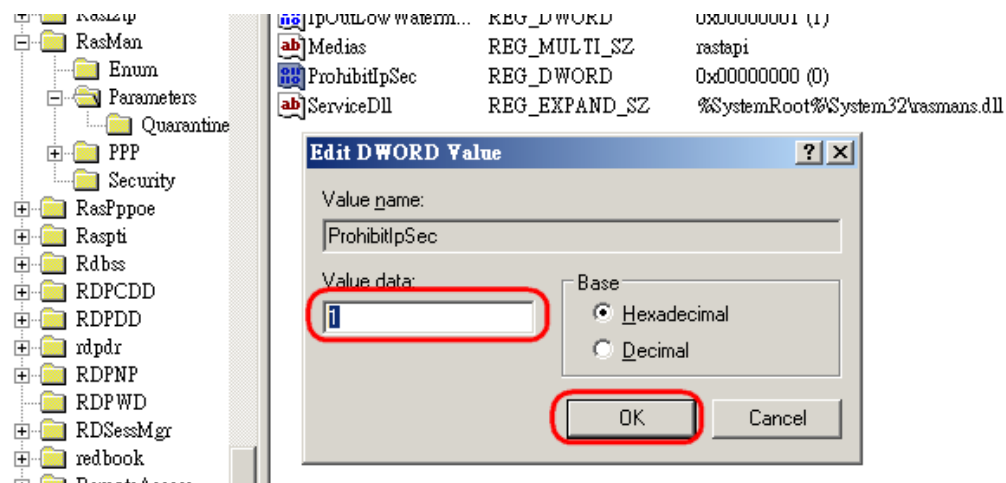

Your new registry should look like this.

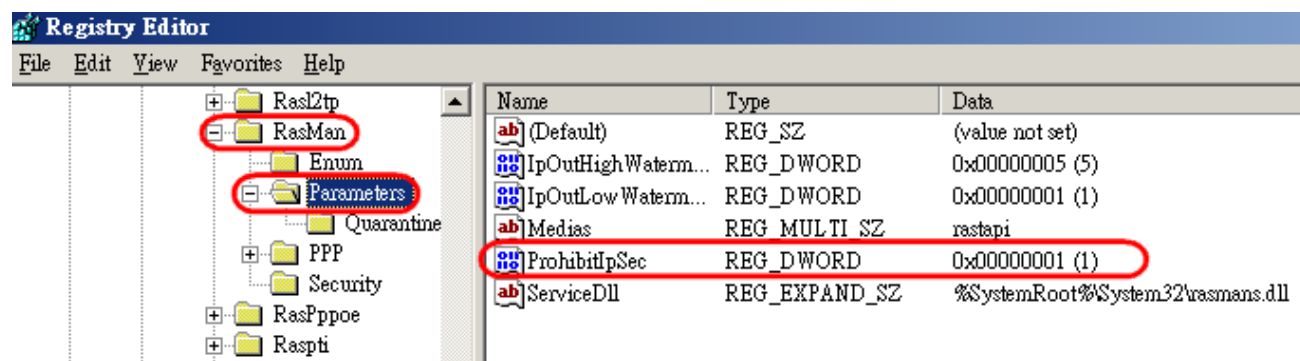


Close the Registry Editor.



IMPORTANT: Please Reboot your system now, to make the new setting affective.

Once we have added the registry, we can create the VPN connection for L2TP over IPsec now.

Start Menu → Control Panel → Network Connections → Net Connection Wizard

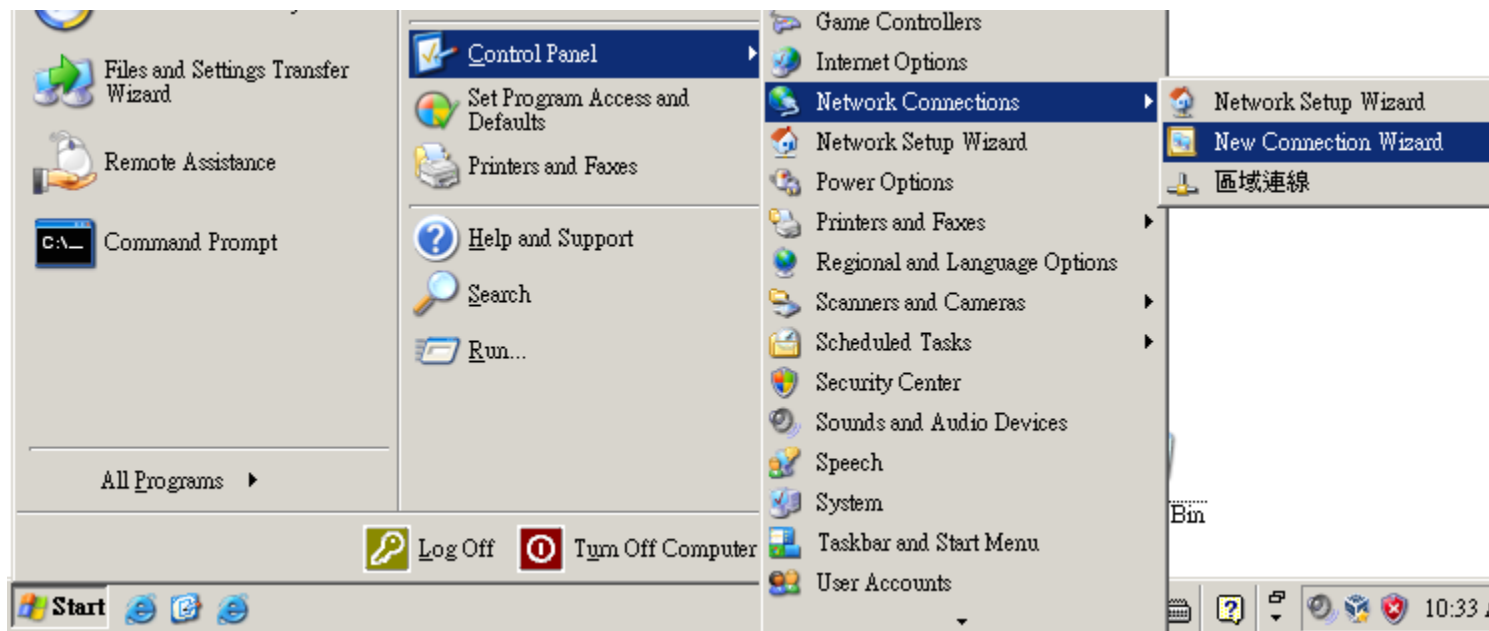


Click **Next** to proceed.




Select **Connect** to the network at my workplace.

Click **Next** to proceed.

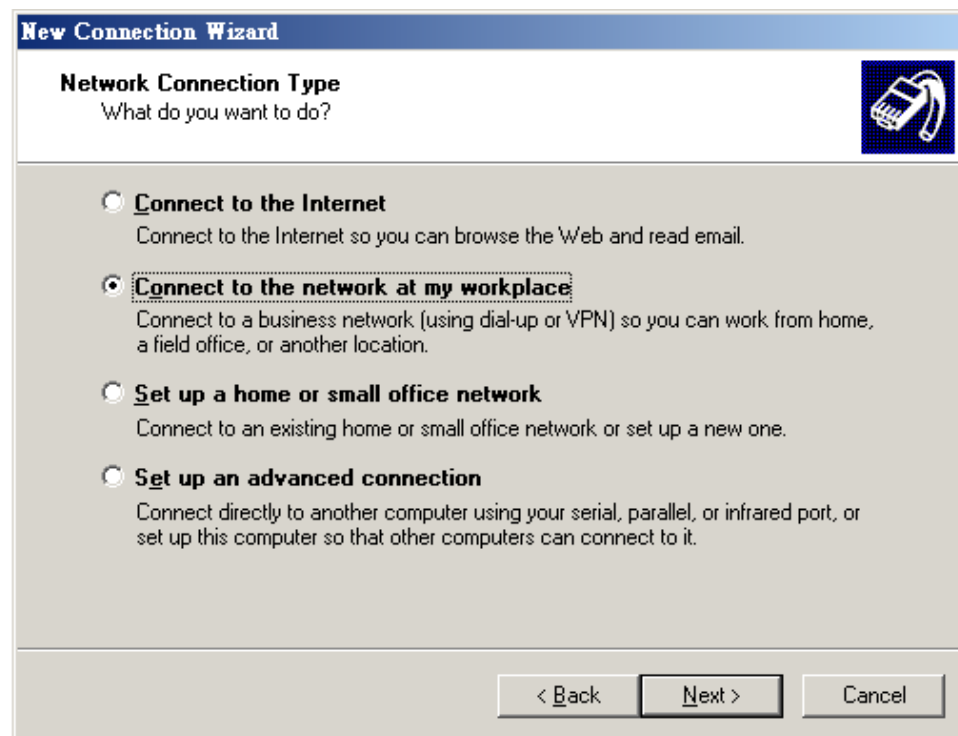


Select **Virtual Private Network connection**.

Click **Next** to proceed.

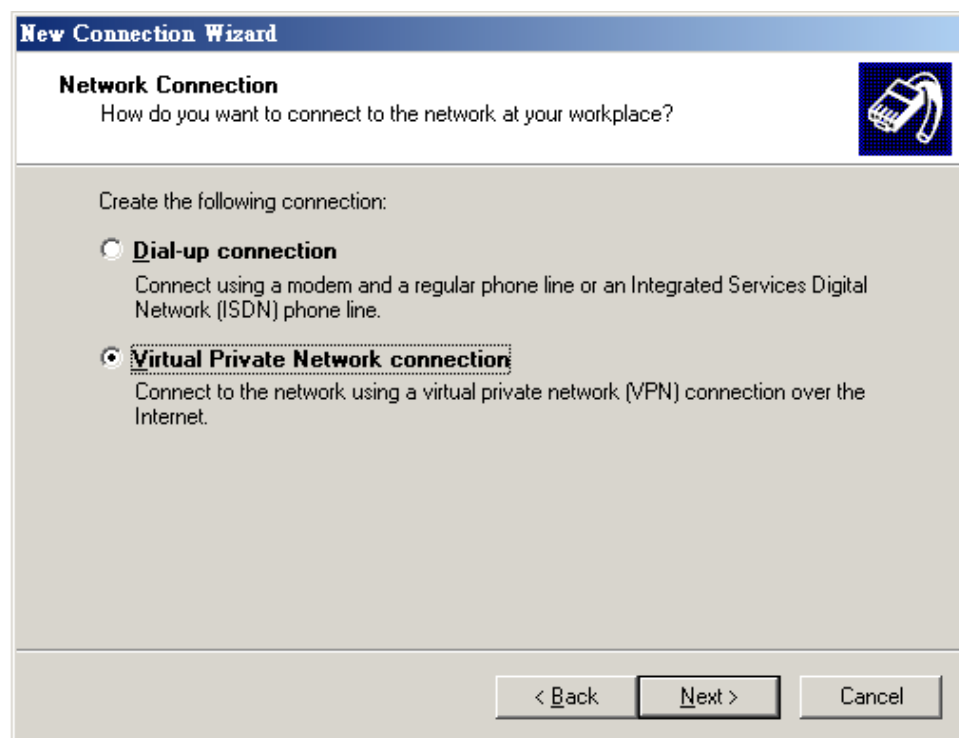


Enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click **Next** to proceed.

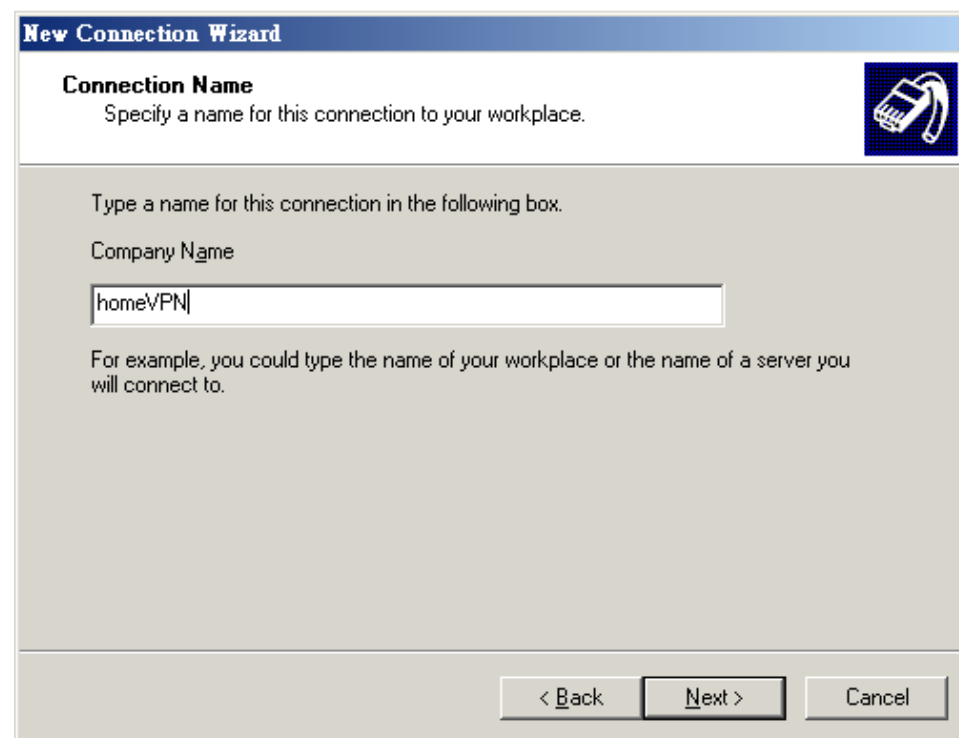

Choose **Do not dial the initial connection**.


Click **Next** to proceed.

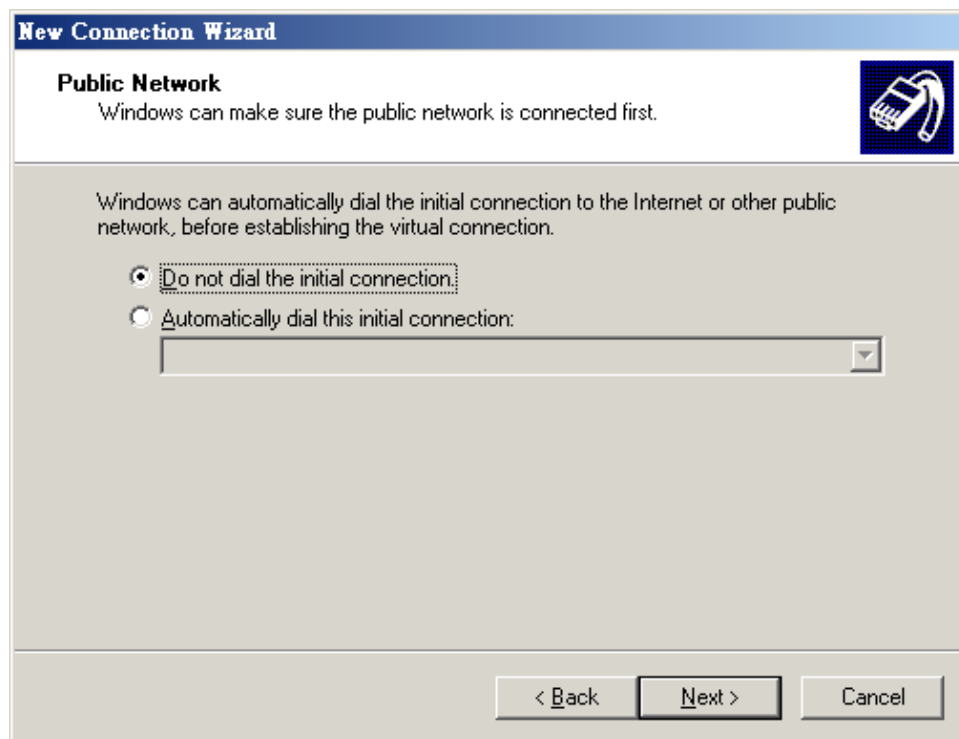

The screenshot shows the 'New Connection Wizard' window with the 'Public Network' tab selected. The window has a blue title bar and a blue icon of a network card. The main area is white with a blue header. The text 'Public Network' is followed by 'Windows can make sure the public network is connected first.' Below this, a message states: 'Windows can automatically dial the initial connection to the Internet or other public network, before establishing the virtual connection.' There are two radio buttons: the first is selected and labeled 'Do not dial the initial connection'; the second is labeled 'Automatically dial this initial connection:' and has a dropdown menu next to it. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

Please enter the DDNS name of your VPN Gateway.
In this example, we enter **0f9e76a.engeniusddns.com**.

Click **Next** to proceed.

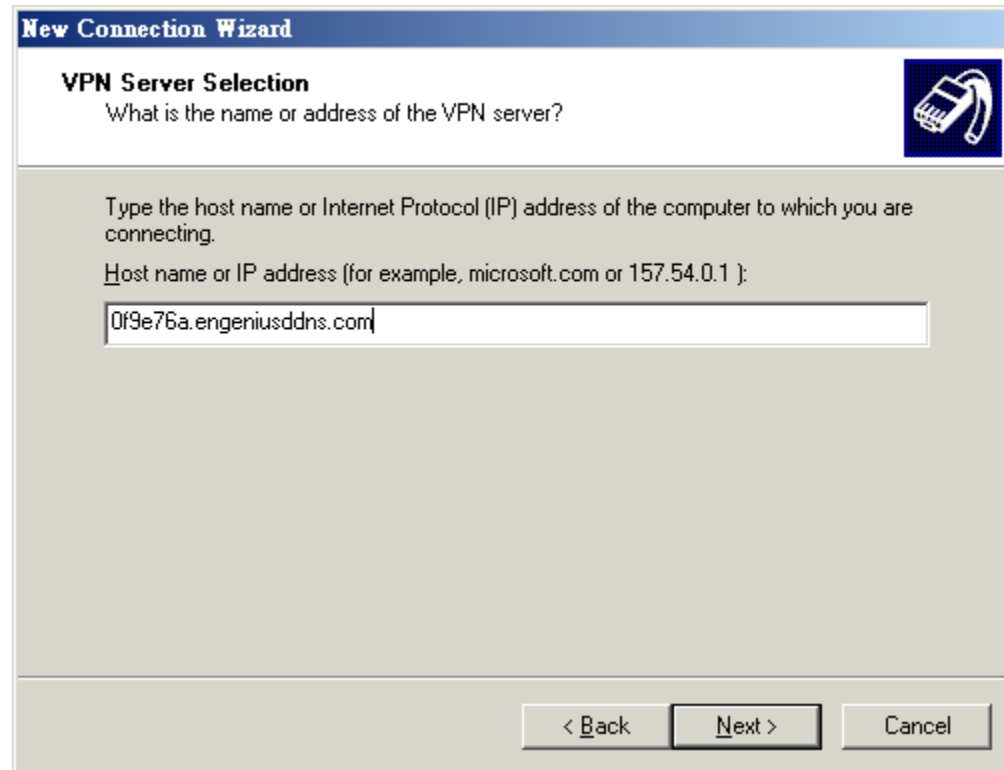


The screenshot shows the 'New Connection Wizard' window with the 'VPN Server Selection' tab selected. The window has a blue title bar and a blue icon of a network card. The main area is white with a blue header. The text 'VPN Server Selection' is followed by 'What is the name or address of the VPN server?'. Below this, a message states: 'Type the host name or Internet Protocol (IP) address of the computer to which you are connecting.' There is a text input field with the placeholder text 'Host name or IP address (for example, microsoft.com or 157.54.0.1):' and the value '0f9e76a.engeniusddns.com' entered. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

Select **Add a shortcut to this connection to my desktop** for easy access to establish a connection.


Click **Finish** to complete the setup.

Click on **Properties**.

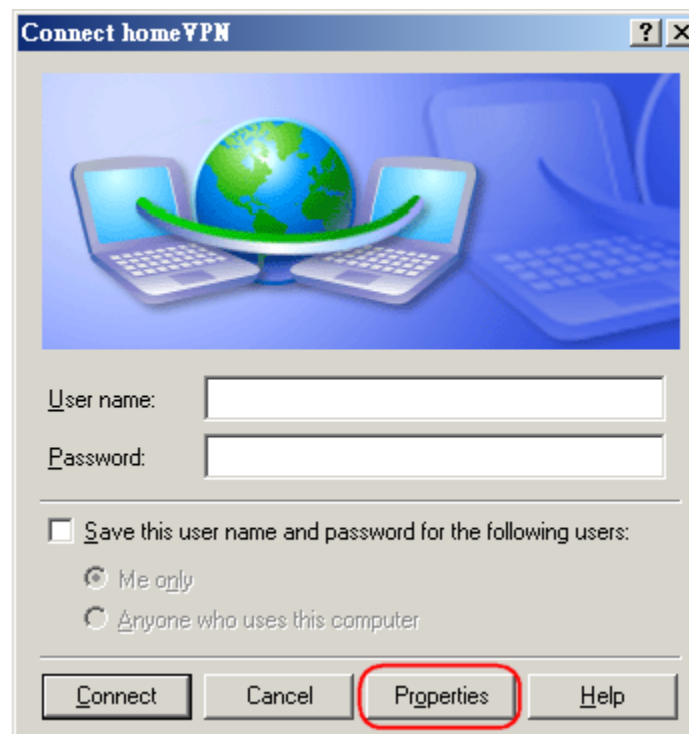


Under **Networking** tab, select **L2TP IPsec VPN**.

Click **OK** to close the window.

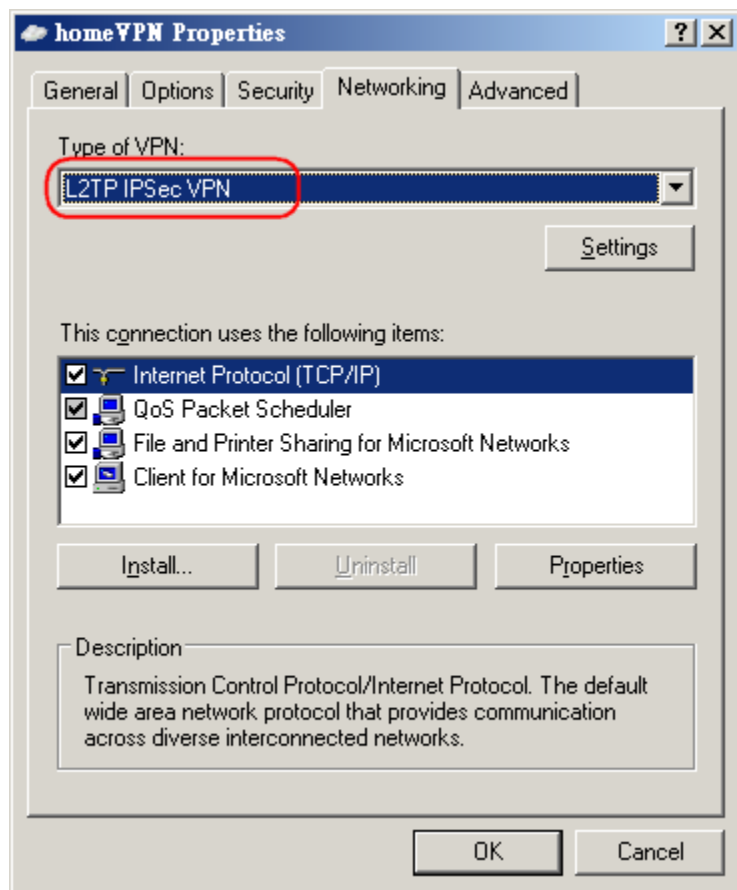

Select **Advanced** (custom settings)

Click on **Settings**

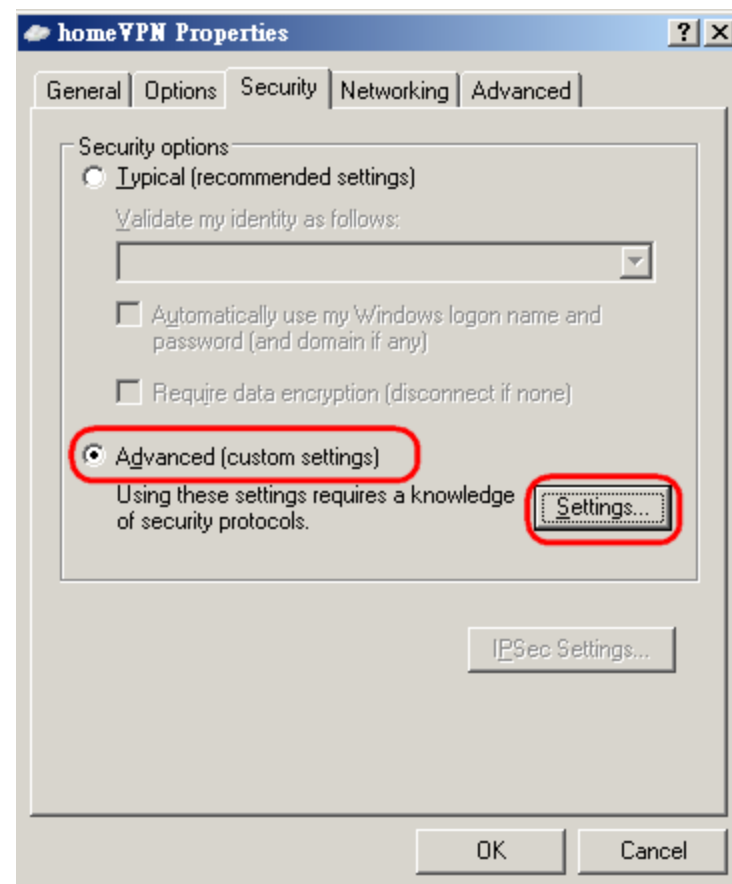



Select **Required encryption (disconnect if sever declines)**

Select **Allow these protocols**

Select **Microsoft CHAP Version 2 (MS-CHAP v2)**


Click OK to finish.

Click **OK to complete**

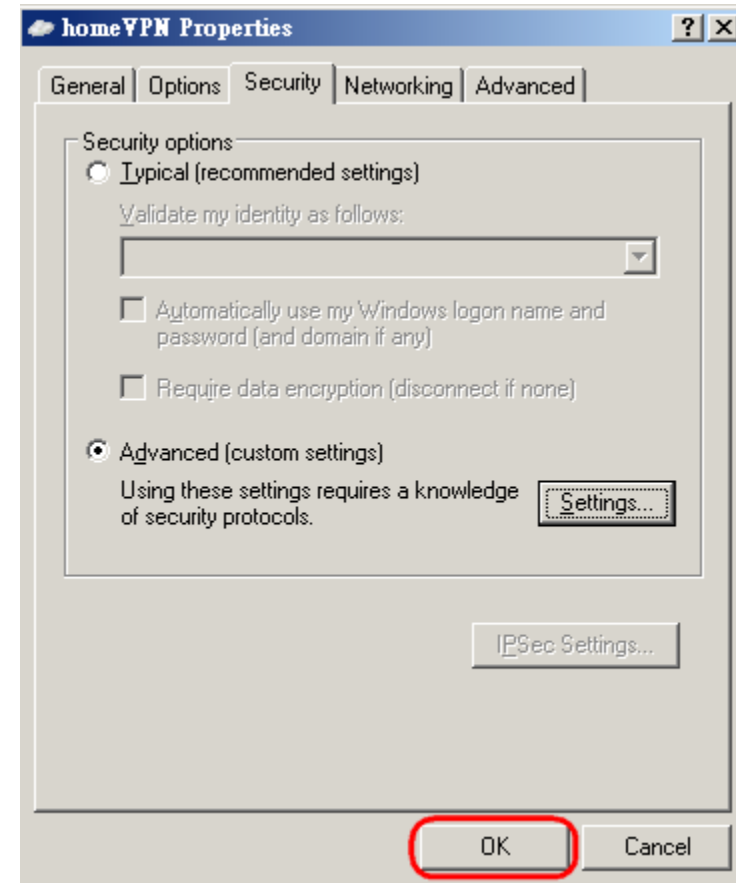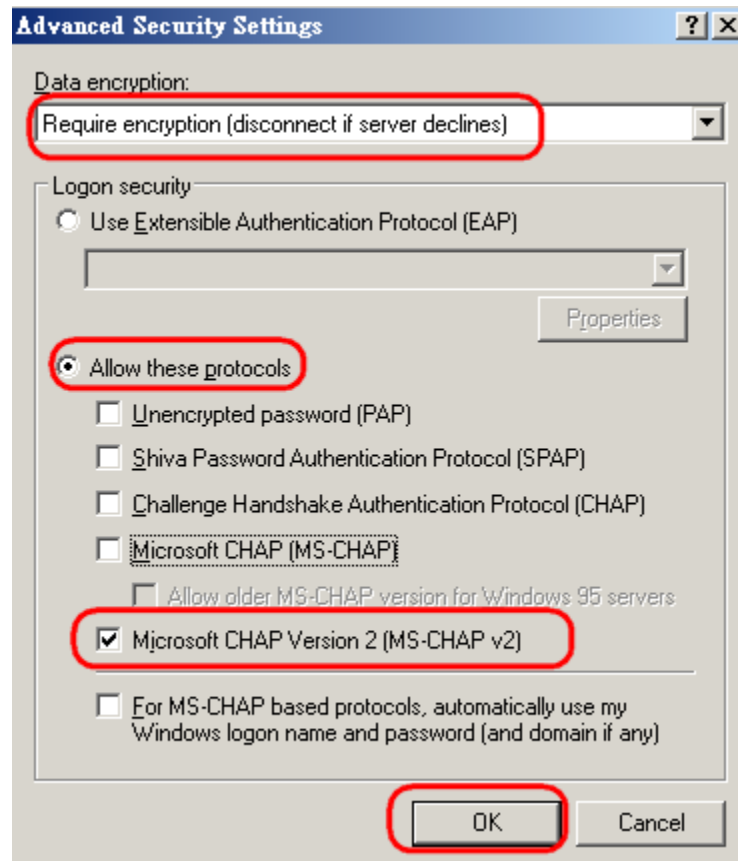


Enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.

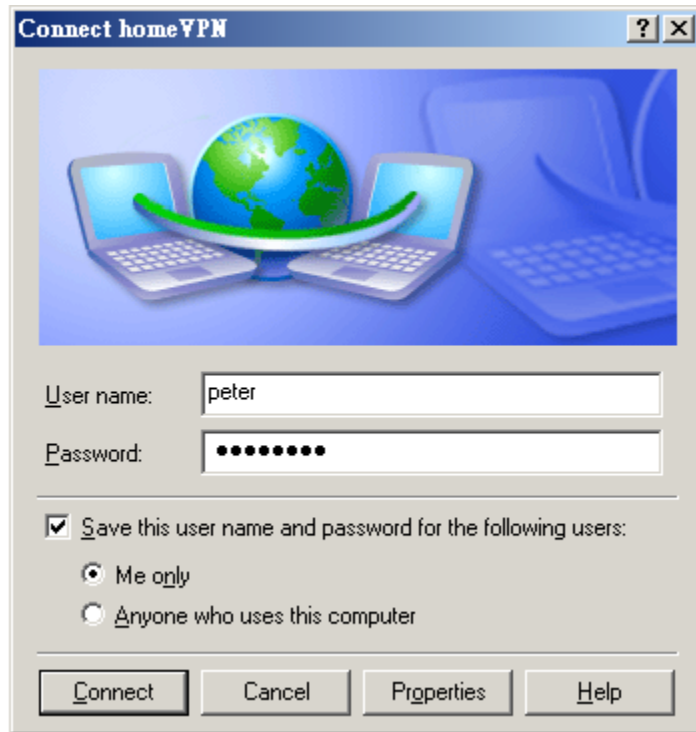


The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

Windows Vista

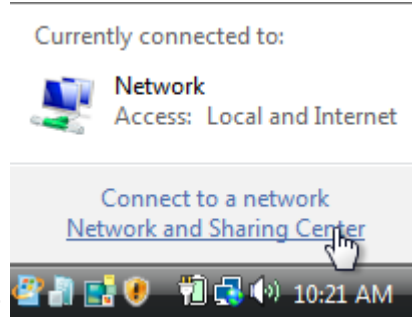

On the Task Bar , **right click** on the **network interface icon**  **Left-Click** on **Network and Sharing Center**

Click on Set **up a connection or network**

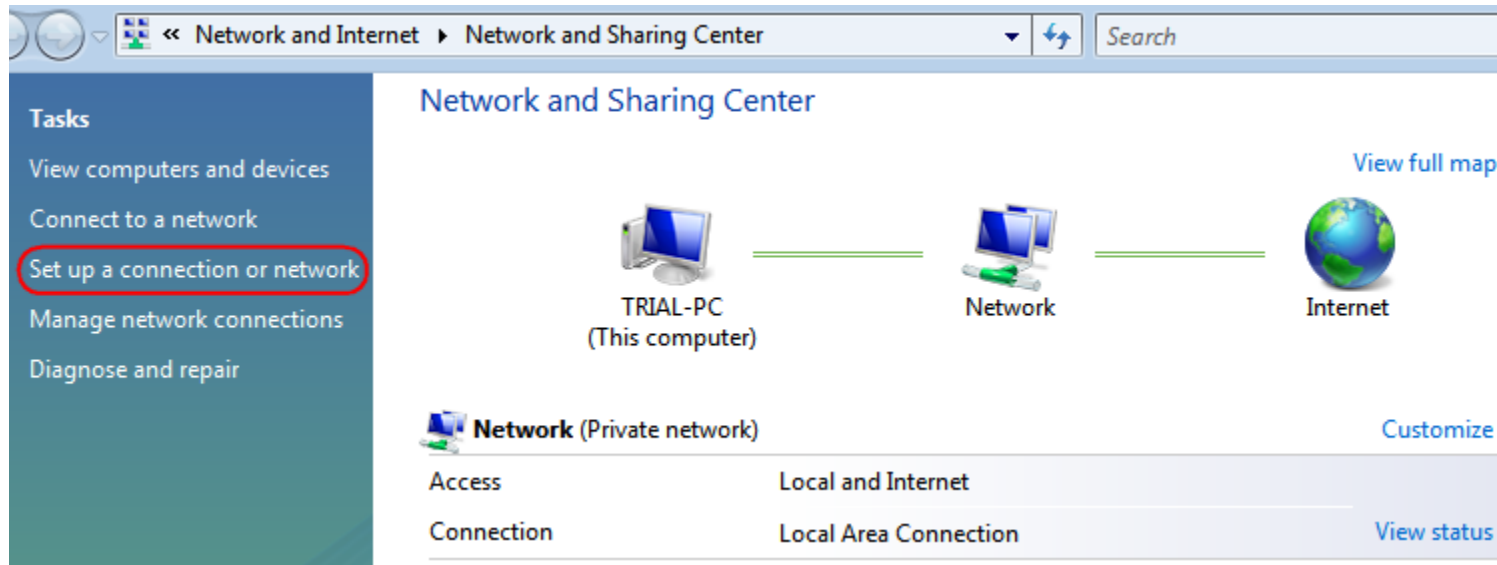

Choose **Connect** to a workplace from the option menu.

Click on **Next** to proceed.

 Set up a connection or network

Choose a connection option

**Connect to the Internet**
Set up a wireless, broadband, or dial-up connection to the Internet.

**Set up a wireless router or access point**
Set up a new wireless network for your home or small business.

**Set up a dial-up connection**
Connect through a dial-up connection to the Internet.

**Connect to a workplace**
Set up a dial-up or VPN connection to your workplace.

Next

Cancel

Choose **Use my Internet connection (VPN)** from the option menu.

 Connect to a workplace

How do you want to connect?

 **Use my Internet connection (VPN)**
Connect using a virtual private network (VPN) connection through the Internet.

 **Dial directly**
Connect directly to a phone number without going through the Internet.

 —  — 

 — 

[What is a VPN connection?](#)


Cancel

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox **Don't connect now; just set it up so I can connect later**

Click on **Next** to proceed.

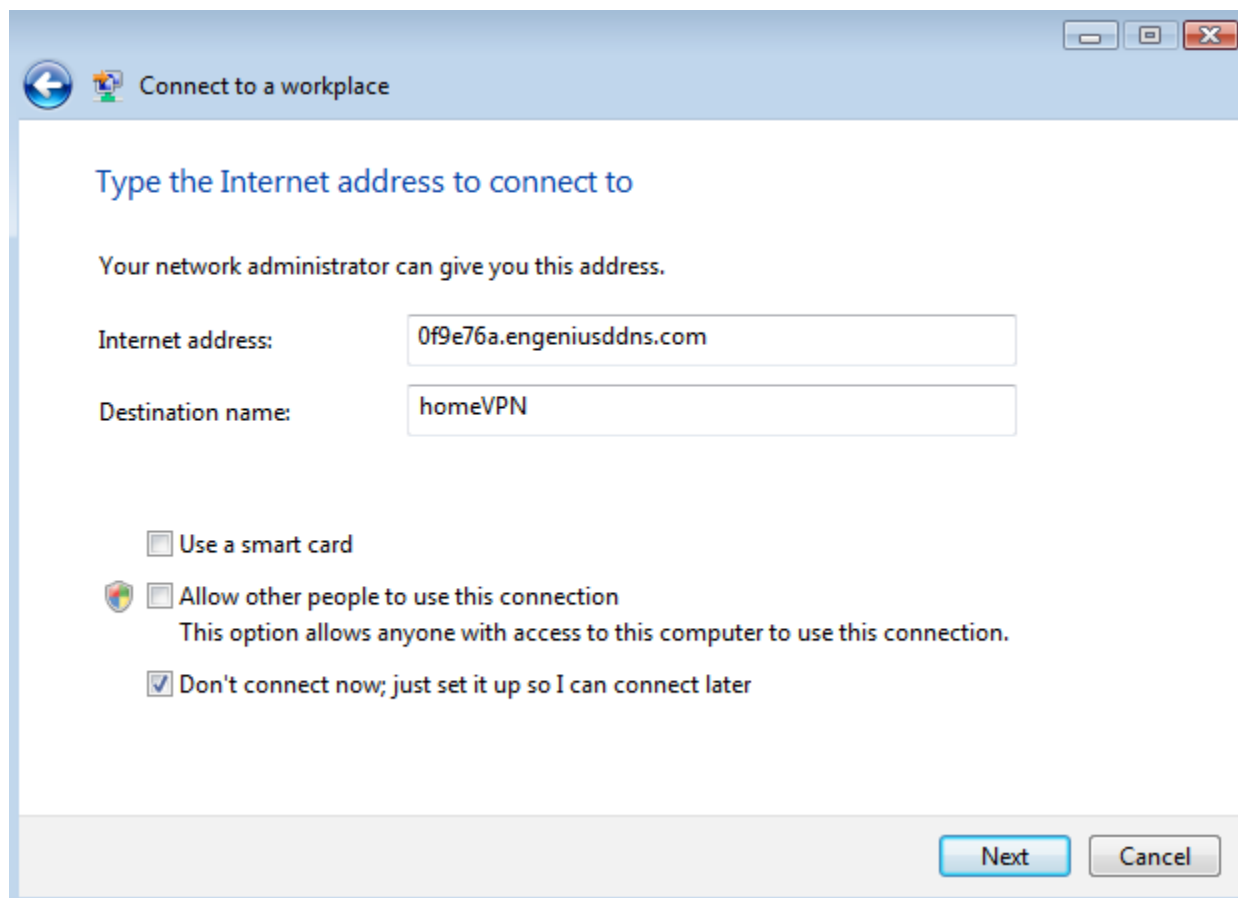

Connect to a workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

Enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.

 Connect to a workplace

Type your user name and password

User name:

peter

Password:

••••••••

☐ Show characters

☐ Remember this password

Domain (optional):

Create

Cancel

Now the profile has been created. Click **Close to complete**.

 Connect to a workplace

The connection is ready to use

 Connect now

Close

Back to **Network** and **Sharing Center**, Click on **Manage network connections**.

Tasks

- View computers and devices
- Connect to a network
- Set up a connection or network
- Manage network connections**
- Diagnose and repair

Network and Sharing Center

View full map

Network (Private network) [Customize](#)

Access	Local and Internet
Connection	Local Area Connection View status


In the **Network Connections** window, find **homeVPN** (the new created VPN interface).

Network and Internet > Network Connections

Organize Views


Name	Status	Device Name	Connectivity	Network
LAN or High-Speed Internet (1)				
	Local Area Connection	Network		
		Intel(R) PRO/1000 MT Desk...		
Virtual Private Network (1)				
	homeVPN	Disconnected		
		WAN Miniport (PPTP)		

Right-click on **homeVPN**, and choose **Properties**.

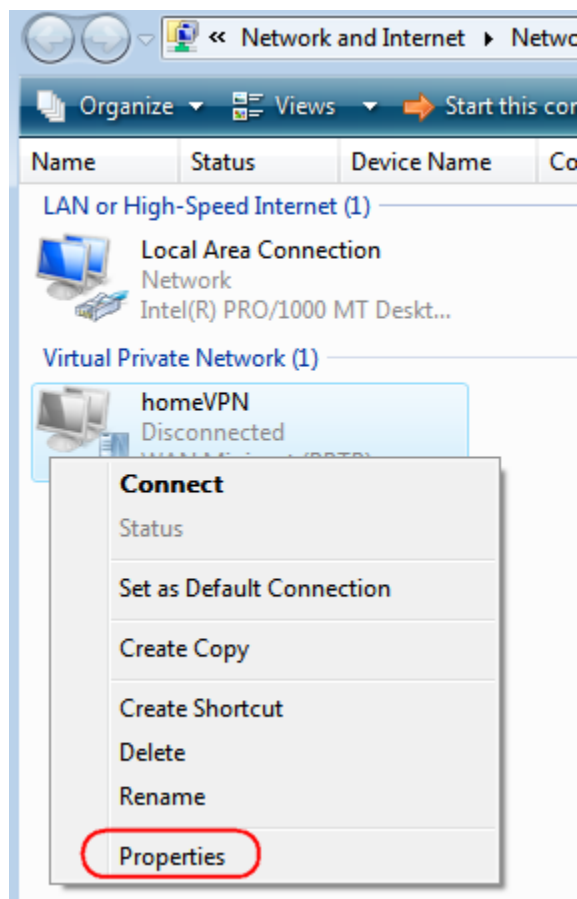

Click **Security** tab in the Properties window.
Choose **Advanced (custom settings)**



Click **Settings...**

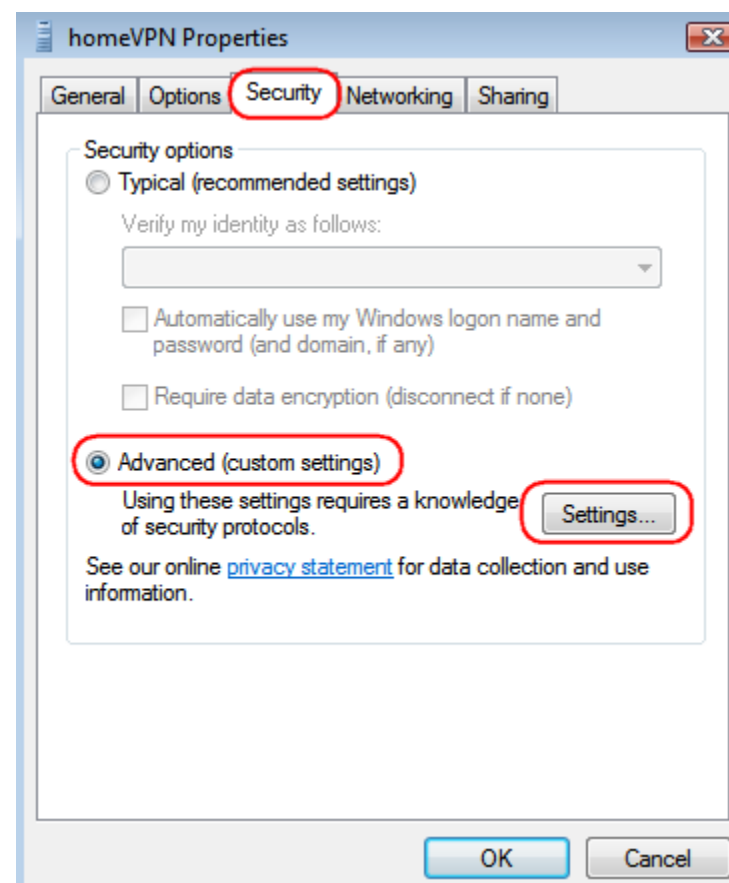

In Advanced Security Settings window, check if the setting is the same the default shown below.
If yours is different, please adjust the settings accordingly.

Click **OK** when done.

Back to **Properties** window, click on **Networking** tab.
For VPN type, choose **L2TP IPsec VPN**.

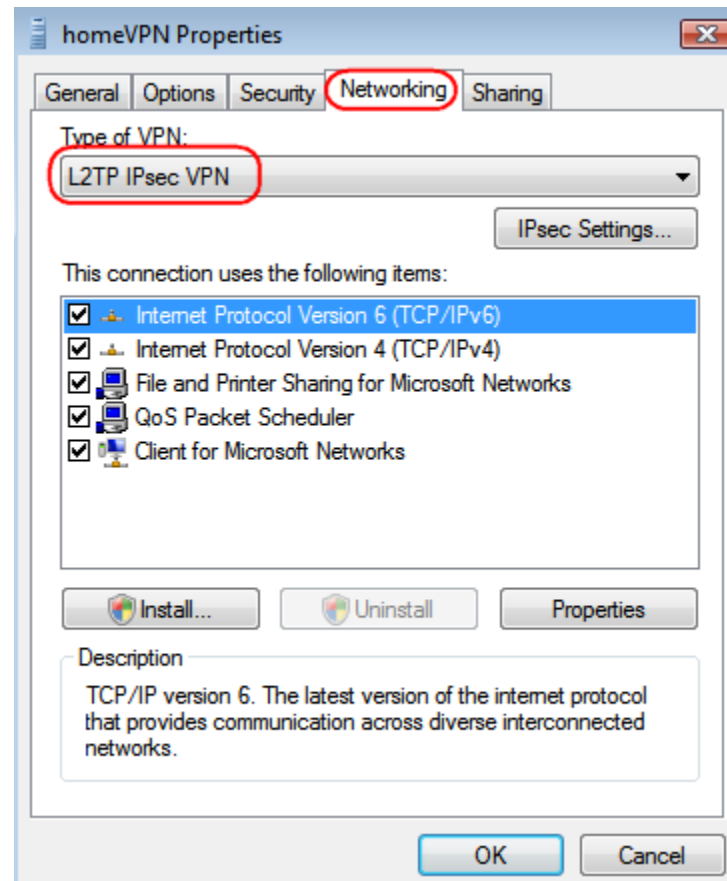
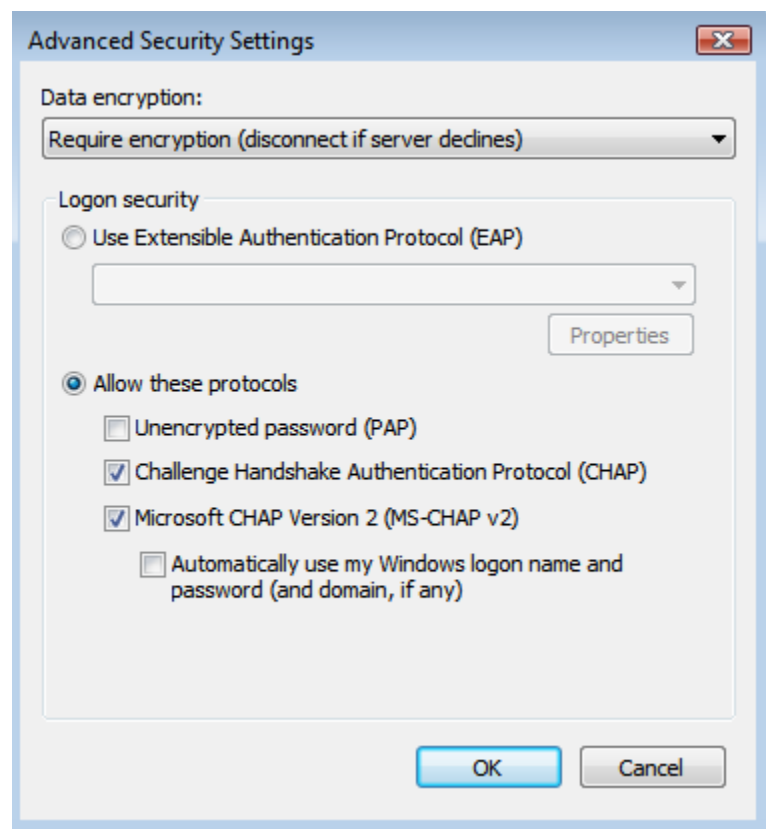


Then, click on **IPsec Settings**.

Choose Use preshared key for authentication and enter the Key **11112222**.


Click **OK** when done.

Back to **Properties** window, click on **OK** to complete.

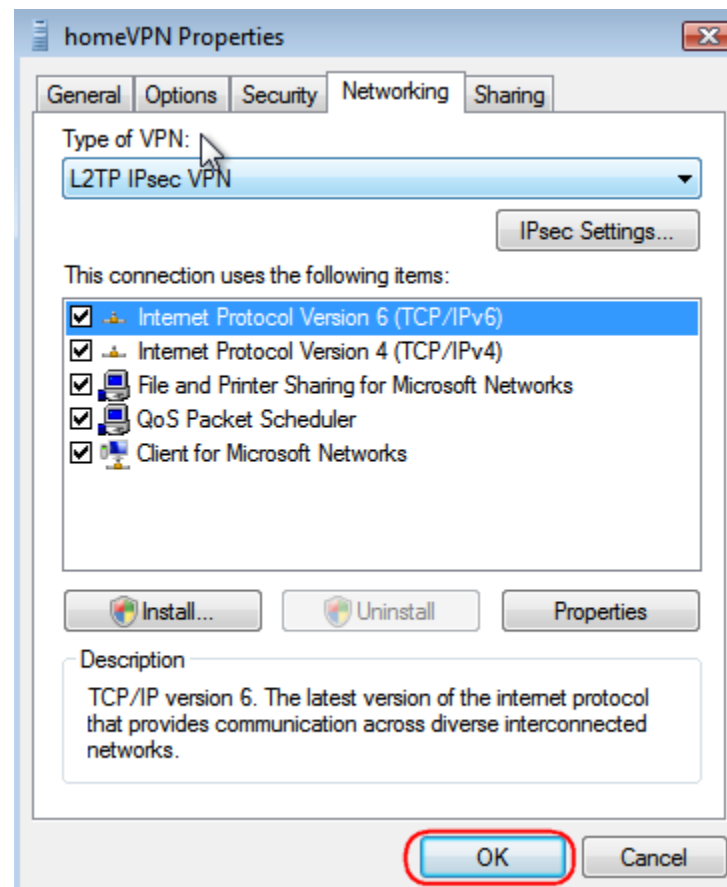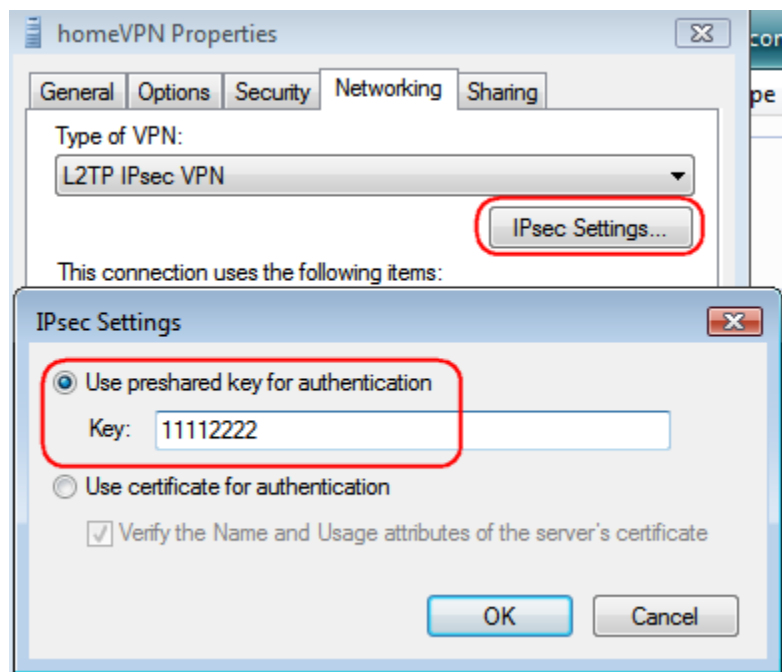

Back to **Network** Connections, find **homeVPN** and **right-click** on the icon.

Click **Connect** to establish the VPN tunnel.

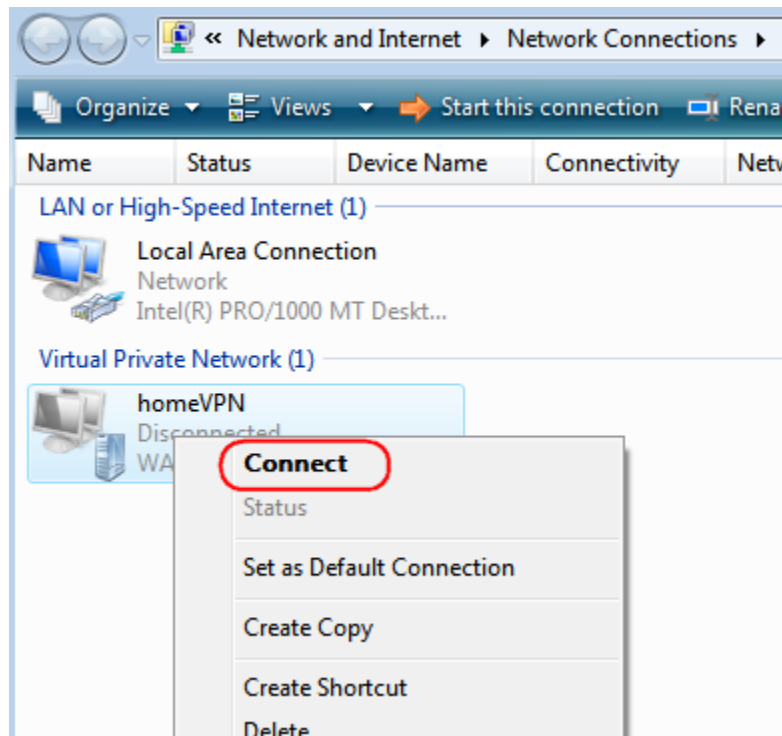


A window prompts for user verification, enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.




The client device can now access to the internal FTP server **192.168.0.116 over the Internet.**

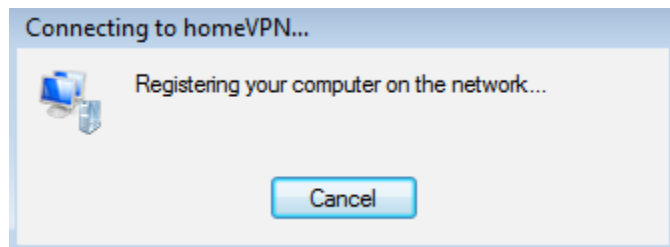


To verify the connection, please follow the instructions below.

Press keyboard  +  to run File Explorer. Type in cmd then press Enter key to run Command Prompt

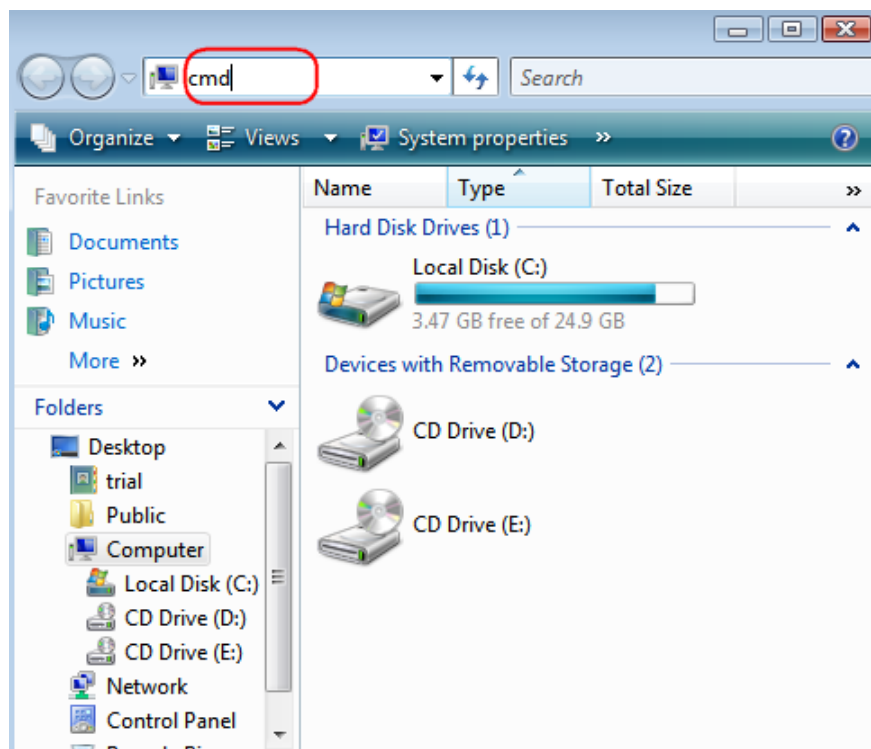

Under **Command Prompt** type in ping **192.168.0.116**. Replies should be received as shown below.

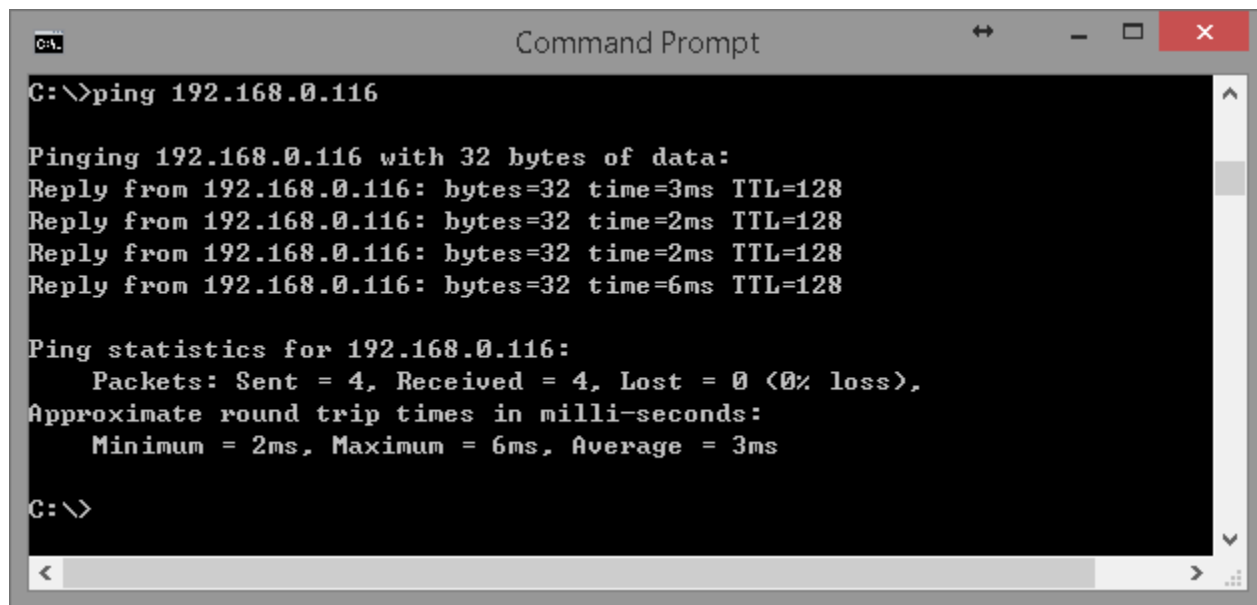


```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms


C:\>
```

Windows 7

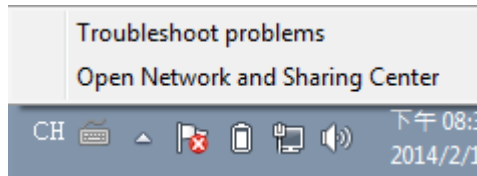


On the Task Bar , **right click** on the network interface icon  **Left-Click** on Open Network and Sharing Center.

Under **Network and Sharing Center**, click on **Set up** a new connection or network.

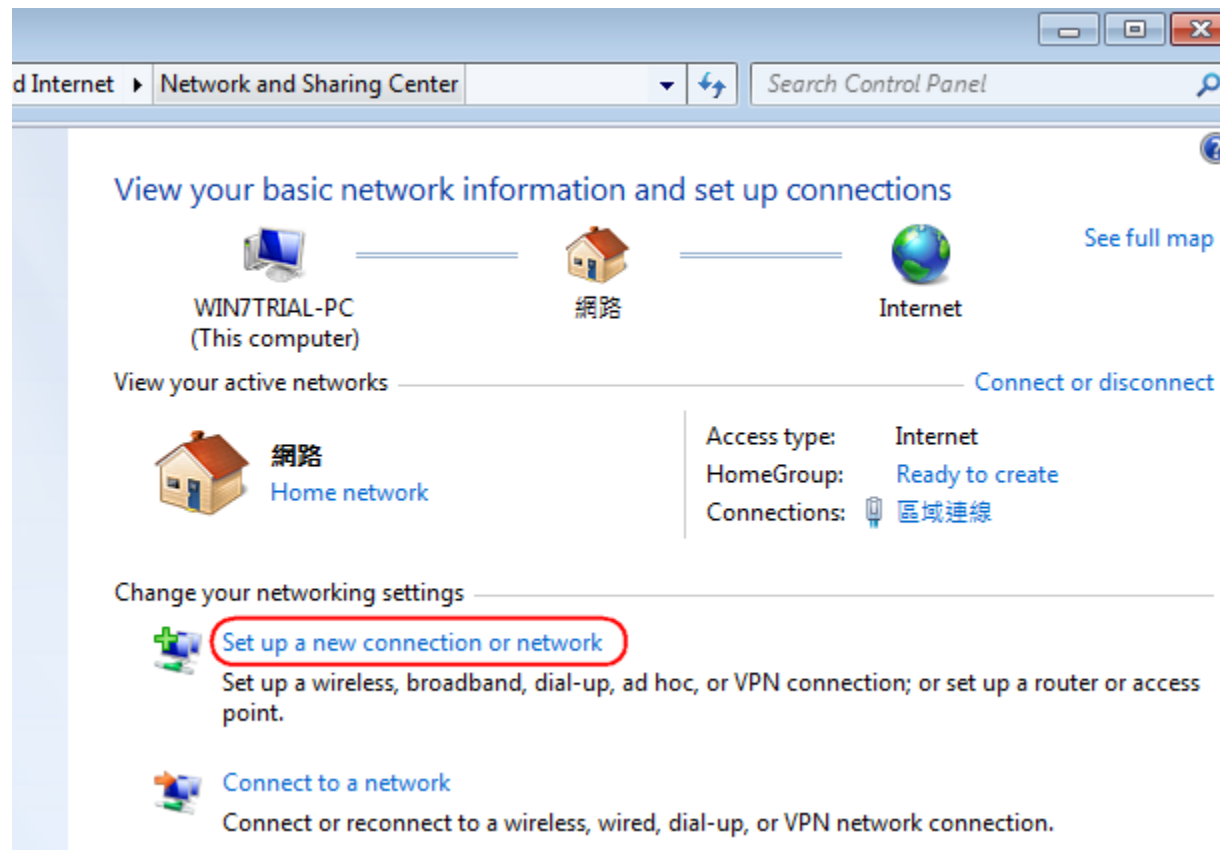


Choose **Connect to a workplace** from the option menu.

Click on **Next** to proceed.

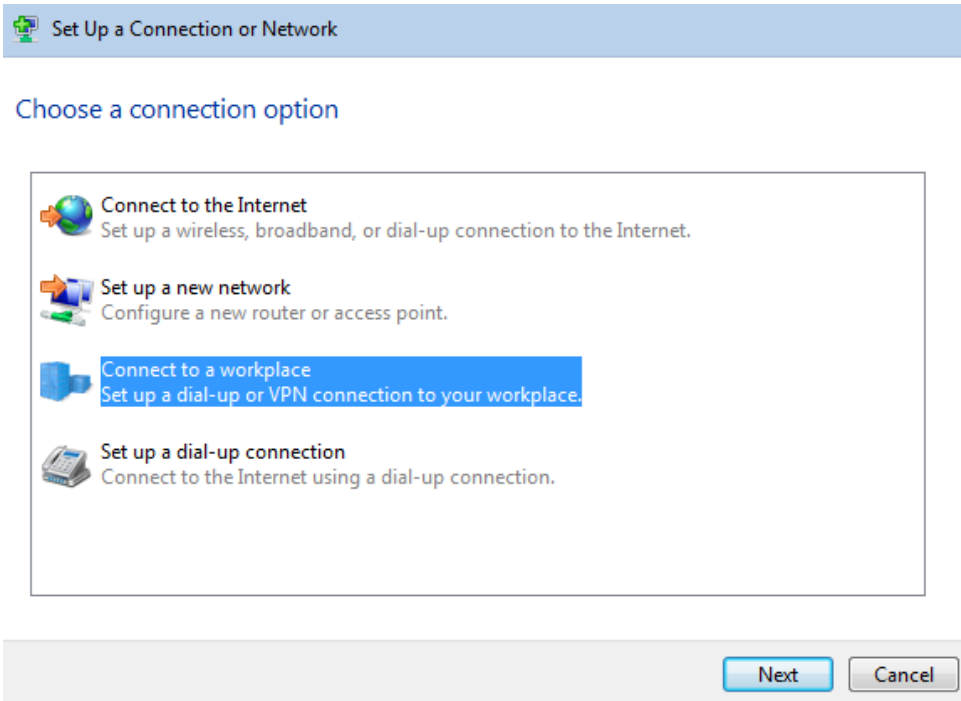

Click **Use my Internet connection (VPN)**

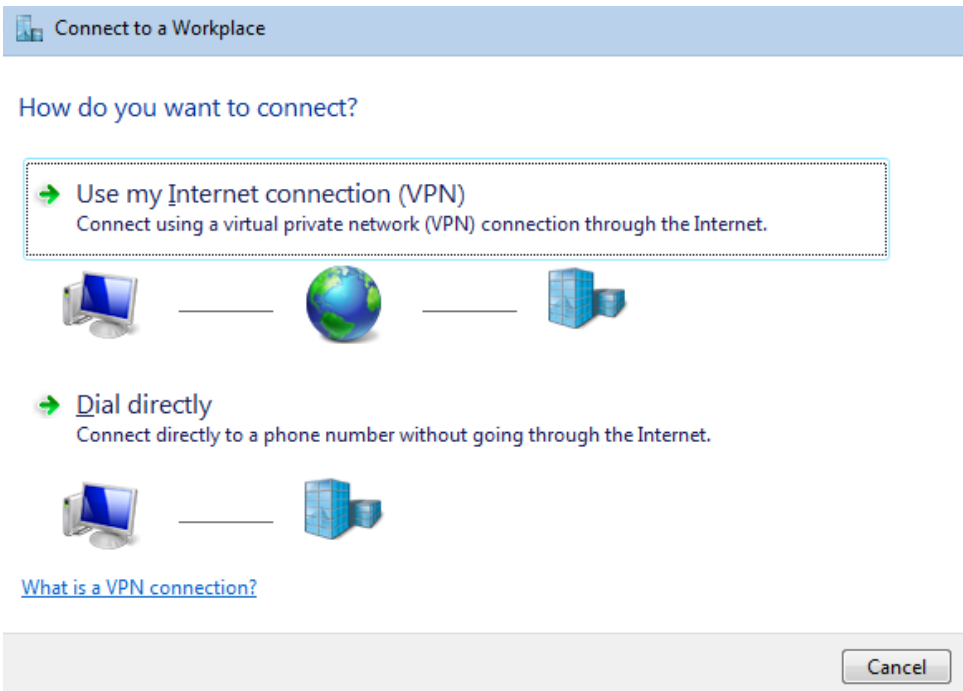


Internet address: type in the Gateway DDNS domain, in this example, 0f9e76a.engeniusddns.com.

Destination name: enter a meaningful name; for instance, homeVPN is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox Don't connect now; just set it up so I can connect later

Click on **Next** to proceed.

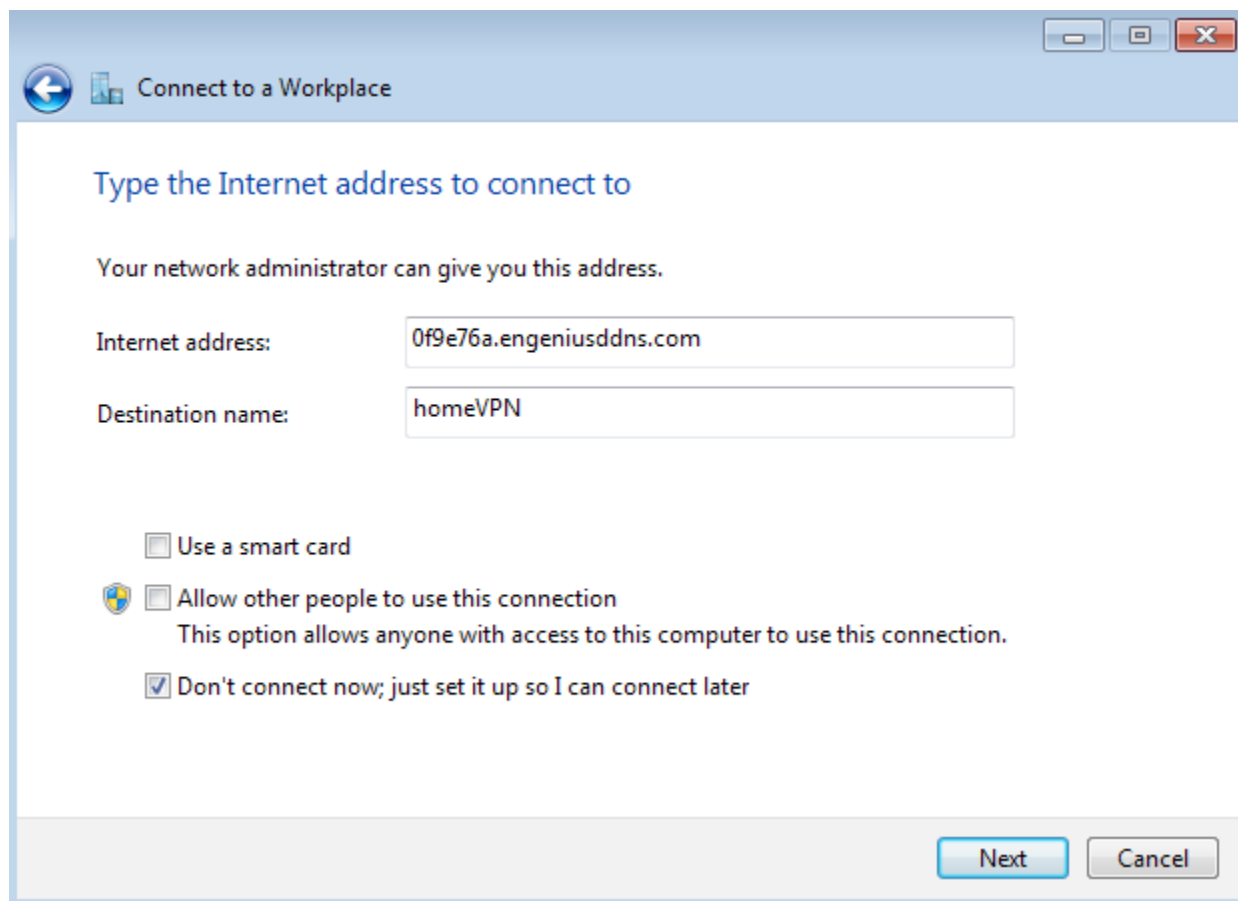

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

Click **Close** to finish.

The connection is ready to use




→ Connect now

Close


Go back to **Network and Sharing Center**

Click on **Change adapter settings** to view all network adapters.

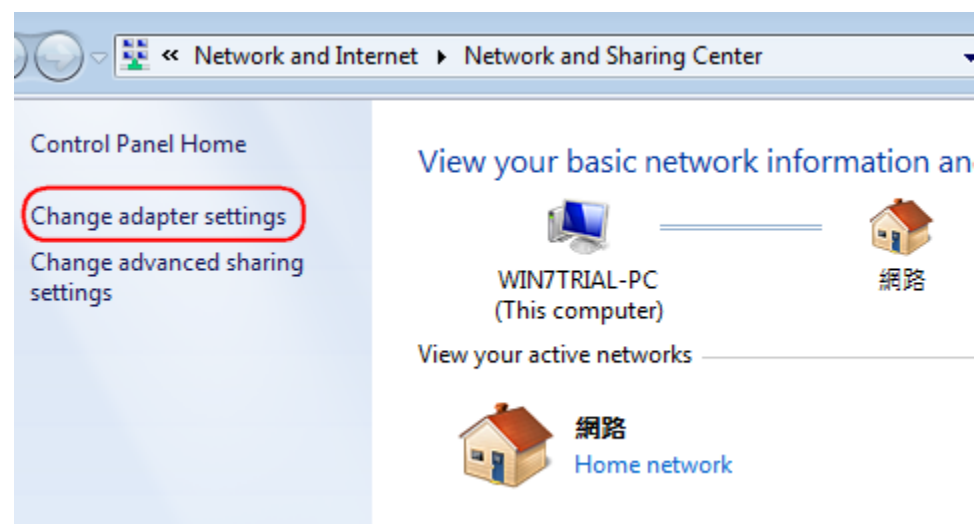


In the Network Connections window, find **homeVPN** (the new created VPN interface) and **right-click** on it.

In the pop-up menu, click on **Properties**.

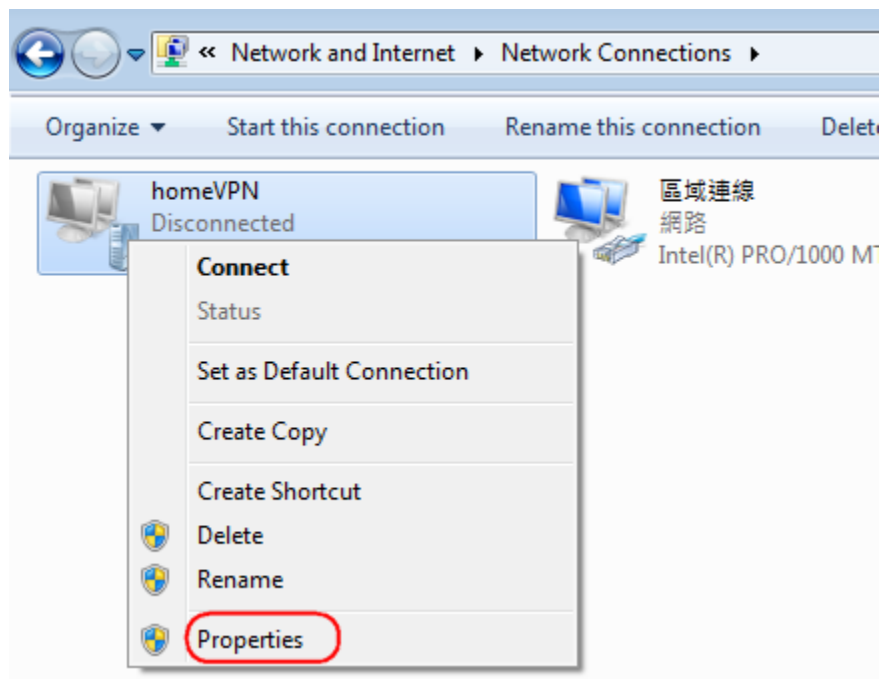


In the **Properties** window, click on **Security** tab. Change **Type of VPN** to **Layer 2 Tunneling Protocol with IPsec (L2TP/IPSec)**

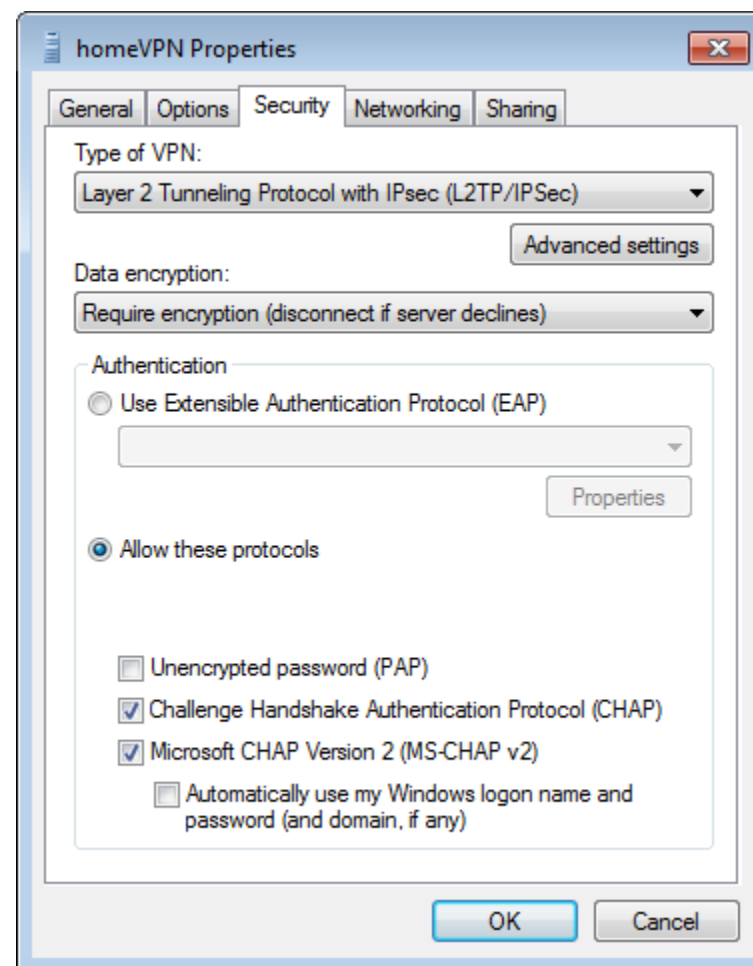


Click on **Advanced settings**

In the Advanced Properties, choose Use preshared key for authentication.

Enter the Key **11112222** and click **OK** to close the window.

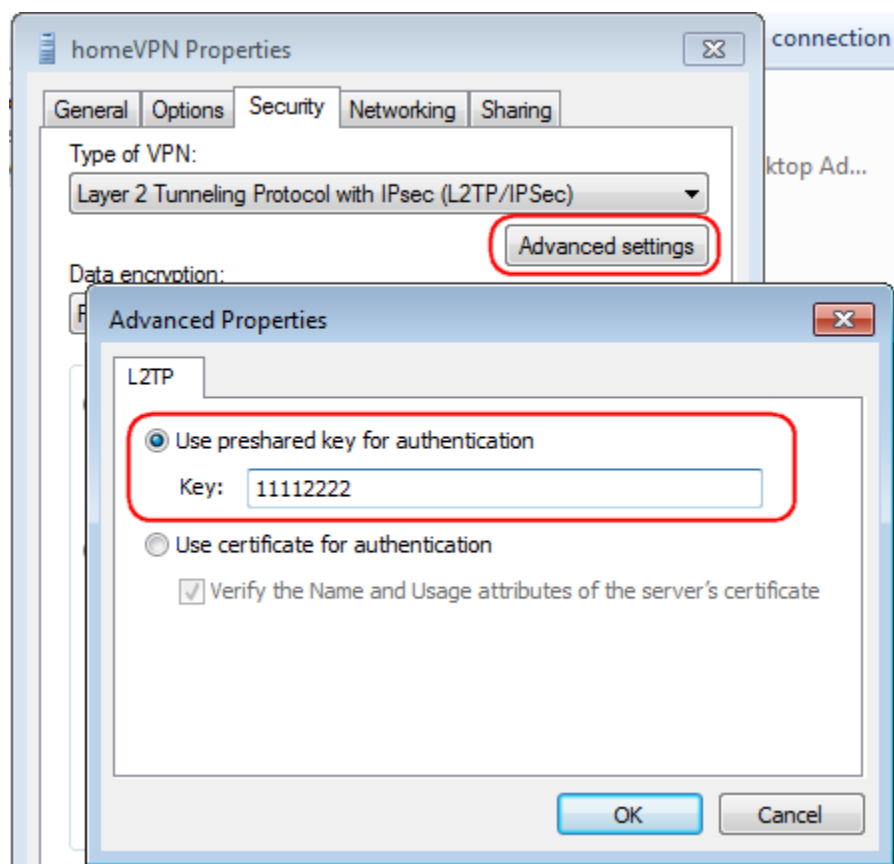


Once completed all changes, click on **OK to complete the setting.**

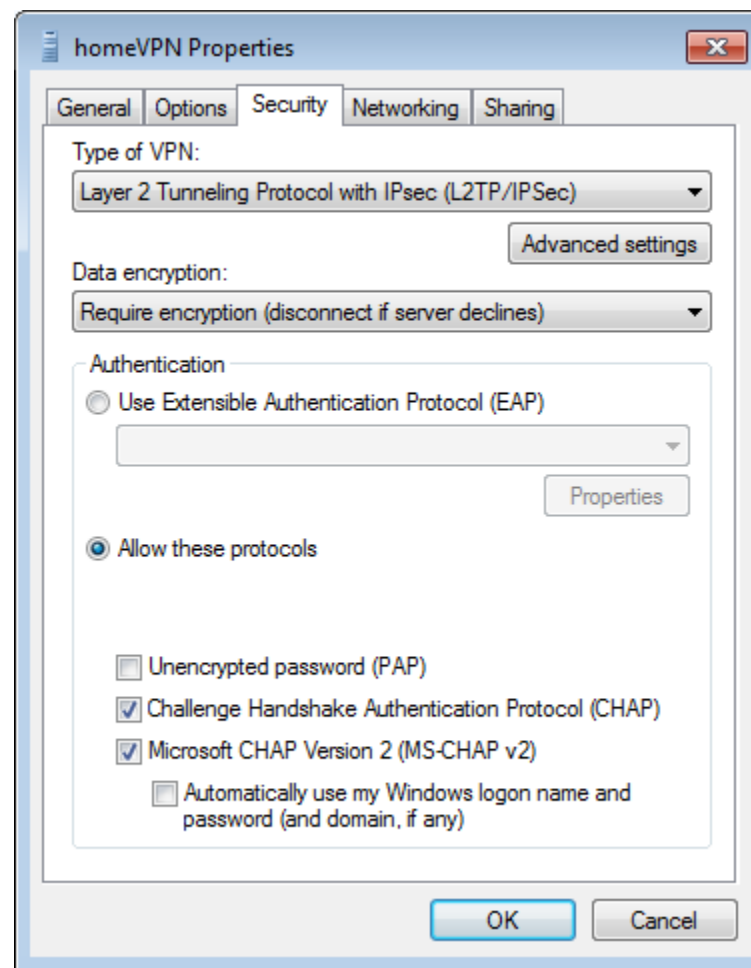

Back to **Network Connections**, find **homeVPN** and right-click on the icon.

Click **Connect** to establish the VPN tunnel.

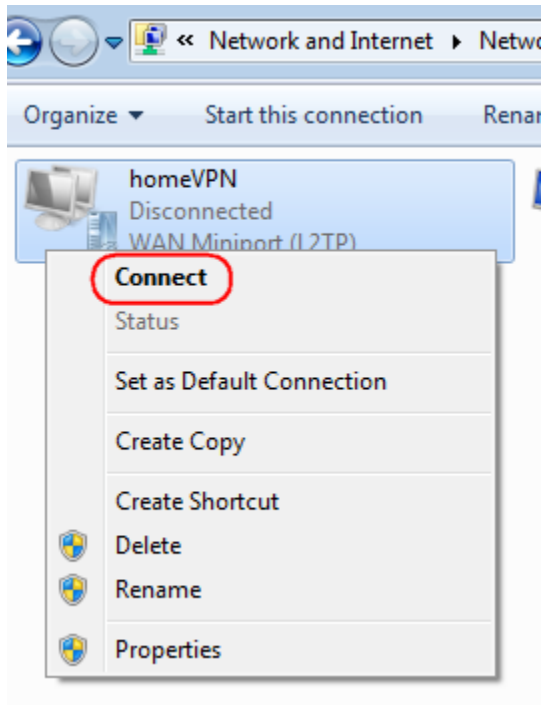


A window prompts for user verification, simply enter peter for user name and **ax123456** for the password.

Click **Connect** to start connection.




Depends on the location and network traffic of your region this may take a while.

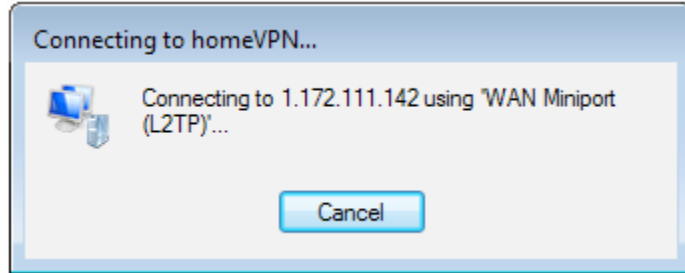

Once VPN tunnel is established successfully **homeVPN** will be marked Connected.


The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

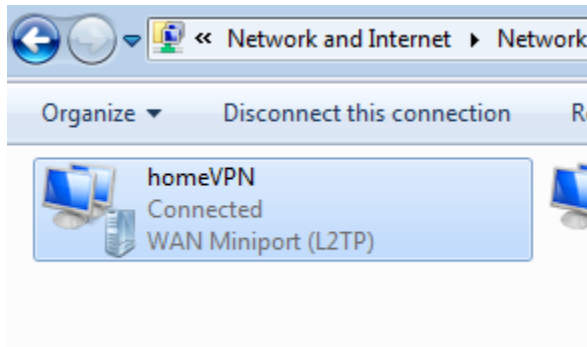

To verify the connection, please follow the instructions below.


Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

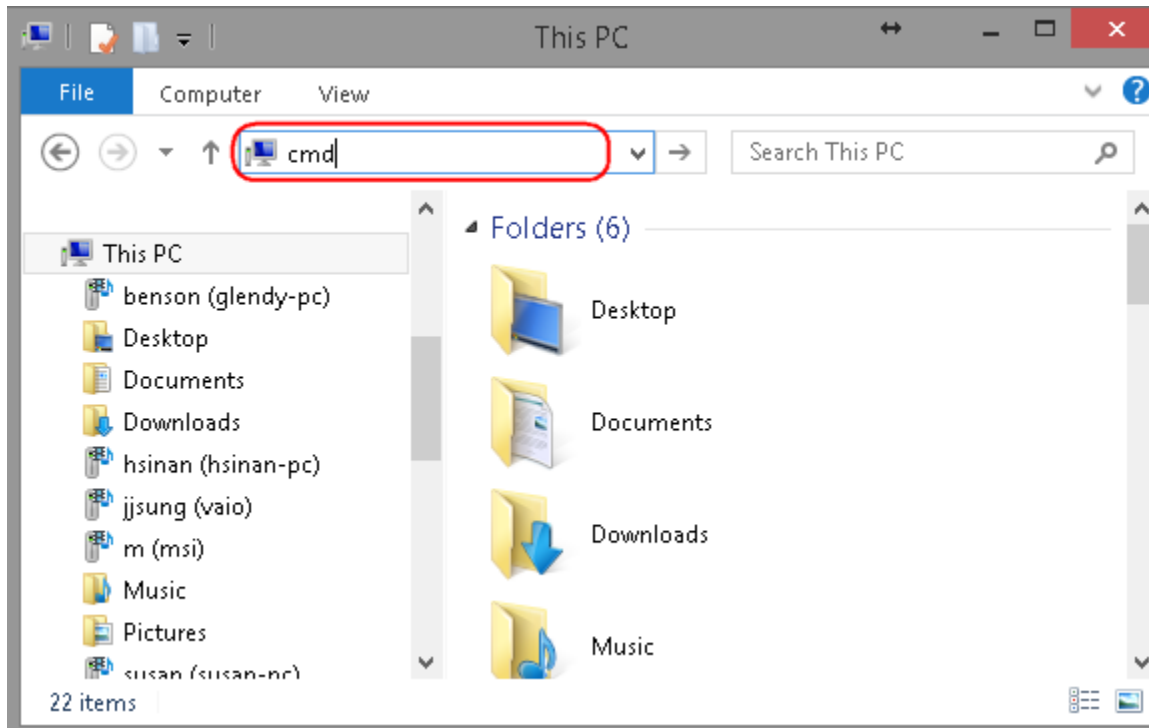

Under **Command Prompt type** in **ping 192.168.0.116**.

Replies should be received as shown below.

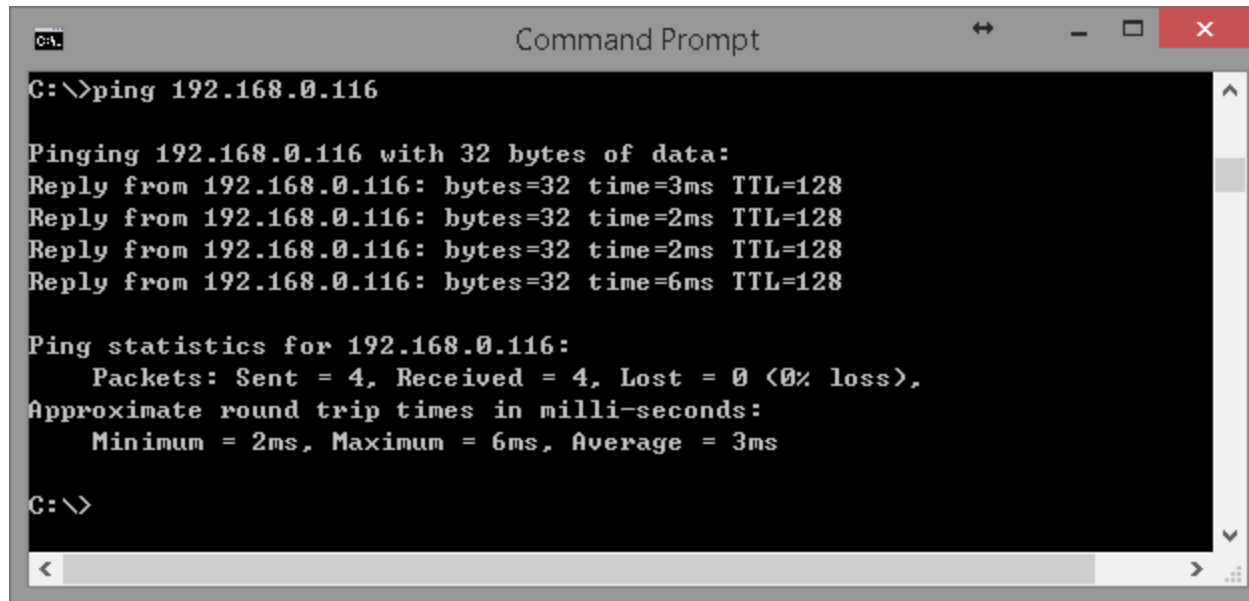A screenshot of a Windows Command Prompt window. The title bar reads "Command Prompt". The command prompt shows the command "C:\>ping 192.168.0.116" and its output. The output indicates a successful ping to 192.168.0.116 with 32 bytes of data. It shows four replies with varying times (3ms, 2ms, 2ms, 6ms) and a TTL of 128. Ping statistics are also displayed, showing 4 packets sent and received with 0% loss. The round trip times are: Minimum = 2ms, Maximum = 6ms, Average = 3ms. The prompt ends with "C:\>".


```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```


Windows 8

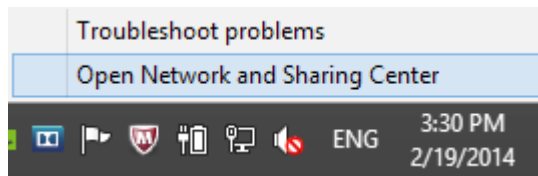

On the Task Bar, **right click** on the network interface icon.

Left-Click on **Open Network and Sharing Center**.



Under **Network and Sharing Center**, click on **Set up a new connection or network**.

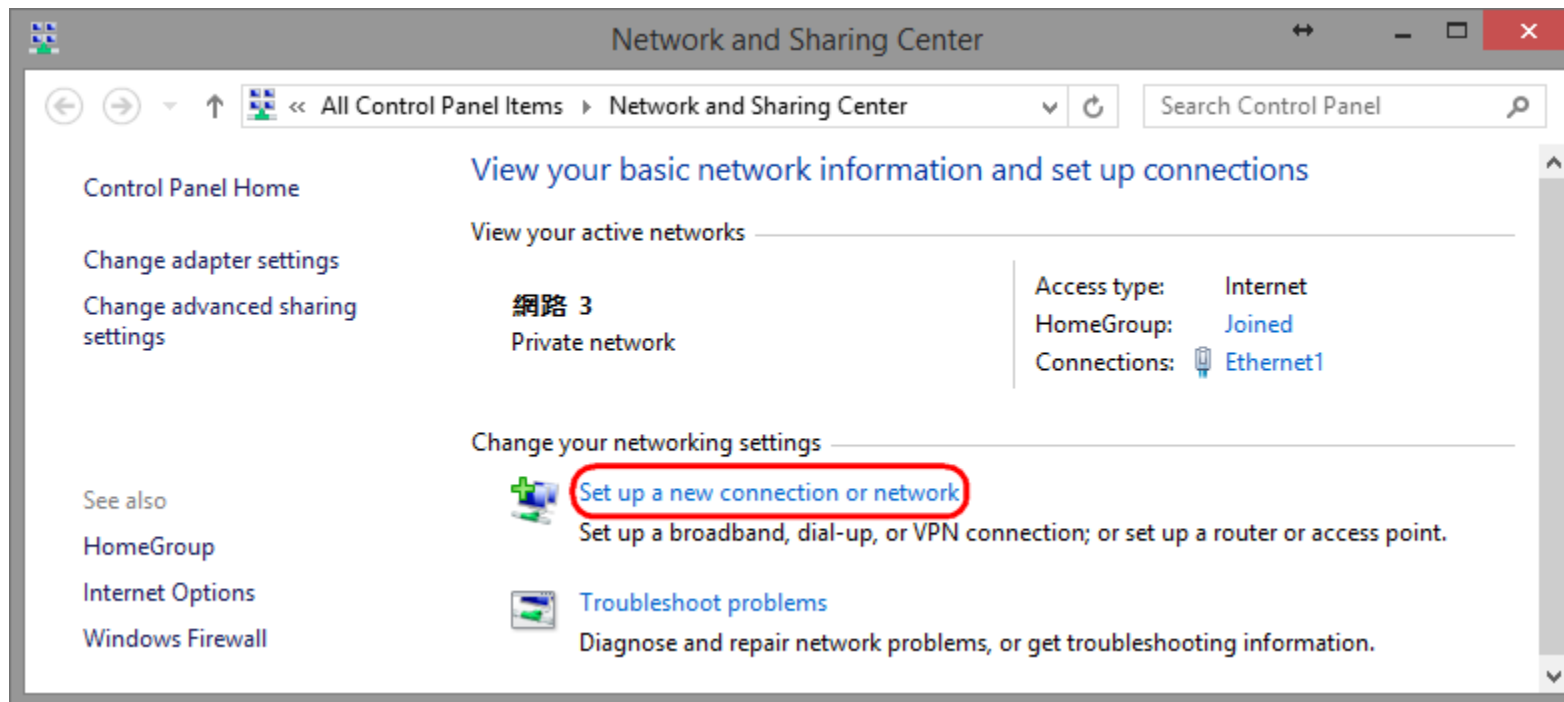

Choose **Connect to a workplace** from the option menu.

Click on **Use my Internet connection (VPN)**.


Click on **Next** to proceed.

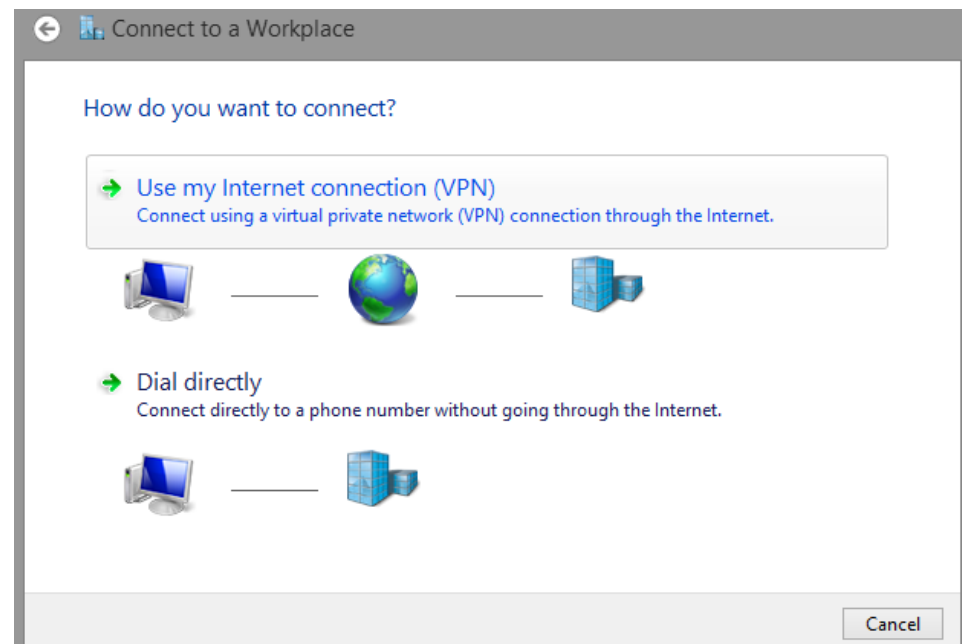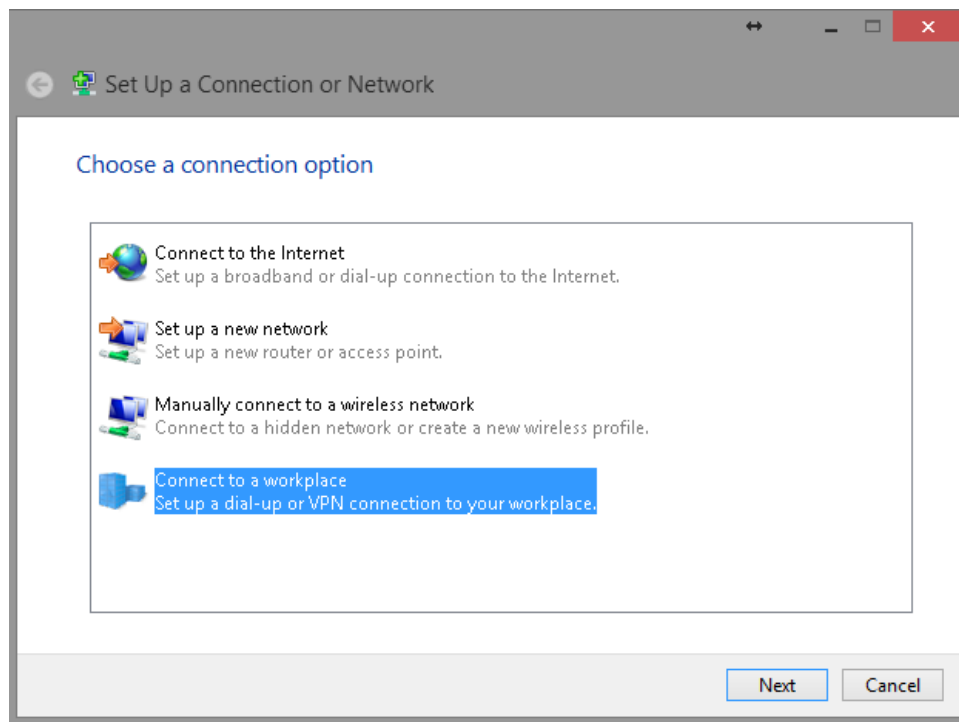

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click on **Create** to proceed.

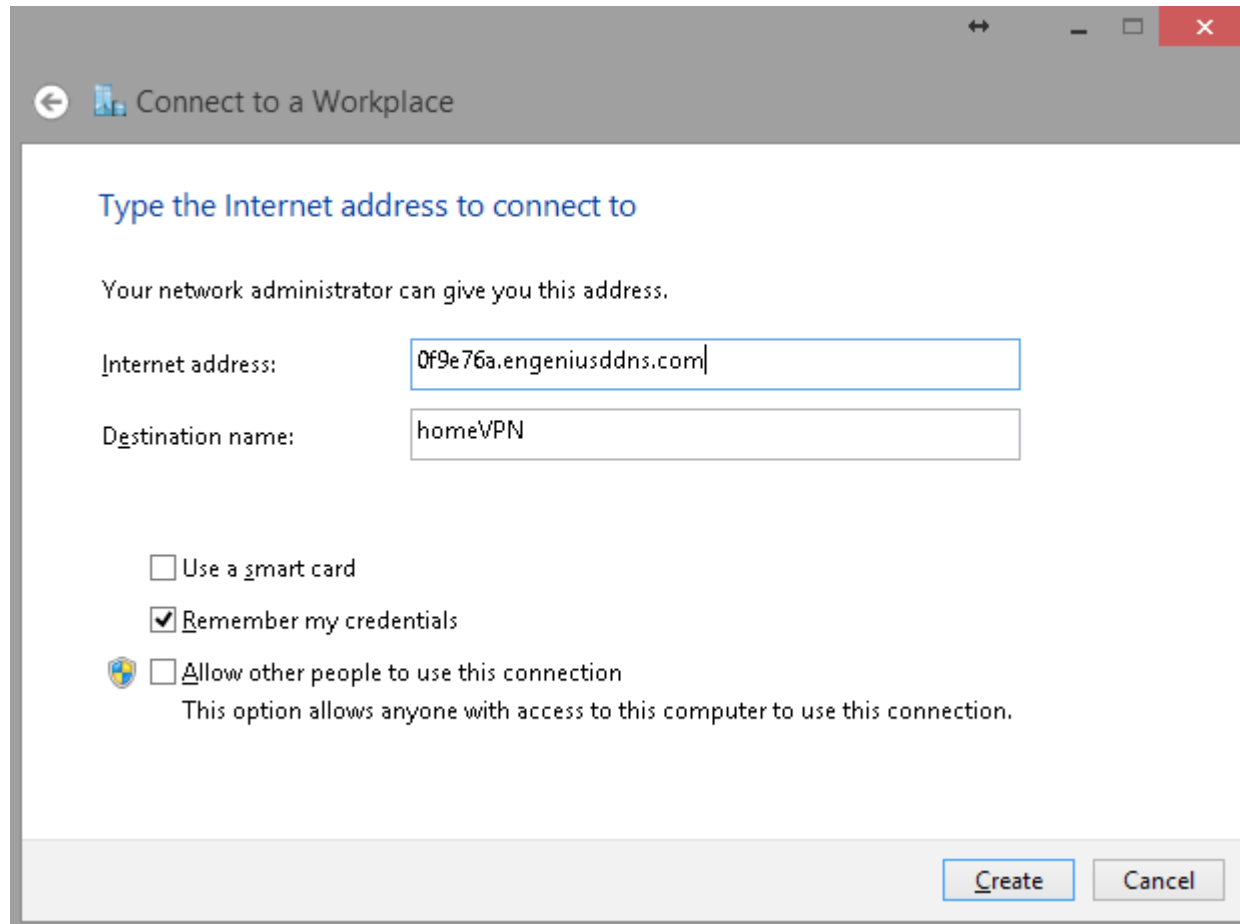

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN


☐ Use a smart card

☒ Remember my credentials


☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

Create Cancel


Please wait for a few seconds. The creation process will be completed once the following window disappear.

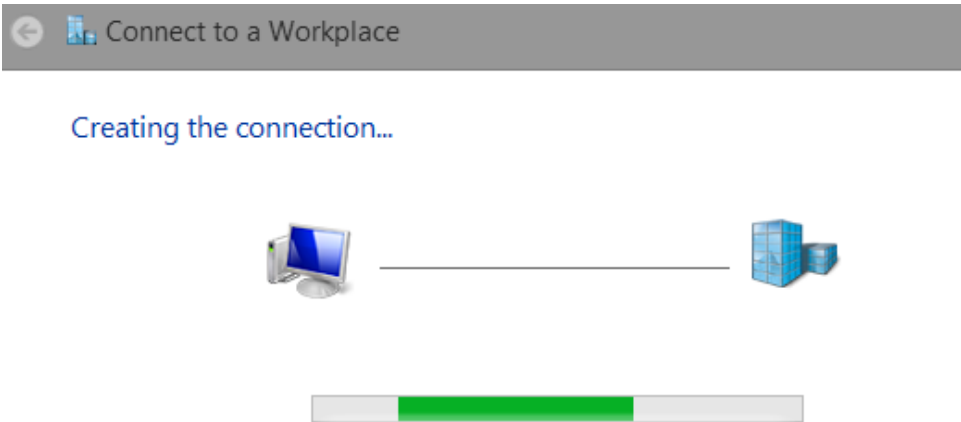

Go back to **Network and Sharing Center** and click on **Change adapter settings**.

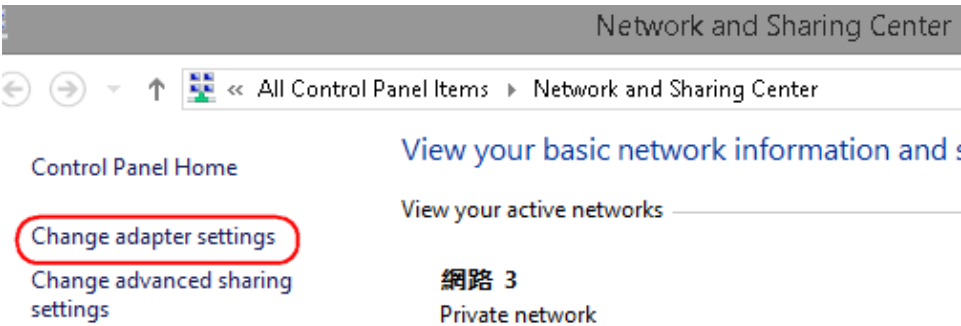


Left click on the network interface icon  on the task bar. The new interface **homeVPN** should be found as shown below.

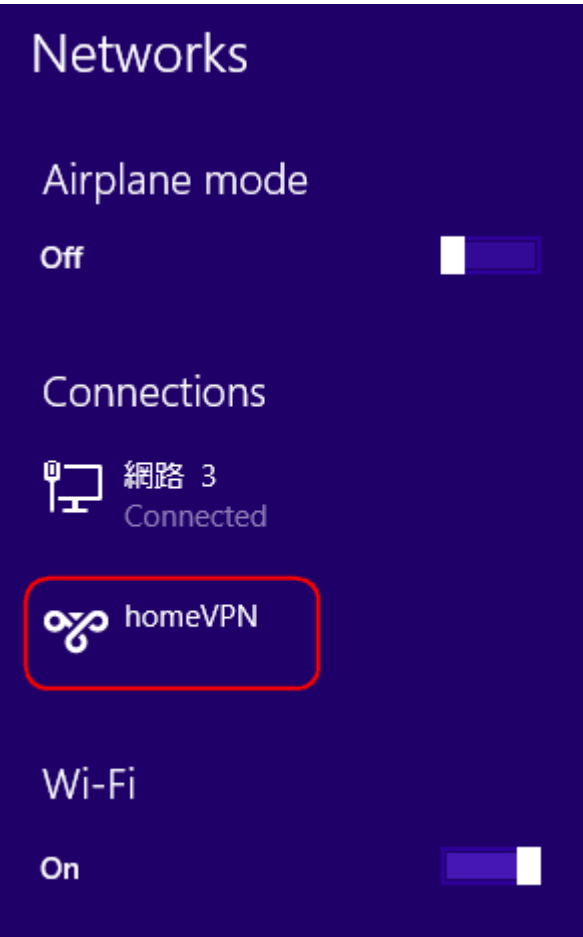

In the Network Connections window, find **homeVPN icon** and **right-click**.


Choose **Properties** to continue setting.

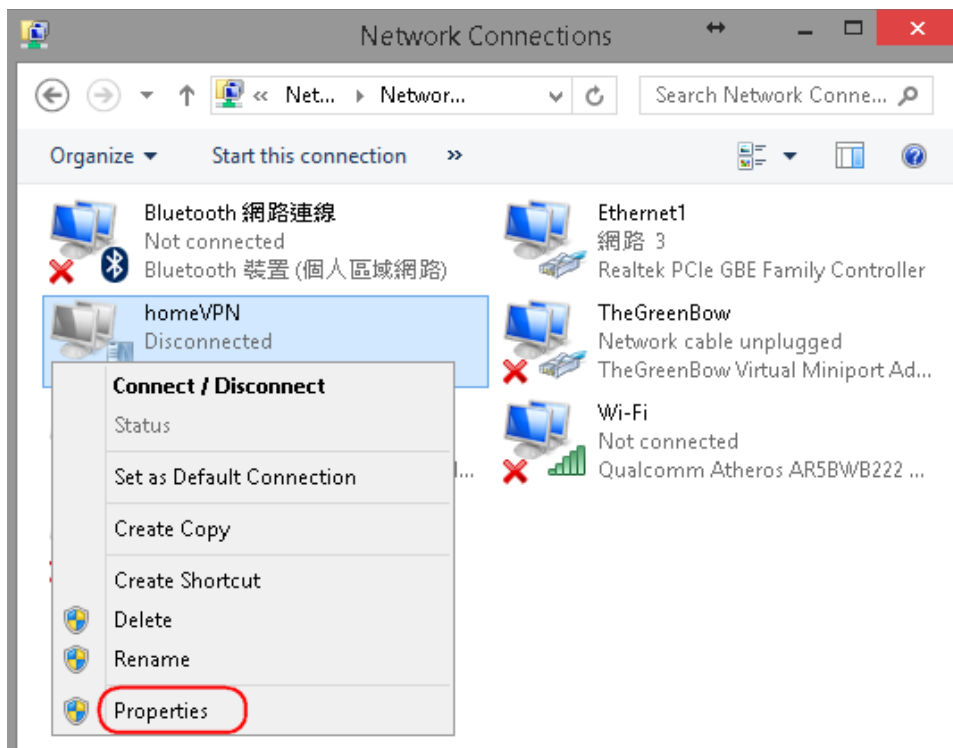

In the **Properties** window, click on **Security** tab. Change Type of VPN to **Layer 2 Tunneling Protocol with IPsec (L2TP/IPsec)**

Click on **Advanced settings**


In the pop-up window, enter **11112222** for the preshared key used for this example. Click **OK** to close the window.

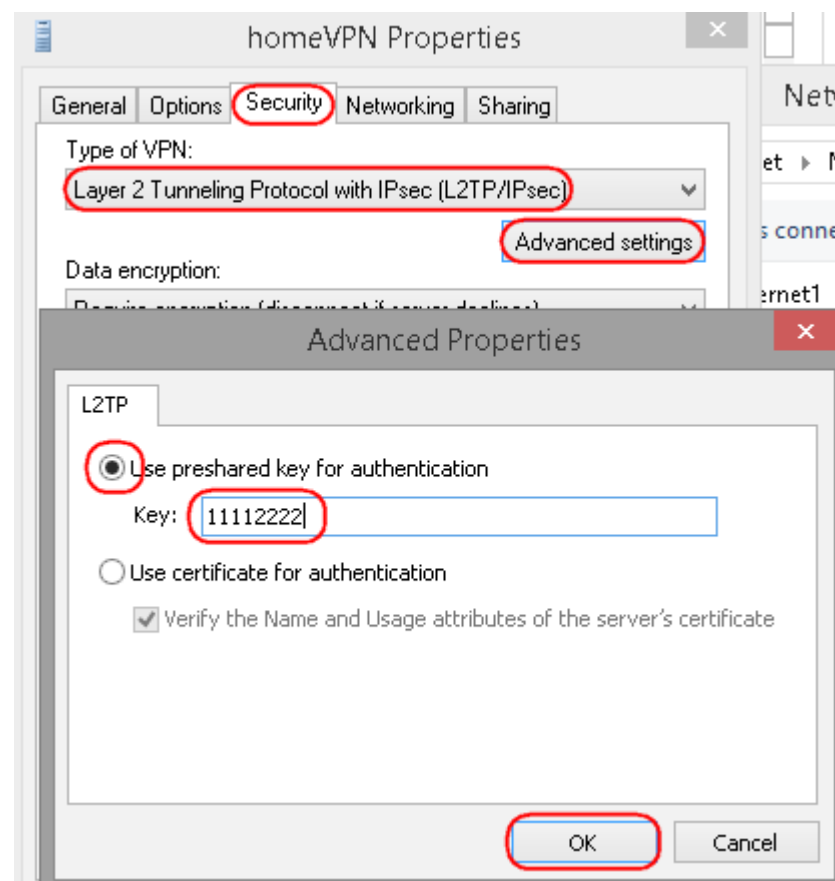

Change **Require encryption** (disconnect if server declines)


Click **Allow these protocols** and check **Microsoft CHAP Version 2** (MS-CHAP v2)

Click **OK** when completed.

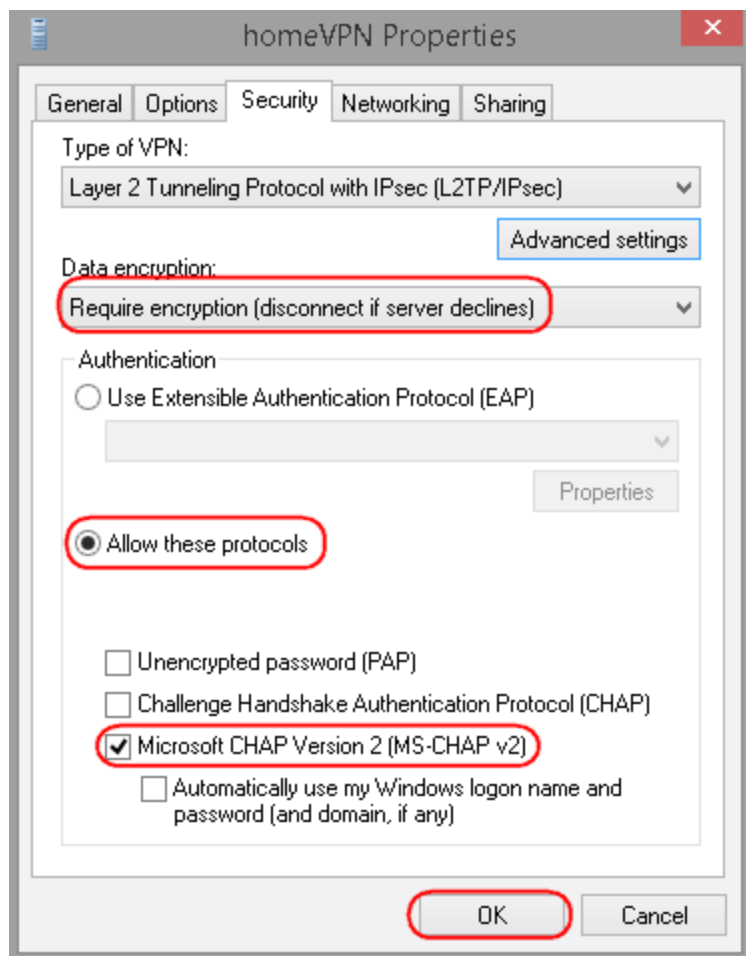


To connect to the VPN, click on **homeVPN**.

When the Connect button appears, click on **Connect** to initiate the link.

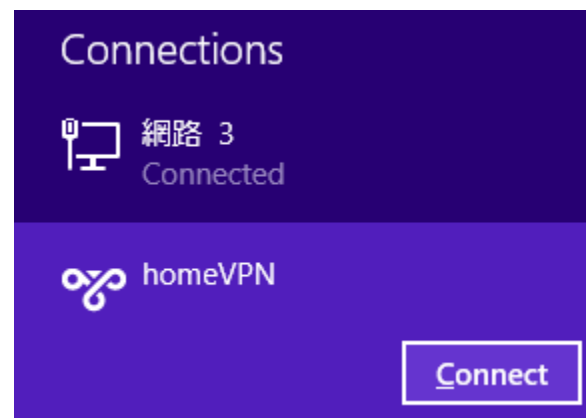


Now type in the username and password. In this example our user name is **peter** and password is **ax123456**. If you don't know the user name and password, please go back to **User Setting** under VPN section for detail.


Click **Ok** to start continue.

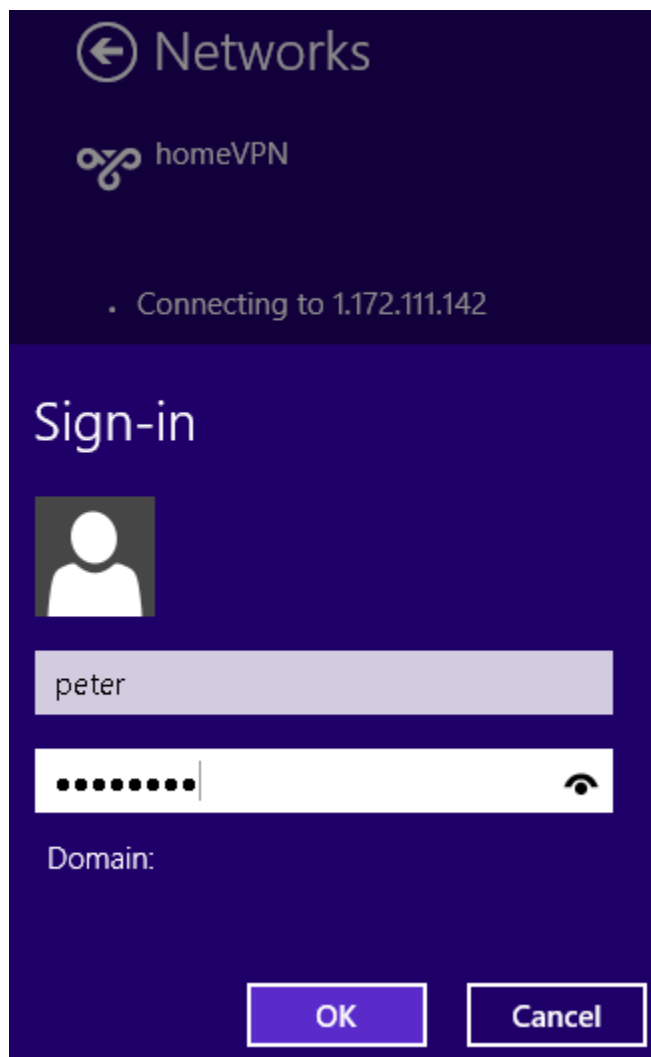

Depends on the location and network traffic of your region this may take a while.

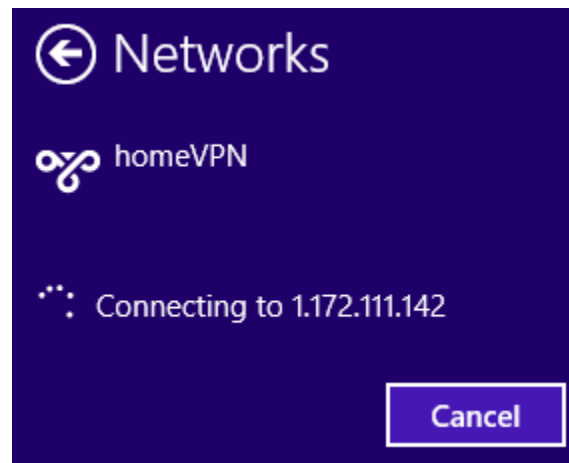


Once the VPN tunnel is established successfully, you should see your VPN interface labeled **Connected**. The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

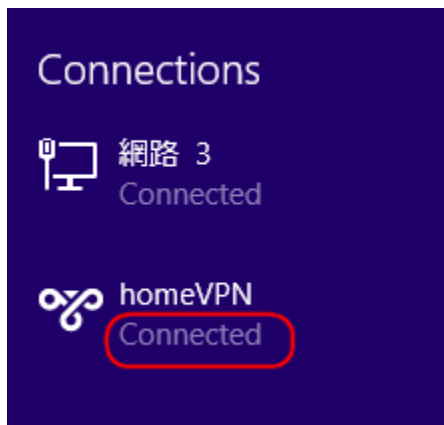


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press **Enter** key to run **Command Prompt**

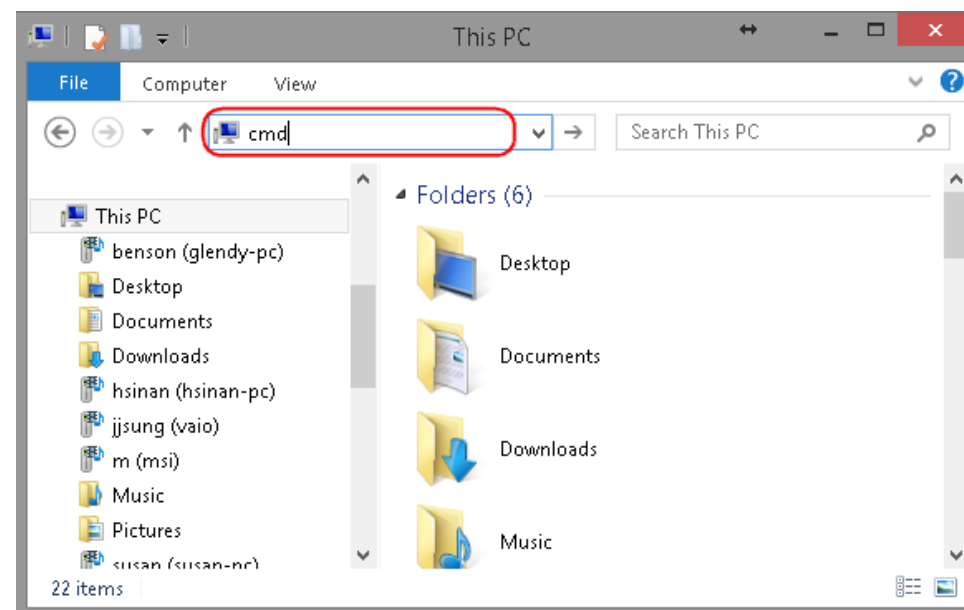

Under **Command Prompt** type in ping **192.168.0.116**. Replies should be received as shown below.

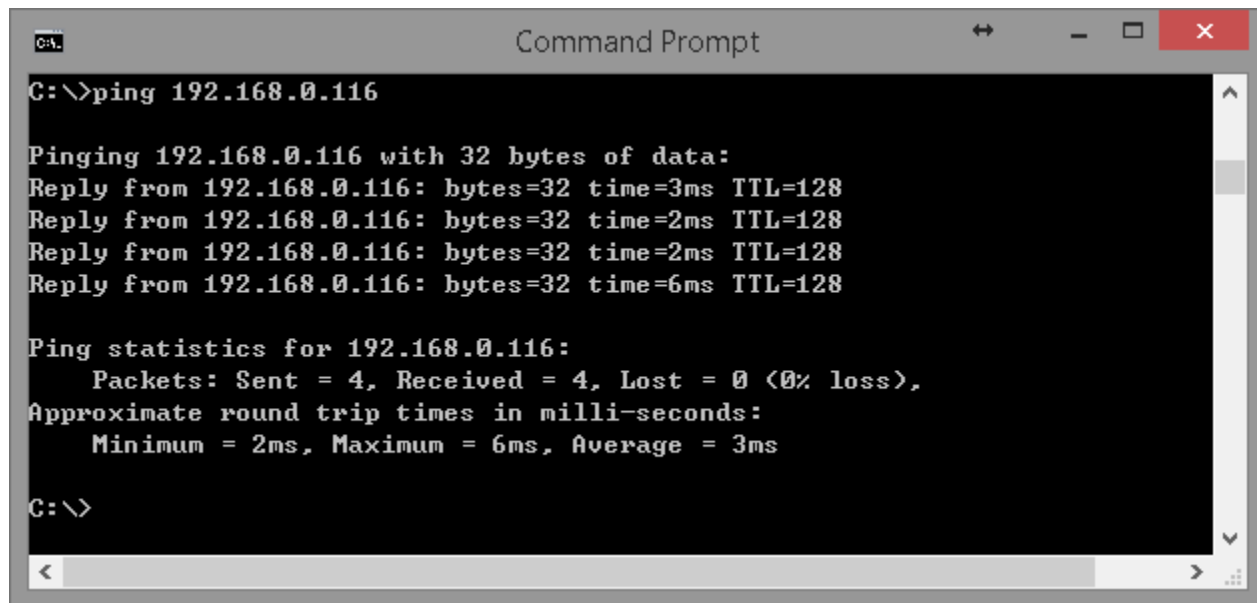

```
C:\>ping 192.168.0.116


Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```

VPN Wizard: L2TP

The following diagram illustrates the example given in this section. A user, **peter**, has already been created in the User Setting.

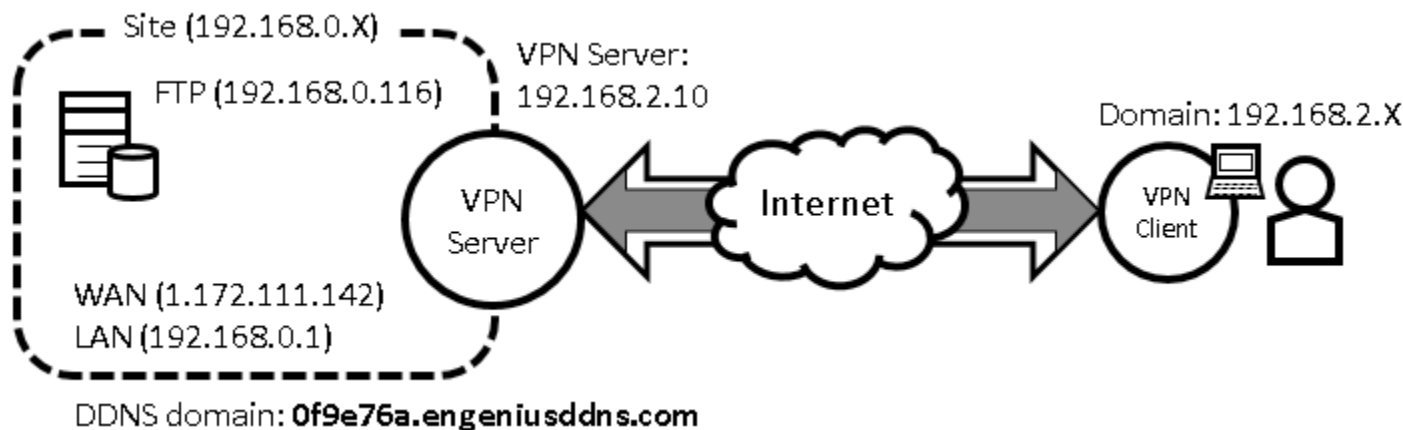

VPN Server Side Information:

Private Network domain: **192.168.0.X**

Domain net mask: **255.255.255.0**

DDNS domain: **0f9e76a.engeniusddns.com**

LAN IP: **192.168.0.1**

User Name: **peter**

Password: **ax123456**

VPN Server Address: **192.168.2.10**

Client Side:

VPN Client will be assigned with an IP address **192.168.2.X** address when the tunnel is established.

VPN Server (Gateway Side)

Under **VPN** section, choose **Wizard**.

 VPN
Status
Profile Setting
User Setting
Wizard

Assign a VPN policy name by typing **homeVPN** (or any other preferable name).

Click **Next** to proceed.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name (eg: OfficeVPN)

Back

Next

Cancel

Select **L2TP** and click **Next** to proceed.

Step2: VPN Connection Type

Please choose VPN connection type

- ☐ IPsec Choose this if you are using other 3rd party VPN client software, or gateway
- ☐ L2TP over IPsec Choose this if you are using Windows VPN client for connection
- ☒ L2TP Choose this if you are using L2TP client for connection
- ☐ PPTP Choose this if you are using PPTP client for connection

Back

Next

Cancel

Select a user (which created earlier in **User Setting section**) from the user list. In this example “**peter**” is selected.
VPN Server IP is given to the VPN server on EPG600. In this case, please type in **192.168.2.10**.
Type in **192.168.2.100** and **200** into the Remote IP range fields.

Click **Next** to continue.

Step3: VPN L2TP Setting

Please enter the setting of L2TP

L2TP Settings

Authentication

MSCHAP_V2 ▾

User Name

☒ User List

peter ▾

peter

john

(eg: guest)

password

.....

(eg: nk9543)

VPN Server IP Setting

Server IP

192.168.2.10

(eg: 10.0.174.45)

Remote IP range

192.168.2.100

-

200

(eg: 10.0.174.66 -100)

Back

Next

Cancel

Note1: Server IP and Remote IP Range should be under the same domain. The server will be listening to the traffic for from 192.168.2.X.

Note2: Remote IP range is the range of IP addresses space reserved for VPN the connecting VPN clients.

293

At this very last page, click **Apply** to enable the policy immediately.

Setup Successfully

☒ Enable this policy immediately.

Back

Apply

Cancel

It takes about **15 seconds** for the Gateway to activate the VPN profile.

Module is reloading, please wait **13** seconds

Once the Gateway is ready, the page will be redirected to **Profile Setting** section where the new profile **homeVPN** is shown.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐

Add

Edit

Delete Selected

Delete All

Apply

Cancel

VPN Client


You will need a PC or Laptop running VPN enabled operating system. The following sections demonstrate how to use built-in VPN client to establish a VPN tunnel with the VPN server.

Windows XP

Please ensure you have updated your Windows XP with latest service pack.


Before adding a new VPN connection to your XP system, we have to add a new registry to your system.

On the Start Menu, click **Run...**

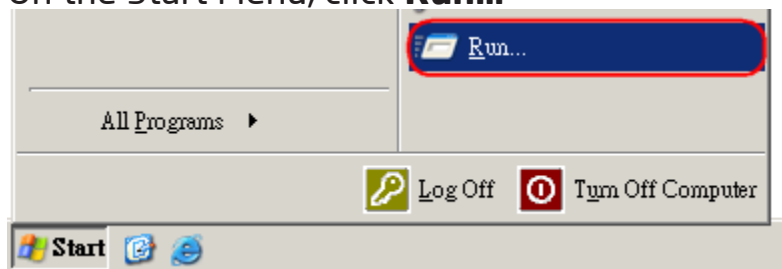

Type in **regedit** to start the Registry Editor

Press **Enter** or click on **OK**

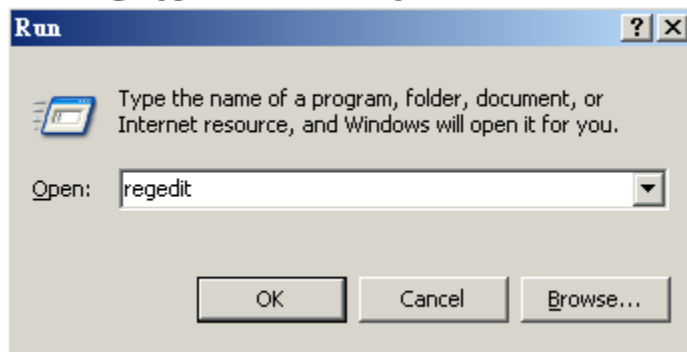


You have to add a new registry value to your XP system to enable **L2TP**.

Locate the registry **HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Rasman\Parameters** and add the following registry value to this key:

Value Name: **ProhibitIpSec**


Data Type: **REG_DWORD**

Value: **1**

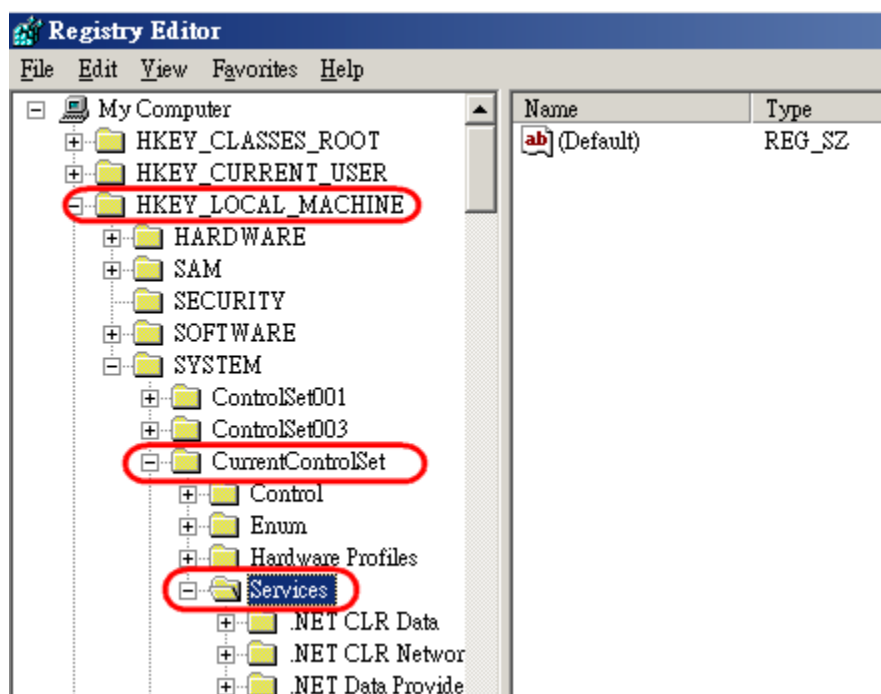


Right-click on the last node, "Parameters".

On the pop-up menu, select **New** and then **DWORD Value**.

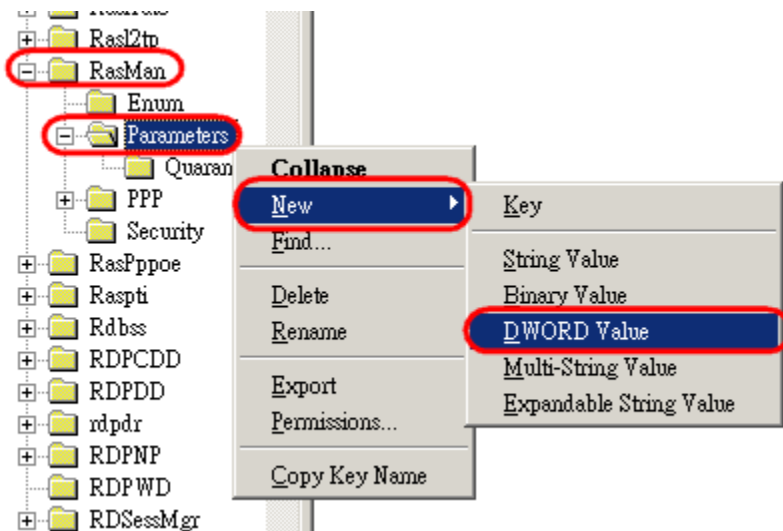


Type in **ProhibitIpSec** and press **Enter**

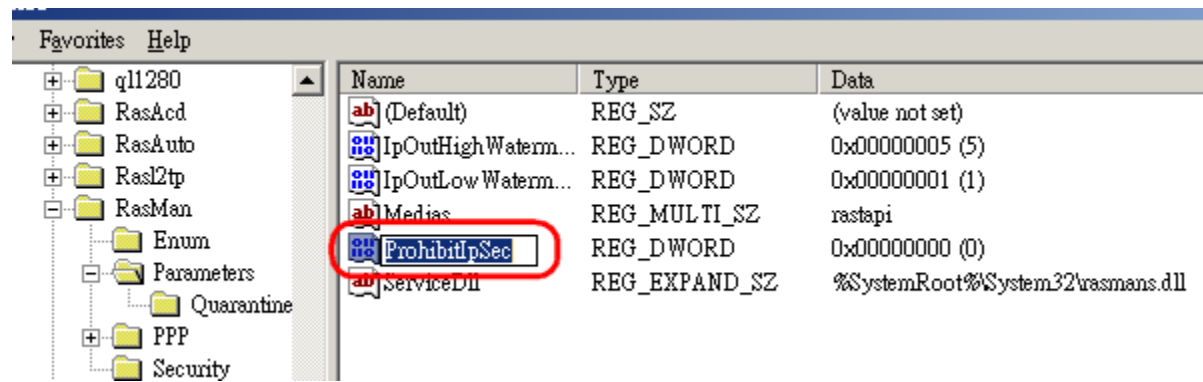


Double click on **ProhibitIpSec**.

In the pop-up window, enter **1** for Value data.

Click **OK** to complete.

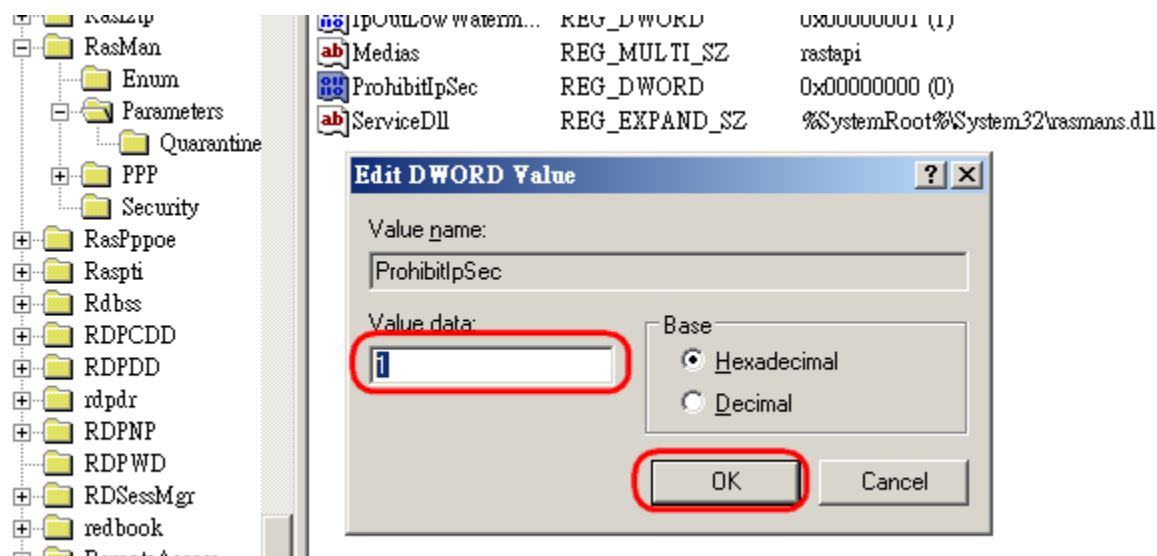

Your new registry should look like this.

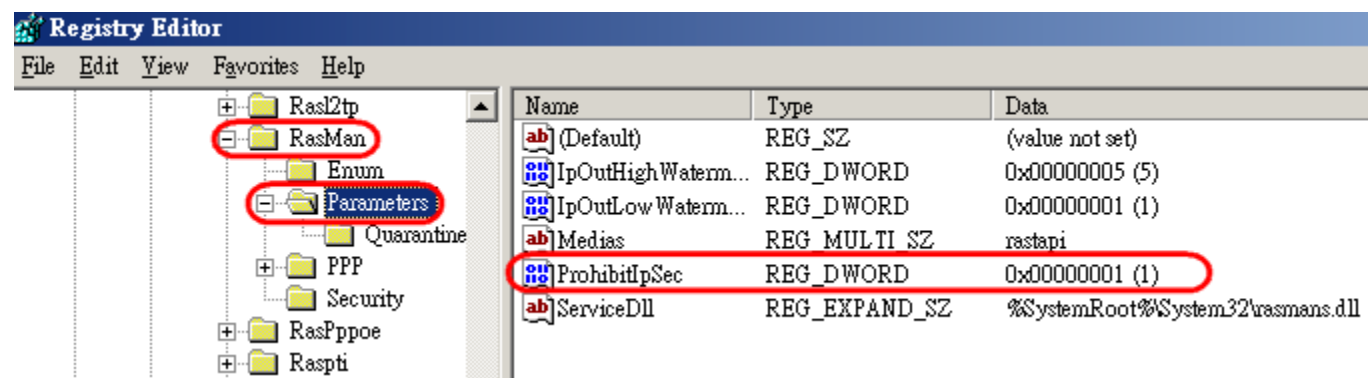


Close the Registry Editor.



IMPORTANT: Please Reboot your system now, to make the new setting affective.

Then, we have to turn off **IPSec service**.


In the Control Panel, find Administrative Tools and **double-click** on **Services**.

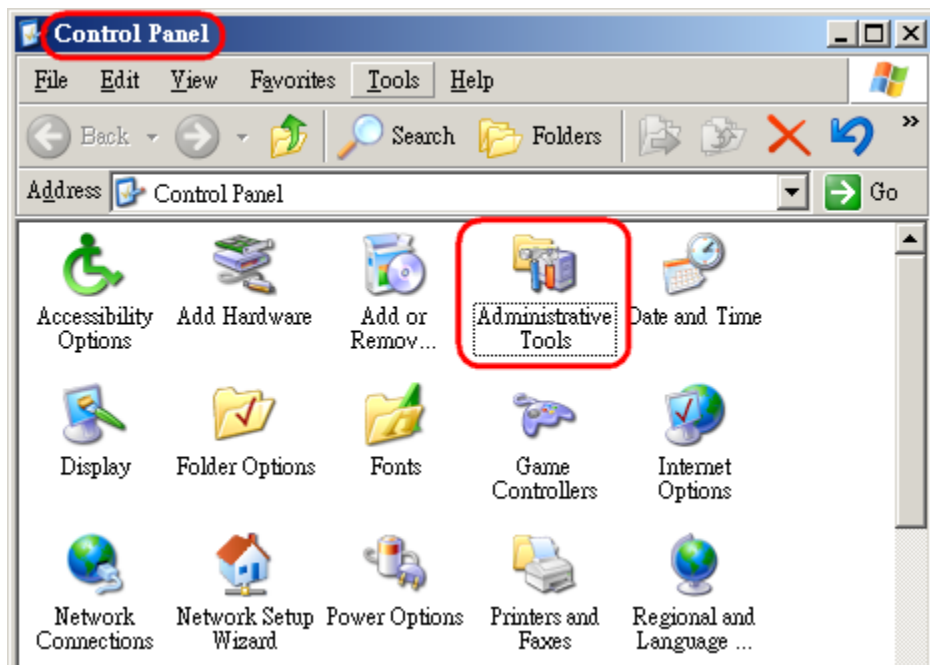

In the Services window, please find **IPSEC Services**.


Right-click on **IPSEC Services**.

On the pop-up menu, click on **Stop** (note that this service will start again if you reboot).

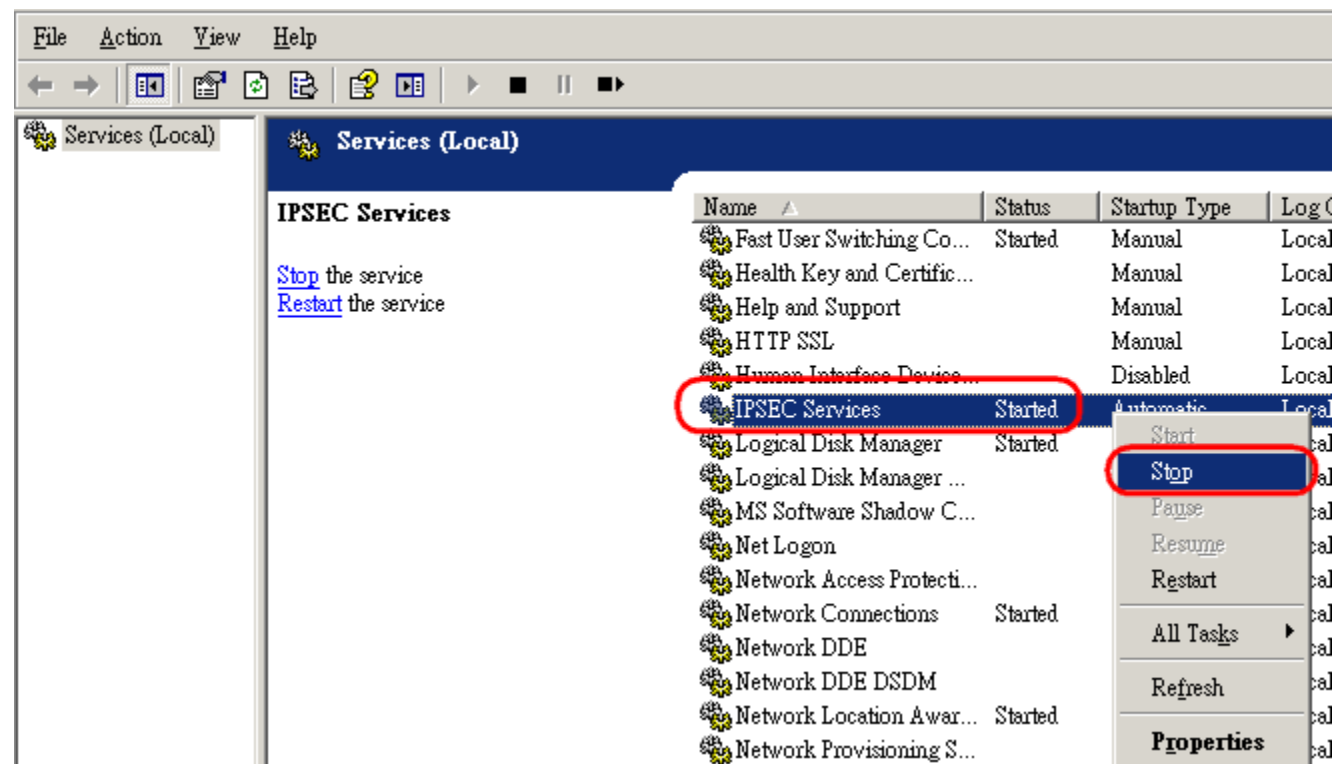

Once we have added the **ProhibitIpSec registry** and stop **IPSEC Services**, we can create the VPN connection for L2TP over IPSec now.

Start Menu → Control Panel → Network Connections → Net Connection Wizard

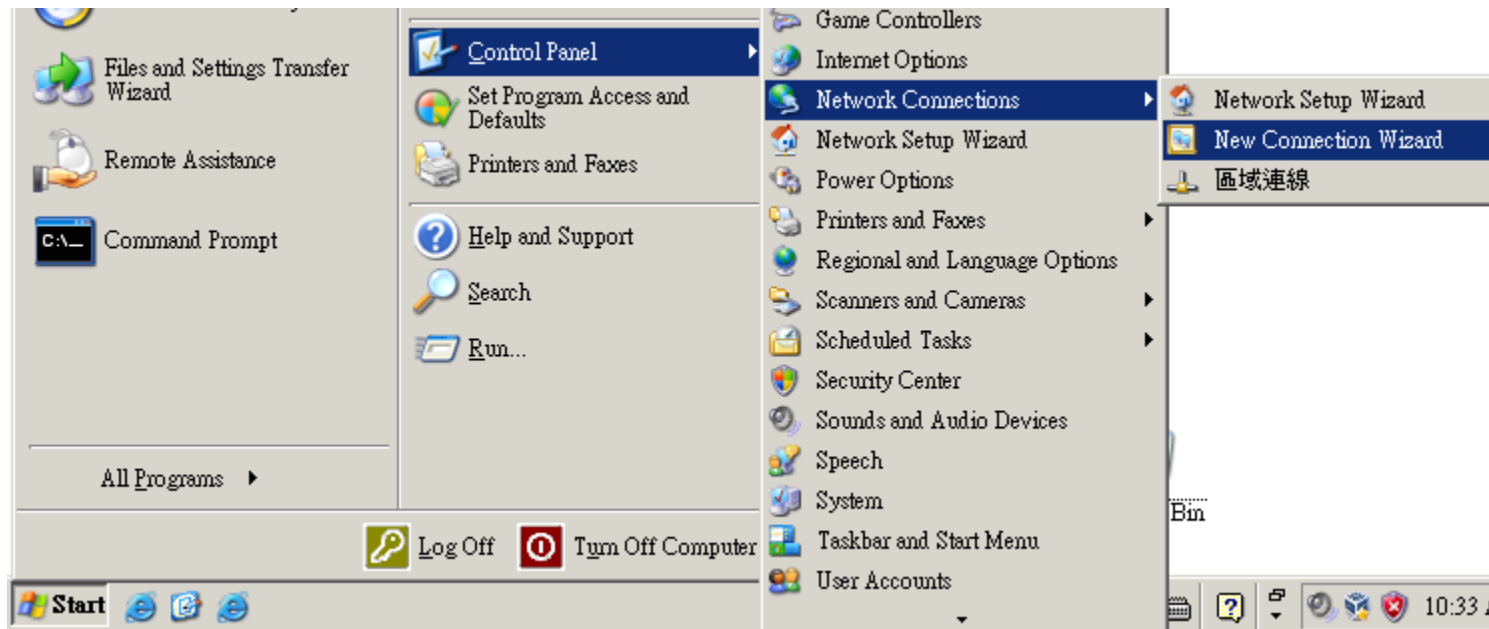


Click **Next** to proceed.




Select **Connect** to the network at my workplace.

Click **Next** to proceed.

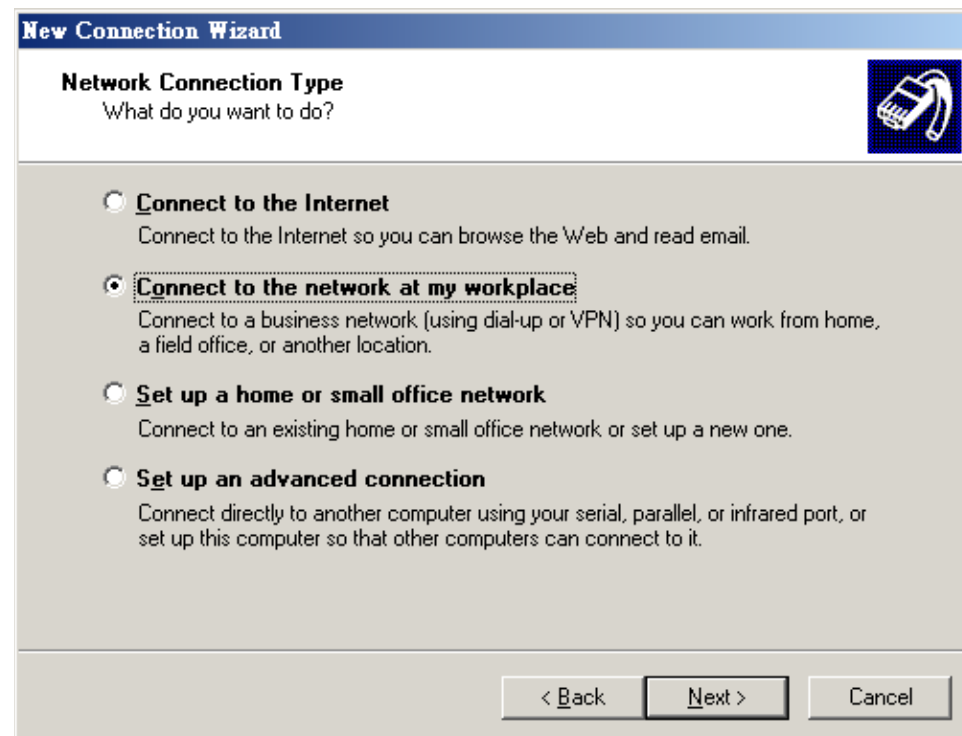


Select **Virtual Private Network connection**.

Click **Next** to proceed.

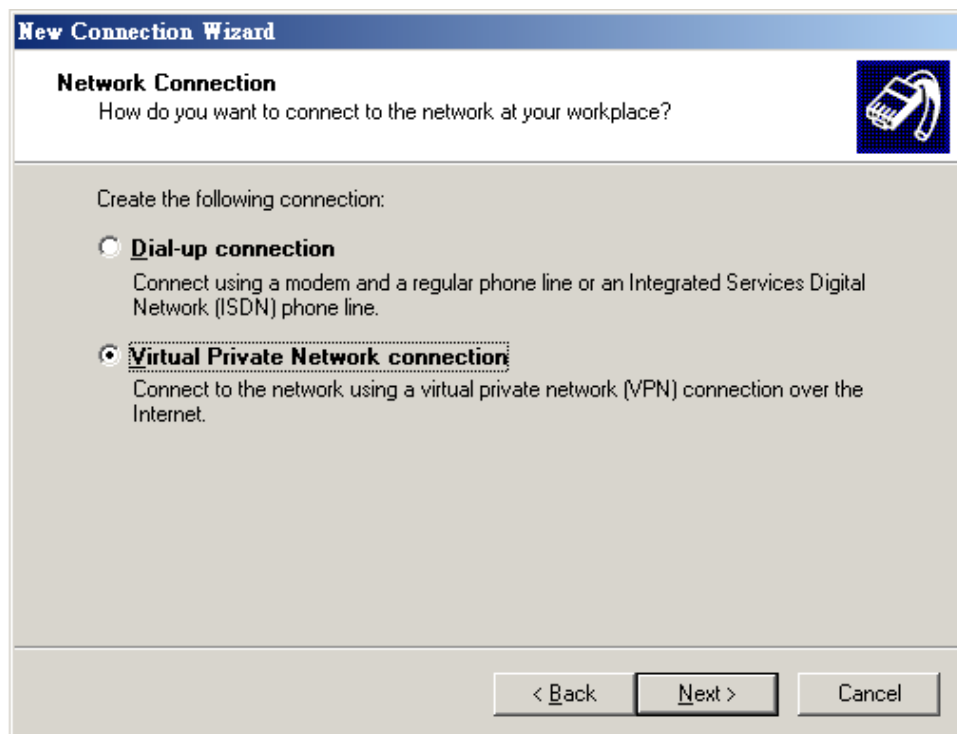


Enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click **Next** to proceed.

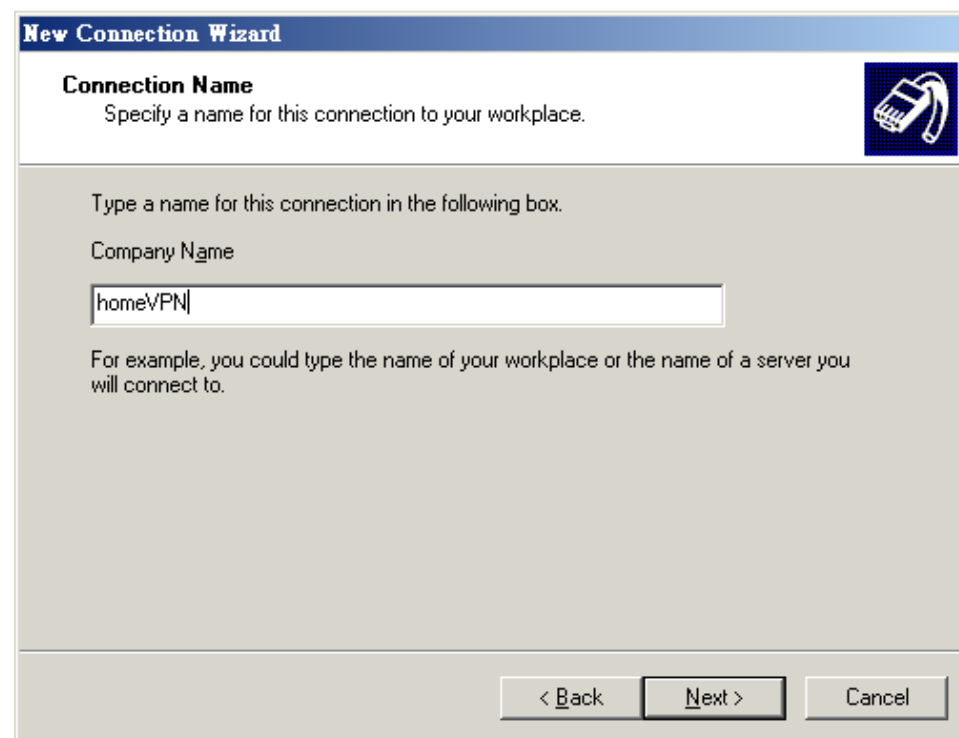

Choose **Do not dial the initial connection**.

Click **Next** to proceed.

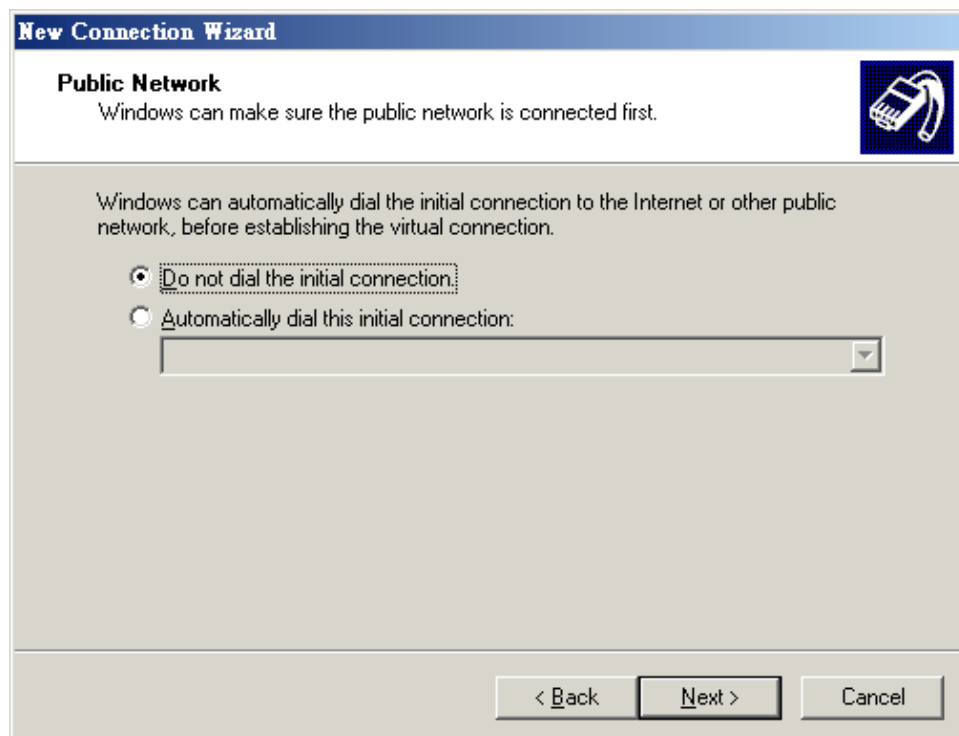

The screenshot shows the 'New Connection Wizard' window with the 'Public Network' tab selected. The window has a blue title bar and a blue icon of a network card. The main area is light gray. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

New Connection Wizard

Public Network
Windows can make sure the public network is connected first.

Windows can automatically dial the initial connection to the Internet or other public network, before establishing the virtual connection.


☒ Do not dial the initial connection.

☐ Automatically dial this initial connection:

< Back Next > Cancel

Please enter the DDNS name of your VPN Gateway.
In this example, we enter **0f9e76a.engeniusddns.com**.

Click **Next** to proceed.

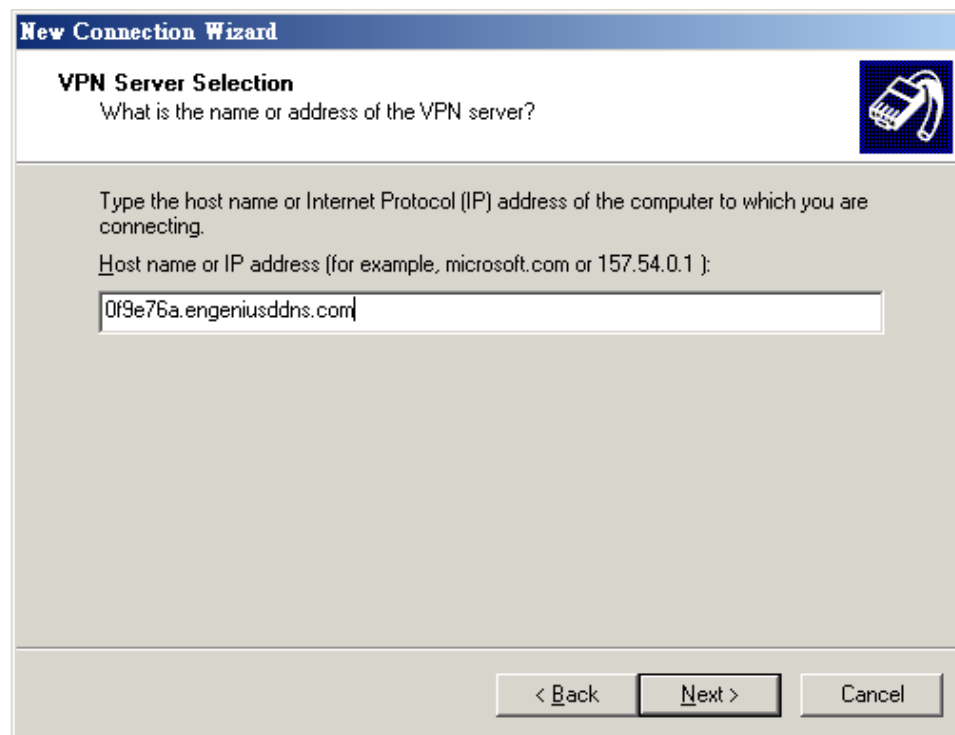

The screenshot shows the 'New Connection Wizard' window with the 'VPN Server Selection' tab selected. The window has a blue title bar and a blue icon of a network card. The main area is light gray. At the bottom, there are three buttons: '< Back', 'Next >', and 'Cancel'.

New Connection Wizard

VPN Server Selection
What is the name or address of the VPN server?

Type the host name or Internet Protocol (IP) address of the computer to which you are connecting.

Host name or IP address (for example, microsoft.com or 157.54.0.1):

0f9e76a.engeniusddns.com


< Back Next > Cancel

Select Add a shortcut to this connection to my desktop for easy access to establish a connection.

Click **Finish** to complete the setup.



Click on **Properties**.

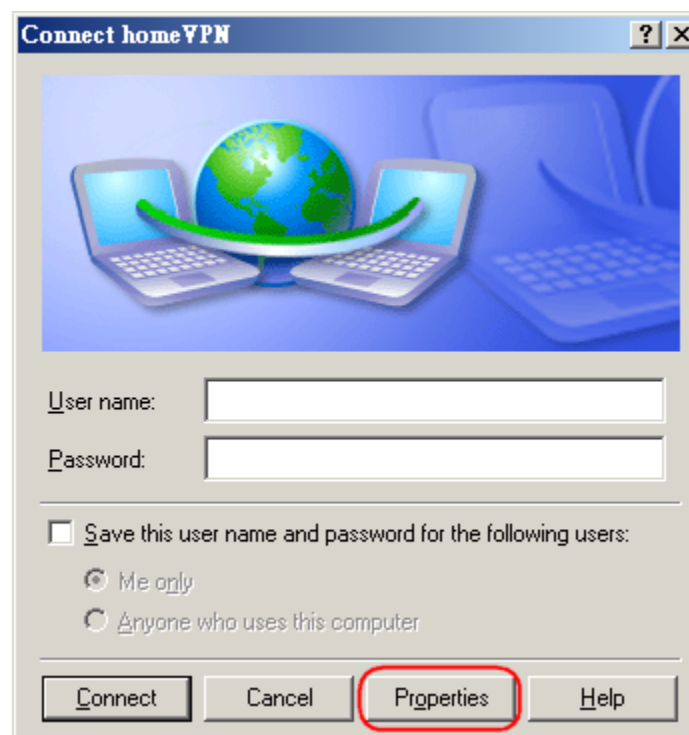


Under **Networking** tab, select **L2TP IPsec VPN**.

Please note that since XP does not support pure L2TP, we have to choose **L2TP IPsec VPN**.

This is the reason why we need to turn off **IPSEC Service** at the beginning of this chapter.

Click **OK** to close the window.

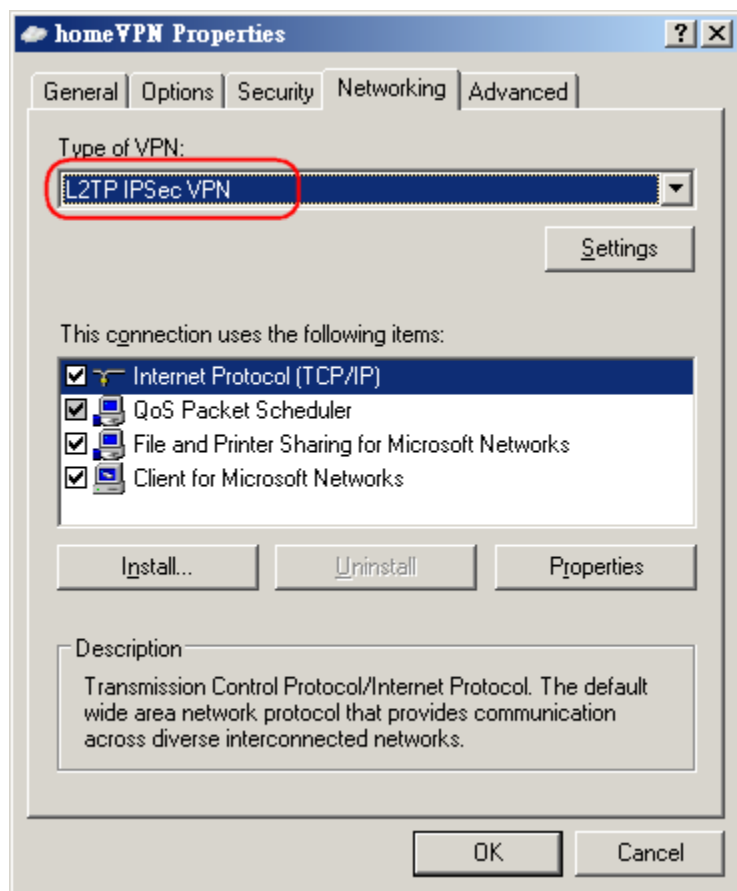


Under **Security** tab.


Select **Typical** (recommended settings)

Uncheck **Require data encryption**.

Click **OK** when done.

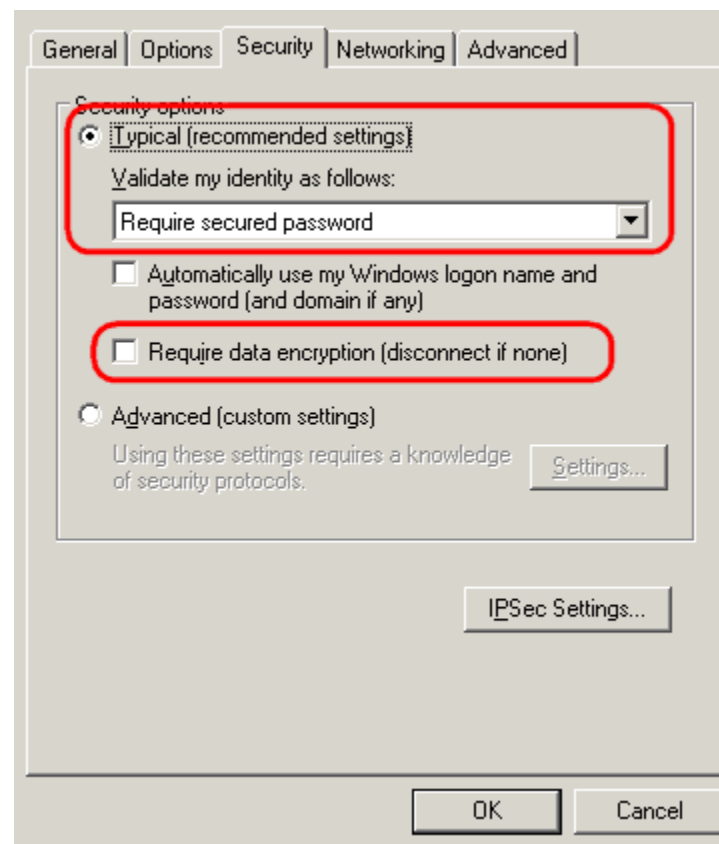


Click **OK** to complete

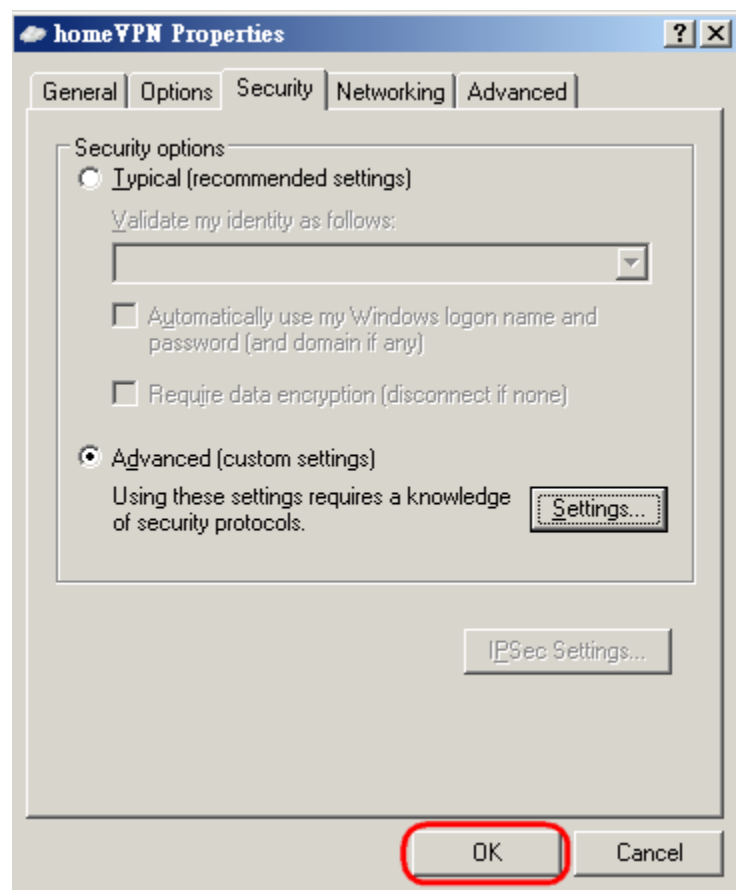

Enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.

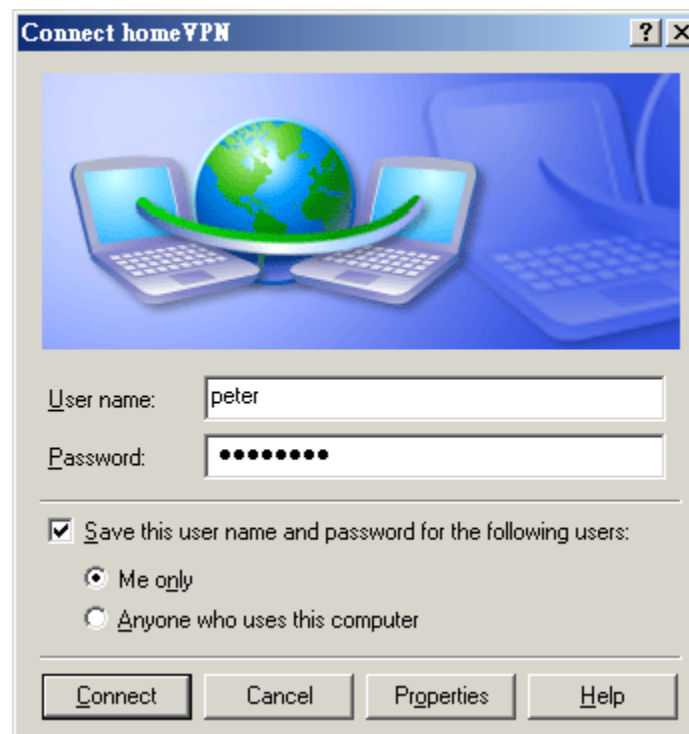


The client device can now access to the internal FTP server **192.168.0.116** over the Internet.


Windows Vista

As part of Windows 7 limitation, using L2TP requires extra setting. To be able to use L2TP VPN tunnel, IKE AuthIP **IPsec service** on the client device must be **disabled**. Please note that disabling this service may affect other IKE/IPsec dependent applications.

Click on Windows **Start** icon, type in services and press enter to open **services** window.

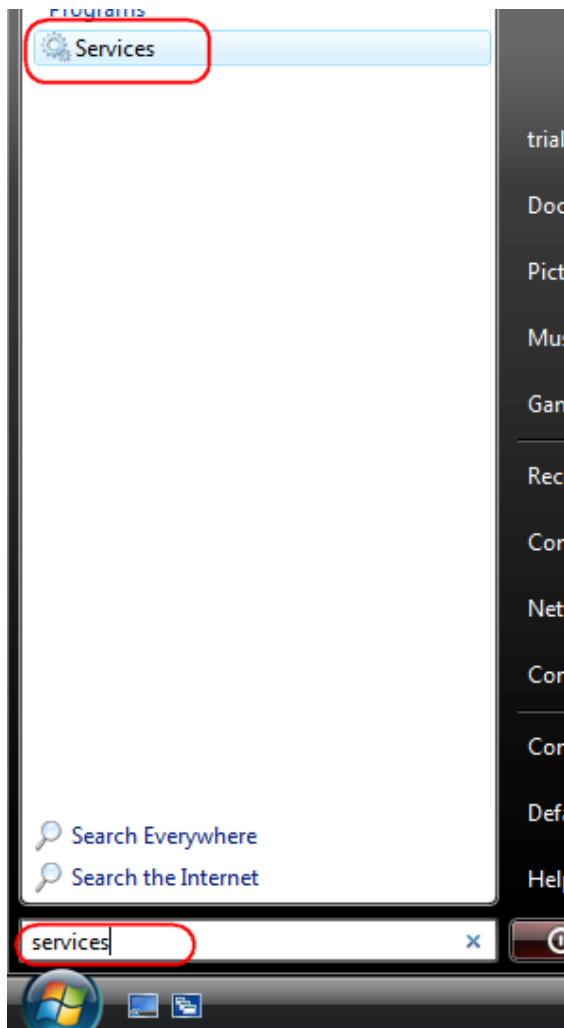

Right-click on **IKE AuthIP IPsec Keying Modules** and choose **Properties**.


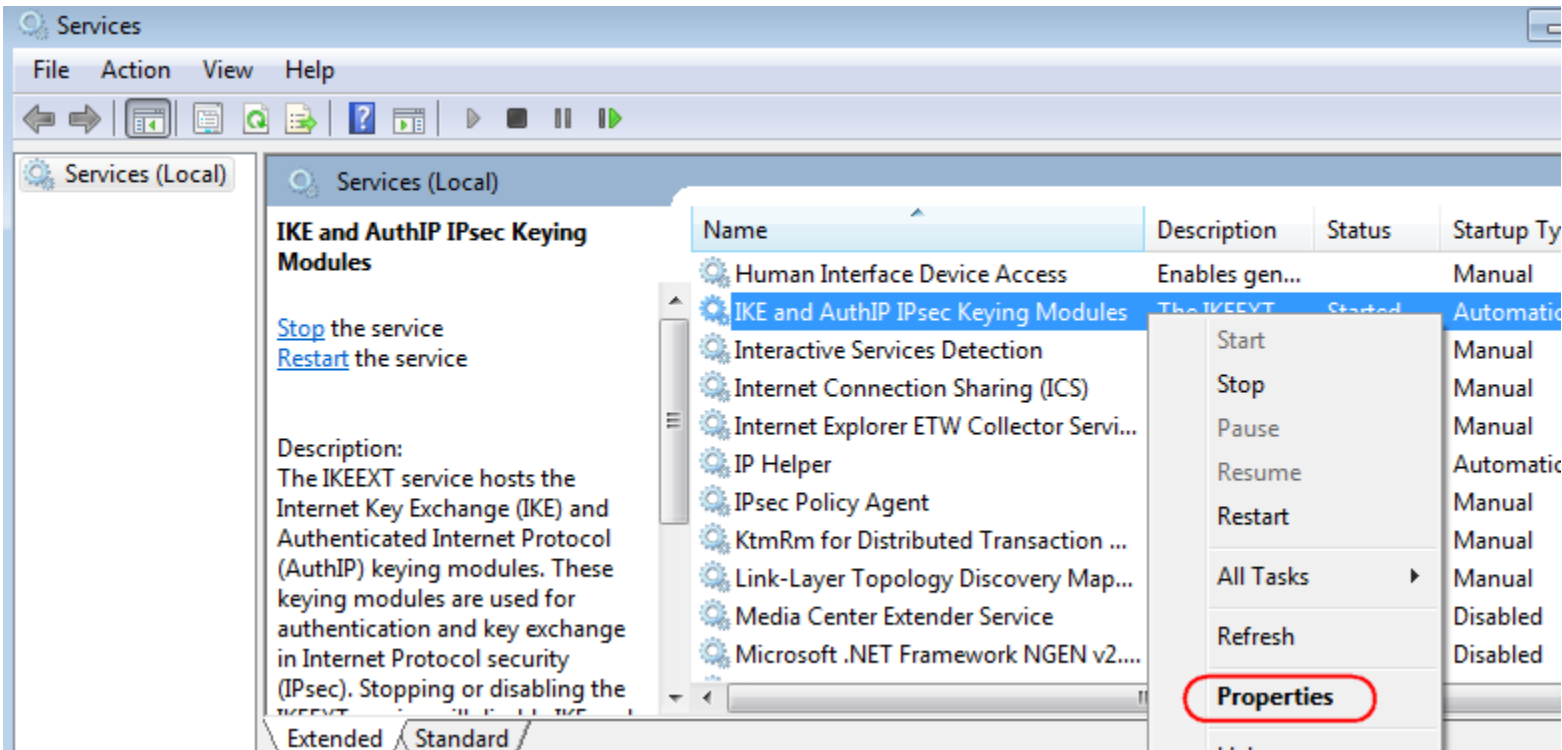


For Startup type choose **Disabled**.

Then click on **Stop** to stop the service immediately.


Click **Apply** to apply the changes.

Finally, click **OK** to complete.

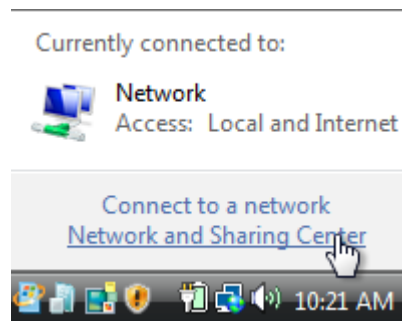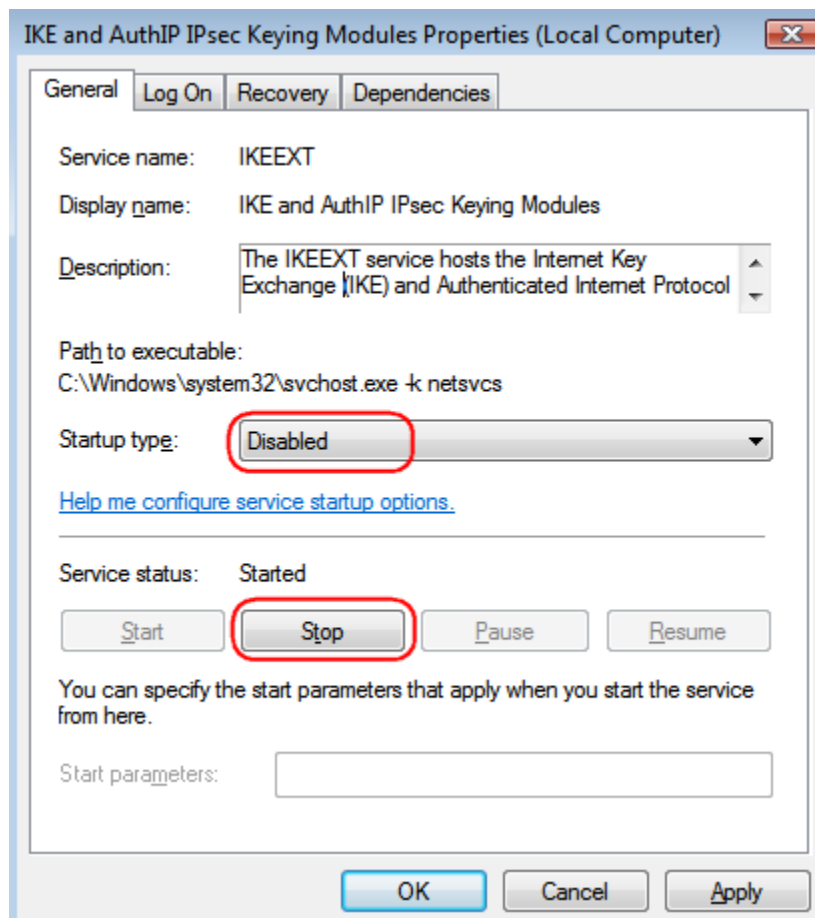


On the Task Bar , right click on the network interface icon  **Left-Click** on **Network and Sharing Center**

Click on **Set up a connection or network**

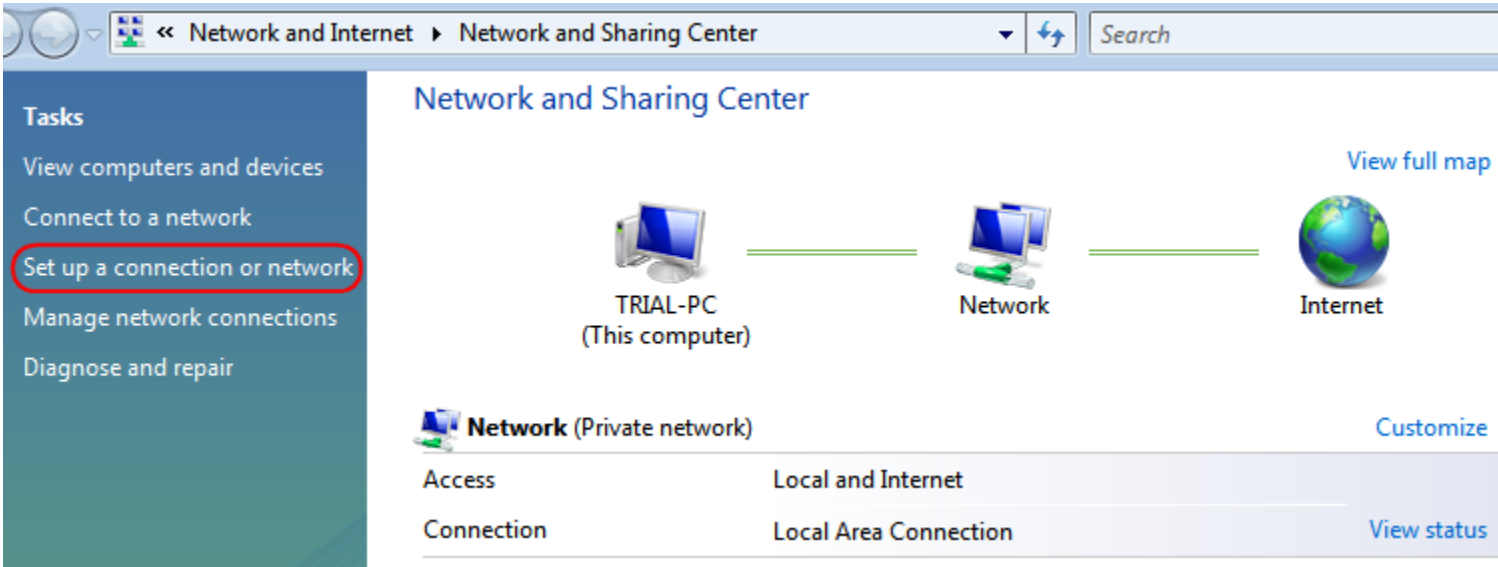


Choose **Connect to a workplace** from the option menu.

Click on Next to proceed.

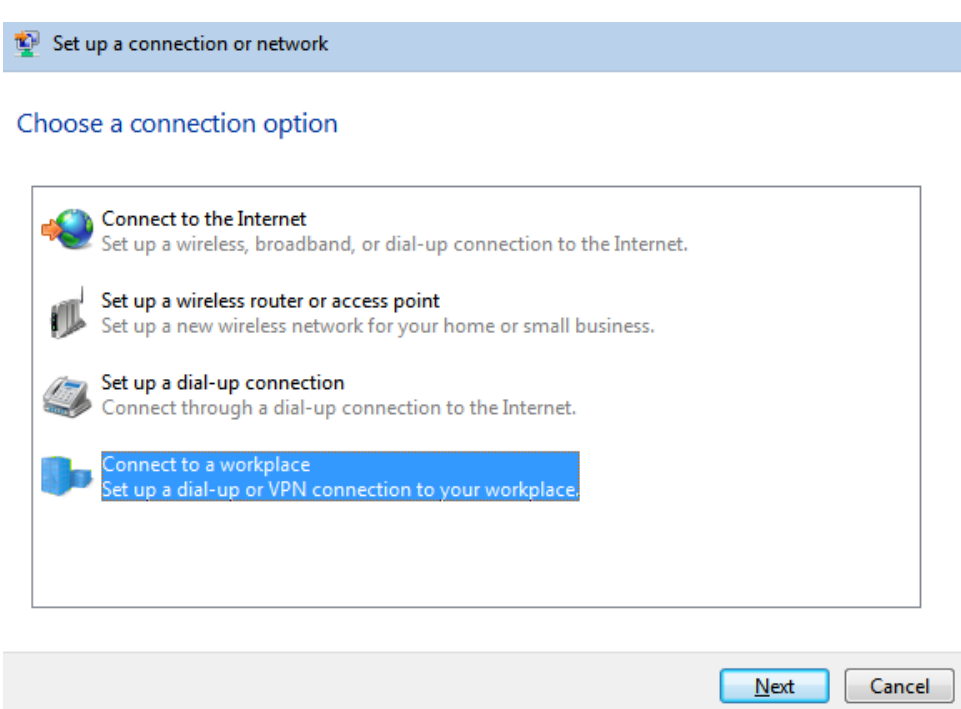

Choose **Use my Internet connection (VPN)** from the option menu.

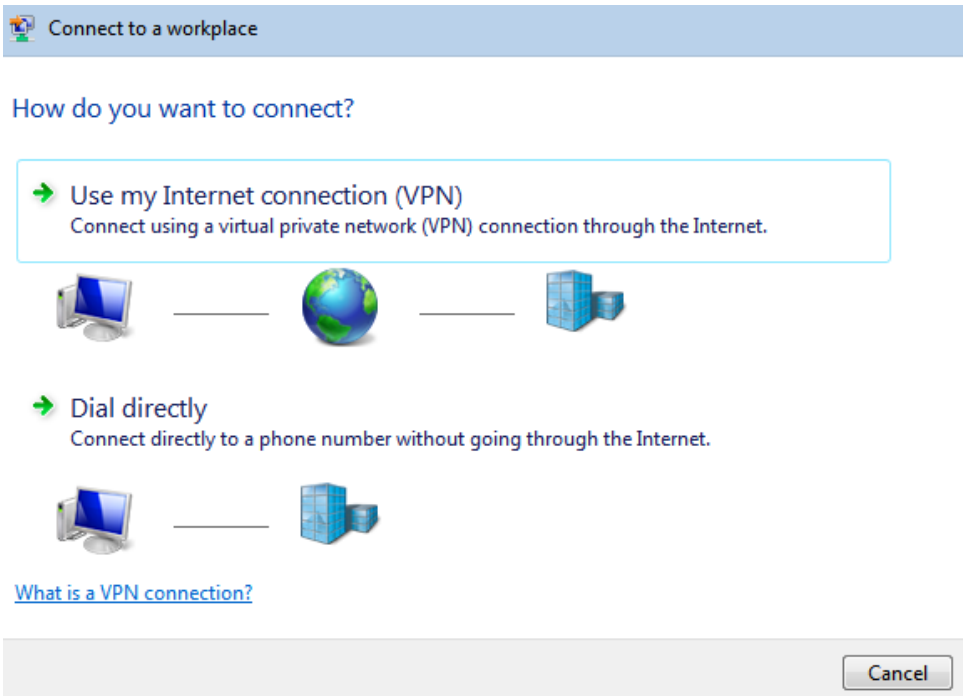


Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox **Don't connect now; just set it up so I can connect later**

Click on **Next** to proceed.

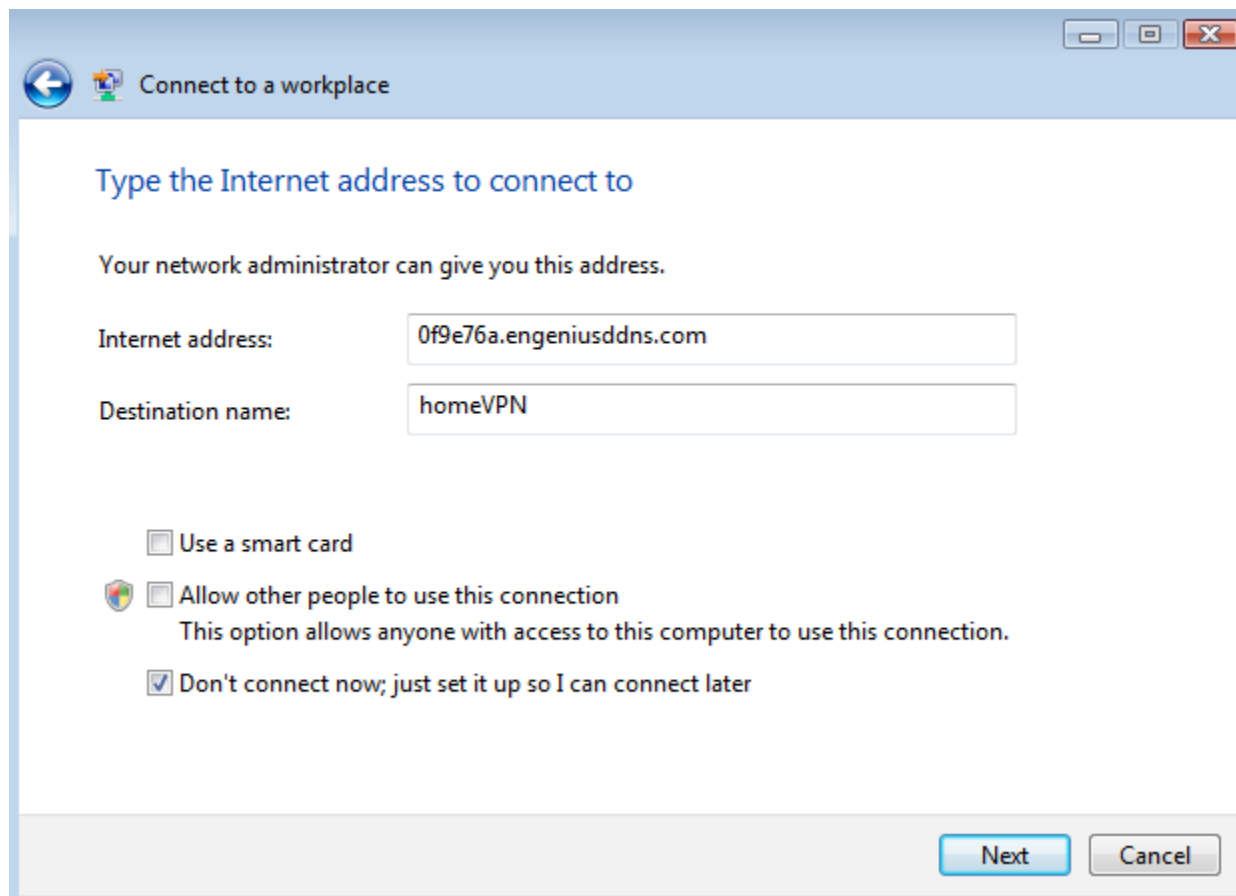

Connect to a workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

Now the profile has been created. Click **Close to complete.**

 Connect to a workplace

Type your user name and password

User name:

Password:

☐ Show characters

☐ Remember this password

Domain (optional):

 Connect to a workplace

The connection is ready to use



Back to **Network and Sharing Center**, Click on **Manage network connections**.

Tasks

View computers and devices

Connect to a network

Set up a connection or network

Manage network connections

Diagnose and repair

Network and Sharing Center



TRIAL-PC
(This computer)



Network



Internet

View full map




Network (Private network)

Customize


Access	Local and Internet
Connection	Local Area Connection

View status


In the **Network Connections** window, find **homeVPN** (the new created VPN interface).

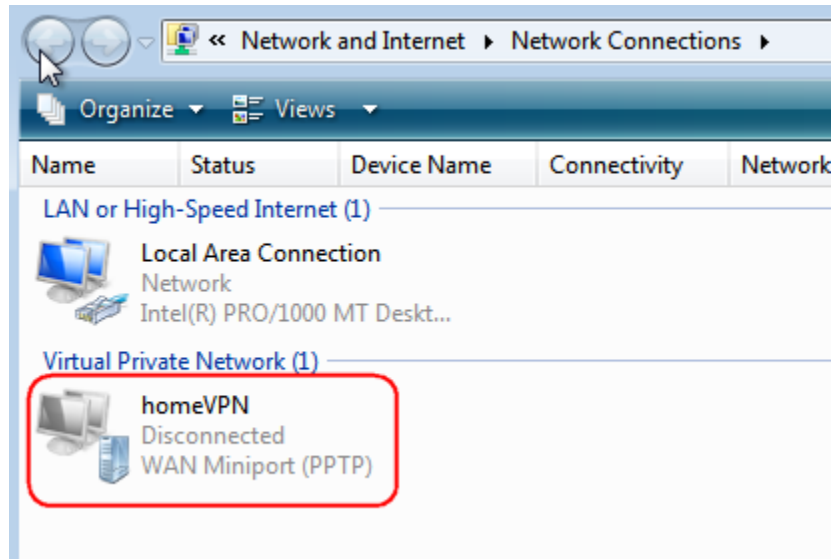


Right-click on **homeVPN**, and choose **Properties**.

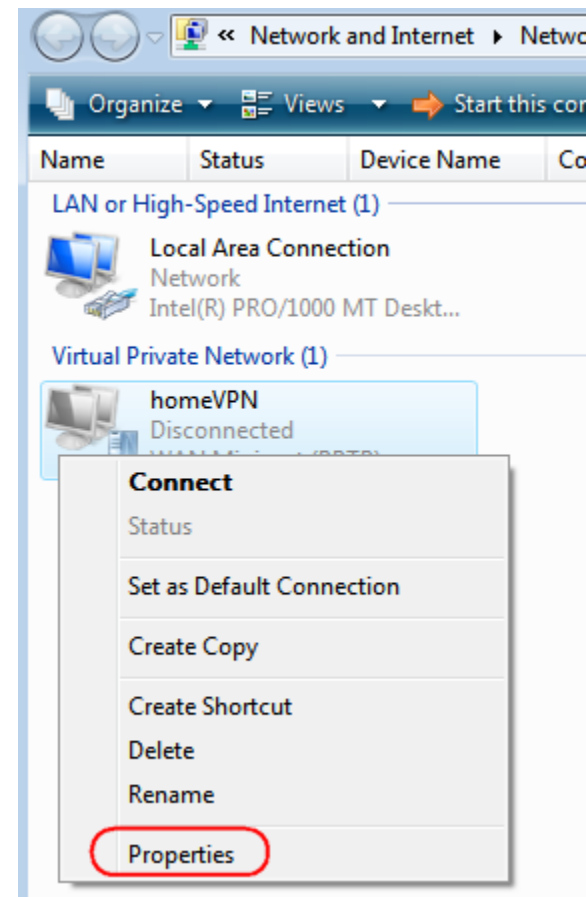


Click **Security** tab in the Properties window.
Uncheck **Require data encryption** (disconnect if none)

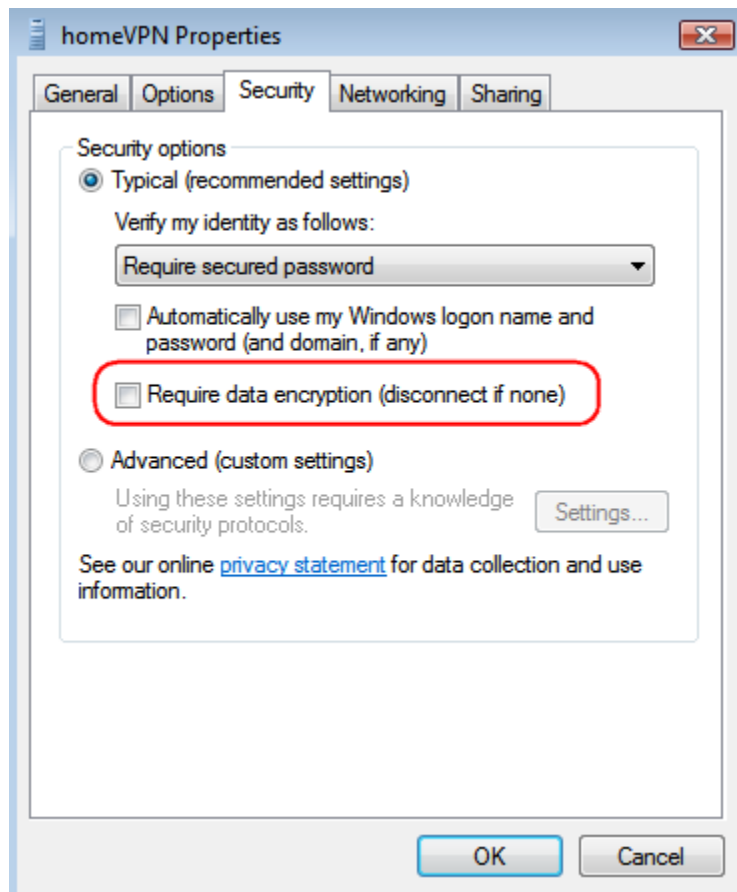

Back to **Properties window**, click on **Networking** tab.
For VPN type, choose **L2TP IPsec VPN**.

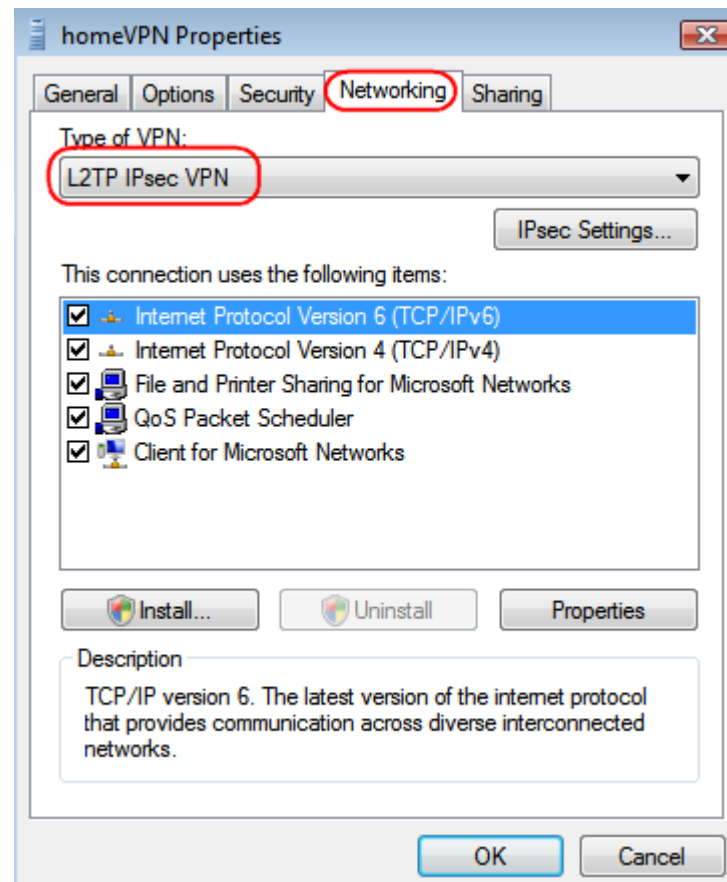


Back to **Properties window**, click on **OK** to complete.

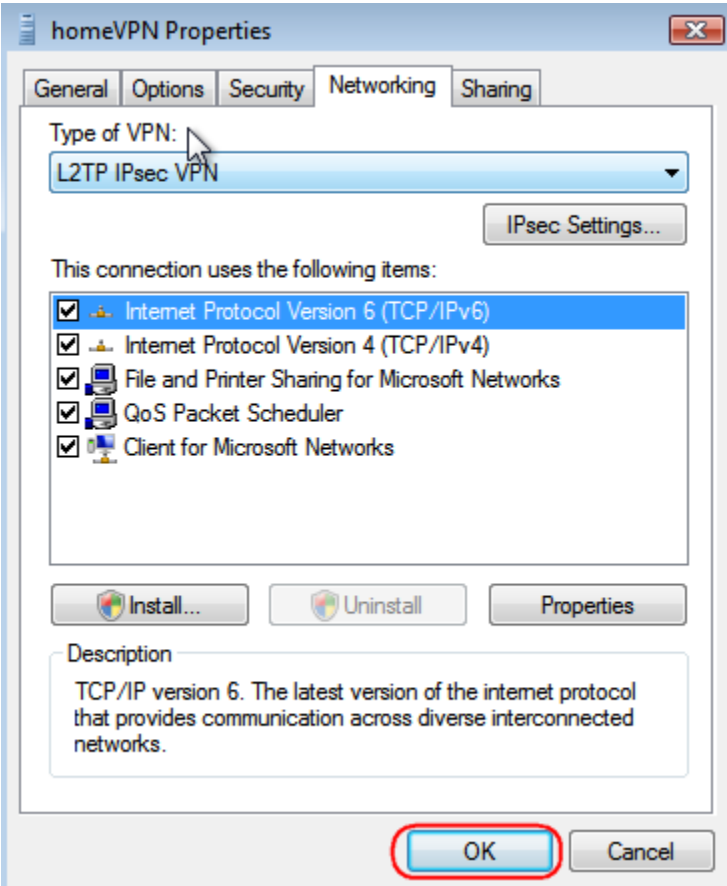


Back to **Network Connections**, find **homeVPN** and **right-click** on the icon.

Click **Connect** to establish the VPN tunnel.

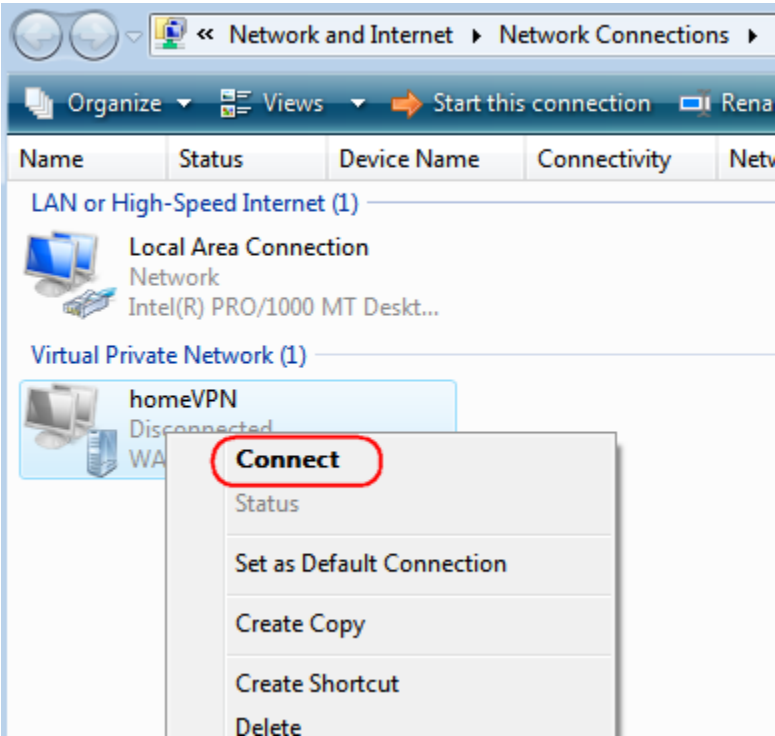


A window prompts for user verification, simply enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.

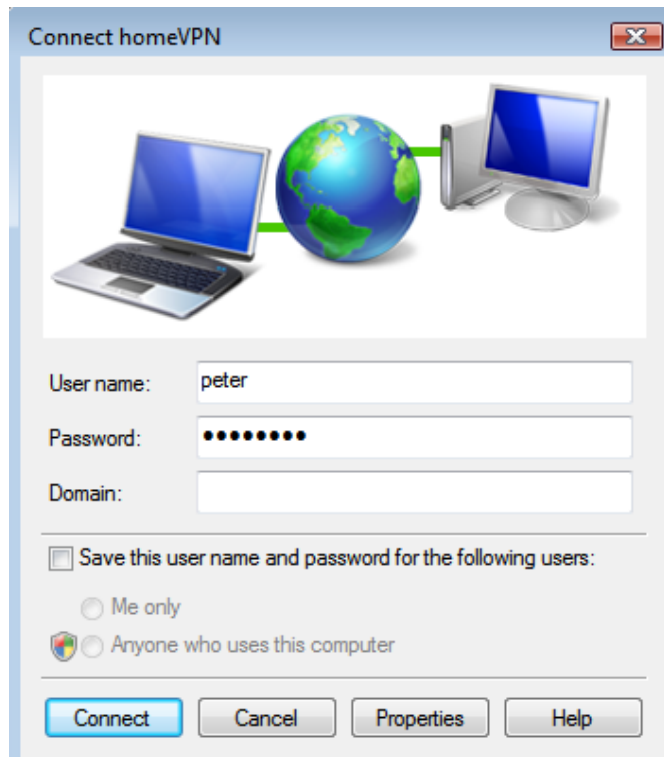


The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

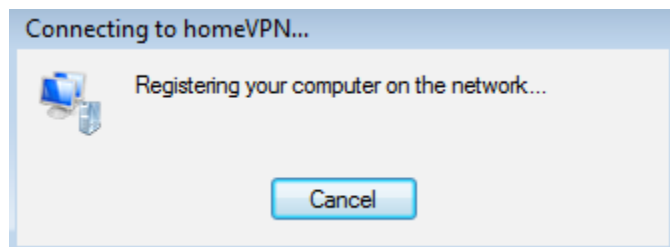


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

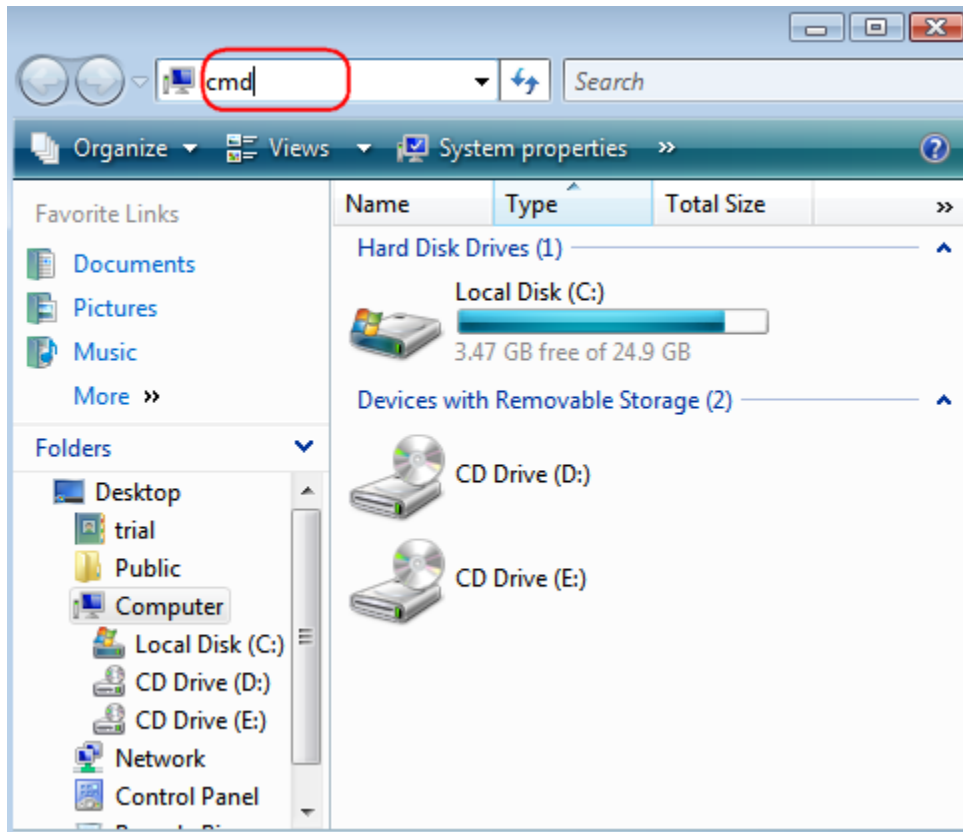

Under **Command Prompt** type in ping **192.168.0.116**. Replies should be received as shown below.

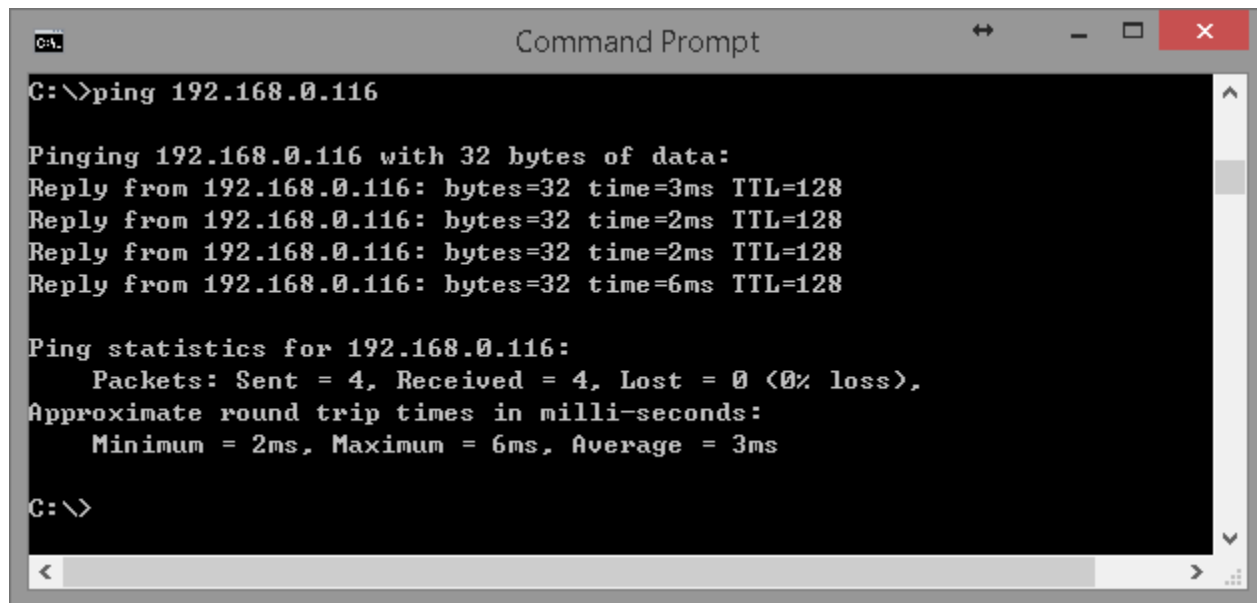

```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128


Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```

Windows 7


As part of Windows 7 limitation, using L2TP requires extra setting. To be able to use L2TP VPN tunnel, **IKE AuthIPsec service** on the client device must be **disabled**. Please note that disabling this service may affect other IEK/IPsec dependent applications.

Click on **Windows Start** icon, type in **services** and press **enter** to open services window.

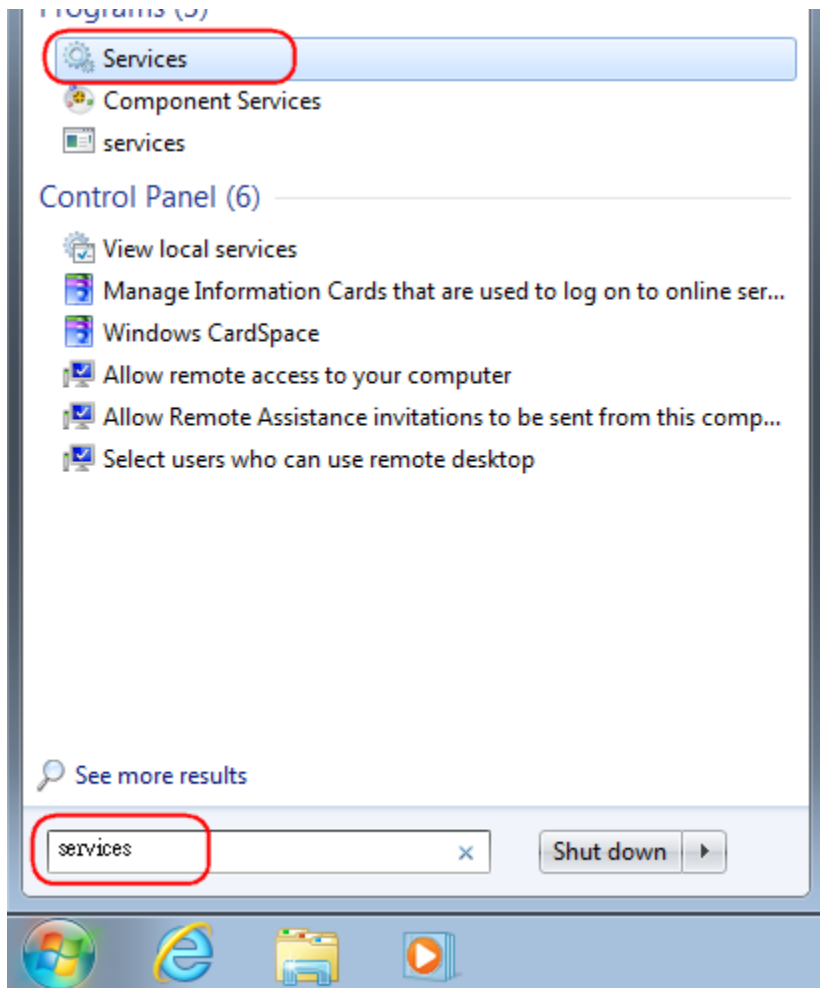



In the **Services window**, right click on the service name **IEK and AuthIP IPsec Keying Modules**

Click on **Properties**.

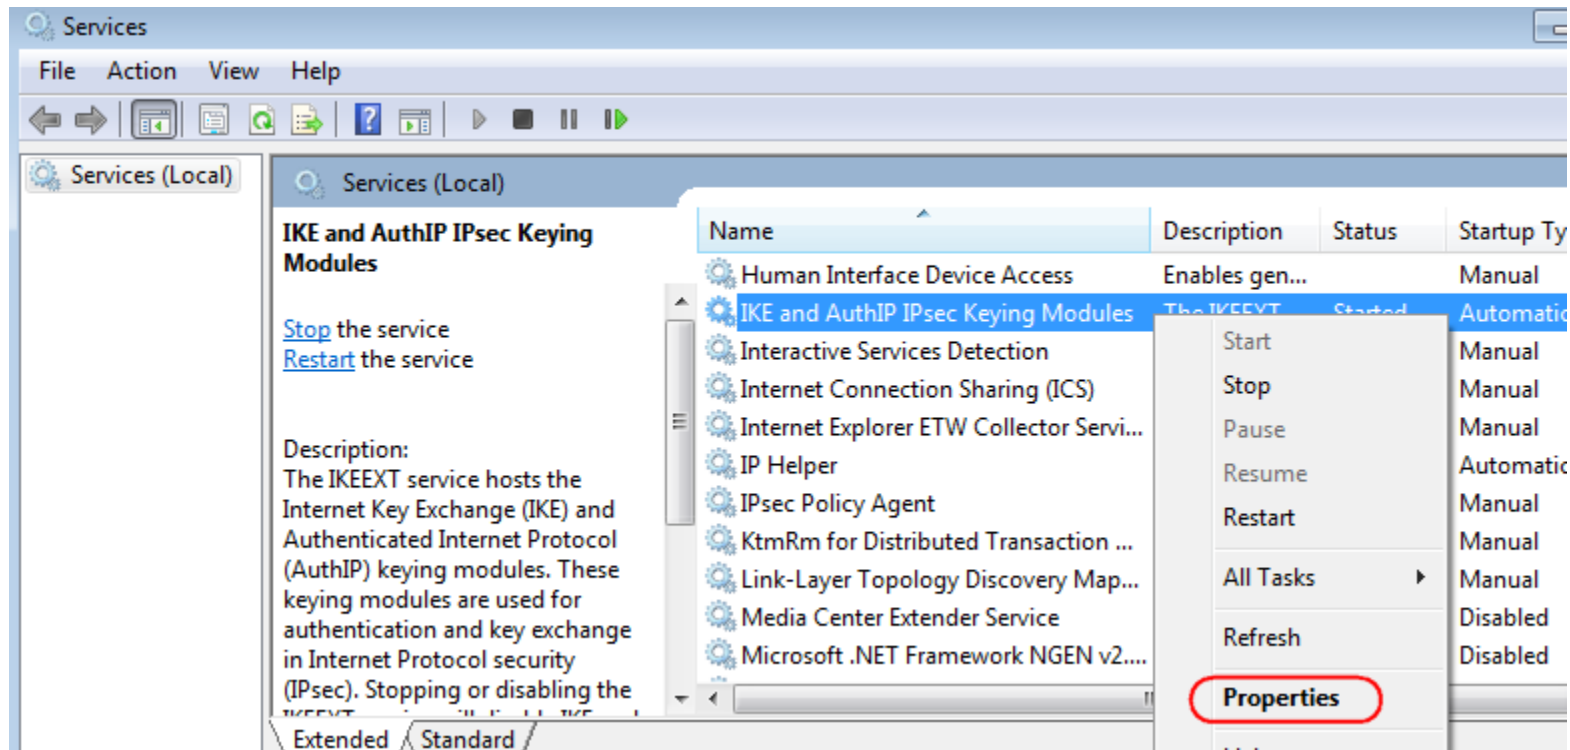


At **Startup type**, set to **Disabled** and press **OK** or **Apply** to apply the change.
The **IKE AuthIP IPsec** service is now disabled.

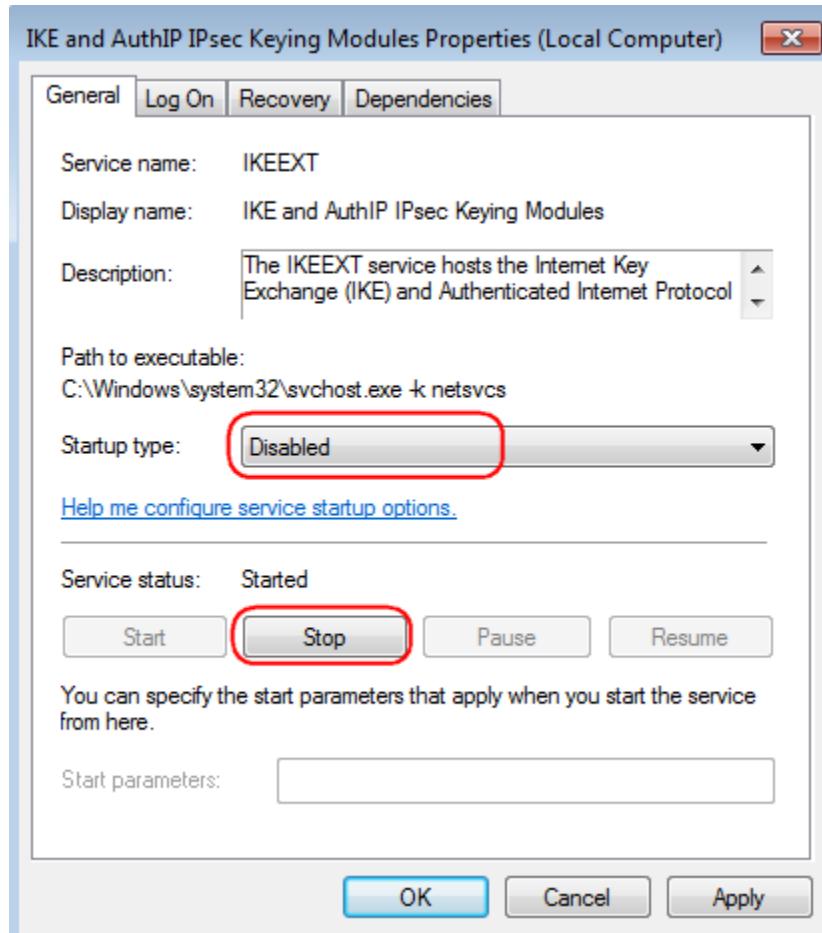

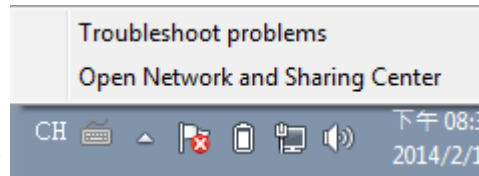

On the Task Bar , **right click** on the network interface icon  **Left-Click** on **Open Network and Sharing Center**.

Under **Network and Sharing Center**, click on **Set up a new connection or network**.

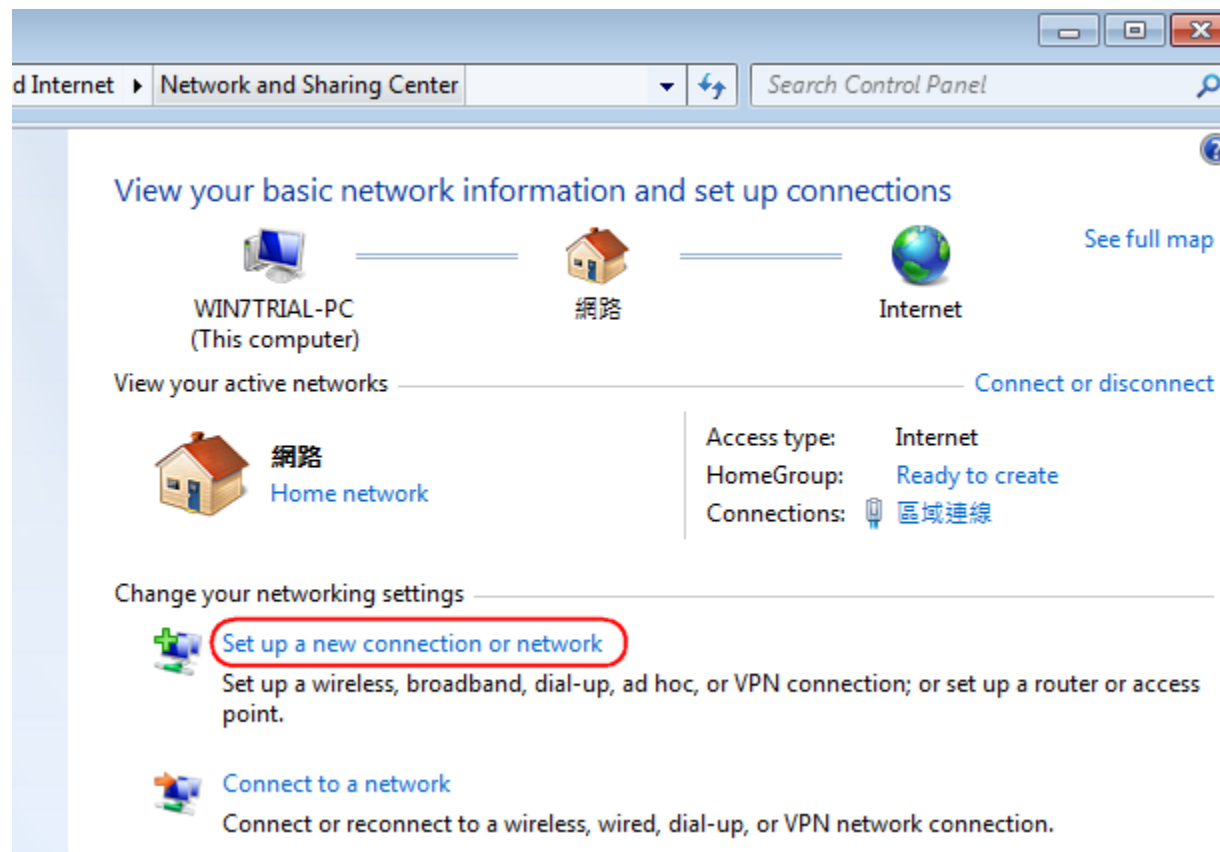

Choose **Connect to a workplace** from the option menu.

Click on **Next** to proceed.

Set Up a Connection or Network

Choose a connection option

Connect to the Internet
Set up a wireless, broadband, or dial-up connection to the Internet.

Set up a new network
Configure a new router or access point.

Connect to a workplace
Set up a dial-up or VPN connection to your workplace.

Set up a dial-up connection
Connect to the Internet using a dial-up connection.

Next

Cancel

Click **Use my Internet connection (VPN)**

Connect to a Workplace

How do you want to connect?

Use my Internet connection (VPN)
Connect using a virtual private network (VPN) connection through the Internet.

Dial directly
Connect directly to a phone number without going through the Internet.

[What is a VPN connection?](#)


Cancel

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox **Don't connect now; just set it up so I can connect later**

Click on **Next** to proceed.

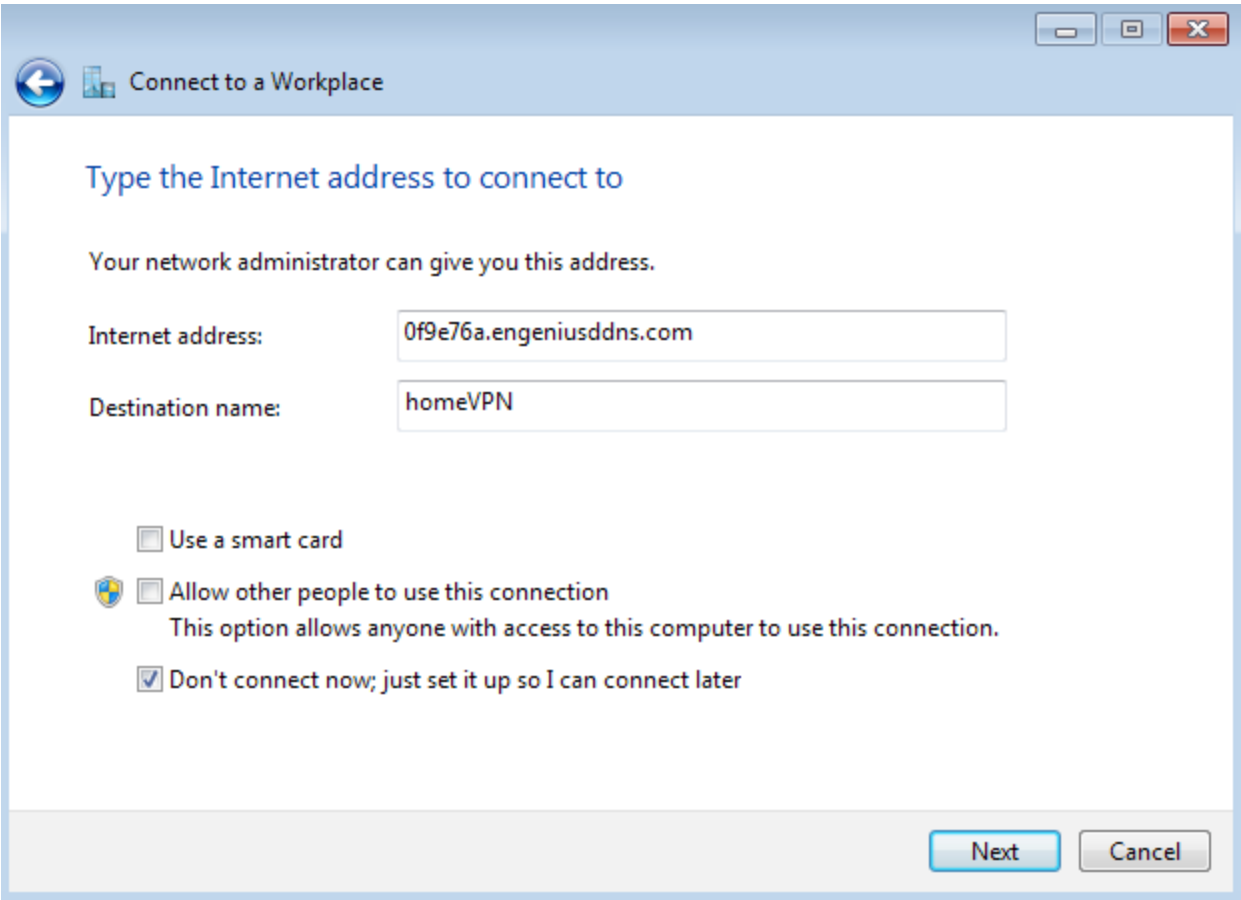

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

Click **Close** to finish.

The connection is ready to use




 Connect now


Close

Go back to **Network and Sharing Center**

Click on **Change adapter settings** to view all network adapters.

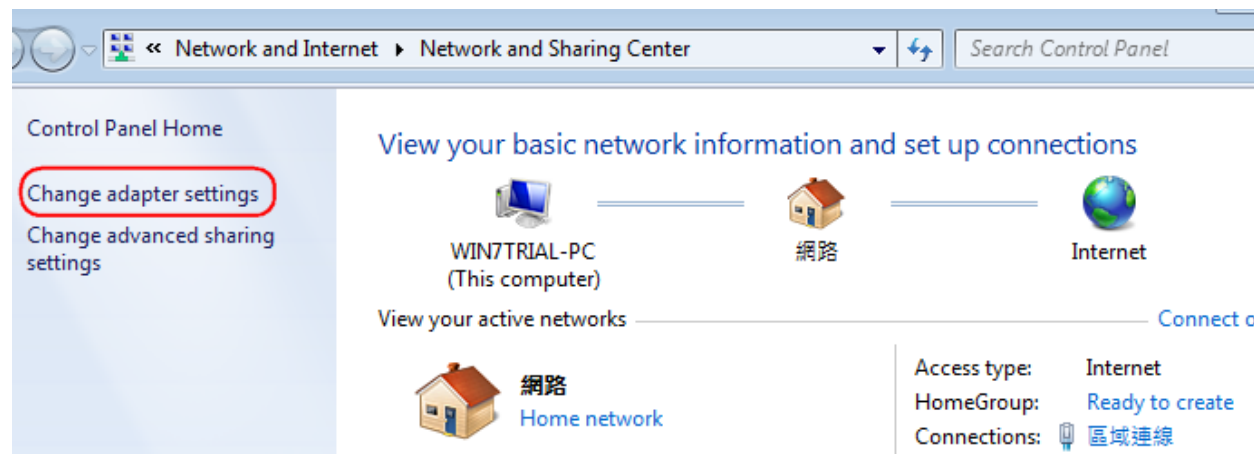

In the **Network Connections window**, find **homeVPN** (the new created VPN interface) and **right-click** on it. In the pop-up menu, click on **Properties**.

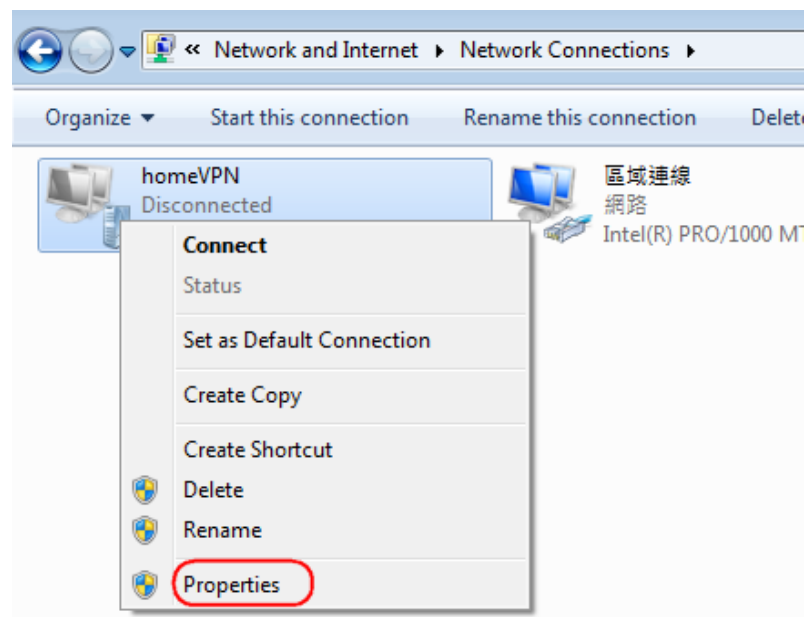


In the **Properties window**, click on **Security** tab.

Change Type of VPN to **Layer 2 Tunneling Protocol with IPsec** (L2TP/IPSec)


Change **Data encryption** to **No encryption allowed** (server will disconnect if it requires encryption)

Click **OK** to apply the change

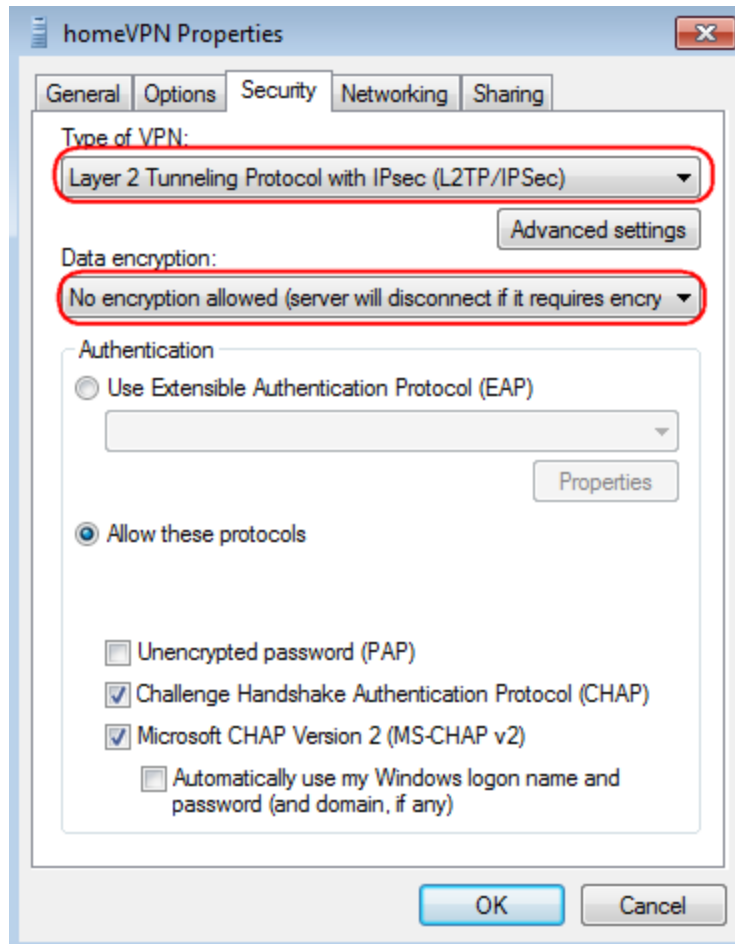

Back to **Network Connections**, find **homeVPN** and **right-click** on the icon.

Click **Connect** to establish the VPN tunnel.

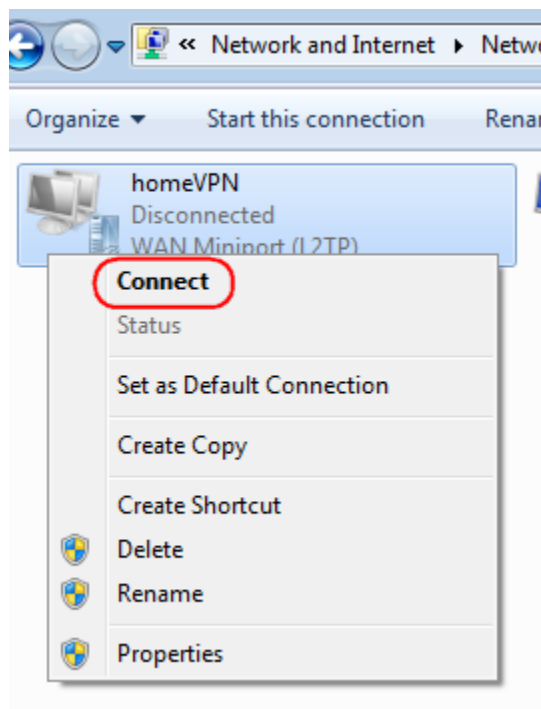


A window prompts for user verification, simply enter **peter** for user name and **ax123456** for the password.


Click **Connect** to start connection.



Depends on the location and network traffic of your region this may take a while.

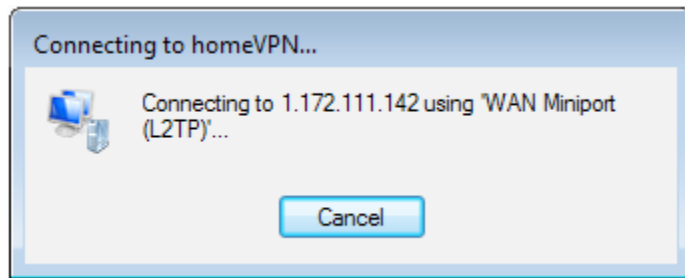


Once VPN tunnel is established successfully **homeVPN** will be marked **Connected**.
The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

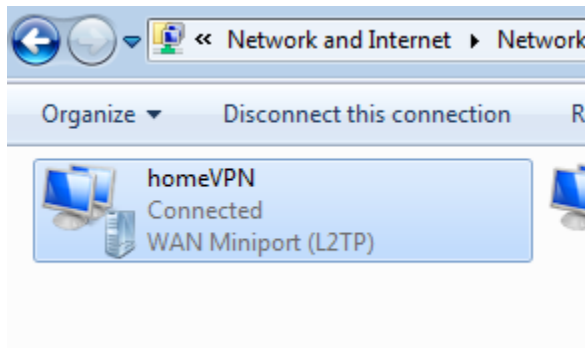


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

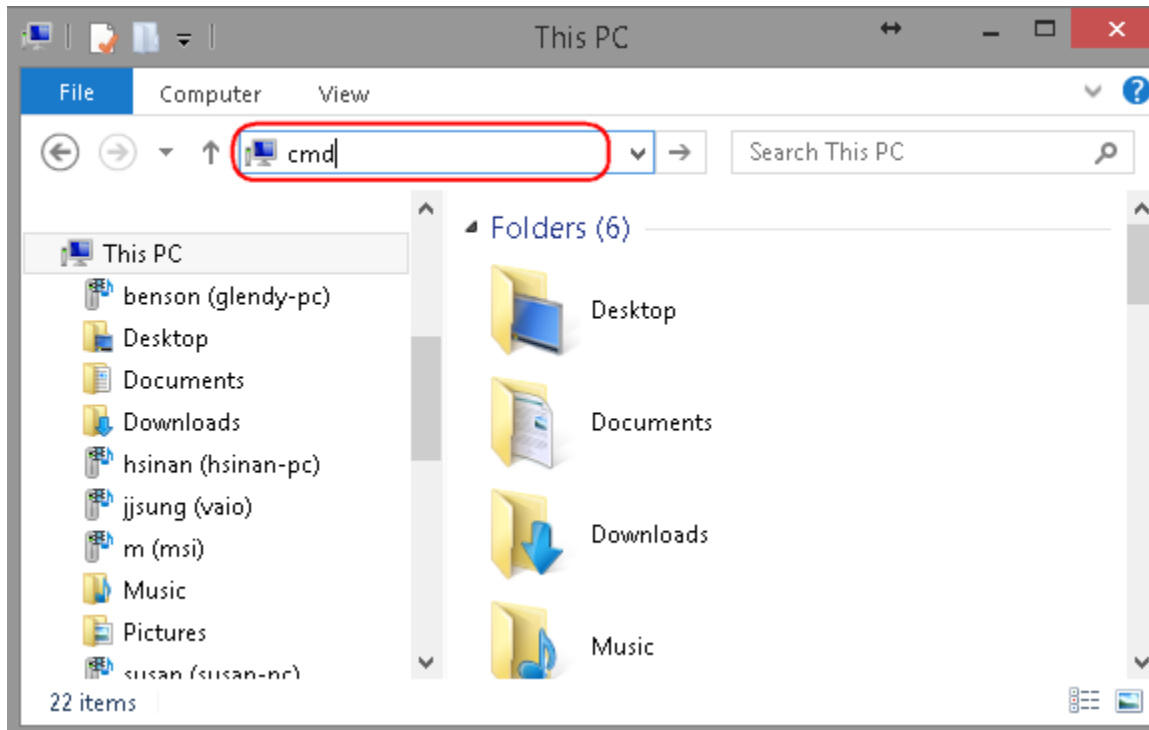

Under **Command Prompt type** in ping **192.168.0.116**. Replies should be received as shown below.

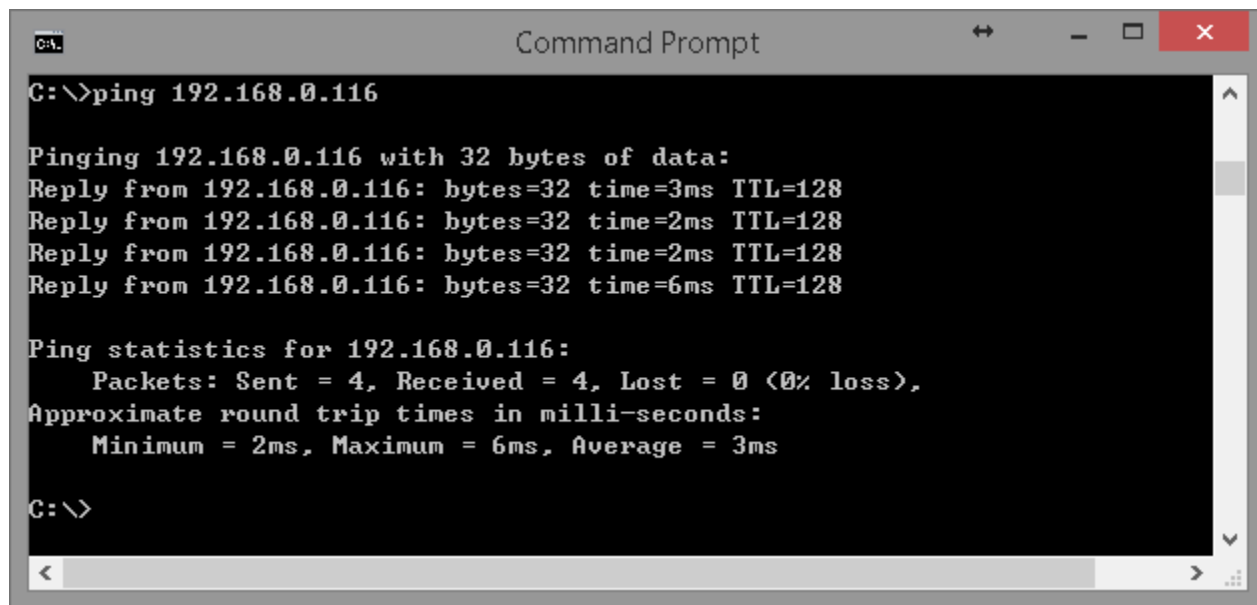


```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```


Windows 8

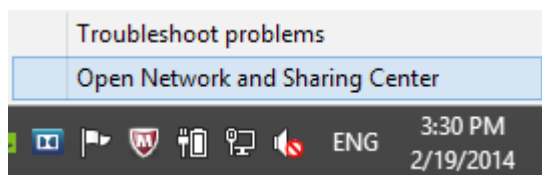

On the Task Bar , **right click** on the network interface icon .


Left-Click on **Open Network and Sharing Center**.

Under **Network and Sharing Center**, click on **Set up a new connection or network**.

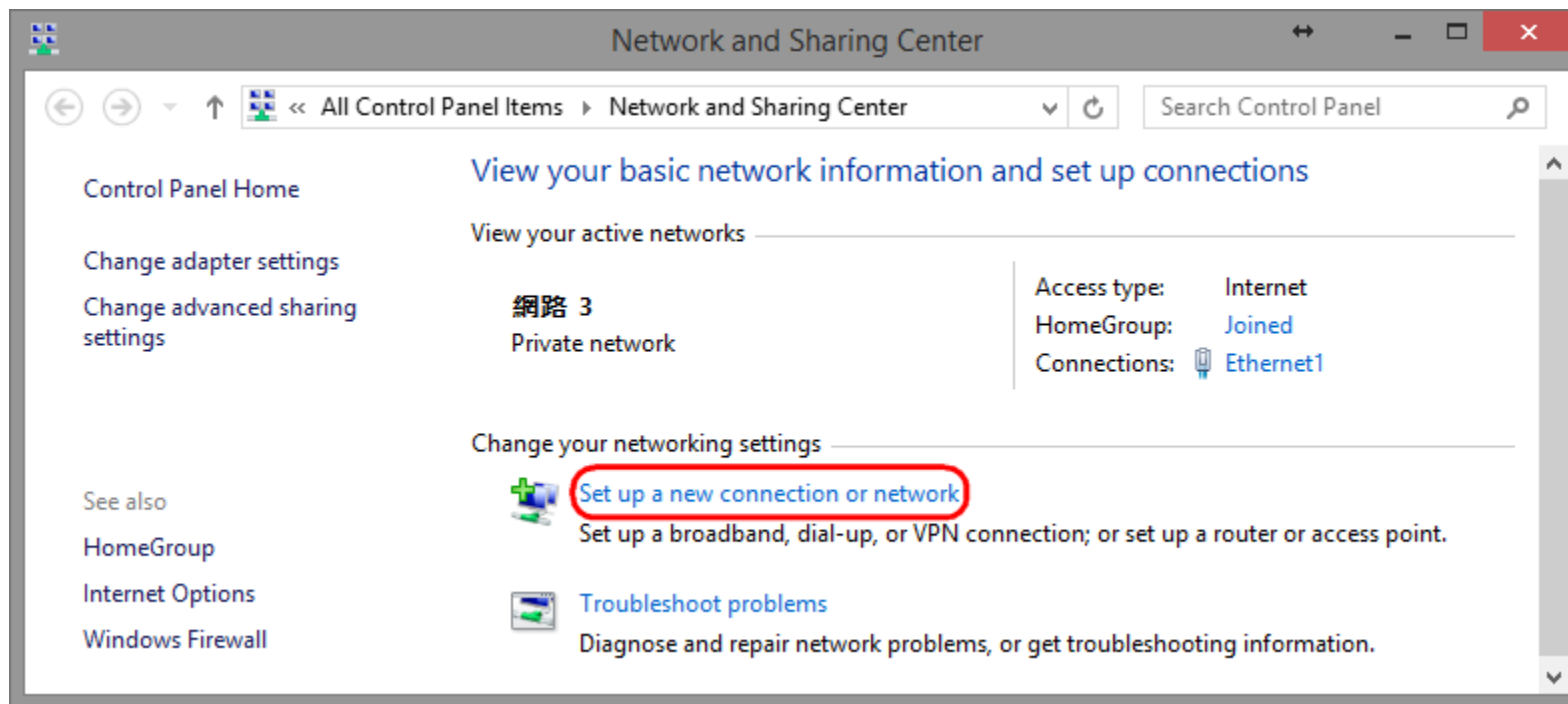


Choose **Connect to a workplace** from the option menu.

Click on **Next** to proceed.

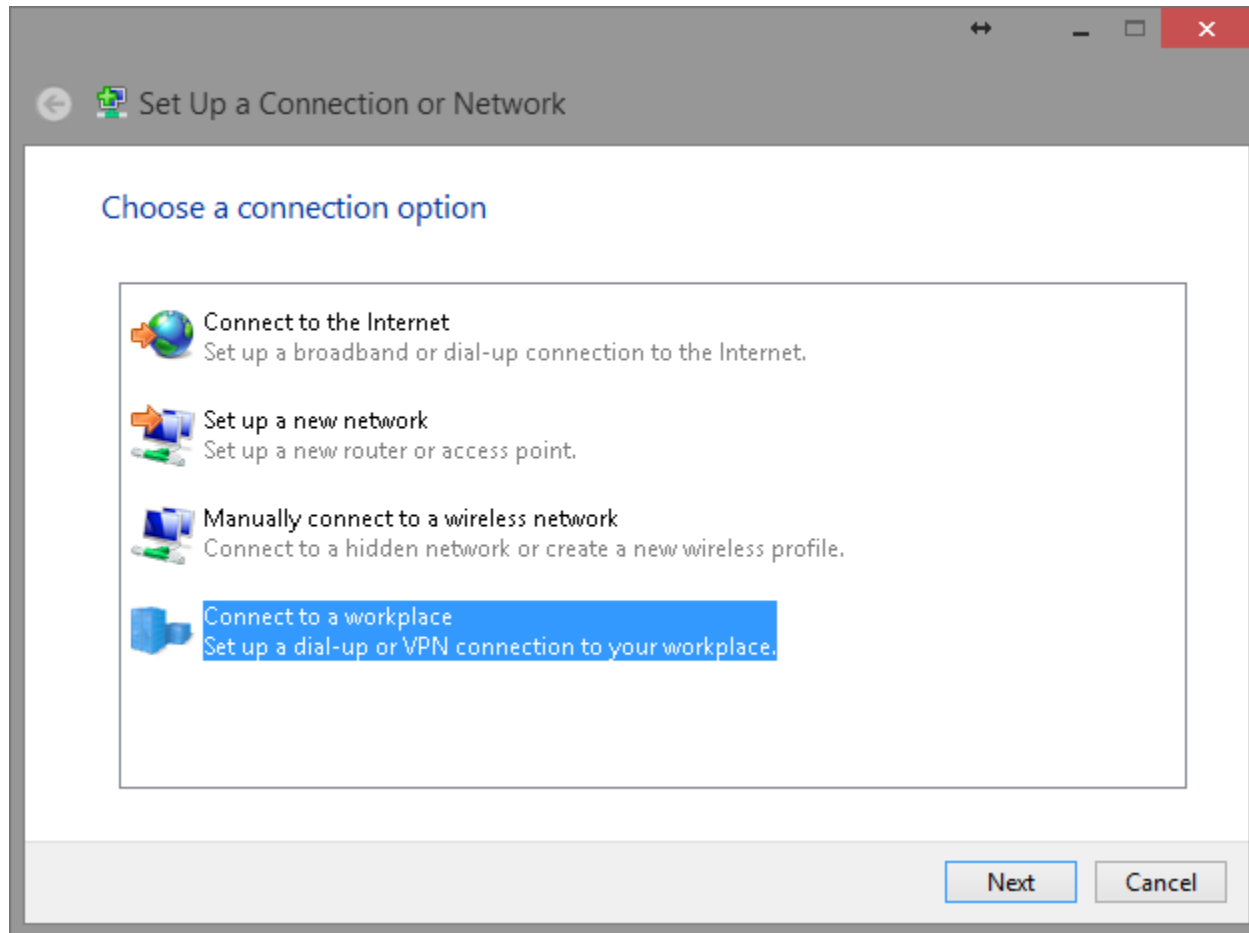


Click on **Use my Internet connection (VPN)**.

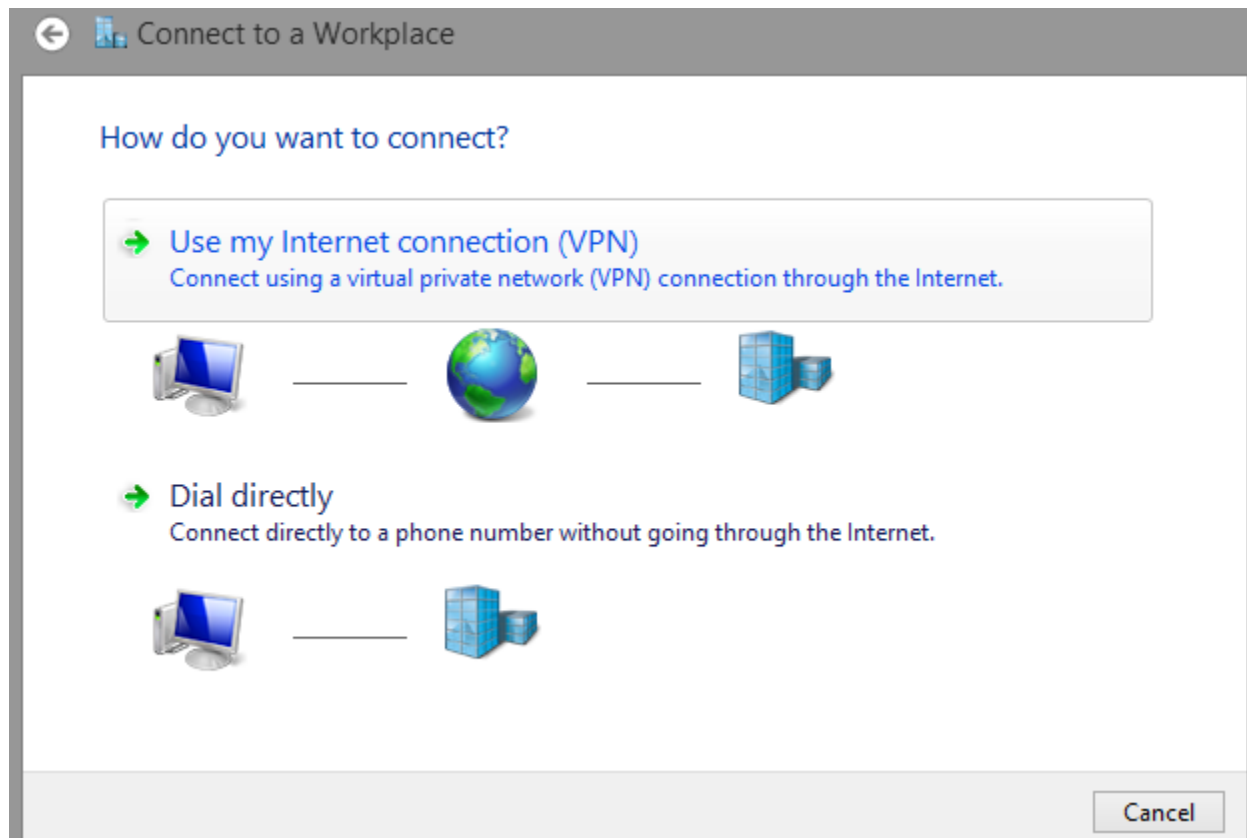

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click on **Create** to proceed.

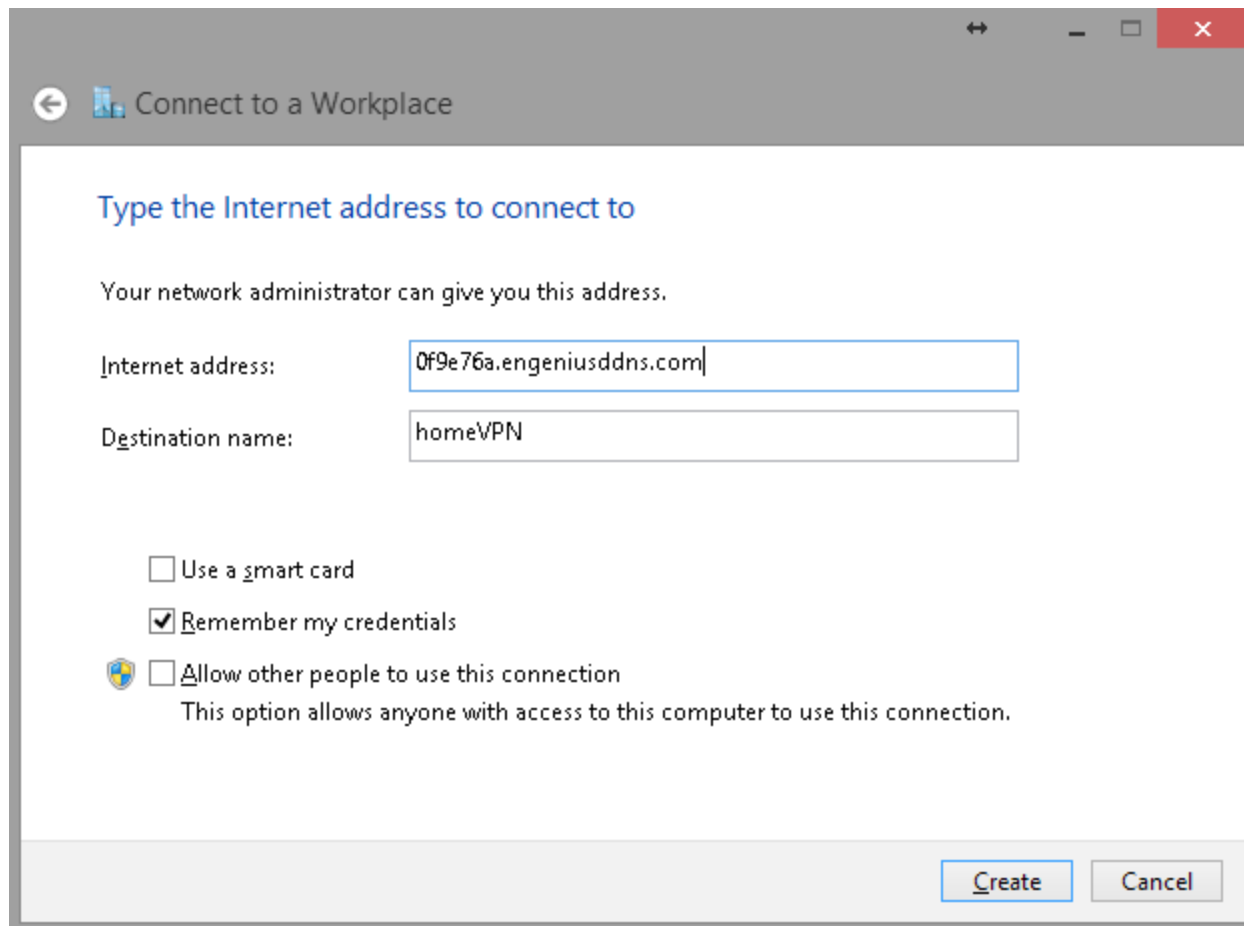

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☒ Remember my credentials

☐ Allow other people to use this connection


This option allows anyone with access to this computer to use this connection.

Create Cancel


Please wait for a few seconds. The creation process will be completed once the following window disappear.

←  Connect to a Workplace


Creating the connection...

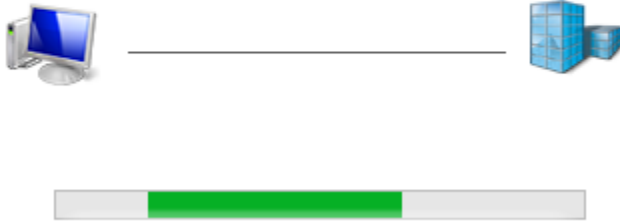


Left click on the network interface icon  on the task bar. The new interface **homeVPN** should be found as shown below.

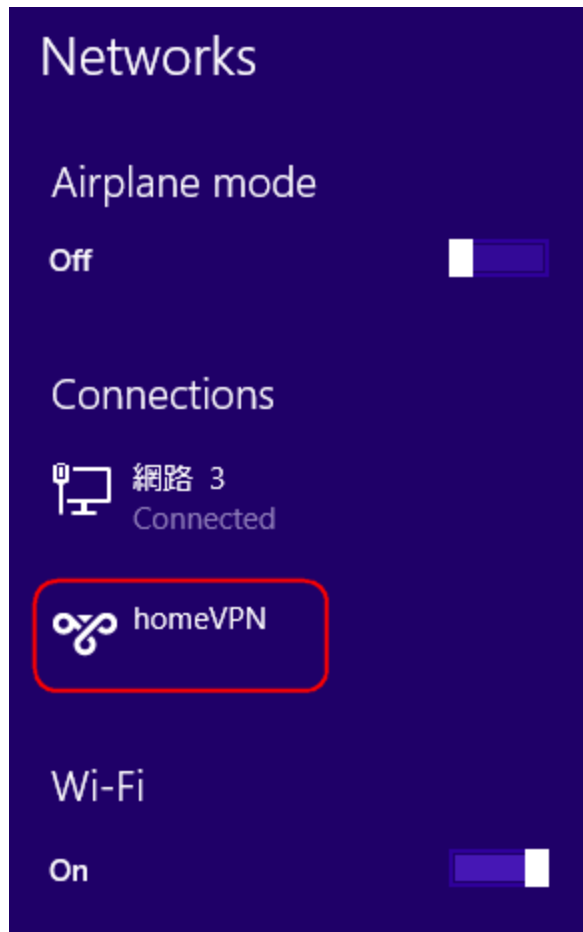

Go back to **Network and Sharing Center** and click on **Change adapter settings**.

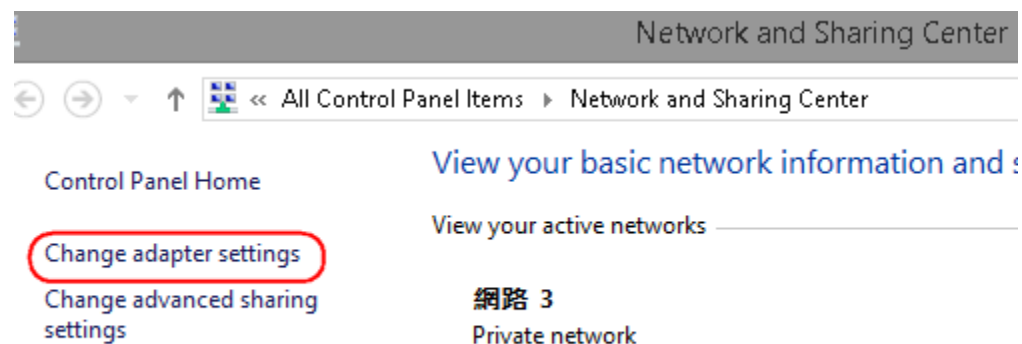

In the Network Connections window, find **homeVPN** icon and right-click. Choose **Properties** to continue setting.

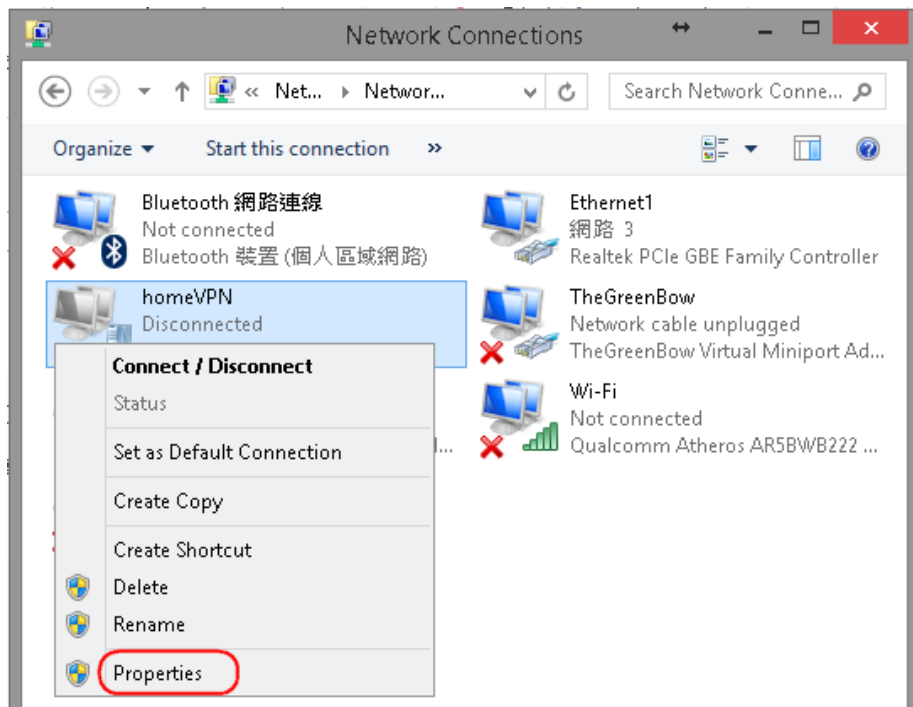

In the **Properties** window, click on **Security** tab.

Change Type of VPN to **Point to Point Tunneling Protocol (PPTP)**


Change **Require encryption (disconnect if server declines)**

Click **Allow these protocols**

Click **OK** to apply the change

To connect to the VPN, click on **homeVPN**.


When the Connect button appears, click on **Connect** to initiate the link.

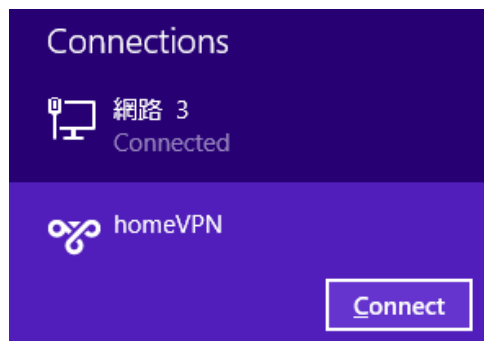


Now type in the username and password. In this example our user name is **peter** and password is **ax123456**.

If you don't know the user name and password, please go back to **User Setting** under VPN section for detail.


Click **OK** to start continue.

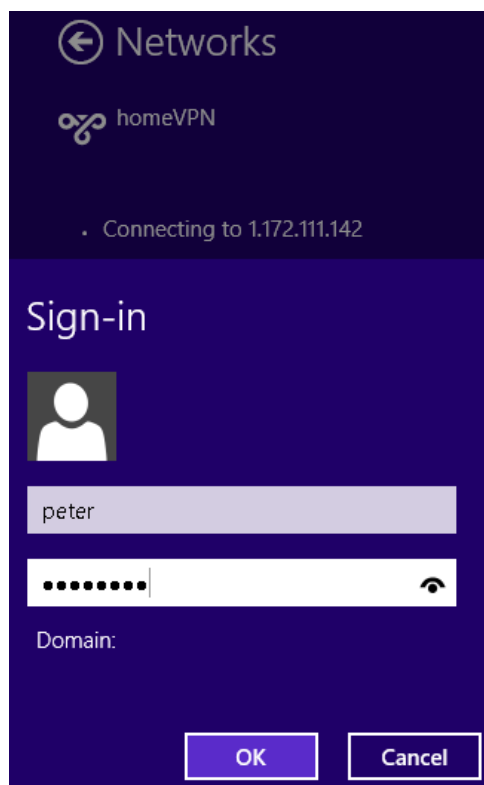

Depends on the location and network traffic of your region this may take a while.

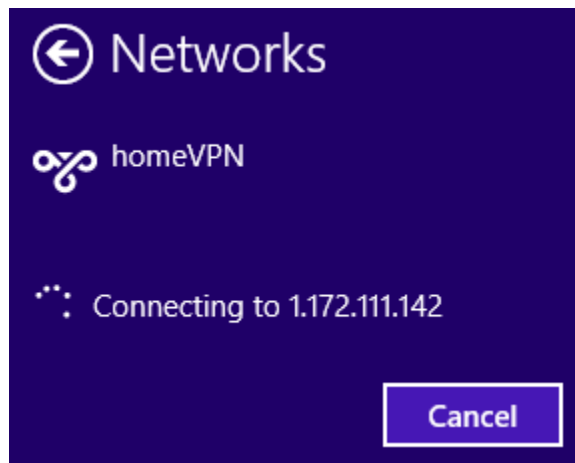


Once the VPN tunnel is established successfully, you should see your VPN interface labeled **Connected**. The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

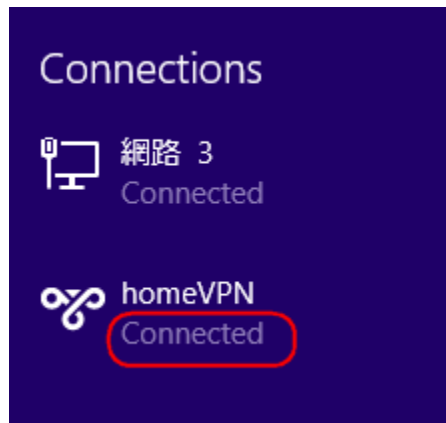


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

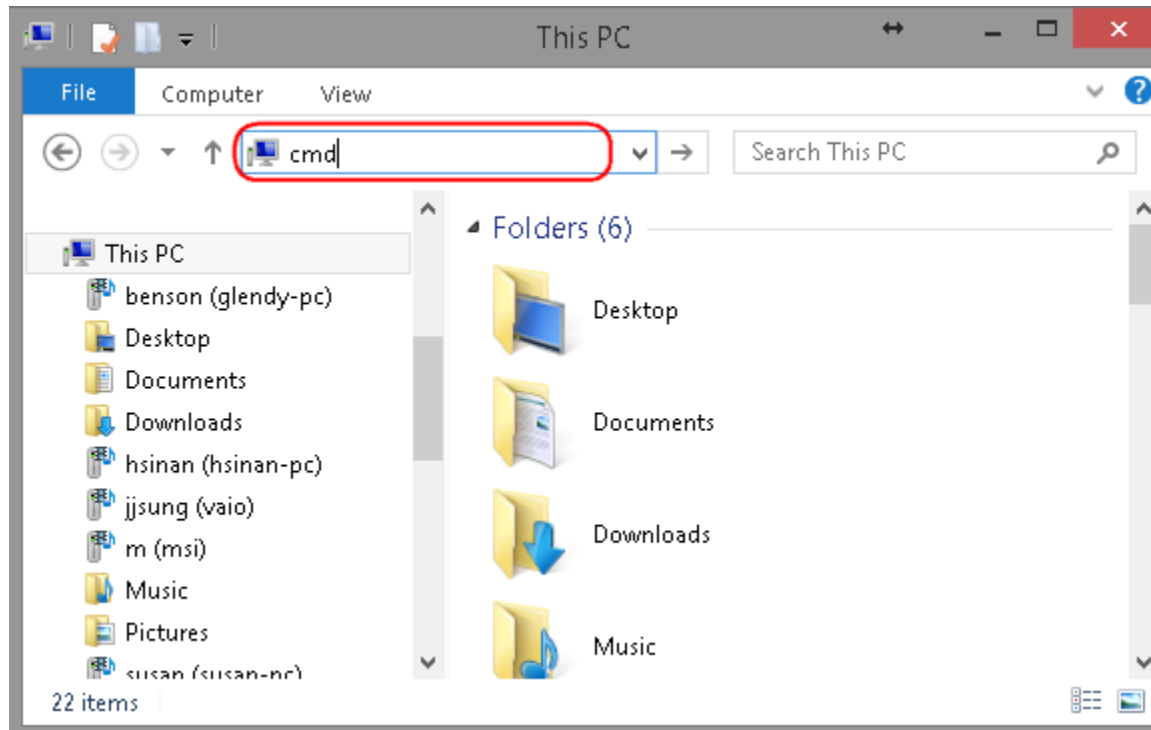

Under **Command Prompt** type in **ping 192.168.0.116**. Replies should be received as shown below.

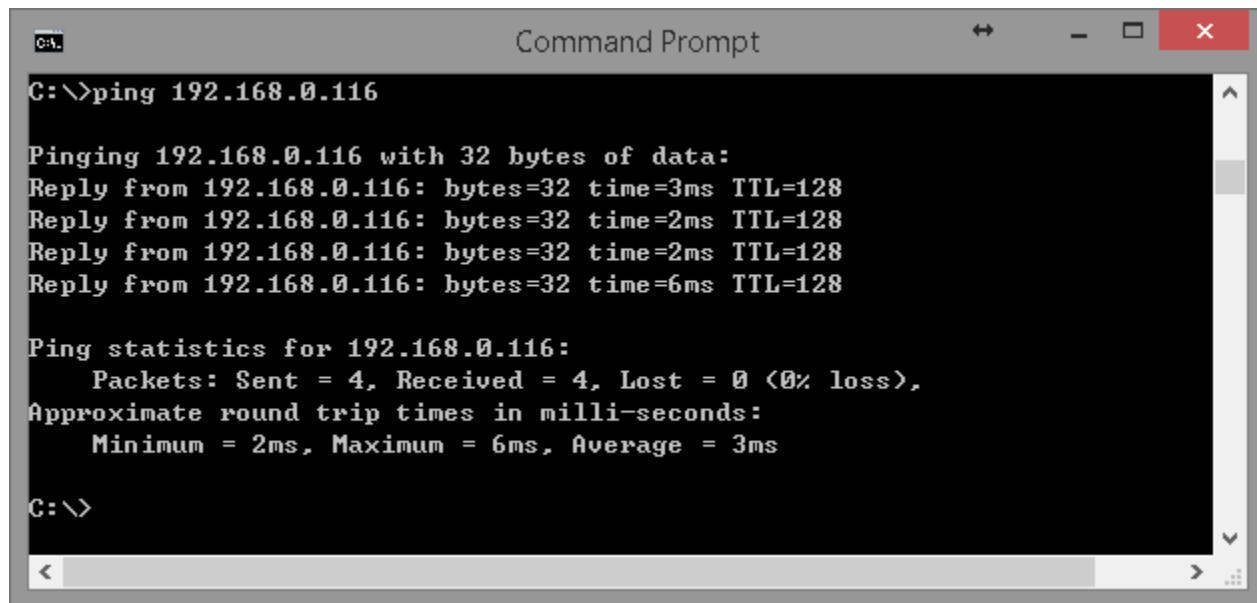

```
C:\>ping 192.168.0.116


Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```

PPTP

The following diagram illustrates the example given in this section. A user, **peter**, has already been created in the User Setting.

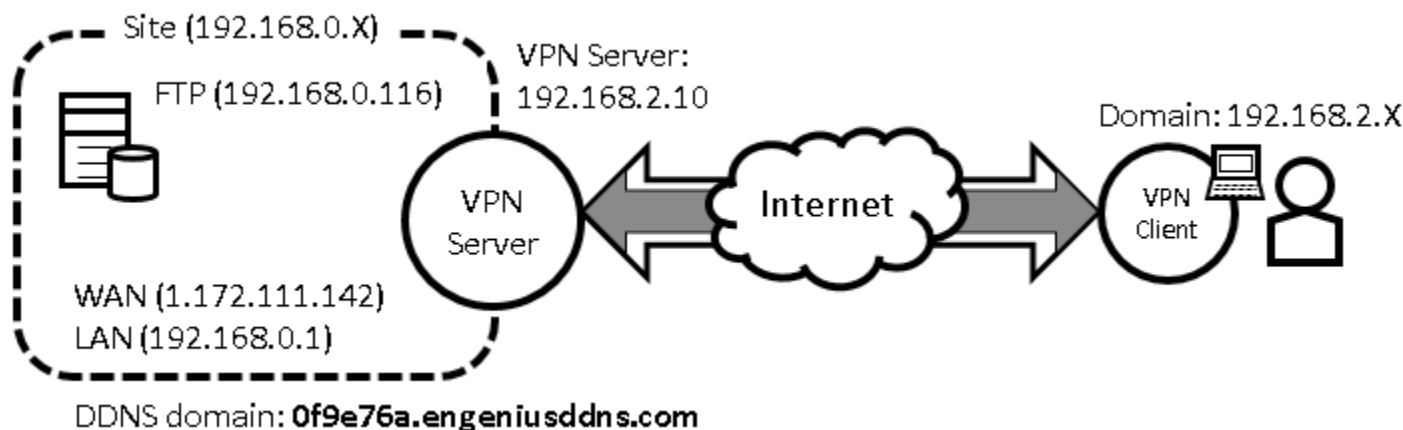

VPN Server Side Information:

Private Network domain: **192.168.0.X**

Domain net mask: **255.255.255.0**

DDNS domain: **0f9e76a.engeniusddns.com**

LAN IP: **192.168.0.1**

User Name: **peter**

Password: **ax123456**

VPN Server Address: **192.168.2.10**

Client Side:

VPN Client will be assigned with an IP address **192.168.2.X** address when the tunnel is established.

VPN Server (Gateway Side)

Under **VPN** section, choose **Wizard**.

 VPN
Status
Profile Setting
User Setting
Wizard

Assign a VPN policy name by typing **homeVPN (or any other preferable name)**.

Click **Next** to proceed.

Step1: VPN Policy Name

Please enter the policy name

VPN policy name

Name (eg:OfficeVPN)

Back

Next

Cancel

Select **PPTP** and click **Next** to proceed.

Step2: VPN Connection Type

Please choose VPN connection type

- ☐ IPsec Choose this if you are using other 3rd party VPN client software, or gateway
- ☐ L2TP over IPsec Choose this if you are using Windows VPN client for connection
- ☐ L2TP Choose this if you are using L2TP client for connection
- ☒ PPTP Choose this if you are using PPTP client for connection

Back

Next

Cancel

Select a user (which created earlier in **User Setting** section) from the user list. In this example “**peter**” is selected.
VPN Server IP is given to the VPN server on EPG600. In this case, please type in **192.168.2.10**.
Type in **192.168.2.100** and **200** into the Remote IP range fields.

Click **Next** to continue.

Step3: VPN PPTP Setting

Please enter the setting of PPTP

PPTP Settings

Authentication	MSCHAP_V2
Encryption:	128-bit
User Name	☒ User List peter (eg: guest)
Password	 (eg: nk9543)

VPN Server IP Setting

Server IP	192.168.2.1 (eg: 10.0.174.45)
Remote IP range	192.168.2.101 - (eg: 10.0.174.66 -100)

Back

Next

Cancel



Note1: Server IP and Remote IP Range should be under the same domain. The server will be listening to the traffic for from 192.168.2.X.

Note2: Remote IP range is the range of IP addresses space reserved for VPN the connecting VPN clients.

At this very last page, click **Apply** to enable the policy immediately.

Setup Successfully

☒ Enable this policy immediately.

Back

Apply

Cancel

It takes about 15 seconds for the Gateway to activate the VPN profile.

Module is reloading, please wait **13** seconds

Once the Gateway is ready, the page will be redirected to **Profile Setting** section where the new profile **homeVPN** is shown.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	PPTP	192.168.0.0/24	192.168.2.101-200	N/A	192.168.2.1	☐

Add

Edit

Delete Selected

Delete All

Apply

Cancel

VPN Clients


You will need a PC or Laptop running VPN enabled operating system. The following sections demonstrate how to use built-in VPN client to establish a VPN tunnel with the VPN server.

Windows XP

Please ensure you have updated your Windows XP with latest service pack.


Before adding a new VPN connection to your XP system, we have to add a new registry to your system.

On the Start Menu, click **Run...**

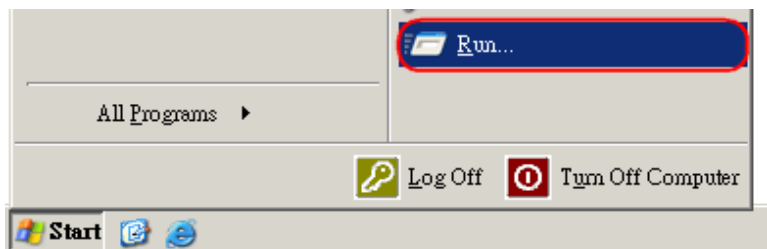

Type in **regedit** to start the Registry Editor

Press **Enter** or click on **OK**

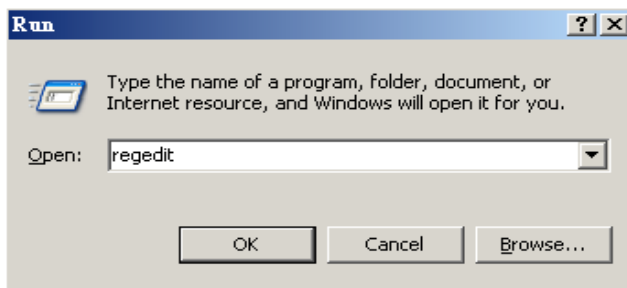


You have to add a new registry value to your XP system to enable L2TP over IPSec.

Locate the registry **HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Rasman\Parameters** and add the following registry value to this key:

Value Name: **ProhibitIpSec**


Data Type: **REG_DWORD**

Value: **1**

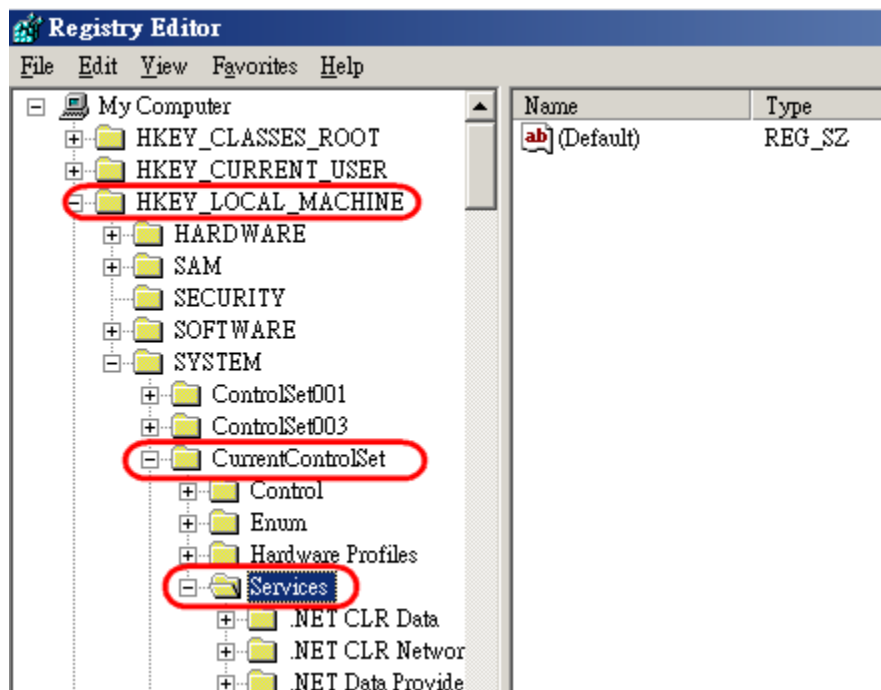


Right-click on the last node, "**Parameters**".

On the pop-up menu, select **New** and then **DWORD Value**.

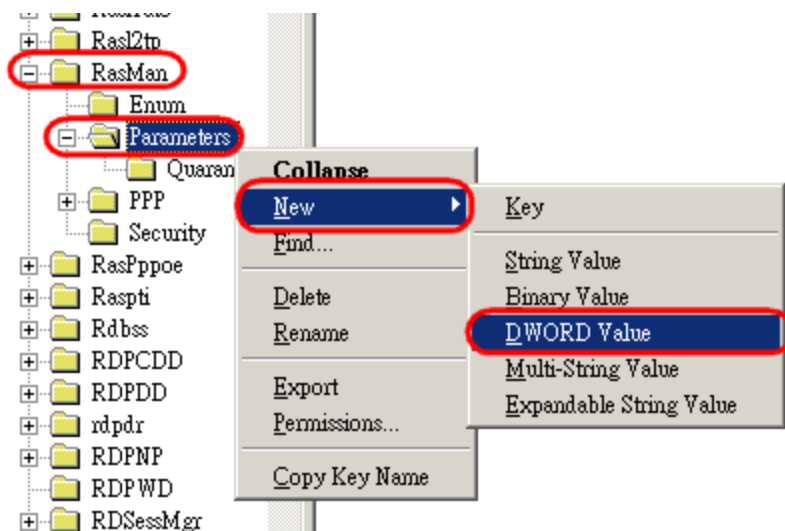


Type in **ProhibitIpSec** and press **Enter**

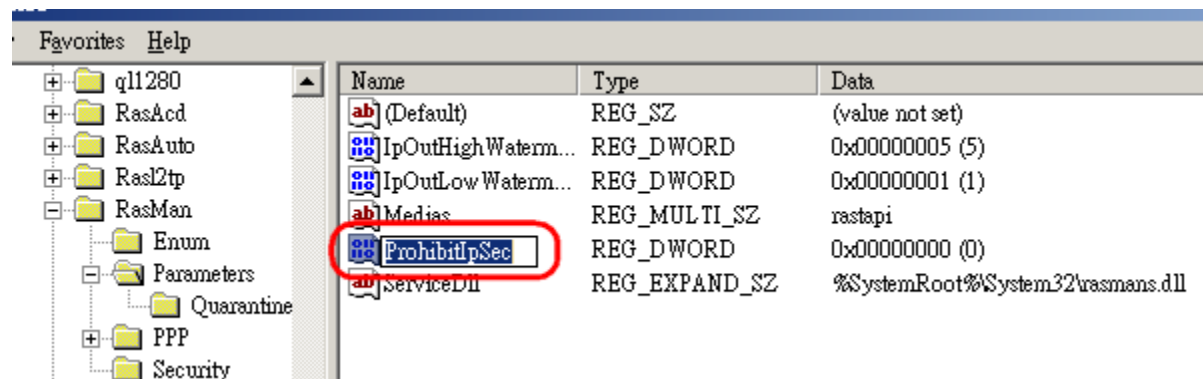


Double click on **ProhibitIpSec**.

In the pop-up window, enter **1** for Value data.

Click **OK** to complete.

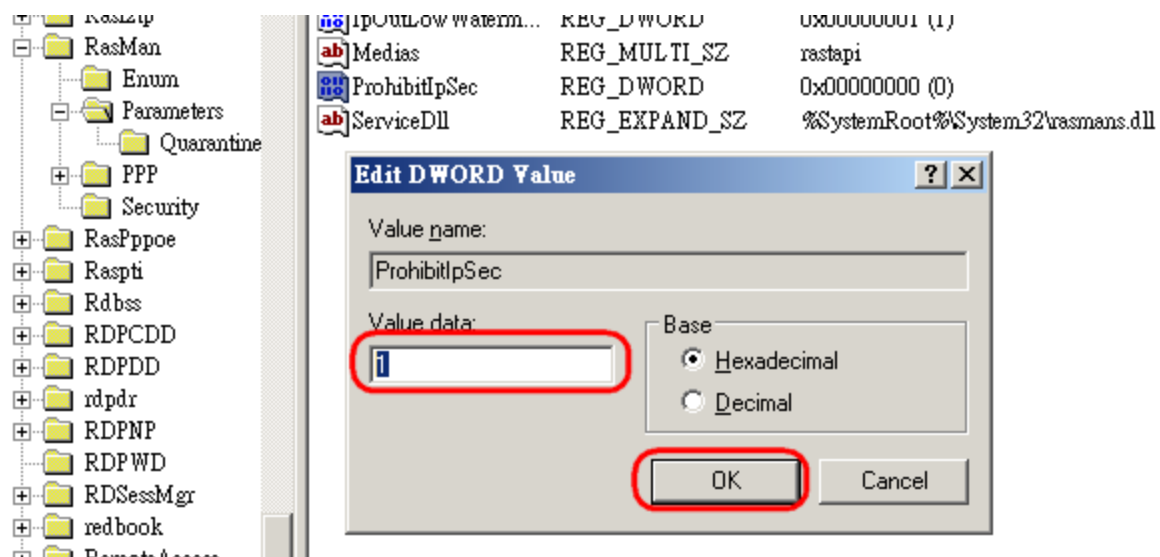

Your new registry should look like this.

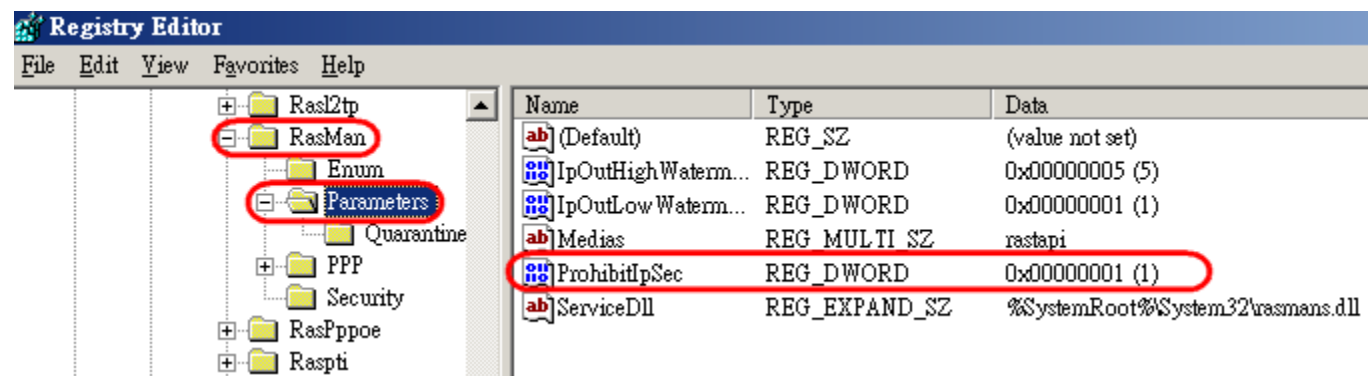


Close the Registry Editor.



IMPORTANT: Please Reboot your system now, to make the new setting affective.

Once we have added the registry, we can create the VPN connection for **PPTP** now.

Start Menu → Control Panel → Network Connections → Net Connection Wizard

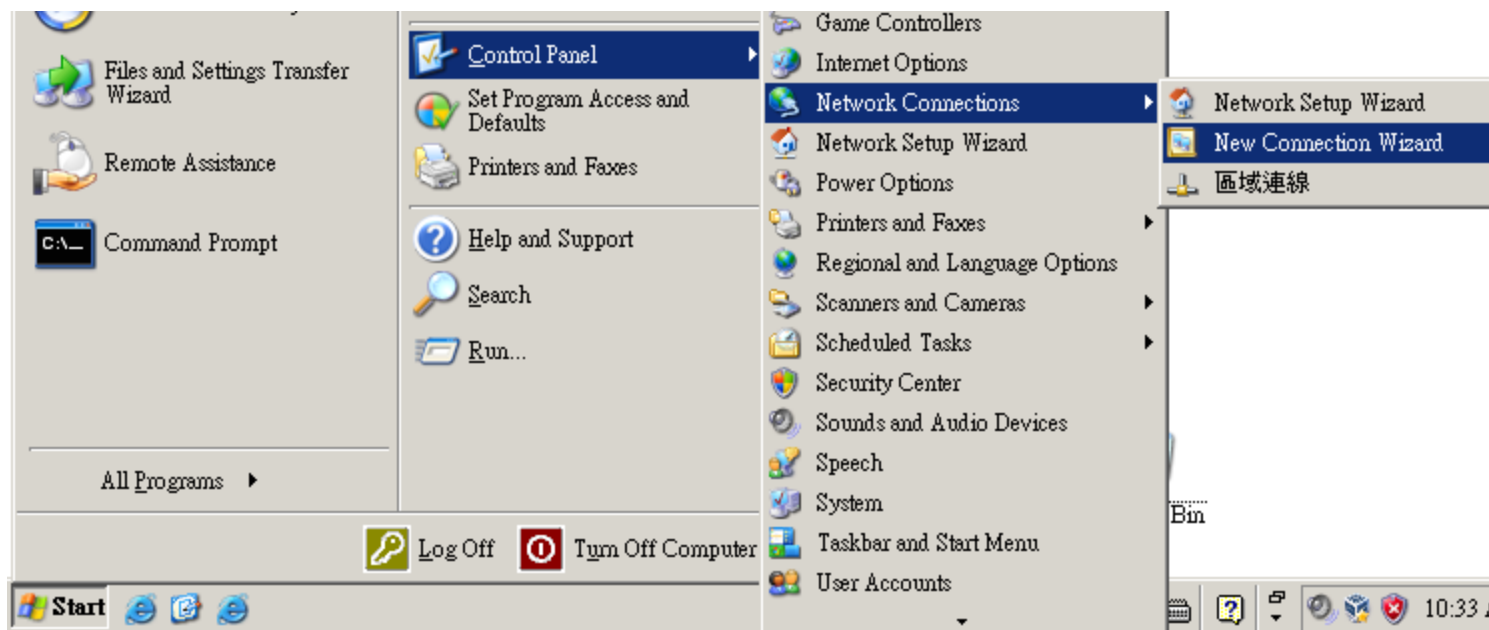


Click **Next** to proceed.




Select **Connect to the network at my workplace**.

Click **Next** to proceed.

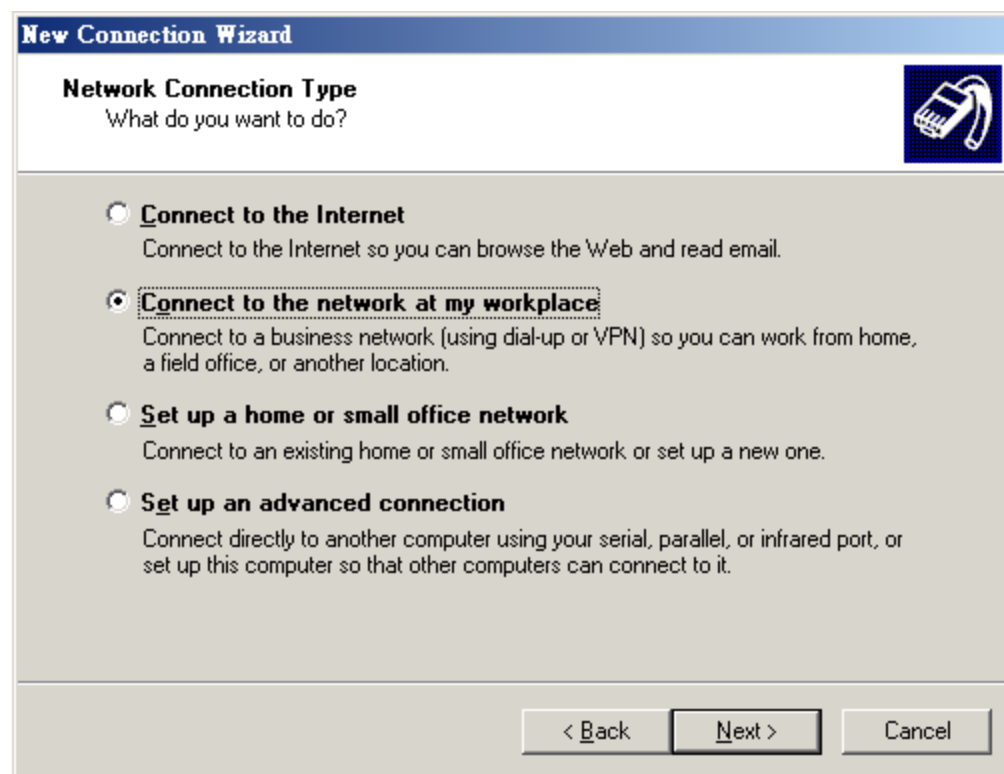


Select **Virtual Private Network connection**.

Click **Next** to proceed.

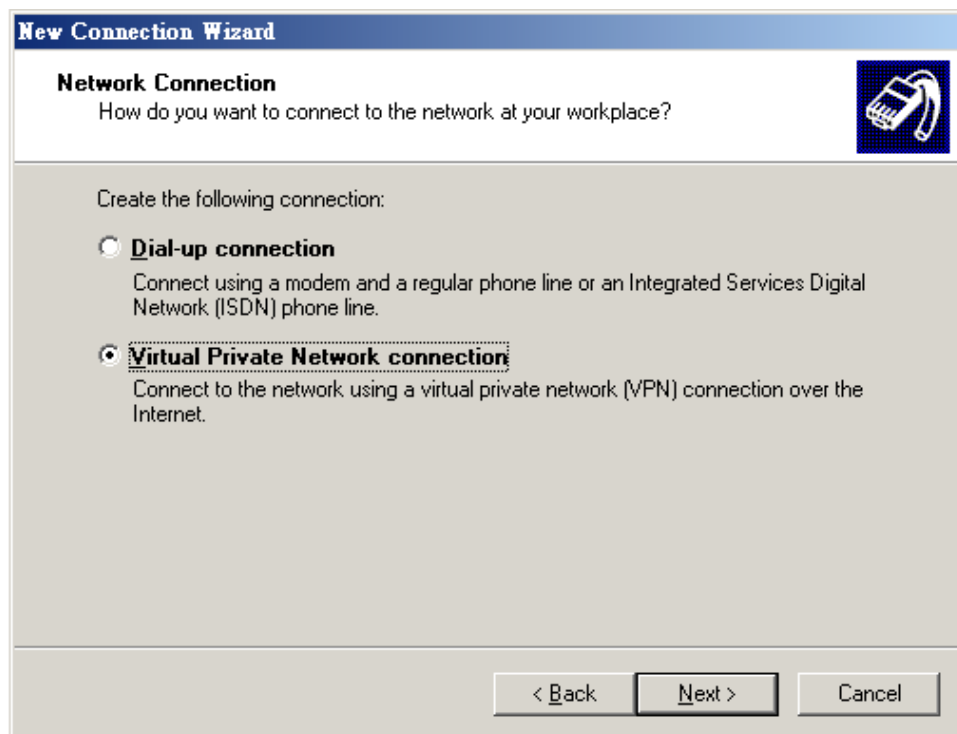


enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click **Next** to proceed.

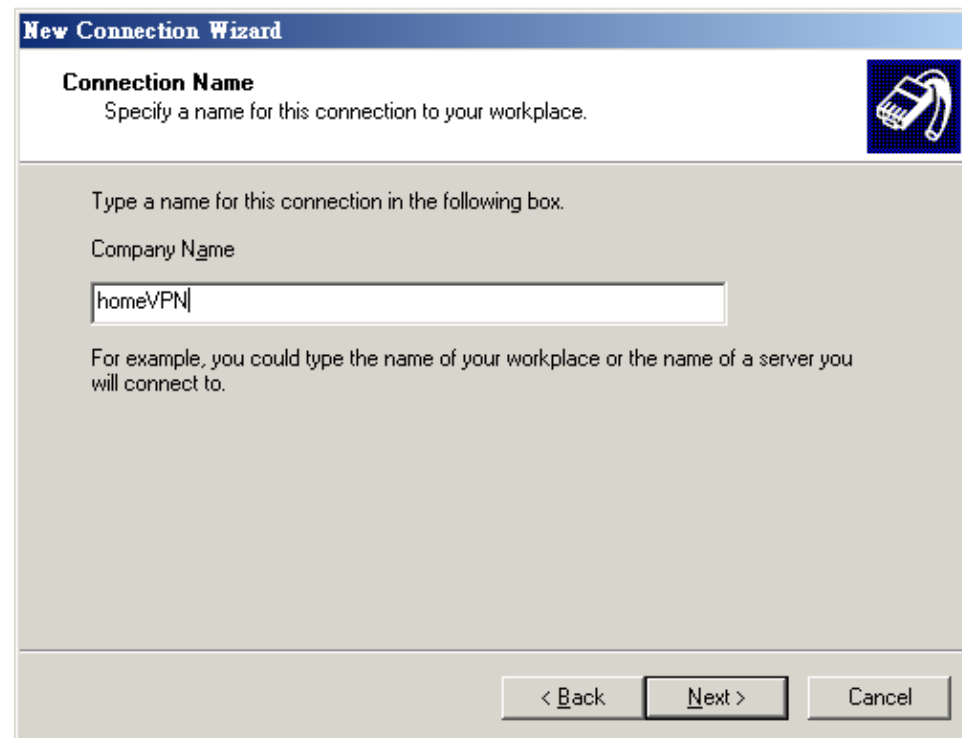


Choose **Do not dial the initial connection**.

Click **Next** to proceed.

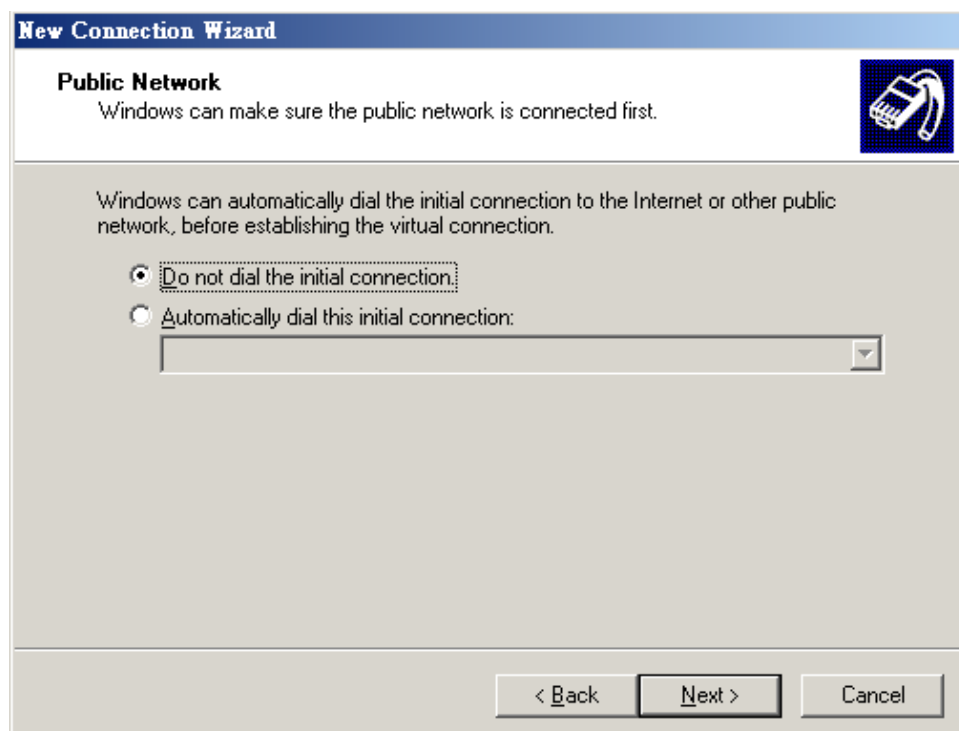

Please enter the DDNS name of your VPN Gateway.
In this example, we enter **0f9e76a.engeniusddns.com**.

Click **Next** to proceed.

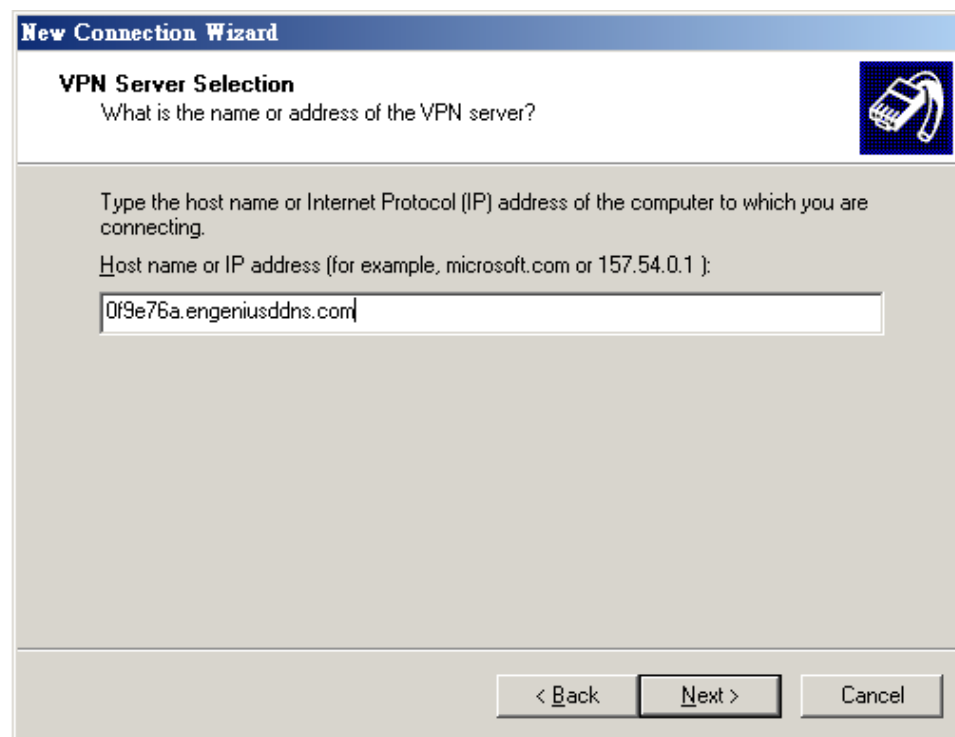


Select **Add a shortcut to this connection to my desktop** for easy access to establish a connection.

Click **Finish** to complete the setup.




Click on **Properties**.

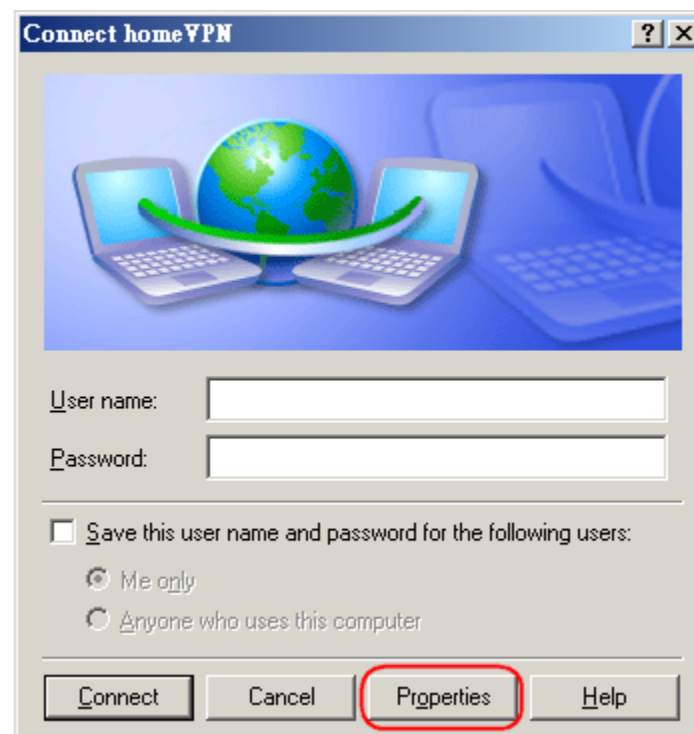


Under **Networking** tab, select **PPTP VPN**.

Click **OK** to close the window.

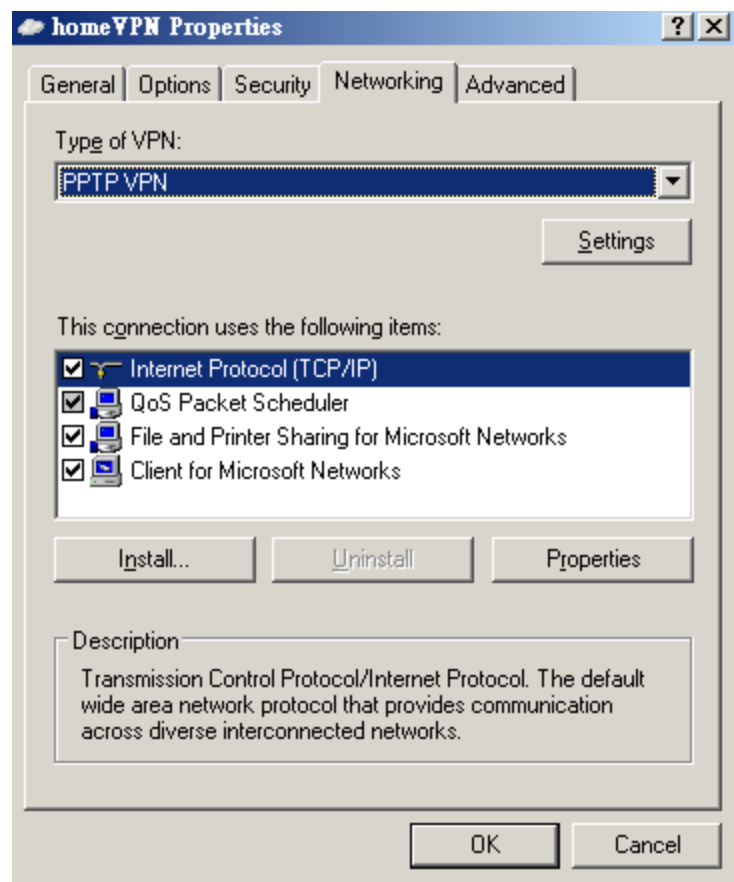

Select **Advanced** (custom settings)

Click on **Settings**

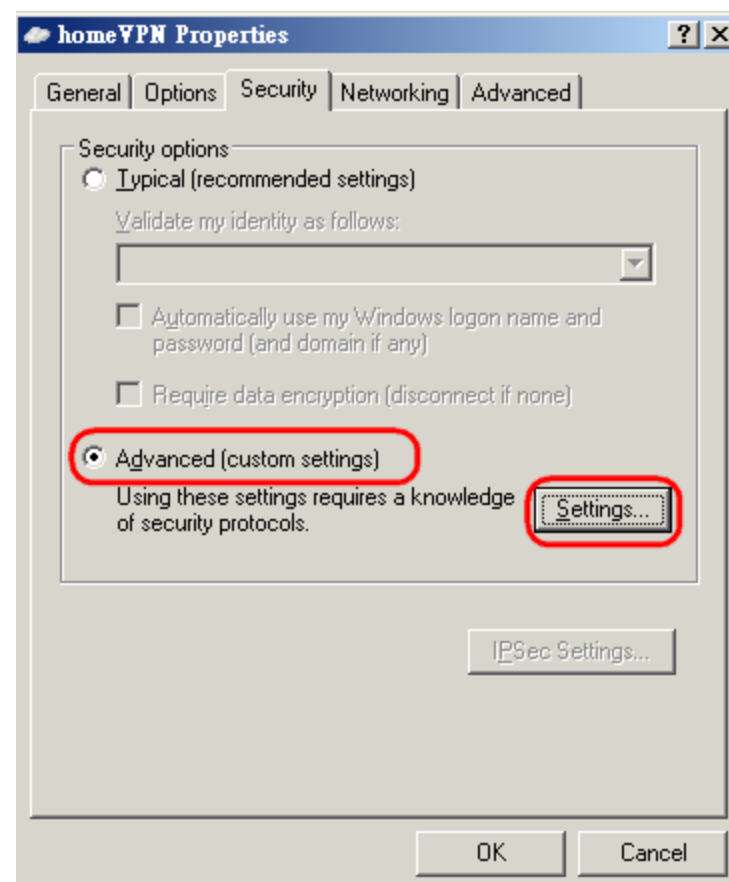


Select **Required encryption (disconnect if sever declines)**


Select **Allow these protocols**

Select **Microsoft CHAP Version 2 (MS-CHAP v2)**

Click **OK** to finish.

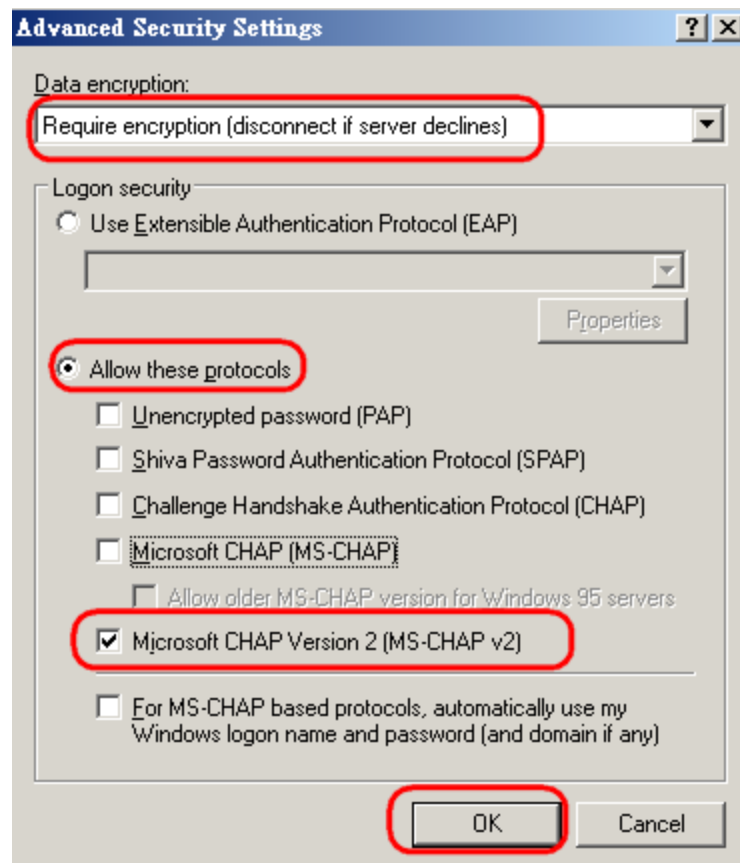

Click **OK** to complete

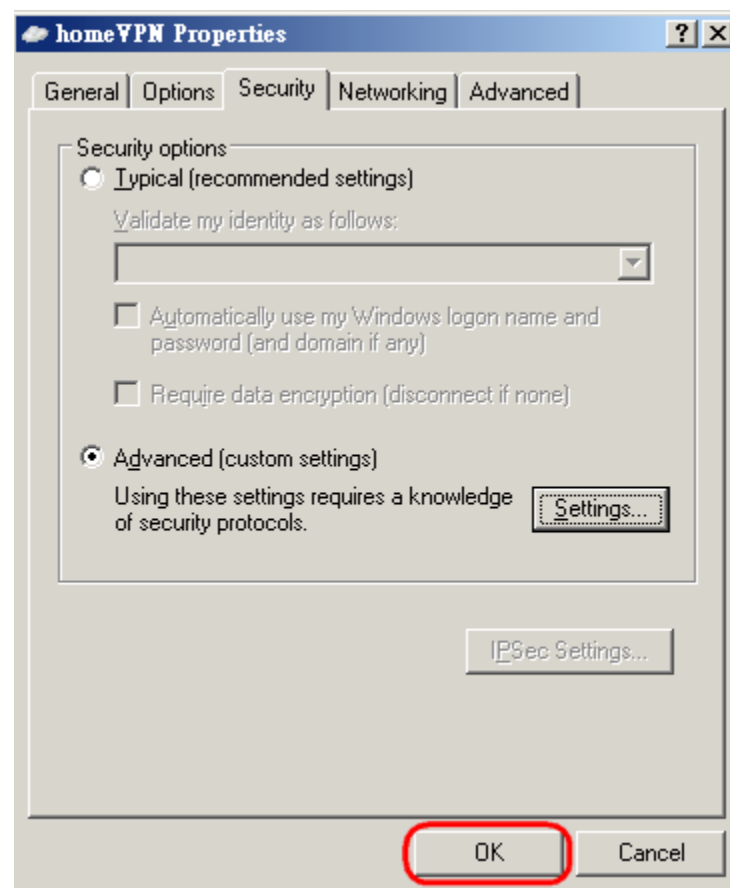


Enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.



The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

Windows Vista

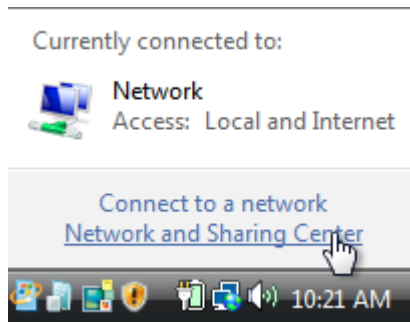


On the Task Bar
Sharing Center

, **right click** on the network interface icon




Left-Click on **Network and**


Click on **Set up a connection or network**

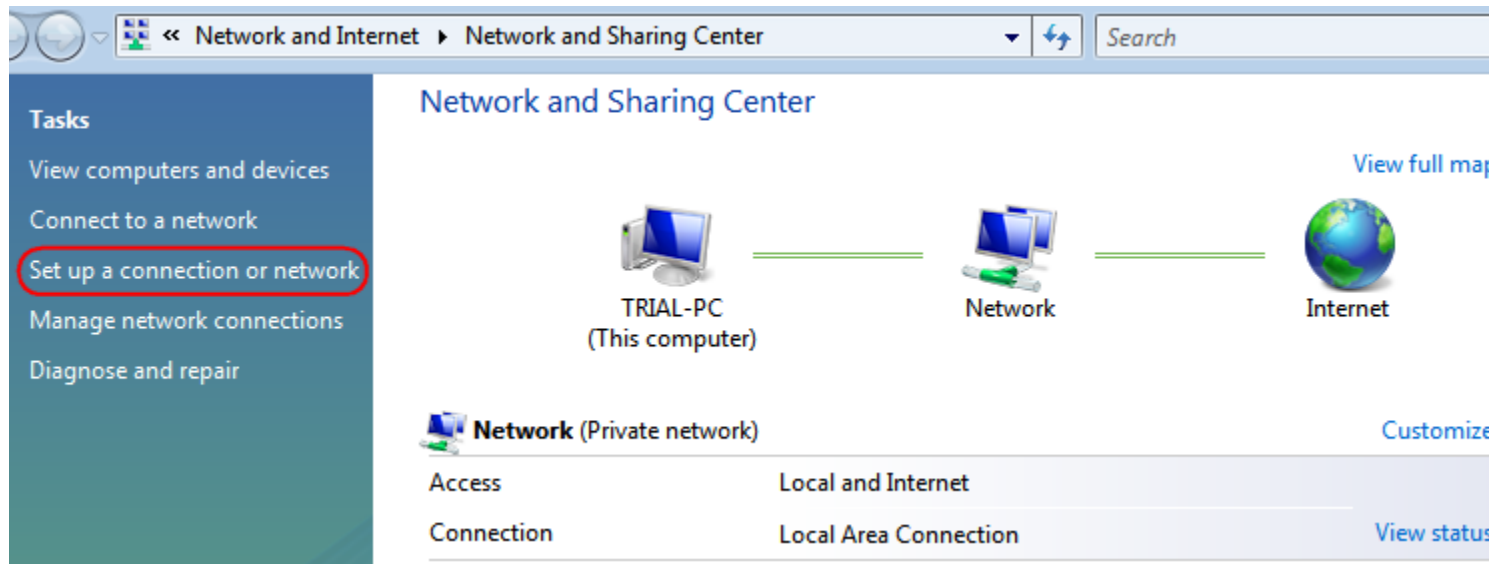

Choose **Connect to a workplace** from the option menu.
Click on **Next** to proceed.

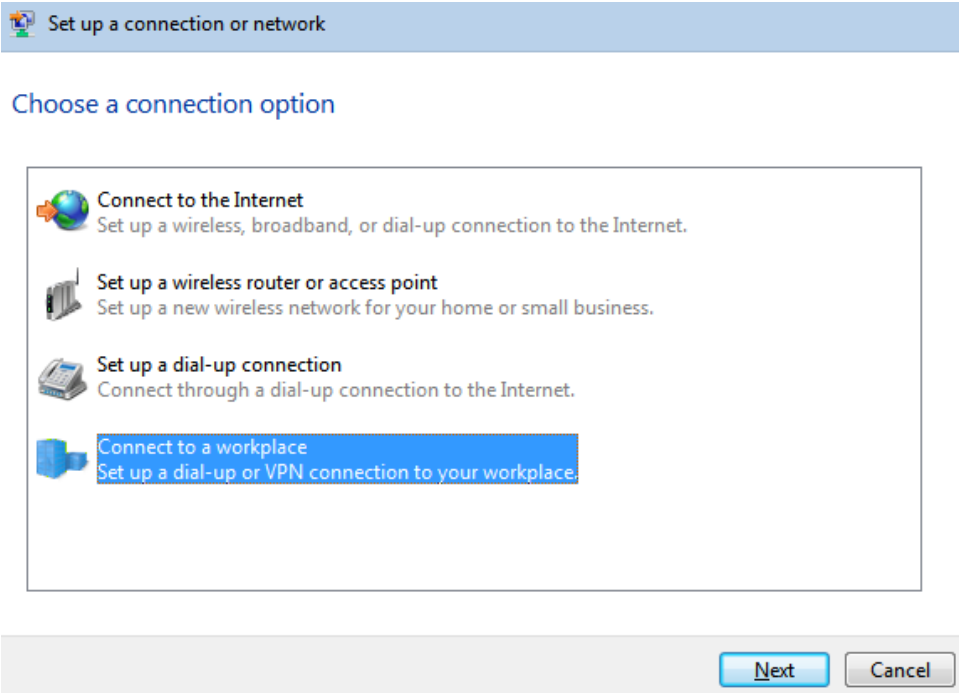

option menu.

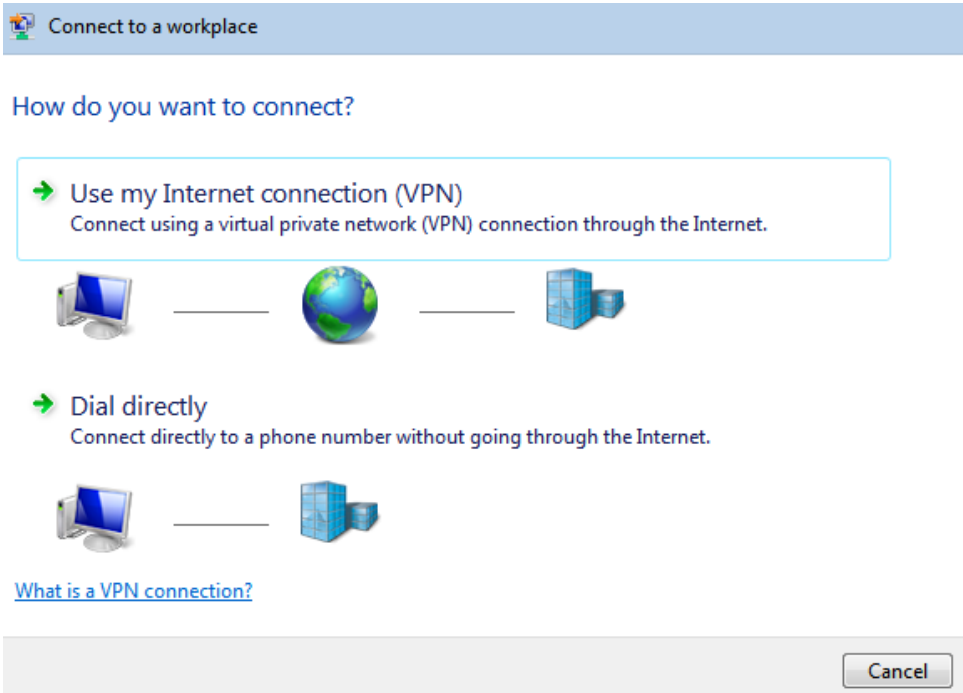


Choose **Use my Internet connection (VPN)** from the

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox **Don't connect now; just set it up so I can connect later**

Click on **Next** to proceed.

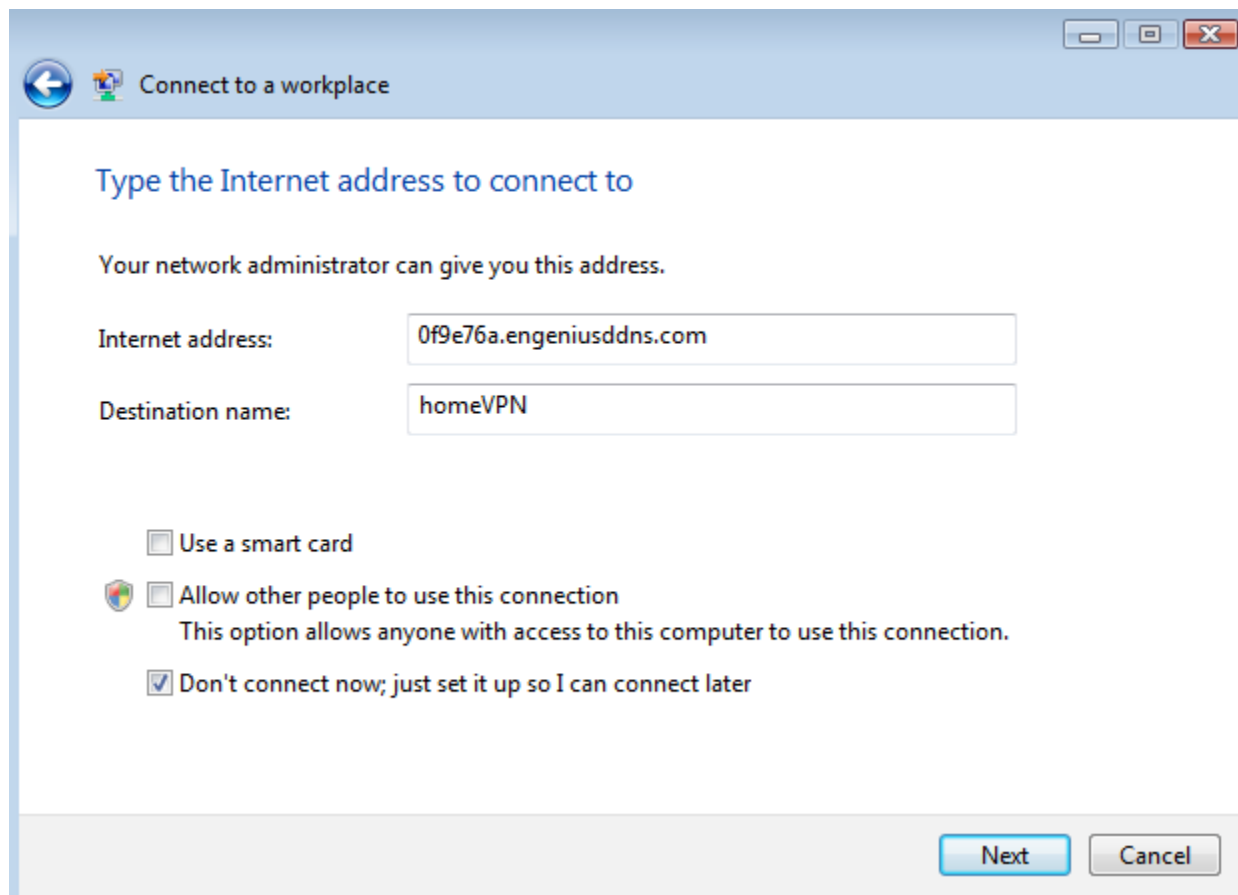

Connect to a workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

 Connect to a workplace

Type your user name and password

User name:

peter

Password:

••••••••

☐ Show characters

☐ Remember this password

Domain (optional):

Now the profile has been created. Click **Close to complete**.

 Connect to a workplace

The connection is ready to use



 Connect now

Close

Back to **Network and Sharing Center**, Click on **Manage network connections**.

Tasks

View computers and devices

Connect to a network

Set up a connection or network

Manage network connections

Diagnose and repair

Network and Sharing Center


TRIAL-PC
(This computer)


Network


Internet

View full map


 **Network** (Private network)

Customize


Access	Local and Internet
Connection	Local Area Connection View status

371


In the Network Connections window, find **homeVPN** (the new created VPN interface).

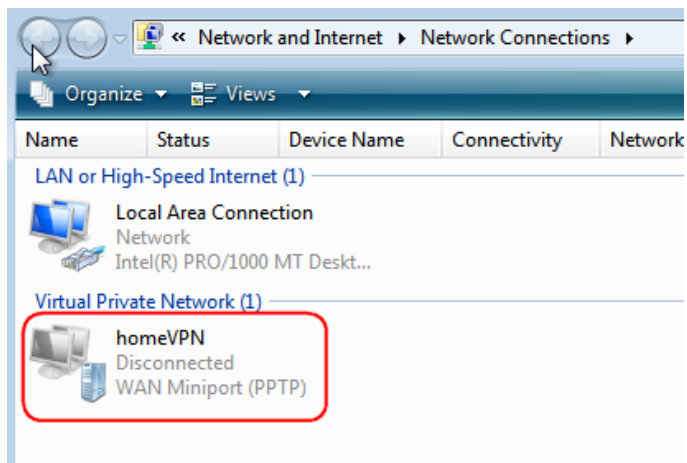

Right-click on **homeVPN**, and choose **Properties**.

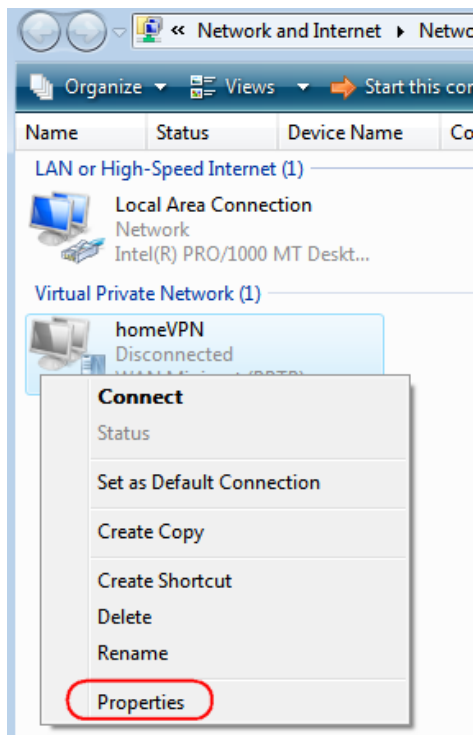


Click **Security** tab in the Properties window.
Click on **Advanced (custom settings)** then **Settings** button

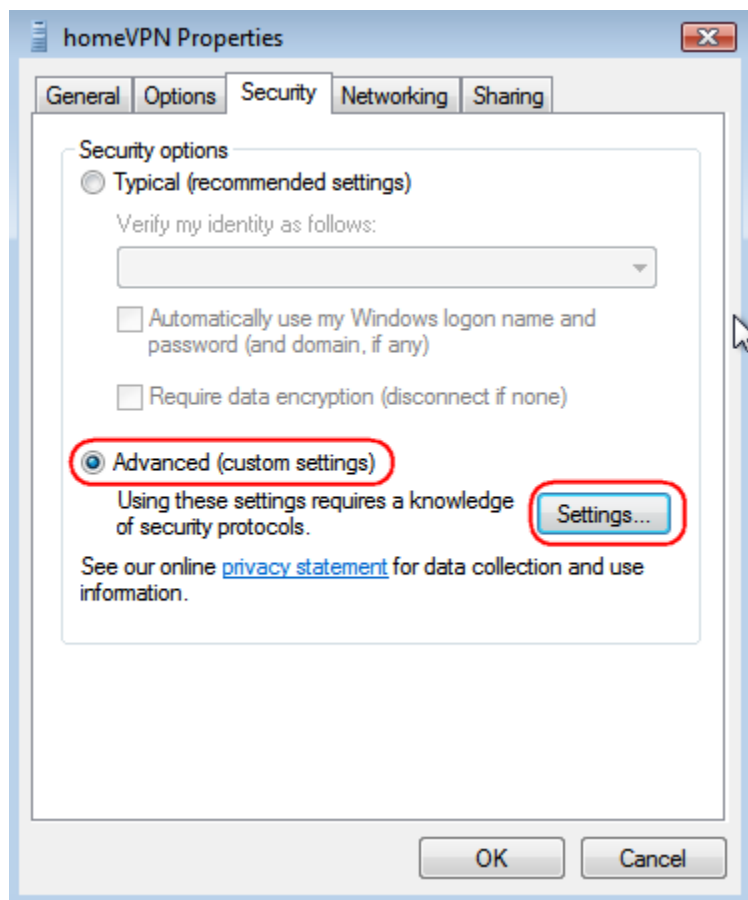

In the Advanced Security Settings, ensure you have the same settings below.

Set **Data encryption to Require encryption (disconnect if server declines)**


Set **Allow these protocols** and check on **Microsoft Chap Version 2 (MS-CHAP v2)**

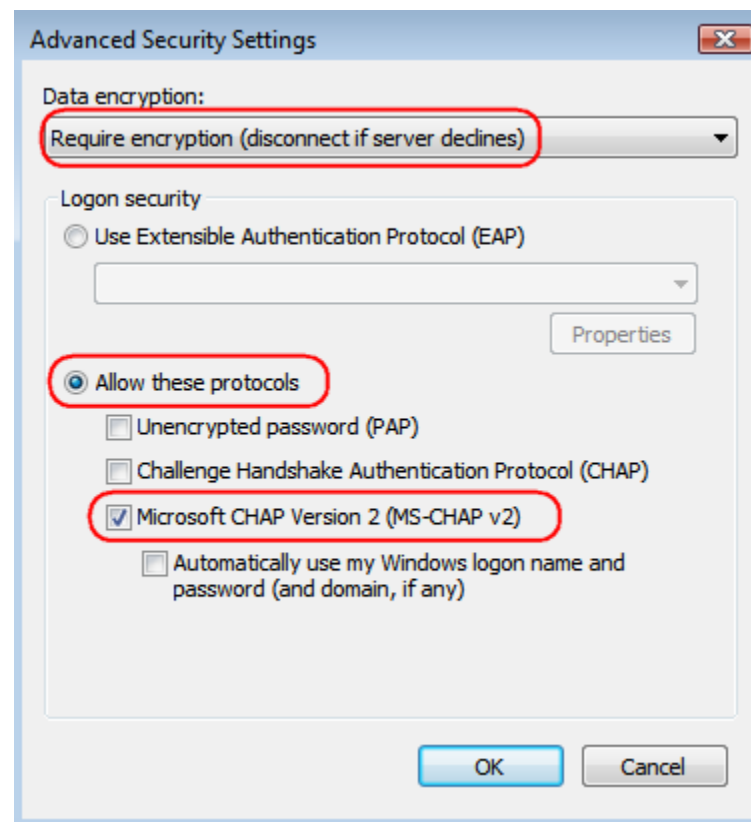

Click on **Networking tab**.


For VPN type, choose **PPTP VPN**

Click on **OK** to complete.

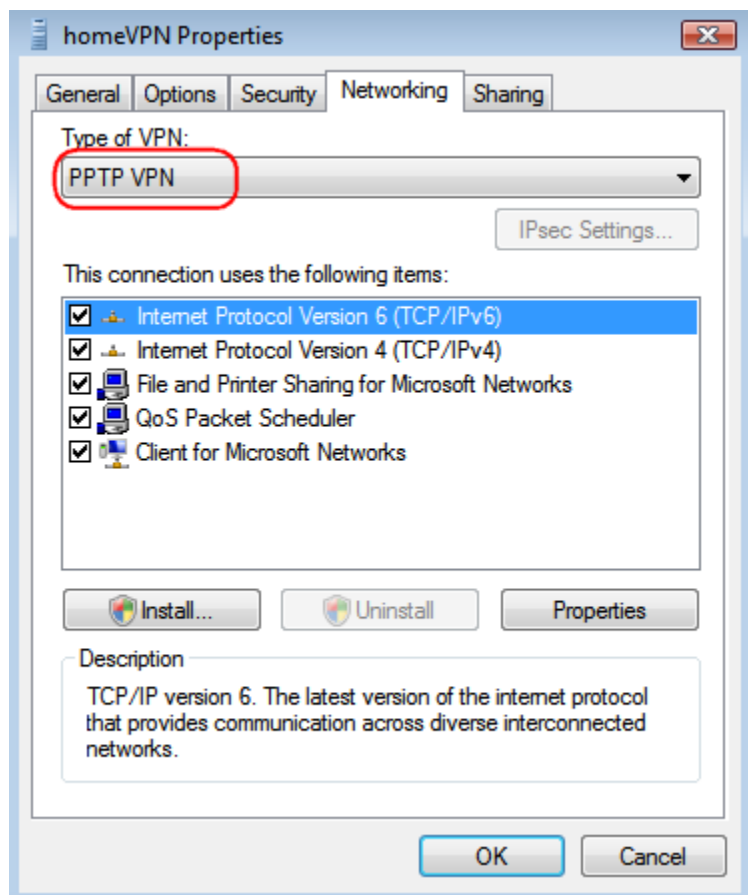

Back to **Network Connections**, find **homeVPN** and **right-click** on the icon.

Click **Connect** to establish the VPN tunnel.

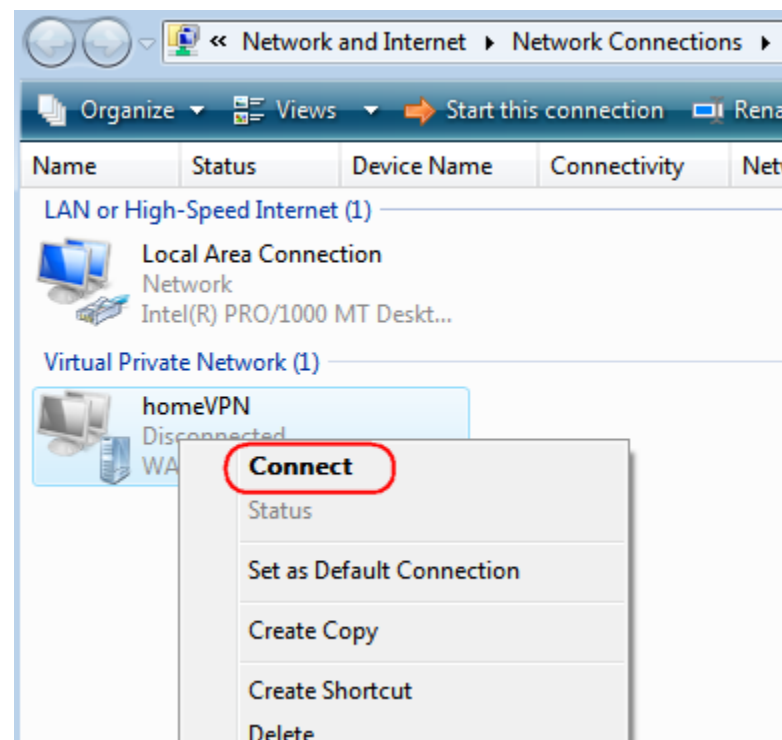


A window prompts for user verification, simply enter **peter** for user name and **ax123456** for the password.

Click on **Connect** to start connection.




The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

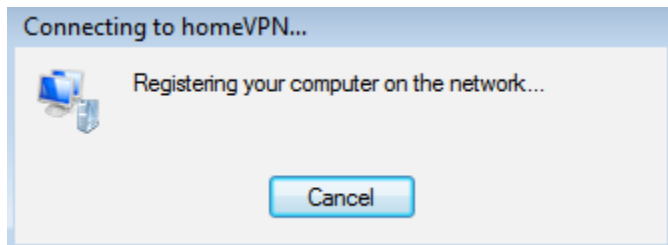


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

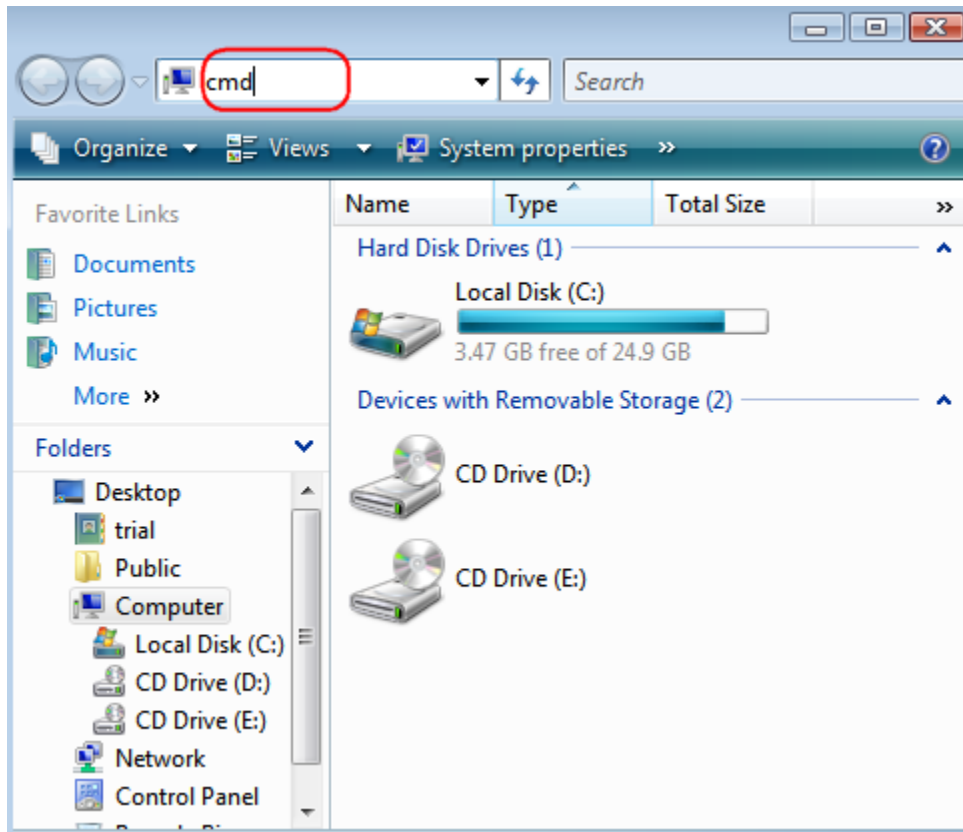

Under **Command Prompt type** in **ping 192.168.0.116**. Replies should be received as shown below.

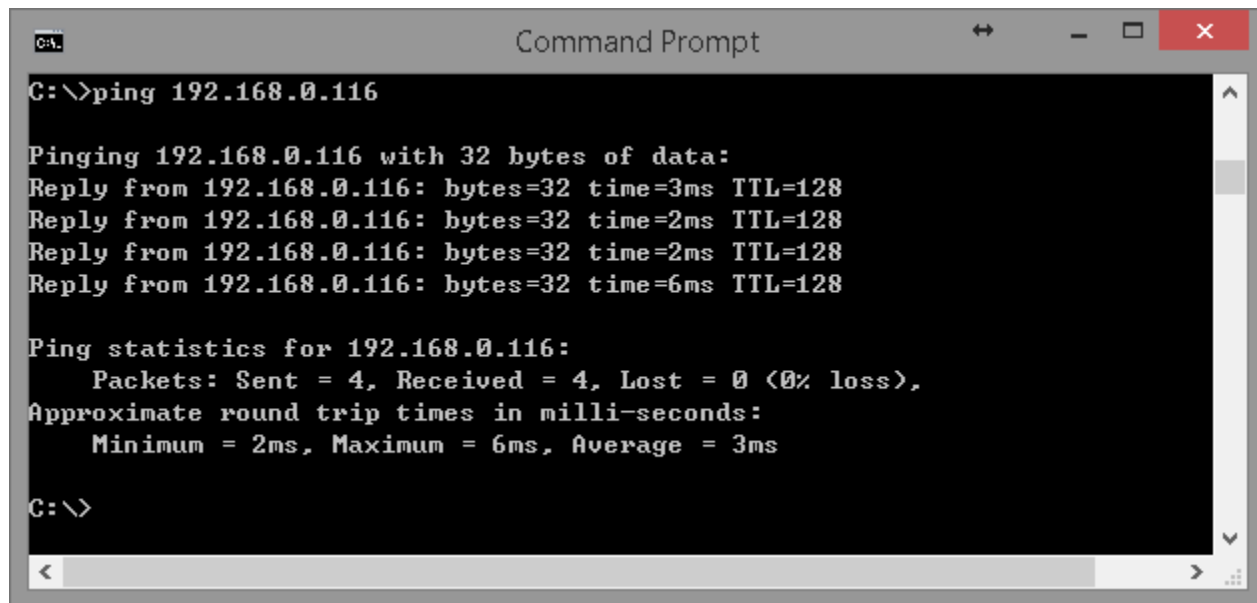


```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms


C:\>
```

Windows 7

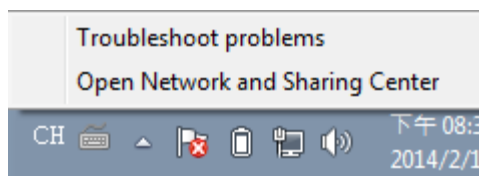

On the Task Bar , **right click** on the network interface icon  **Left-Click** on **Open Network and Sharing Center**.

Under **Network and Sharing Center**, click on **Set up a new connection or network**.

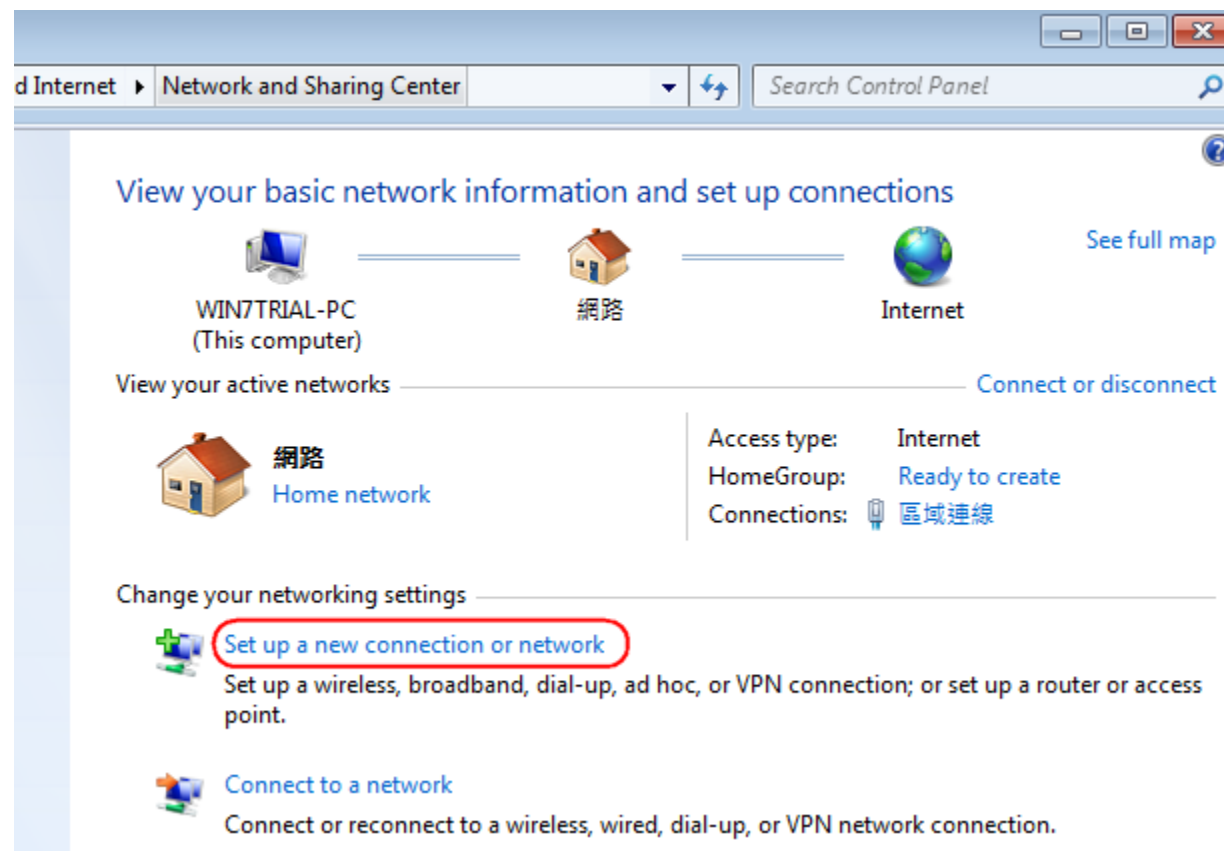

Choose **Connect to a workplace** from the option menu.

Click on **Next** to proceed.

Set Up a Connection or Network

Choose a connection option

Connect to the Internet
Set up a wireless, broadband, or dial-up connection to the Internet.

Set up a new network
Configure a new router or access point.

Connect to a workplace
Set up a dial-up or VPN connection to your workplace.

Set up a dial-up connection
Connect to the Internet using a dial-up connection.

Next

Cancel

Click **Use my Internet connection (VPN)**

Connect to a Workplace

How do you want to connect?

Use my Internet connection (VPN)
Connect using a virtual private network (VPN) connection through the Internet.

Dial directly
Connect directly to a phone number without going through the Internet.

[What is a VPN connection?](#)

Cancel

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Select checkbox **Don't connect now; just set it up so I can connect later**

Click on **Next** to proceed.

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card

☐ Allow other people to use this connection
This option allows anyone with access to this computer to use this connection.

☒ Don't connect now; just set it up so I can connect later

Next Cancel

Click **Close to finish.**

The connection is ready to use




→ Connect now


Close

Go back to **Network and Sharing Center**

Click on **Change adapter settings** to view all network adapters.

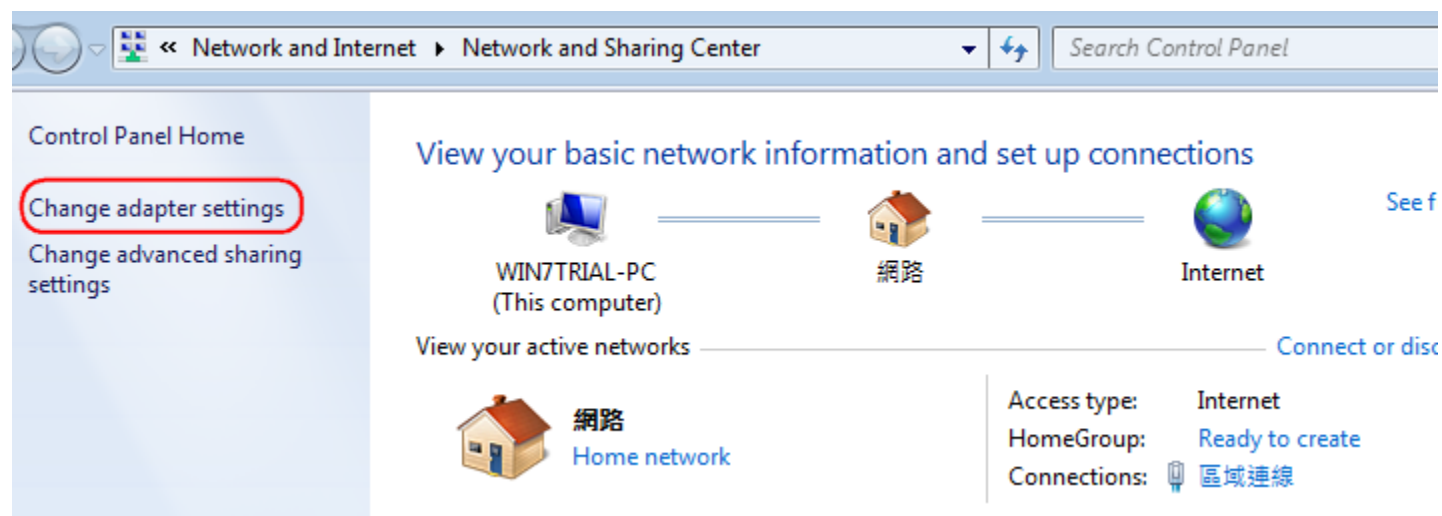


In the Network Connections window, find **homeVPN** (the new created VPN interface) and **right-click** on it.
In the pop-up menu, click on **Properties**.

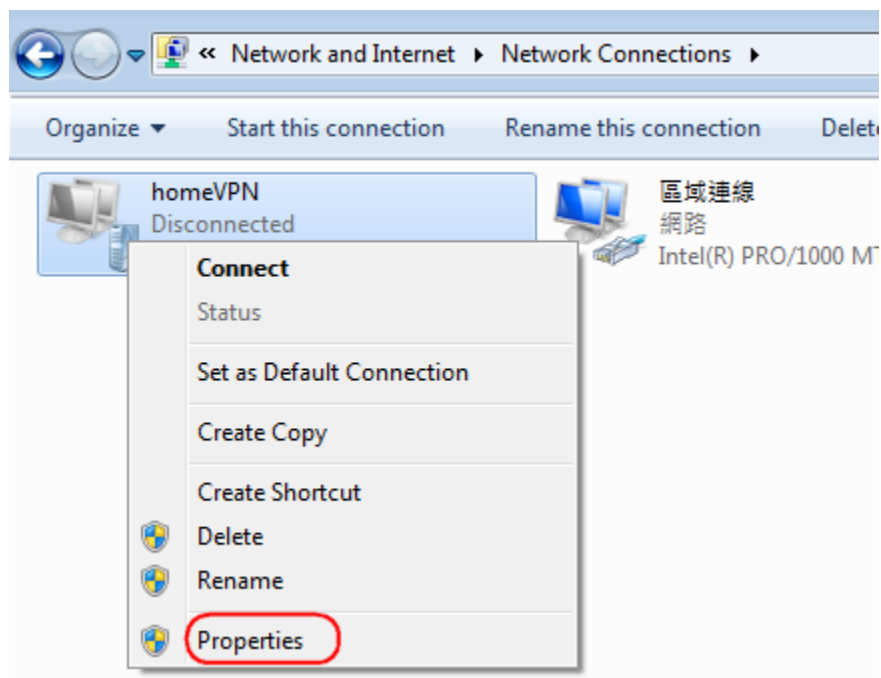


In the **Properties** window, click on **Security** tab.
Change Type of VPN to **Point to Point Tunneling Protocol (PPTP)**
Change **Require encryption** (disconnect if server declines)

Click **OK** to apply the change

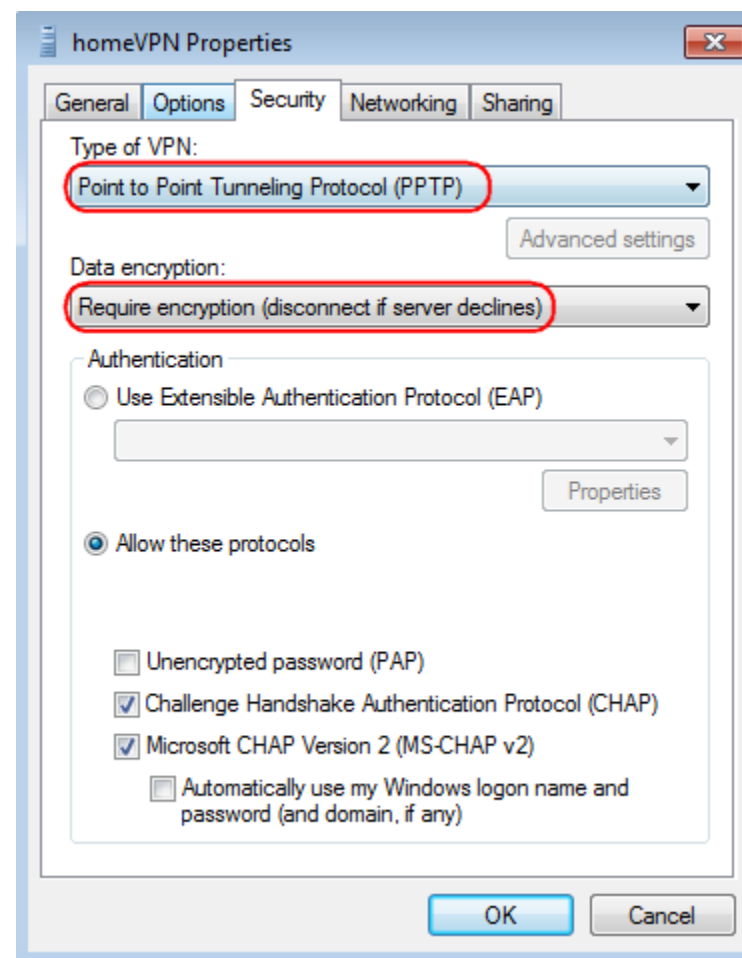

Back to **Network** Connections, find **homeVPN** and **right-click** on the icon.

Click **Connect** to establish the VPN tunnel.

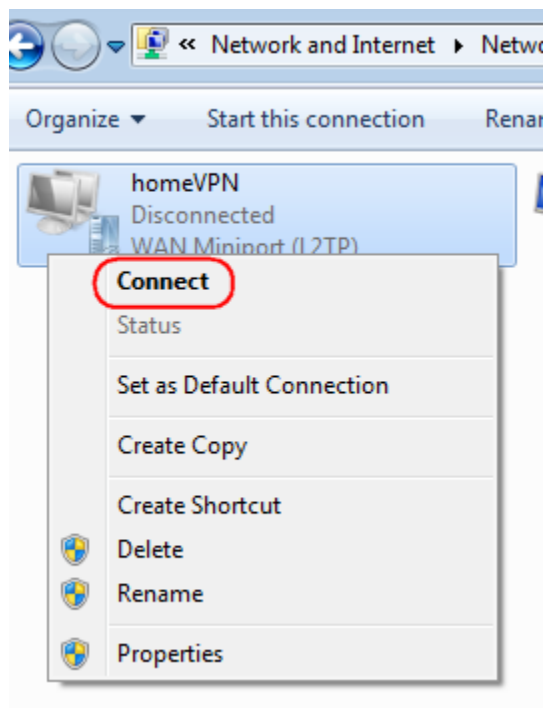


A window prompts for user verification, simply enter **pe-ter** for user name and **ax123456** for the password.


Click **Connect** to start connection.



Depends on the location and network traffic of your region this may take a while.

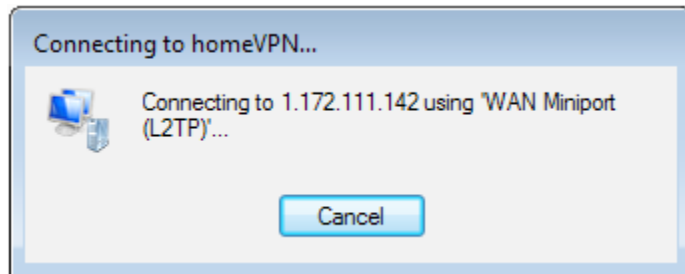


Once VPN tunnel is established successfully **homeVPN** will be marked **Connected**.
The client device can now access to the internal FTP server **192.168.0.116** over the Internet.

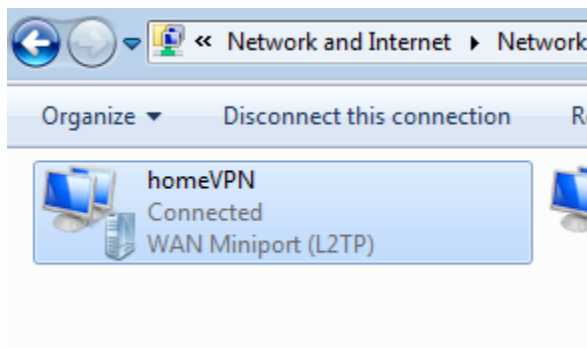


To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

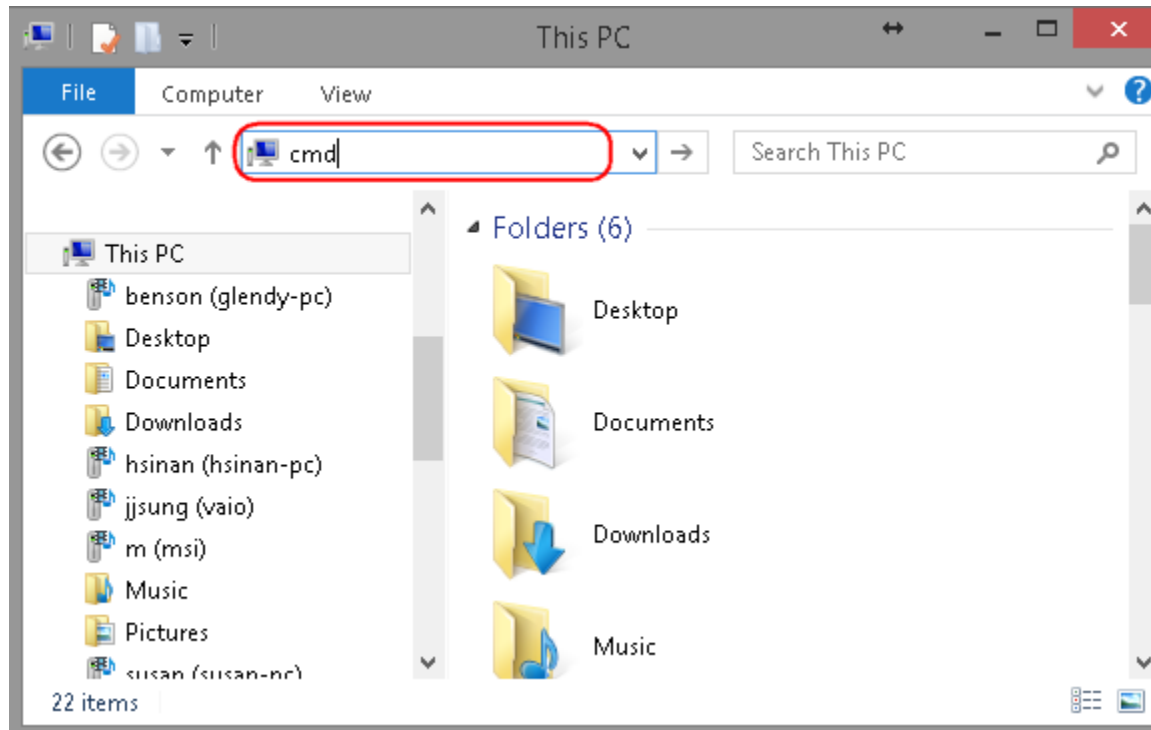

Under **Command Prompt** type in **ping 192.168.0.116**. Replies should be received as shown below.

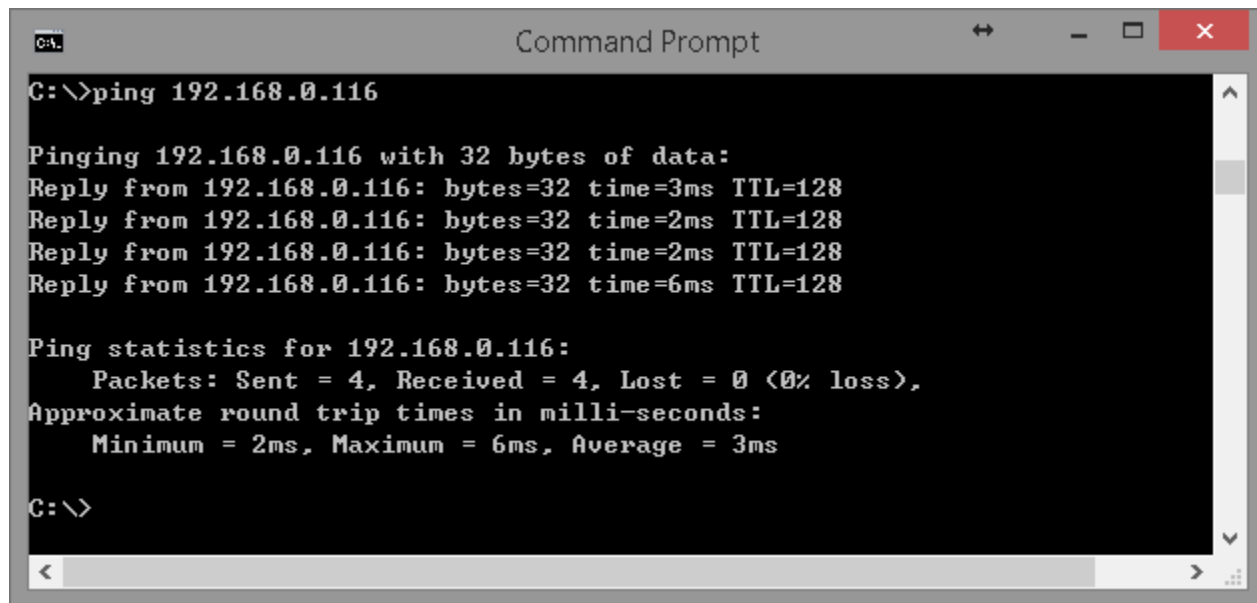


```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```


Windows 8

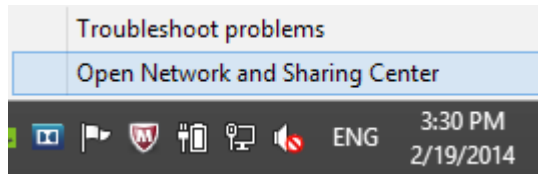

On the Task Bar, right click on the network interface icon.


Left-Click on **Open Network and Sharing Center**.

Under **Network and Sharing Center**, click on **Set up a new connection or network**.

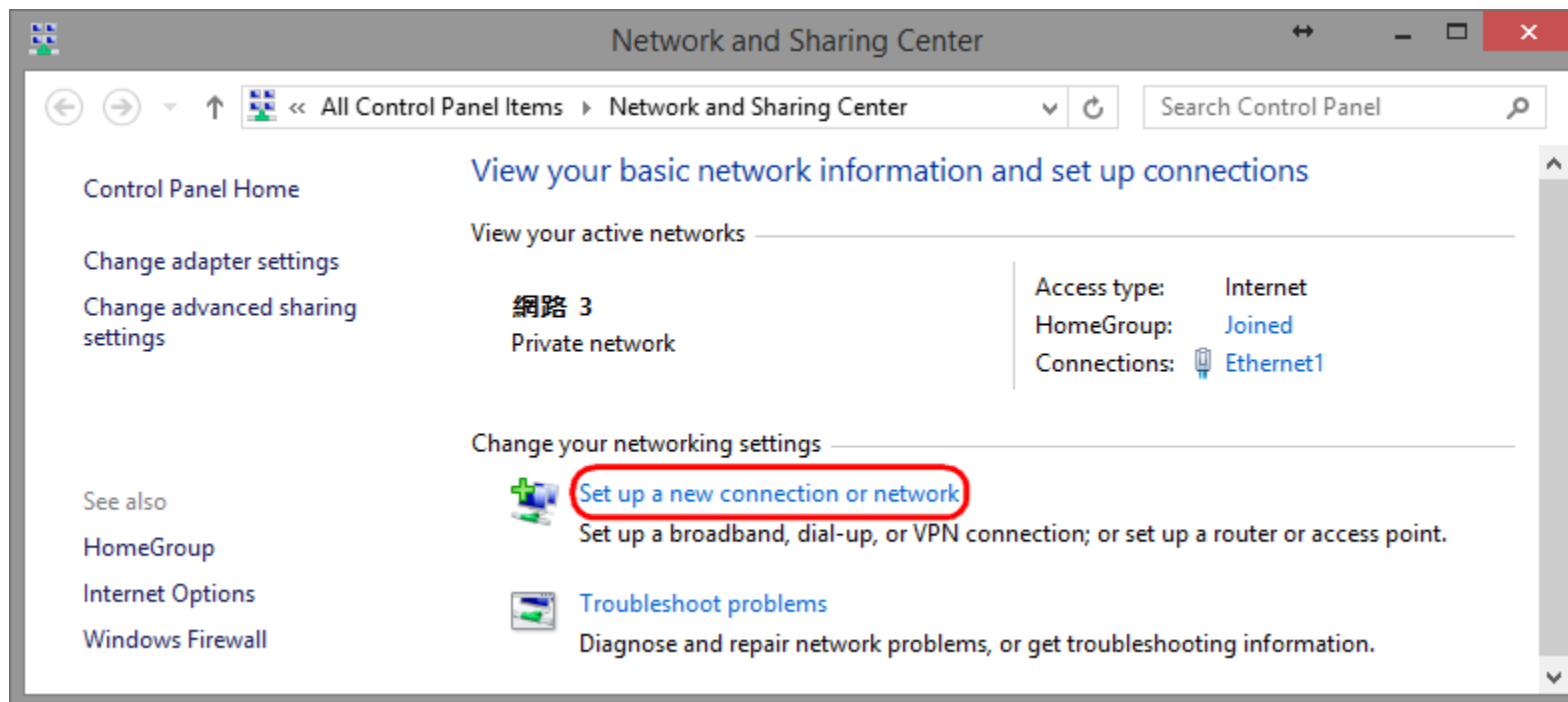


Choose **Connect to a workplace** from the option menu.

Click on **Next** to proceed.

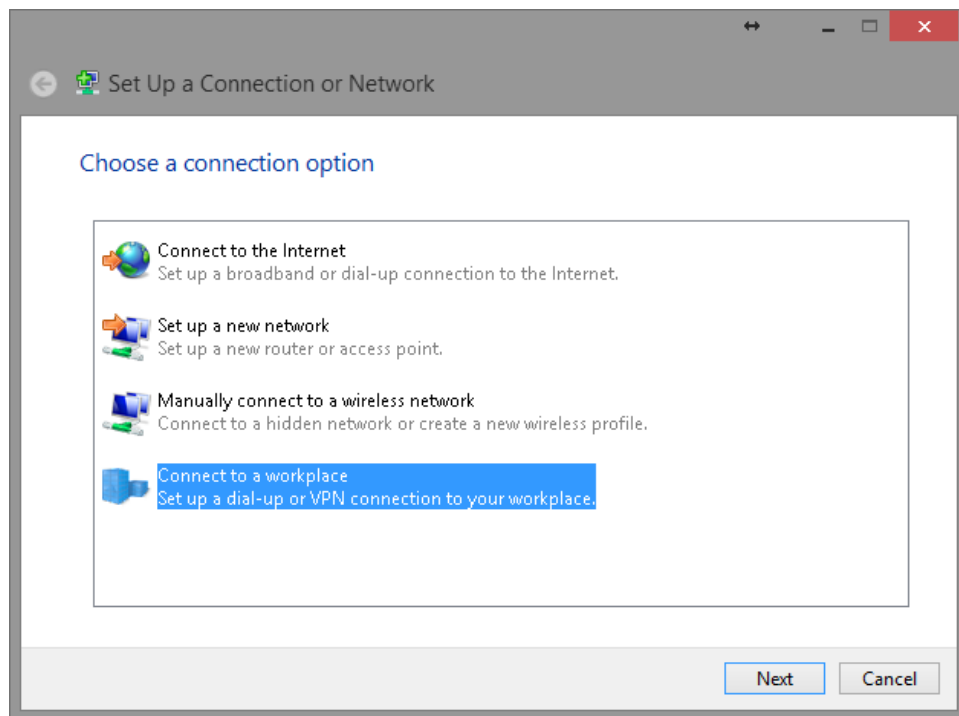


Click on **Use my Internet connection (VPN)**.

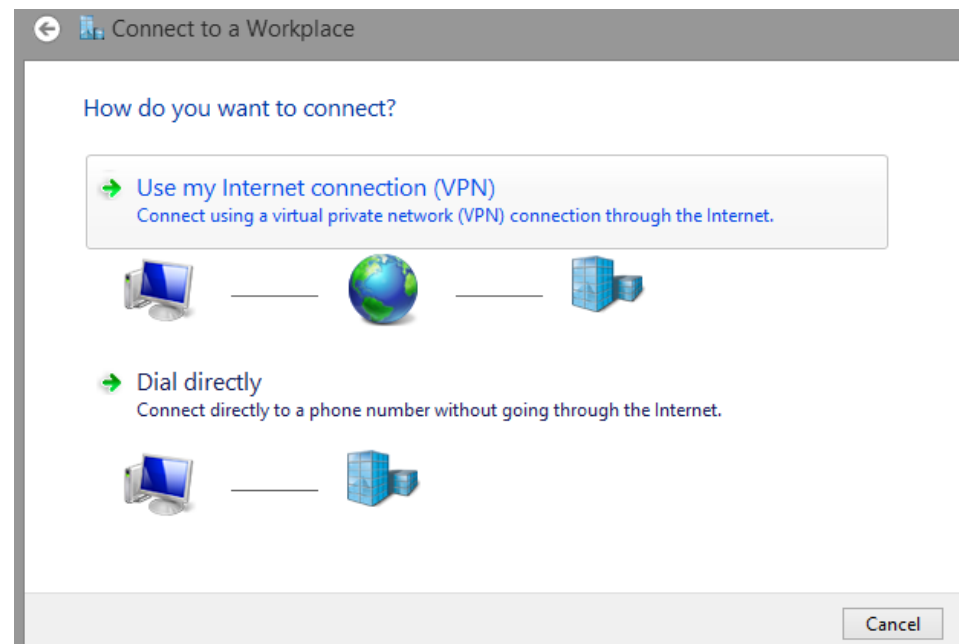

Internet address: type in the Gateway DDNS domain, in this example, **0f9e76a.engeniusddns.com**.

Destination name: enter a meaningful name; for instance, **homeVPN** is used for the example. This name will be used as the description of the new network interface you are about to create.

Click on **Create** to proceed.

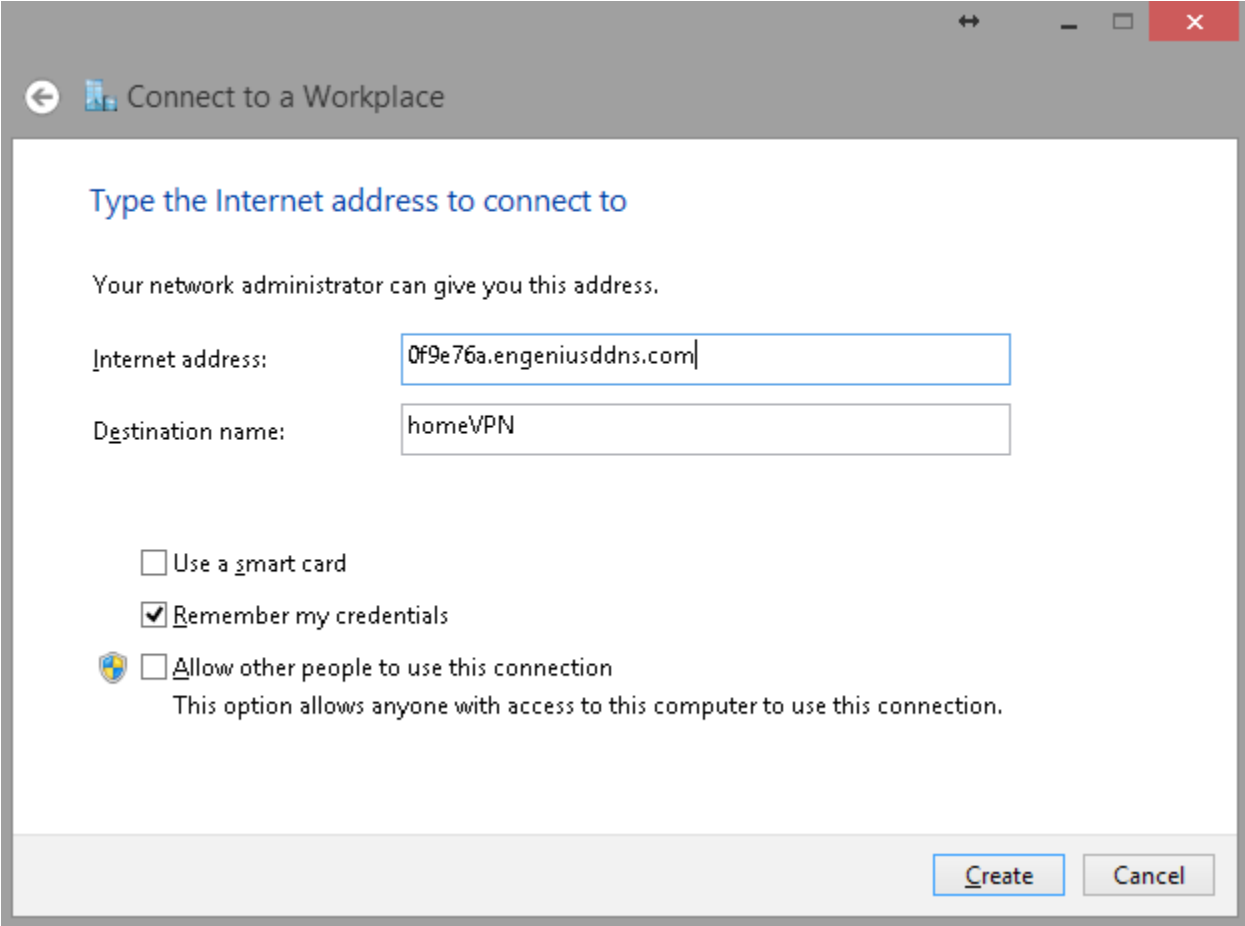

Connect to a Workplace

Type the Internet address to connect to

Your network administrator can give you this address.

Internet address: 0f9e76a.engeniusddns.com

Destination name: homeVPN

☐ Use a smart card


☒ Remember my credentials

☐ Allow other people to use this connection


This option allows anyone with access to this computer to use this connection.

Create Cancel

Please wait for a few seconds. The creation process will be completed once the following window disappear.

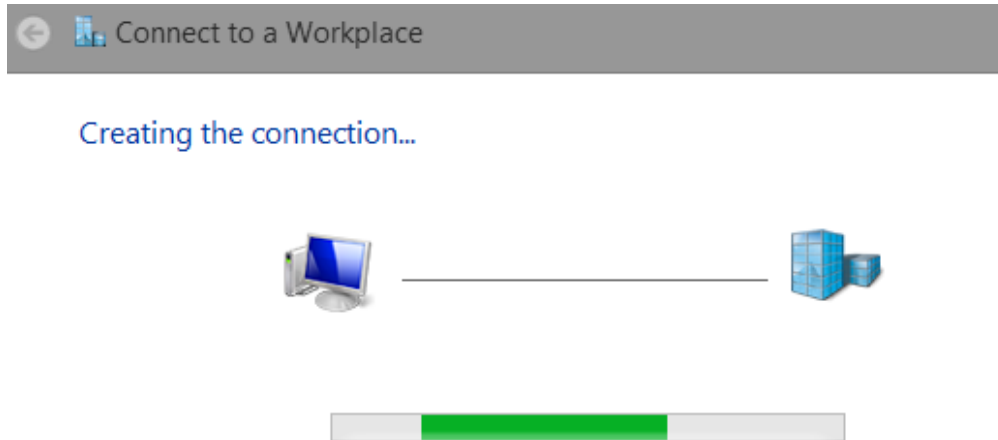


Go back to **Network and Sharing Center** and click on **Change adapter settings**.

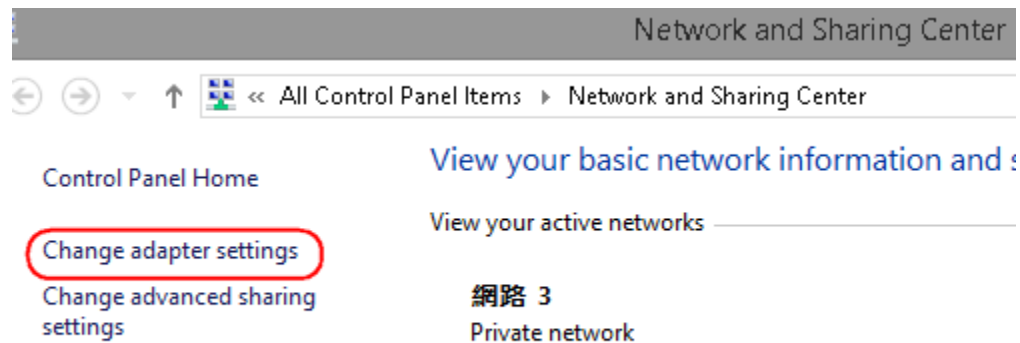

In the Network Connections window, find **homeVPN** icon and **right-click**.

Choose **Properties** to continue setting.

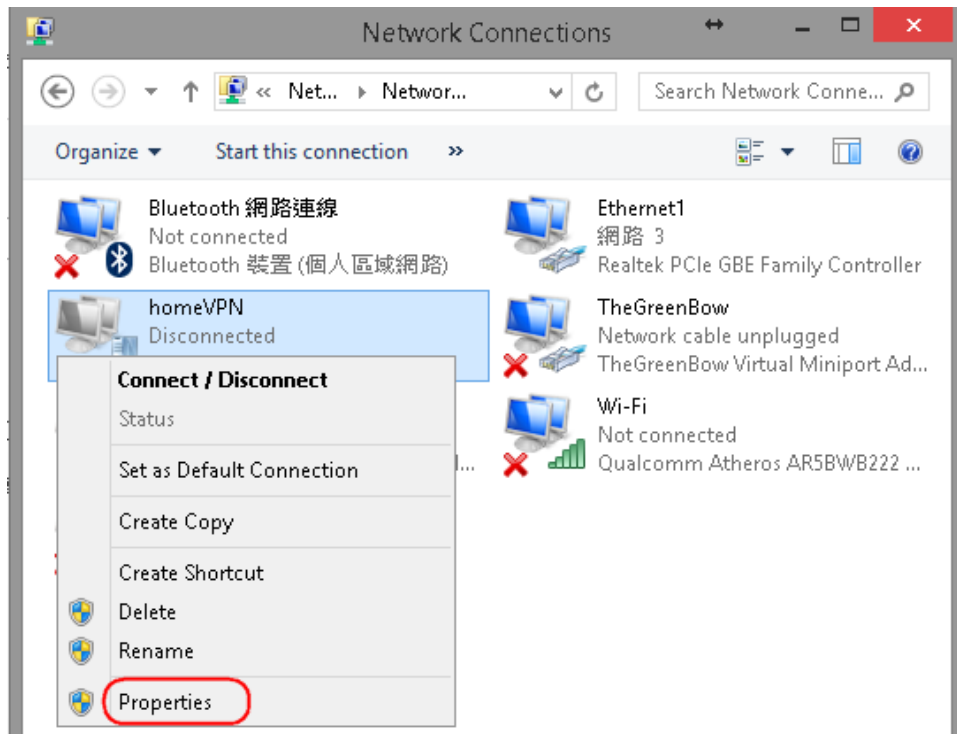


In the **Properties window**, click on **Security tab**.
Change Type of VPN to **Point to Point Tunneling Protocol (PPTP)**


Change **Require encryption** (disconnect if server declines)

Click **Allow these protocols**

Click **OK** to apply the change

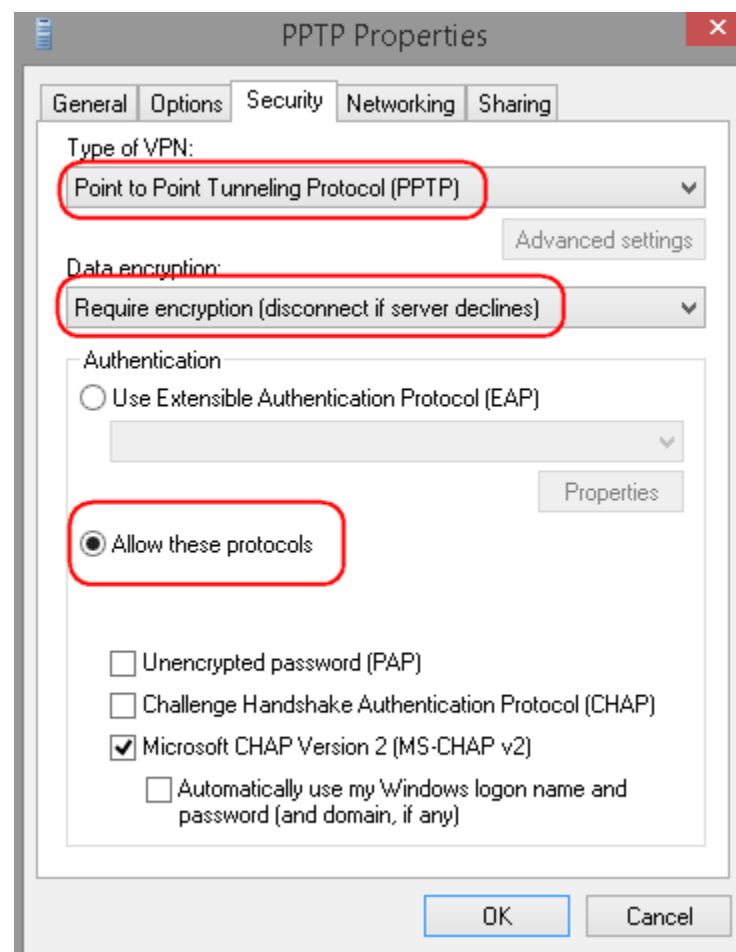


Left click on the network interface icon  on the task bar. The new interface **homeVPN** should be found as shown below.

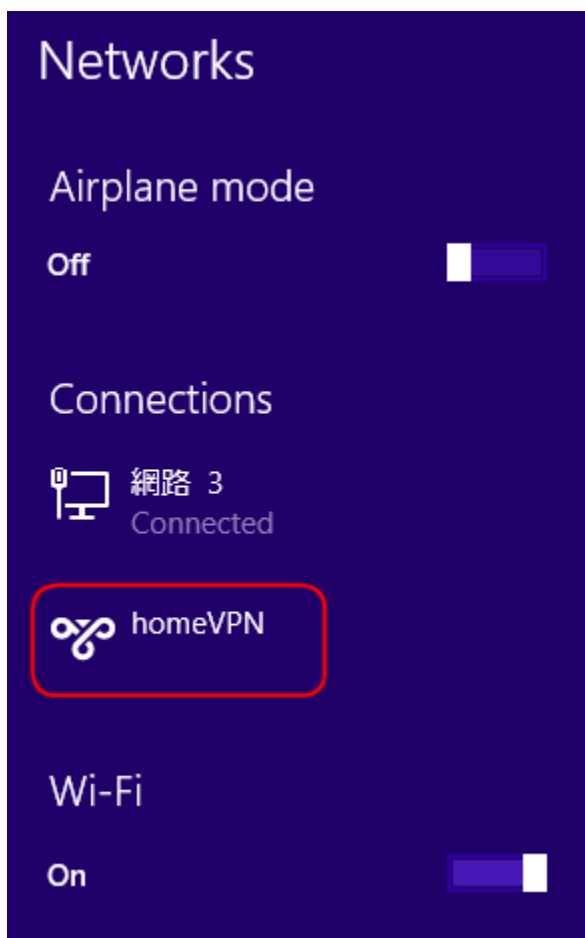


To connect to the VPN, click on **homeVPN**.

When the Connect button appears, click on Connect to initiate the link.

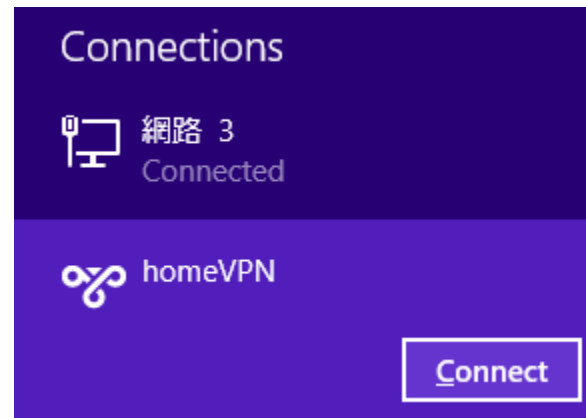


Now type in the username and password. In this example our user name is **peter** and password is **ax123456**. If you don't know the user name and password, please go back to **User Setting** under VPN section for detail.

Click **Ok** to start continue.

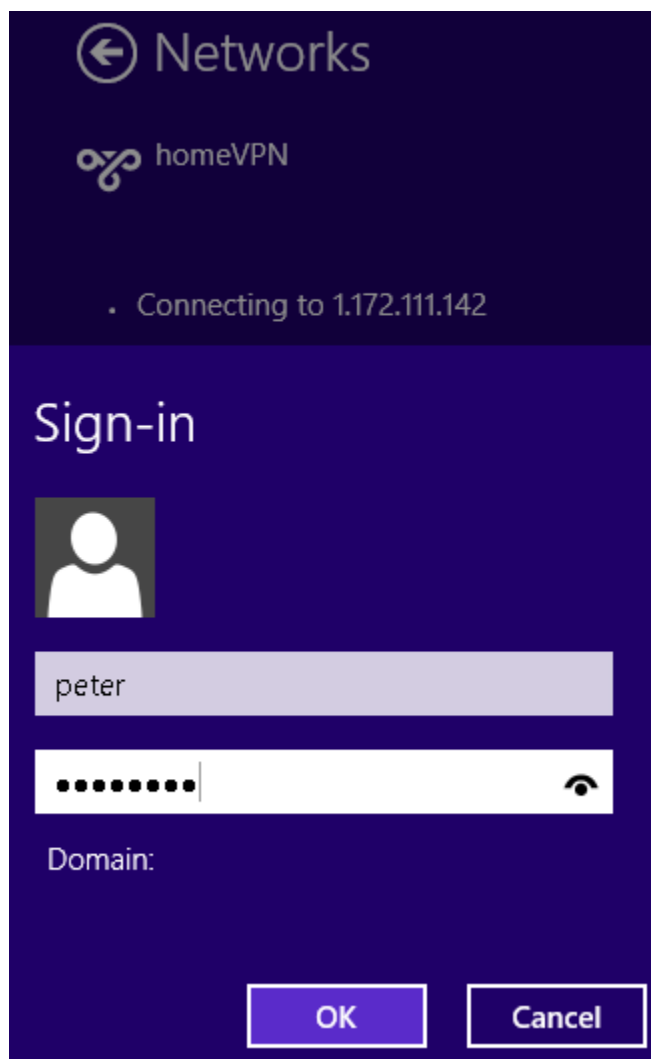

Depends on the location and network traffic of your region this may take a while.

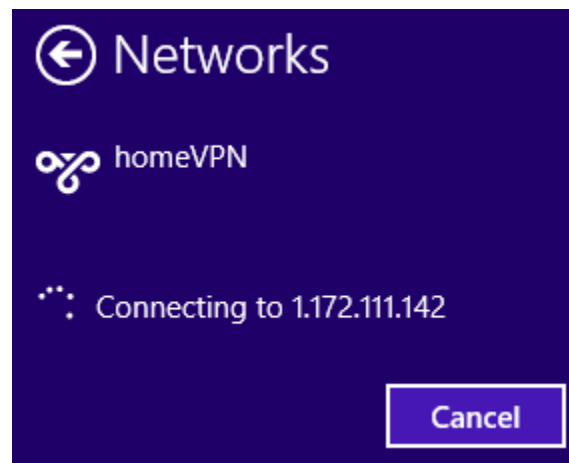


Once the VPN tunnel is established successfully, you should see your VPN interface labeled **Connected**. The client device can now access to the internal FTP server **192.168.0.116** over the Internet.




To verify the connection, please follow the instructions below.

Press keyboard  +  to run **File Explorer**.

Type in **cmd** then press Enter key to run **Command Prompt**

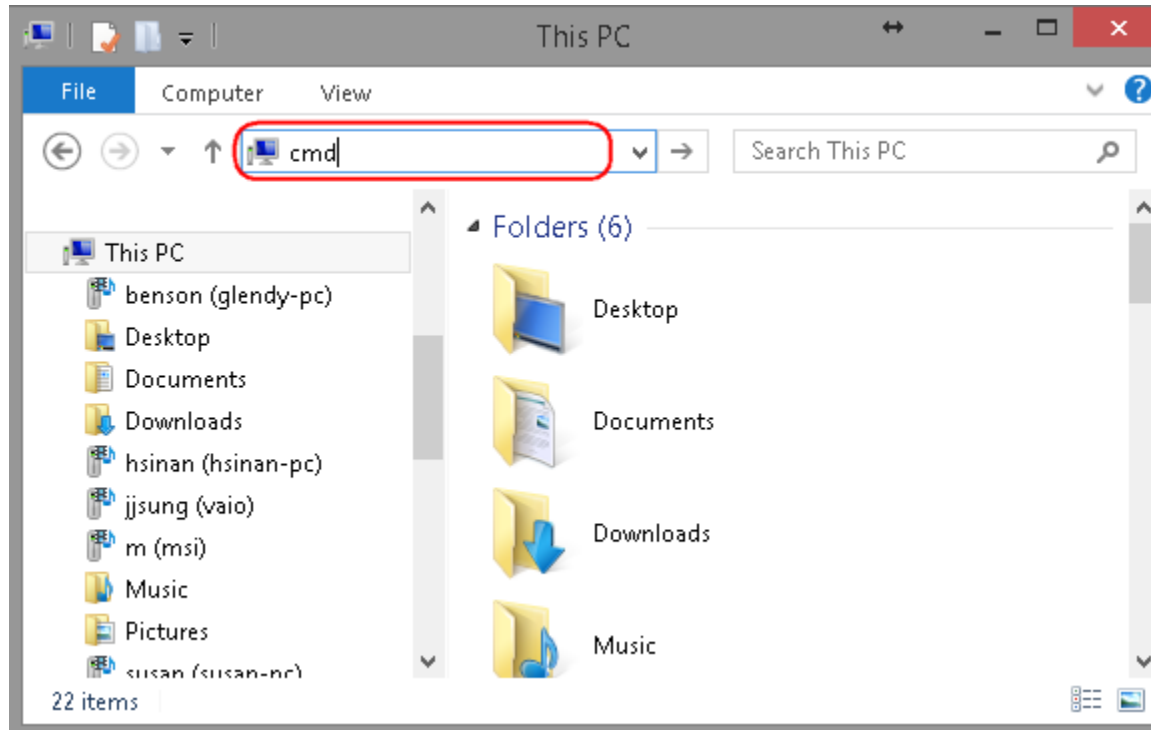

Under **Command Prompt type** in **ping 192.168.0.116**. Replies should be received as shown below.

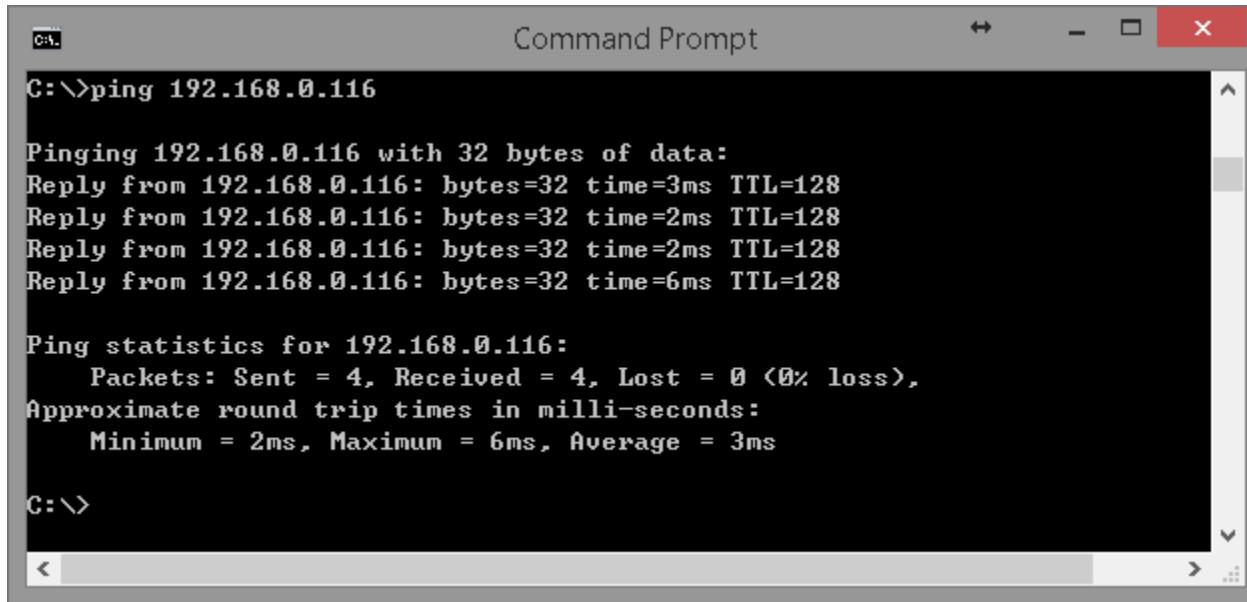

```
C:\>ping 192.168.0.116

Pinging 192.168.0.116 with 32 bytes of data:
Reply from 192.168.0.116: bytes=32 time=3ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=2ms TTL=128
Reply from 192.168.0.116: bytes=32 time=6ms TTL=128

Ping statistics for 192.168.0.116:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 6ms, Average = 3ms

C:\>
```

VPN Manual Setup (Server Side Only)

 VPN
Status
Profile Setting
User Setting
Wizard

This chapter demonstrates VPN manual setup on the server side using **Profile Setting** under VPN section. For VPN Client setup, please refers to VPN Wizard chapter for instructions.

If this is the first time you setup this VPN Gateway, the profile list should be empty as shown below. User is allowed to **Add**, **Edit** and **Delete** the selected profiles.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

Enable/Disable Profile

The VPN profiles can be enabled or disabled dynamically.

Click on the checkboxes under **Enable** column to set enable or disable the profile. Then, most importantly, click **Apply** button to apply the settings.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐

AddEditDelete SelectedDelete All

ApplyCancel

Add Profile

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

Click **Add** to create a new VPN profile.

General

SA

Network

Advanced

Name

officeVPN

Connection Type

IPSec

Authentication Type

pre-shared key

Shared Key

11112222

Confirm

11112222

Local ID Type

Domain Name

Local ID

0f9e76a.engeniusddns.com

Peer ID Type

IP Address

Peer ID

1.172.111.222

Apply

Cancel

On the Add page, user can switch between functional **tabs** (General, SA, Network, Advanced) to modify the profile setting. Please note that the page content will be slightly different depends on the profile VPN type (the diagram shows the content type **IPsec**).

After modifying the page content, click on **Apply** to create the profile.

Edit Profile

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☒
2	☒	PPTP	PPTP	192.168.0.0/24	192.168.2.201-230	N/A	192.168.2.1	☐

AddEditDelete SelectedDelete All

ApplyCancel

To modify a profile, **select** the profile to be edited.
Click on **Edit** button.

General

L2TP

Network

Name

homeVPN

Connection Type

L2TP over IPSec ▼

Shared Key

11112222

Confirm

11112222

Apply

Cancel

On the Edit page, user can switch between functional tabs (General, L2TP & Network) to modify the profile setting. Please note that the page content will be slightly different depends on the profile VPN type (the diagram shows the content of type L2TP over IPsec).
After modifying the page content, click on **Apply** to update the change.

Delete Profile(s)

To delete a single profile, **select** the profile to be deleted.

Click on **Delete Selected** button.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☒
2	☒	PPTP	PPTP	192.168.0.0/24	192.168.2.201-230	N/A	192.168.2.1	☐

Add

Edit

Delete Selected

Delete All

Apply

Cancel

Click **OK** to confirm.

Message from webpage

?

Do you really want to delete the selected entry?

OK

Cancel

To delete all VPN profiles, click on **Delete All** button.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
2	☒	PPTP	PPTP	192.168.0.0/24	192.168.2.201-230	N/A	192.168.2.1	☐

Add

Edit


Delete Selected

Delete All

Apply


Cancel

Click **OK** to confirm.

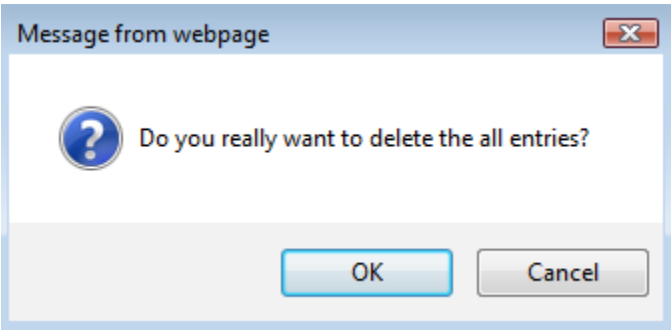

IPsec

The following diagram illustrates the example given in this section. This example consists of two VPN Gateways (servers) with unique DDNS 0f9e76**a** and 0f9e76**b**. IPsec site-to-site VPN tunnel will enable the PCs under these two sites to communicate despite of the different LANs (192.168.1.X and 192.168.2.X) they are under.

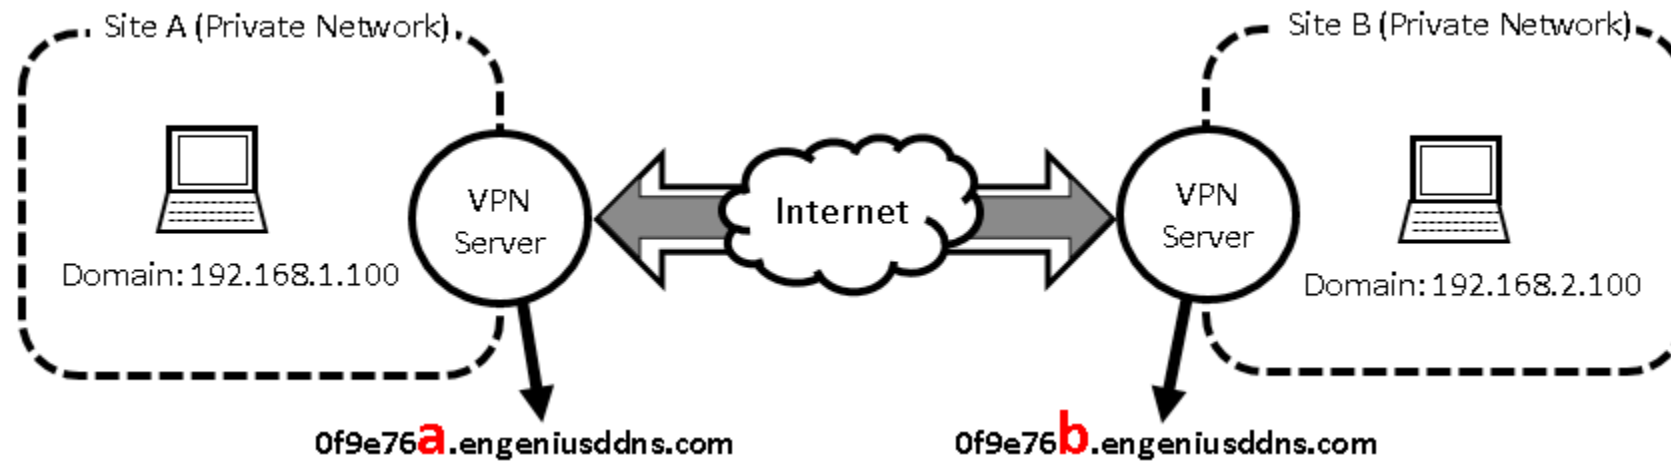

Site A Configuration

VPN
Status
Profile Setting
User Setting
Wizard

Click on **Profile Setting** under VPN section.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

Click on **Add** button to create a new VPN profile.

General Tab

General SA Network Advanced

Name	siteB
Connection Type	IPSec
Authentication Type	pre-shared key
Shared Key	11112222
Confirm	11112222
Local ID Type	Domain Name
Local ID	0f9e76a.engeniusddns.com
Peer ID Type	Domain Name
Peer ID	0f9e76b.engeniusddns.com

Apply

Cancel

Name Enter a name for the profile; for this example we enter **Site B** (meaning that it is used to connect to SiteB).

Connection Type: IPSec

Shared Key Create a shared key **11112222** for the profile and **Confirm** the shared key.

Local ID Type Select **Domain Name**.

Local ID: Type in the local DDNS 0f9e76a.engeniusddns.com

Peer ID Type: Select **Domain Name**.

Peer ID: Type in 0f9e76b.engeniusddns.com

SA

Unless otherwise defined by other vendor, please leave the default setting for this example.

GeneralSANetworkAdvanced

IKE(Phase 1)Proposal

ExchangeMain Mode

DH GroupGroup 2

Encryption3DES

AuthenticationSHA1

Life Time28800(1080-86400 Secs)

IPSec(Phase 2)Proposal

ProtocolESP

Encryption3DES

AuthenticationSHA1

Perfect Forward SecrecyEnableDisable

DH GroupGroup 2

Life Time28800(1080-86400 Secs)

ApplyCancel

Network

Security Gateway Type: select Domain Name
Security Gateway: enter 0f9e76b.engeniusddns.com (the peer DDNS).
Local Address: enter 192.168.1.100 (the address of this Gateway)
Local Netmask: enter 255.255.255.0
Remote Address: enter 192.168.2.0 (remote network domain)
Remote Netmask: enter 255.255.255.0

General

SA

Network

Advanced

Security Gateway Type

Domain Name ▾

Security Gateway

0f9e76b.engeniusddns.com

Local Network

Local Address

192.168.1.100

Local Netmask

255.255.255.0

Remote Network

Remote Address

192.168.2.0

Remote Netmask

255.255.255.0

Apply

Cancel

Advanced

Unless otherwise defined by other vendor, please leave the default setting for this example.

General

SA

Network

Advanced

NAT Traversal

☒ Enable ☐ Disable

Dead Peer Detection


☐ Enable ☒ Disable

Apply

Cancel

Click **Apply** to finish the creation process.

L2TP over IPsec

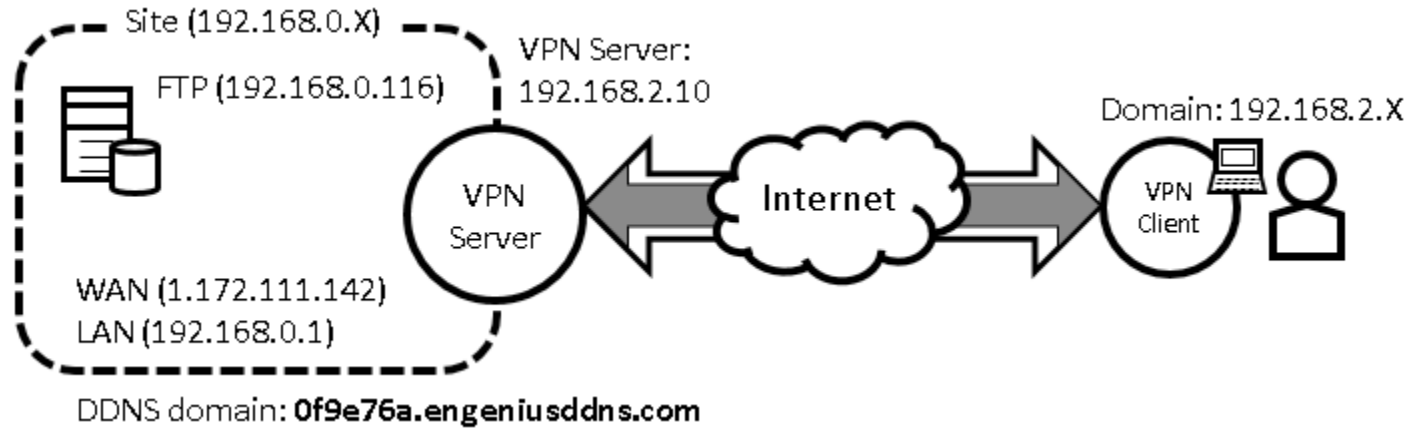

VPN Server Side Information:

Private Network domain: 192.168.0.X

Domain net mask: 255.255.255.0

DDNS domain: 0f9e76a.engeniusddns.com

LAN IP: 192.168.0.1

Pre-shared key: 11112222

User Name: peter

Password: ax123456

VPN Server Address: 192.168.2.10

Client Side:

VPN Client will be assigned with an IP address **192.168.2.X** address when the tunnel is established.

VPN
Status
Profile Setting
User Setting
Wizard

Click on **Profile Setting** under VPN section.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

Click on **Add** button to create a new VPN profile.

General Tab

Name: Assign a VPN profile name by typing homeVPN (or any other preferable name)

Connection Type: select L2TP over IPSec

Shared Key: enter 11112222

Confirm: enter 11112222

Click on **L2TP** tab to proceed.

General

L2TP

Network

Name

homeVPN

Connection Type

L2TP over IPSec ▼

Shared Key

11112222

Confirm

11112222

L2TP Tab

Authentication: leave as default **MSCHAP_V2**.

Add user peter to Member list by clicking on peter and then click >> button.

The screenshot shows the 'L2TP' tab selected in a configuration window. Under 'L2TP Settings', the 'Authentication' dropdown is set to 'MSCHAP_V2'. In the 'Available Users' list, the user 'peter' is highlighted with a blue background and a red circle. To the right of this list is a red '>>' button, also circled in red. Below the 'Available Users' list is a 'john' entry. To the right of the '>>' button is a '<<' button. The 'Member' list on the right is currently empty.

Once the user is added, the user name **peter** will appear under the Member list.

This screenshot shows the same configuration window after the user has been added. The 'Available Users' list now only contains 'john'. The 'Member' list on the right now contains the user 'peter', which is highlighted with a red circle. The '>>' and '<<' buttons remain between the two lists.

Click on **Network Tab** to proceed.

Network Tab

VPN Server IP Setting: enter 192.168.2.10
Remote IP range: type in 192.168.2.100 and 200 into the Remote IP range fields.

Click **Apply** to finish the creation process.

General

L2TP

Network

VPN Server IP Setting

Server IP

192.168.2.10

Remote IP range

192.168.2.100

-

200

Apply

Cancel

The created profile will be shown on the Profile Setting section. At this stage, the profile is not yet enabled. To enable the profile, click on **Enable**.

Finally, click on Apply.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP over IPSec	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
Add Edit Delete Selected Delete All Apply Cancel								

Module is reloading, please wait 13 seconds

The new profile is now activated.

Site B Configuration

 VPN
Status
Profile Setting
User Setting
Wizard

Click on **Profile Setting** under VPN section.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

Click on **Add** button to create a new VPN profile.

General Tab

General SA Network Advanced

Name	siteA
Connection Type	IPSec
Authentication Type	pre-shared key
Shared Key	11112222
Confirm	11112222
Local ID Type	Domain Name
Local ID	0f9e76b.engeniusddns.com
Peer ID Type	Domain Name
Peer ID	0f9e76a.engeniusddns.com

Apply

Cancel

Name Enter a name for the profile; for this example we enter **siteA** (meaning that it is used to connect to Site A).

Connection Type: IPSec

Shared Key: Create a shared key **11112222** for the profile and **Confirm** the shared key.

Local ID Type Select **Domain Name**.

Local ID: Type in 0f9e76**b**.engeniusddns.com (local DDNS)

Peer ID Type: Select **Domain Name**.

Peer ID: Type in 0f9e76**a**.engeniusddns.com (peer DDNS)

SA

Unless otherwise defined by other vendor, please leave the default setting for this example.

General

SA

Network

Advanced

IKE(Phase 1)Proposal

Exchange

Main Mode

DH Group

Group 2

Encryption

3DES

Authentication

SHA1

Life Time

28800

(1080-86400 Secs)

IPSec(Phase 2)Proposal

Protocol

ESP

Encryption

3DES

Authentication

SHA1

Perfect Forward Secrecy

Enable

Disable

DH Group

Group 2

Life Time

28800

(1080-86400 Secs)

Apply

Cancel

Network

- Security Gateway Type:** select Domain Name
- Security Gateway:** enter 0f9e76b.engeniusddns.com (if this Gateway is Site A).
- Local Address:** enter 192.168.2.100 (the address of this Gateway)
- Local Netmask:** enter 255.255.255.0
- Remote Address:** enter 192.168.1.0 (remote network domain)
- Remote Netmask:** enter 255.255.255.0

General

SA

Network

Advanced

Security Gateway Type

Domain Name ▾

Security Gateway

0f9e76b.engeniusddns.com

Local Network

Local Address

192.168.1.100

Local Netmask

255.255.255.0

Remote Network

Remote Address

192.168.2.0

Remote Netmask


255.255.255.0

Apply

Cancel

Advanced

Unless otherwise defined by other vendor, please leave the default setting for this example.

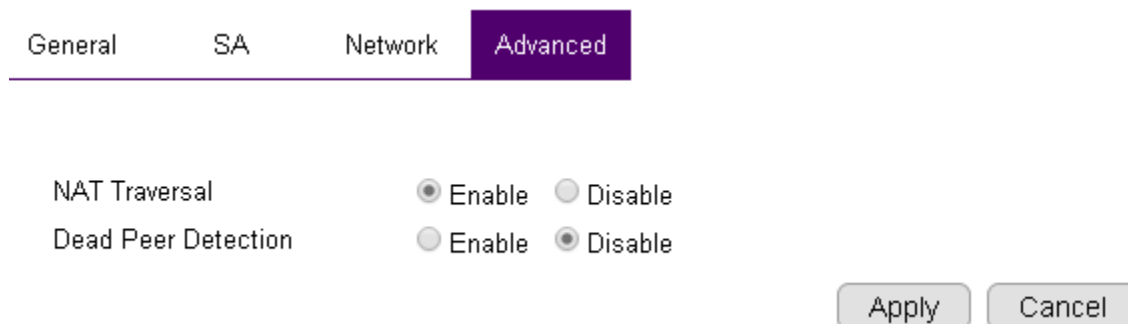

The screenshot shows a configuration window with four tabs: General, SA, Network, and Advanced. The Advanced tab is selected and highlighted in blue. Below the tabs, there are two settings: NAT Traversal and Dead Peer Detection. Each setting has two radio button options: Enable and Disable. For NAT Traversal, the Enable option is selected. For Dead Peer Detection, the Disable option is selected. At the bottom right of the settings area, there are two buttons: Apply and Cancel.


General	SA	Network	Advanced
---------	----	---------	----------

NAT Traversal	☒ Enable	☐ Disable
Dead Peer Detection	☐ Enable	☒ Disable


Click **Apply** to finish the creation process.

Client-to-Site

The following diagram illustrates the example given in this section. This example consists of a VPN Gateway (servers) with unique DDNS 0f9e76a. A client device (PC or laptop) with the VPN-client software TheGreenBow installed.

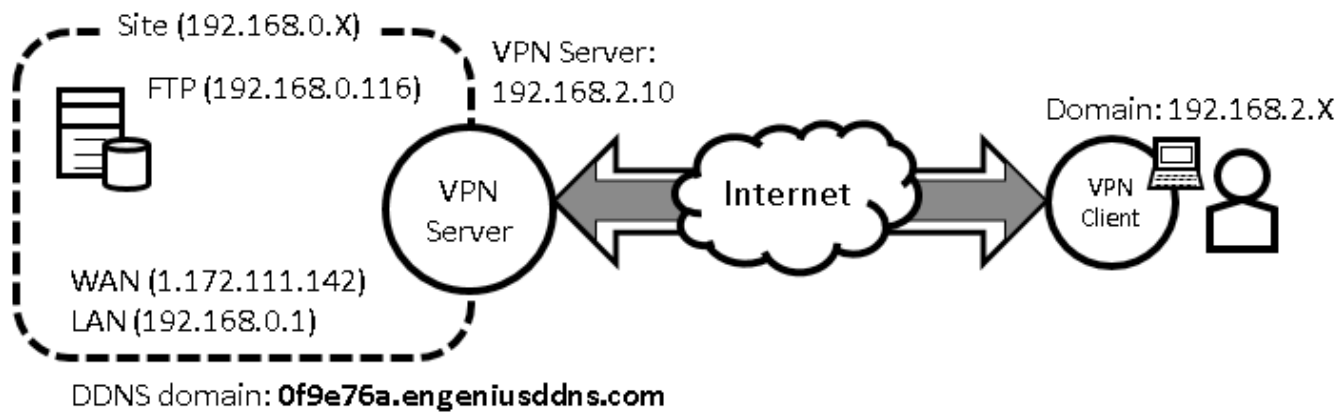

Click on **Profile Setting** under **VPN** section.

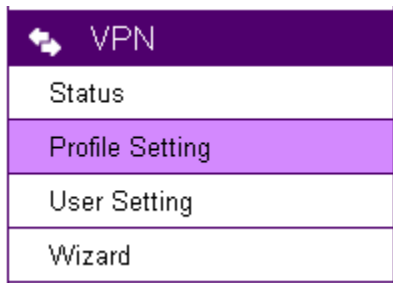

Click on **Add** button to create a new VPN profile.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								

General Tab

Name: Assign a VPN profile name by typing homeVPN (or any other preferable name)

Connection Type: IPSec

Shared Key: 11112222

Confirm: enter 11112222 again.

Local ID Type: Select **Domain Name**.

Local ID: Type in 0f9e76a.engeniusddns.com for this example.

Peer ID Type: Leave default

Local ID: Leave blank

General

SA

Network

Advanced

Name

homeVPN

Connection Type

IPSec

Authentication Type

pre-shared key

Shared Key

11112222

Confirm

11112222

Local ID Type

Domain Name

Local ID

0f9e76a.engeniusddns.com

Peer ID Type

IP Address

Peer ID

Apply

Cancel

SA Tab

Unless otherwise defined by other vendor, please leave the default setting for this example.

GeneralSANetworkAdvanced

IKE(Phase 1)Proposal

ExchangeMain Mode

DH GroupGroup 2

Encryption3DES

AuthenticationSHA1

Life Time28800(1080-86400 Secs)

IPSec(Phase 2)Proposal

ProtocolESP

Encryption3DES

AuthenticationSHA1

Perfect Forward SecrecyEnableDisable

DH GroupGroup 2

Life Time28800(1080-86400 Secs)

ApplyCancel

Network Tab

Security Gateway Type: select Domain Name

Security Gateway: leave it blank

Local Address: enter 192.168.0.1 (the address of this Gateway)

Local Netmask: enter 255.255.255.0

Remote Address: leave it blank

Remote Netmask: leave it blank

General

SA

Network

Advanced

Security Gateway Type

IP Address ▼

Security Gateway

Local Network

Local Address

192.168.0.1

Local Netmask

255.255.255.0

Remote Network

Remote Address

Remote Netmask

Apply

Cancel

Advanced Tab

Unless otherwise defined by other vendor, please leave the default setting for this example.


Click **Apply** to complete the setting.

General SA Network **Advanced**

NAT Traversal ☒ Enable ☐ Disable
Dead Peer Detection ☐ Enable ☒ Disable

Apply Cancel

L2TP

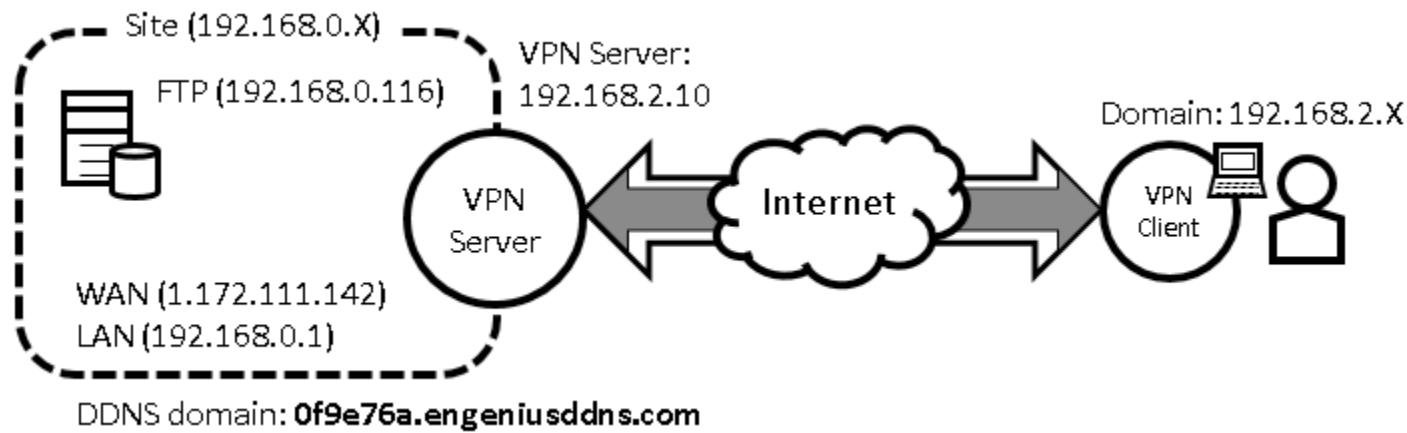

VPN Server Side Information:

Private Network domain: 192.168.0.X

Domain net mask: 255.255.255.0

DDNS domain: 0f9e76a.engeniusddns.com

LAN IP: 192.168.0.1

User Name: peter

Password: ax123456

VPN Server Address: 192.168.2.10

Client Side:

VPN Client will be assigned with an IP address 192.168.2.X address when the tunnel is established.

VPN
Status
Profile Setting
User Setting
Wizard

Click on **Profile Setting** under VPN section.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								


Click on **Add** button to create a new VPN profile.

General Tab

Name: Assign a VPN profile name by typing homeVPN (or any other preferable name)

Connection Type: select L2TP

Click on **L2TP** tab to proceed.

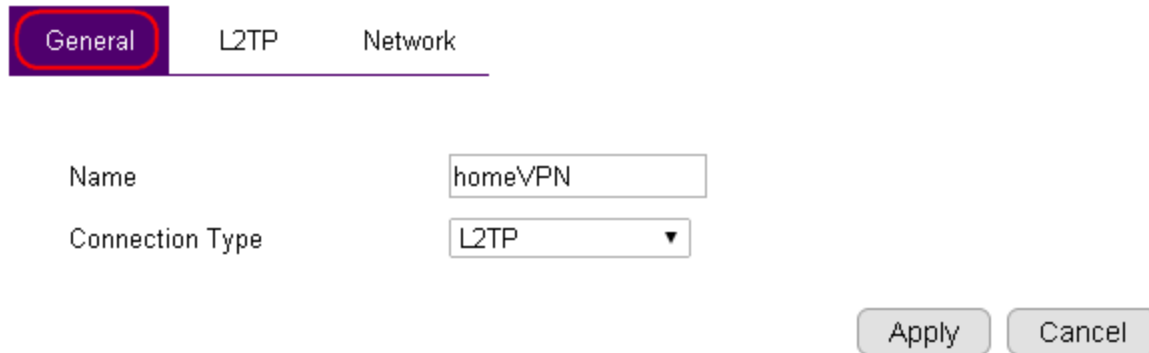

The screenshot shows a dialog box with three tabs: "General", "L2TP", and "Network". The "General" tab is selected and highlighted with a red border. Below the tabs, there are two input fields: "Name" with the text "homeVPN" and "Connection Type" with a dropdown menu showing "L2TP". At the bottom right, there are two buttons: "Apply" and "Cancel".

Tab	Name	Connection Type
General	homeVPN	L2TP
L2TP		
Network		

Buttons: Apply, Cancel

L2TP Tab

Authentication: leave as default MSCHAP_V2.

Add user peter to Member list by clicking on peter and then click >> button.

The screenshot shows the 'L2TP Settings' window with three tabs: 'General', 'L2TP' (selected), and 'Network'. Under 'Authentication', 'MSCHAP_V2' is selected. In the 'Available Users' list, 'peter' is highlighted with a red rectangle. To the right of this list are two buttons: '>>' (highlighted with a red rectangle) and '<<'. To the right of these buttons is an empty 'Member' list.

Once the user is added, the user name **peter** will appear under the Member list.

The screenshot shows the same 'L2TP Settings' window. In the 'Available Users' list, only 'john' is visible. The '>>' button is still present. In the 'Member' list, 'peter' is now listed and highlighted with a red rectangle.

Click on **Network Tab** to proceed.

Network Tab

VPN Server IP Setting: enter 192.168.2.10
Remote IP range: type in 192.168.2.100 and 200 into the Remote IP range fields.

Click **Apply** to finish the creation process.

General

L2TP

Network

VPN Server IP Setting

Server IP

192.168.2.10

Remote IP range

192.168.2.100

-

200

Apply

Cancel

The created profile will be shown on the Profile Setting section. At this stage, the profile is not yet enabled.


To enable the profile, click on **Enable**.
Finally, click on **Apply**.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
Add Edit Delete Selected Delete All Apply Cancel								

Module is reloading, please wait 13 seconds

The new profile is now activated.

PPTP

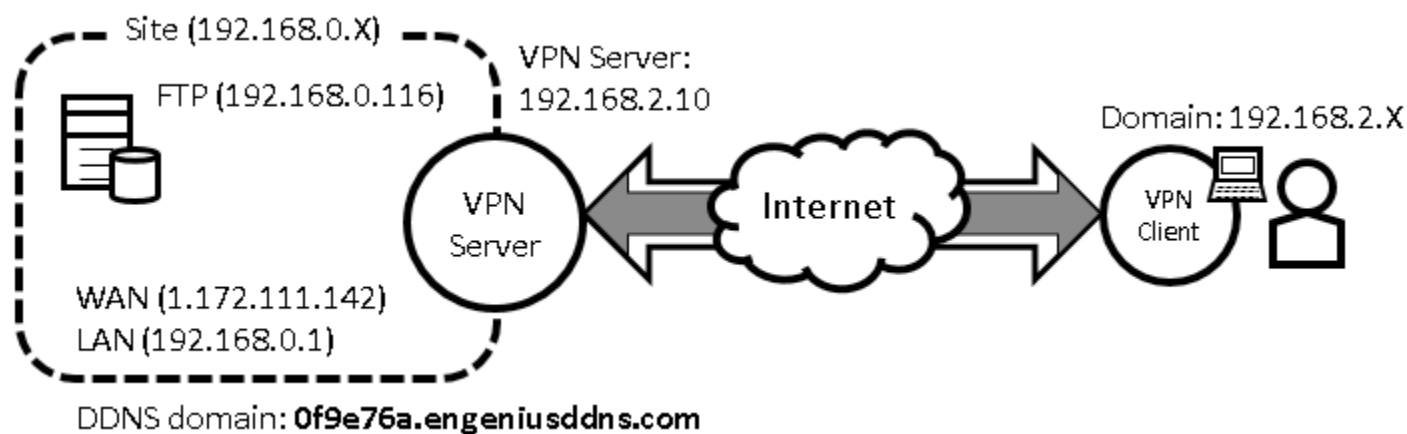

VPN Server Side Information:

Private Network domain: 192.168.0.X

Domain net mask: 255.255.255.0

DDNS domain: 0f9e76a.engeniusddns.com

LAN IP: 192.168.0.1

User Name: peter

Password: ax123456

VPN Server Address: 192.168.2.10

Client Side:

VPN Client will be assigned with an IP address 192.168.2.X address when the tunnel is established.

VPN
Status
Profile Setting
User Setting
Wizard

Click on **Profile Setting** under VPN section.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
Add Edit Delete Selected Delete All Apply Cancel								


Click on **Add** button to create a new VPN profile.

General Tab

Name: Assign a VPN profile name by typing homeVPN (or any other preferable name)

Connection Type: select PPTP

Click on **PPTP** tab to proceed.

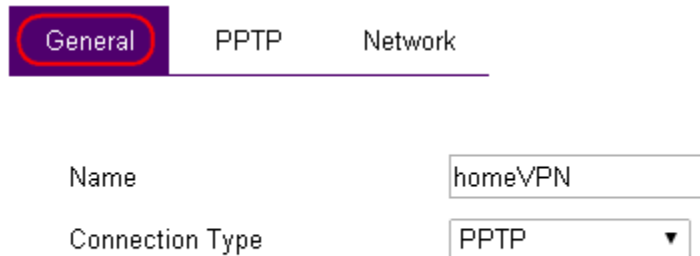

The screenshot shows a window with three tabs: 'General', 'PPTP', and 'Network'. The 'General' tab is selected and highlighted with a red border. Below the tabs, there are two input fields. The first is labeled 'Name' and contains the text 'homeVPN'. The second is labeled 'Connection Type' and is a dropdown menu with 'PPTP' selected and a downward arrow icon.

Tab	Name	Connection Type
General	homeVPN	PPTP ▼
PPTP		
Network		

PPTP Tab

Authentication: leave as default MSCHAP_V2.

Add user peter to Member list by clicking on peter and then click >> button.

The screenshot shows the PPTP configuration window with three tabs: General, PPTP (selected), and Network. Under PPTP Settings, Authentication is set to MSCHAP_V2 and Encryption is set to 128-bit. In the Available Users list, the user 'peter' is highlighted with a red rectangle. A red rectangle also highlights the '>>' button between the Available Users and Member lists. The Member list is currently empty.

Once the user is added, the user name **peter** will appear under the Member list.

The screenshot shows the PPTP configuration window after the user has been added. The Available Users list now only contains 'john'. The Member list now contains 'peter', which is highlighted with a grey background. The '>>' and '<<' buttons are still visible between the two lists.

Click on **Network Tab** to proceed.

Network Tab

VPN Server IP Setting: enter 192.168.2.10
Remote IP range: type in **192.168.2.100** and **200** into the Remote IP range fields.

Click **Apply** to finish the creation process.

General

PPTP

Network

VPN Server IP Setting

Server IP

192.168.2.1

Remote IP range

192.168.2.100

-

200

Apply

Cancel

The created profile will be shown on the Profile Setting section. At this stage, the profile is not yet enabled.
To enable the profile, click on **Enable**.
Finally, click on **Apply**.

No.	Enable	Name	Type	Local Address	Remote Address	Crypto-suite	Gateway	Select
1	☒	homeVPN	L2TP	192.168.0.0/24	192.168.2.100-200	N/A	192.168.2.10	☐
Add Edit Delete Selected Delete All Apply Cancel								


Module is reloading, please wait **13** seconds

The new profile is now activated.


How to use EnShare function?

EnShare


The EnShare interface allows user to connect storage devices such as USB flash-disk or portable/external hard-disk. The USB configuration functions can be located under USB port section. The following guide will demonstrate how to make use of the major functions easily.

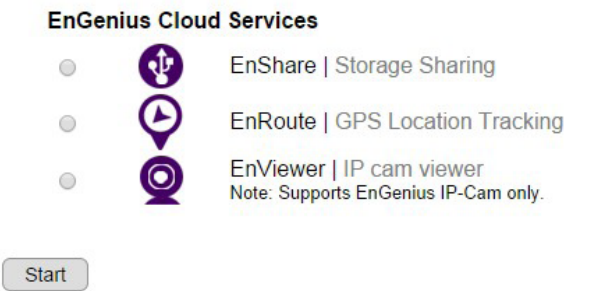

Login into your Gateway Portal page and click on **EnShare**.

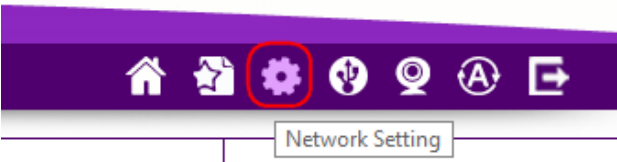


Or login into your Gateway management page and click on **Network Setting**. Click on **EnShare** to open the sub-menu.

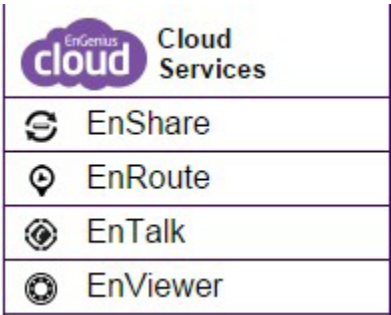



Note:For demonstration purpose, the following guide uses a USB flash-disk as an example. In this example, the Gateway has been pre-configured and is accessible on the Internet using DDNS domain name. Both File Sharing and File Server are enabled.

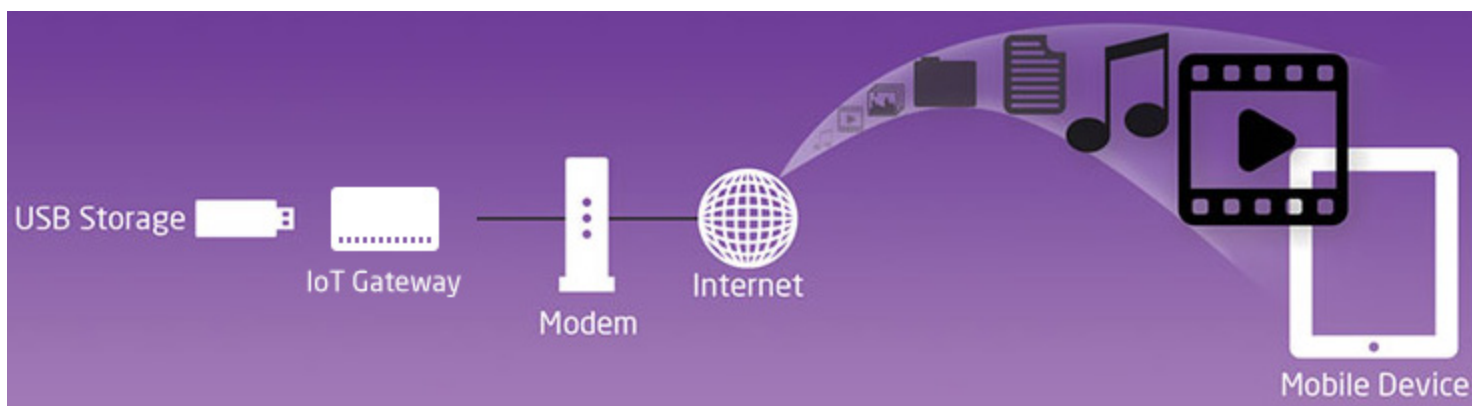

Guest Account

If you are the only user (administrator) that will accesses the shared files, please skip this section.

Since files can be shared by many people, there will be times where you want to limit some users to see only specific files. The user of limited access is referred to as a **“guest”**. While you are using Administrator account, the guest should use a **Guest Account** with a different user name and password to access the files.

Guest Account is the place you can manage the guest account.

 USB Port
File Sharing
File Server
Guest Account
DLNA

By default the guest account is **disabled**.

☐ Enable ☒ Disable

Login Name

Old Password

New Password

Repeat New Password

Guest Folder Name

Apply

Cancel

☒ Enable ☐ Disable

Login Name

Old Password

New Password

Repeat New Password

Guest Folder Name

Apply

Cancel

File Sharing (EnShare & Samba)

 USB Port
File Sharing
File Server
Guest Account
DLNA

The File Sharing function supports **EnShare** and **Samba**:

EnShare is a proprietary feature that allows user to access the files through web browser and the free **EnShare APP** on mobile phones. EnShare allows user to convenience access the files remotely over the Internet while offering security protection.

Samba is a file sharing function widely used among Windows operating system users. However, Samba file sharing is limited to local access only (within homes/office).

Hardware Setting

This Gateway supports any USB 2.0 compatible storage devices. If you are using a portable/external hard-disk, it is recommended to use external power source to ensure disk stability.

Plug in the USB device (which contains the files to be shared over the Internet) into the USB interface on the side of the Gateway.

The Gateway should recognize and initiate the device automatically.

Gateway Setting

Samba Service



Enable



Disable

Apply

Cancel

By default, you should have your **File Sharing** function enabled.

Please check your **File Sharing** setting and make sure Samba Service has been **Enabled**.


If not, please click on **Enable** and Click **Apply** to enable the service.

Web Browser

Administrator Access

On your web browser, enter in the DDNS domain name of your Gateway into the web browser. (Check the label on the back of Gateway for the unique DDNS domain. The DDNS domain name can also be found in DDNS setting under Tools on the Gateway management page.)

For this example, **0f9e76a.engeniusddns.com**.

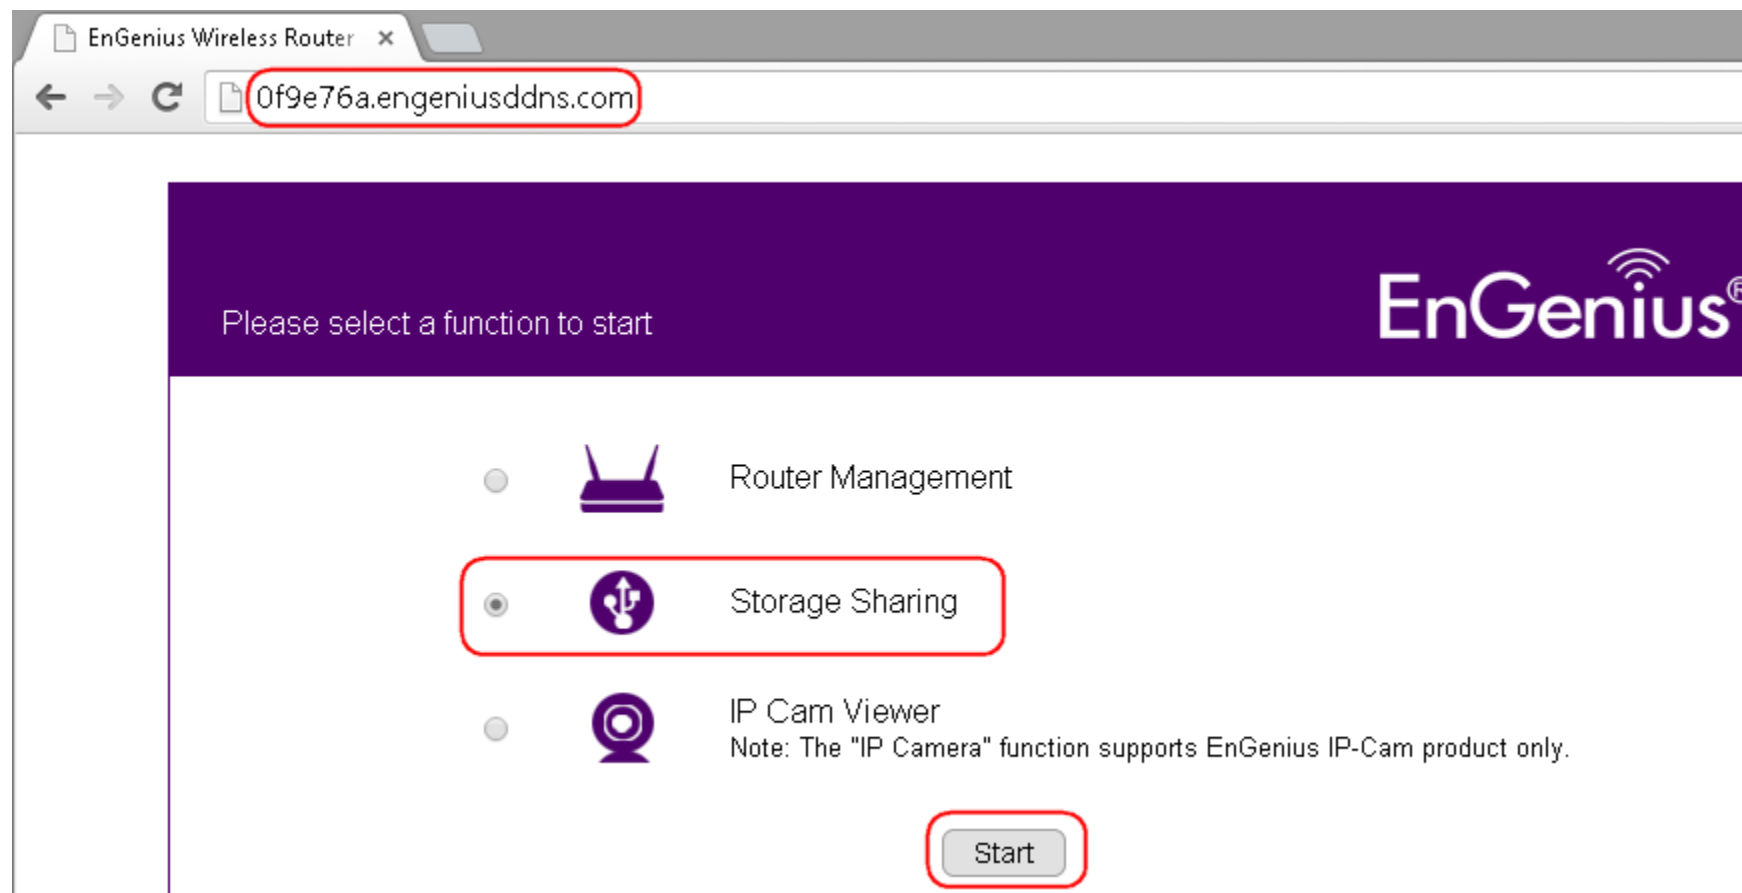

Administrator is allowed to access all the files and folders of the attached USB storage device. If the files are to be shared by users other than yourself, it is recommended to provide the user with Guest Account user name and password so that important files are secured.

Please select user role. Click **Admin** for this example.

Please select an account

EnGenius®

☒



Admin (The Admin user is allowed to access all the folders of the storage page)

☐



Guest (The Guest user has right to access the Guest folder only)

Start

A list of available attached USB storage devices will be shown on the page.

There is only one device listed Ut165 USB Flash Disk.

You should click on the one that has the file to be accessed. In this case, we click **UT165 USB Flash Disk**.

EnShare Web Access

Select a target USB device to access the storage sharing

Note: Connecting single USB drive is suggested if there is no device shown on the list.



Ut165 USB Flash Disk ,3.683G / 4G

When encountering the security prompt, please enter your administrator account **user name** and **password**.

It is the same user name and password your use to enter the Gateway management page.



Once passed the security check, the page will be directed to file list. As shown, these are the files we placed in the USB flash disk.

To open or download the file, simply click on the file name.



Note1: EnShare Web Access supports most of the web browsers available today, even on mobile phones. Please note that there are several folders created by the system automatically; **please do not delete them.**

Note2: Folder **"Guest"** is used for storing files to be shared by guest users. Files placed under "video" folder is to be used by DLNA services.

EnShare Web Access

Index of /usb_admin/sda1/



Name	Last Modified	Size	Type	Rename	Select
 Parent Directory		-	Directory		☐
 Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
 Guest	2014-Feb-24 07:15:56	-	Directory		☐
 video	2014-Feb-25 07:04:18	-	Directory		☐
 Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
 README.txt	2014-Feb-18 10:46:19	2.1K	text/plain		☐
 Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
 myMusic1.mp3	2013-Nov-10 13:31:30	10.7M	audio/mpeg		☐
 myMusic2.mp3	2013-Nov-16 11:28:18	3.3M	audio/mpeg		☐
 myMusic3.mp3	2013-Dec-13 19:38:56	6.0M	audio/mpeg		☐
 picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
 picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐


Users are allow to perform basic file operation including upload, move, delete and create folder.




Upload

To upload a file remotely into the shared device, click on **Upload** icon.


Click **Browse** to choose the file to be uploaded.

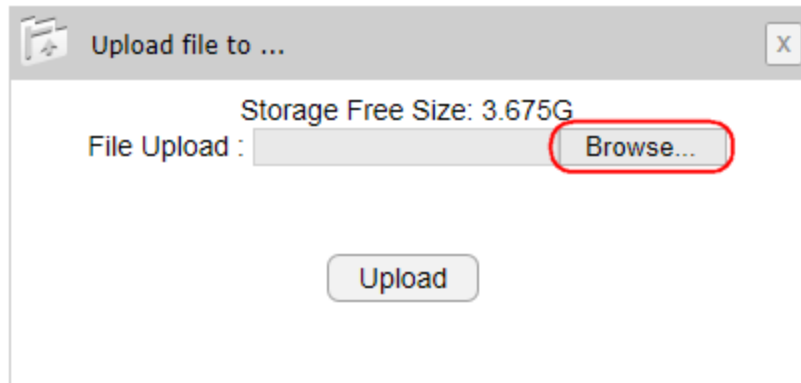


Select the file to be uploaded by selecting the file and then click **Open**.
In this example, a file named "**newfile.txt**" is to be uploaded from the **Desktop**.

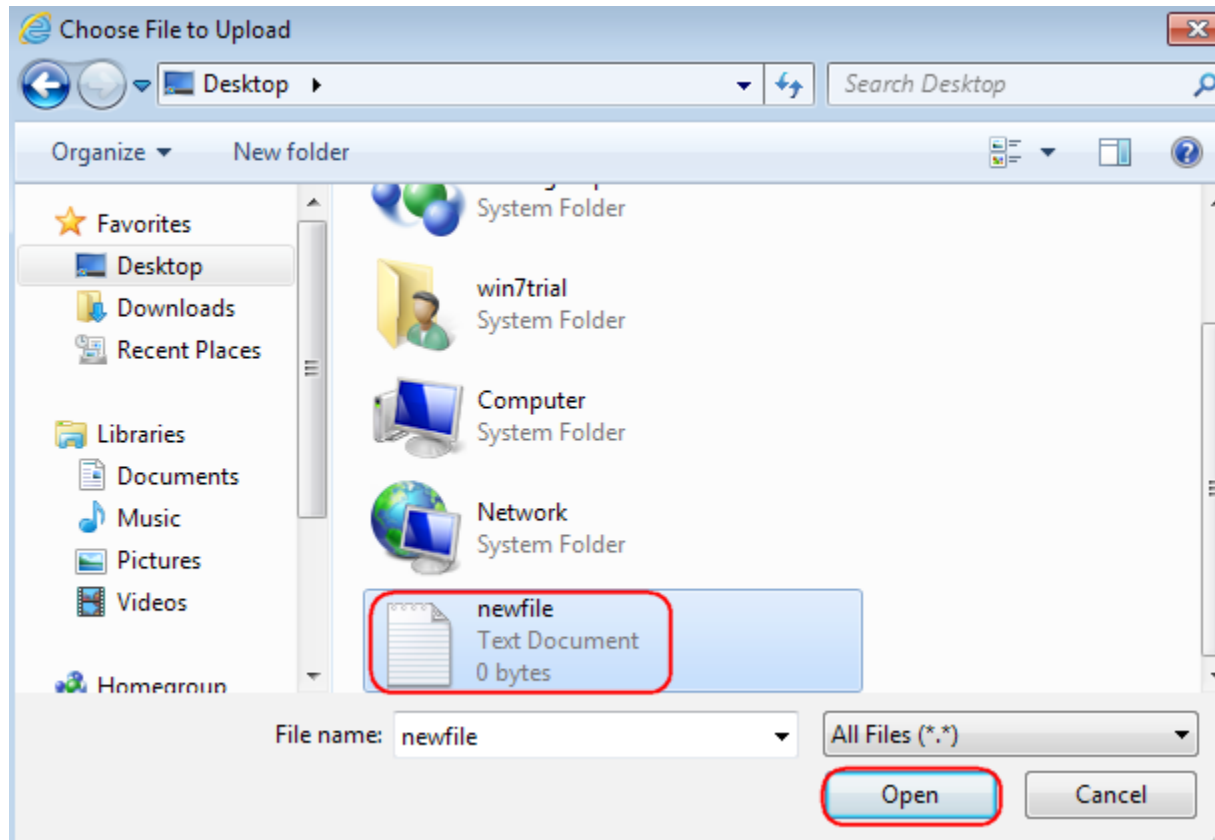

The path of the file is now inserted.
Click **Upload** to start uploading the file.

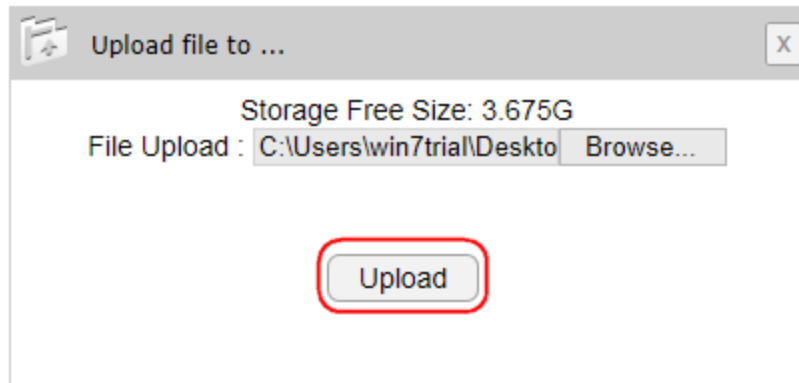

Please note that it may take a very long time to upload a large file under very slow network environment.
Therefore, large files are recommended to be copied into the device before attaching to the Gateway for sharing.
Once upload is complete, click on **OK** on the message box.

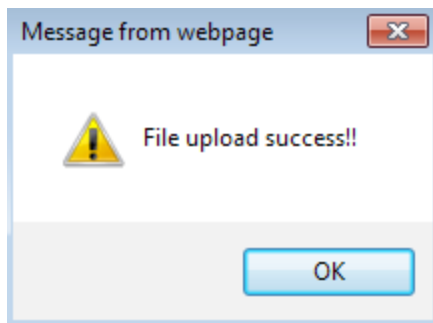

The file **"newfile.txt"** is now available for sharing over the cloud.

EnShare Web Access

Index of /usb_admin/sda1/

Name	Last Modified	Size	Type	Rename	Select
 Parent Directory		-	Directory		☐
 Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
 Guest	2014-Feb-24 07:15:56	-	Directory		☐
 video	2014-Feb-25 07:04:18	-	Directory		☐
 Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
 README.txt	2014-Feb-18 10:46:19	2.1K	text/plain		☐
 Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
 myMusic1.mp3	2013-Nov-10 13:31:30	10.7M	audio/mpeg		☐
 myMusic2.mp3	2013-Nov-16 11:28:18	3.3M	audio/mpeg		☐
 myMusic3.mp3	2013-Dec-13 19:38:56	6.0M	audio/mpeg		☐
 newfile.txt	2014-Feb-25 07:45:39	0.0K	text/plain		☐
 picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
 picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐



Move

Users are allowed to move files from one folder to the other.

Click on the Select boxes of the files to be moved. In this example, three MP3 files were selected.

Then, click on **Move** icon.

EnShare Web Access

Index of /usb_admin/sda1/




Name	Last Modified	Size	Type	Rename	Select
Parent Directory		-	Directory		☐
Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
Guest	2014-Feb-24 07:15:56	-	Directory		☐
video	2014-Feb-25 07:04:18	-	Directory		☐
Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
README.txt	2014-Feb-18 10:46:19	2.1K	text/plain		☐
Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
myMusic1.mp3	2013-Nov-10 13:31:30	10.7M	audio/mpeg		☒
myMusic2.mp3	2013-Nov-16 11:28:18	3.3M	audio/mpeg		☒
myMusic3.mp3	2013-Dec-13 19:38:56	6.0M	audio/mpeg		☒
newfile.txt	2014-Feb-25 07:45:39	0.0K	text/plain		☐
picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐


Then, choose the destination folder. In this case, we choose Guest.



The path is now changed to the **Guest** folder.
Click on **Move**.

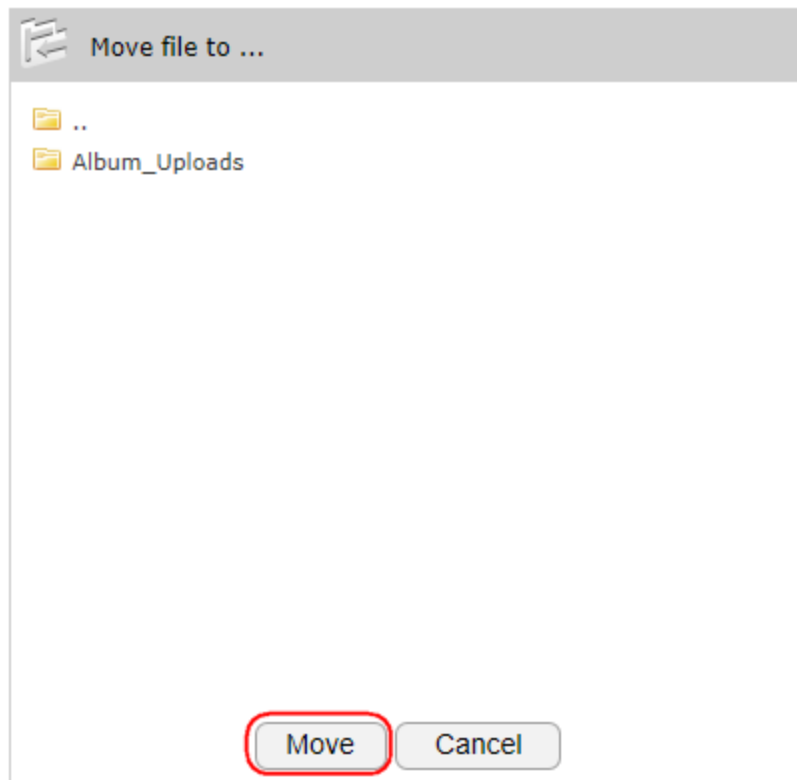

When done, click on **OK**.

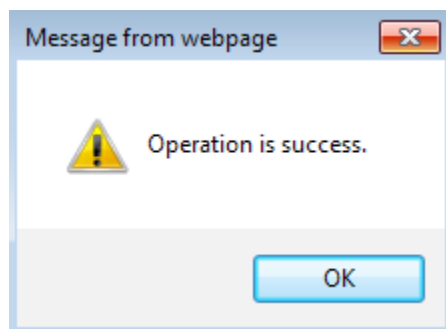

The files are now moved to the Guest folder.

EnShare Web Access					
Index of /usb_admin/sda1/Guest/					
Name	Last Modified	Size	Type	Rename	Select
 Parent Directory		-	Directory		☐
 Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
 myMusic1.mp3	2013-Nov-10 13:31:30	10.7M	audio/mpeg		☐
 myMusic2.mp3	2013-Nov-16 11:28:18	3.3M	audio/mpeg		☐
 myMusic3.mp3	2013-Dec-13 19:38:56	6.0M	audio/mpeg		☐




Delete

To delete the file, click on the **Select box** of the file and then click on **Delete** icon. In this example, three “README.txt” is selected.

   					
Name	Last Modified	Size	Type	Rename	Select
 Parent Directory		-	Directory		☐
 Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
 Guest	2014-Feb-25 08:04:59	-	Directory		☐
 video	2014-Feb-25 07:04:18	-	Directory		☐
 Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
 README.txt	2014-Feb-18 10:46:19	2.1K	text/plain		☒
 Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
 newfile.txt	2014-Feb-25 07:45:39	0.0K	text/plain		☐
 picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
 picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐

Click on **OK** to confirm.

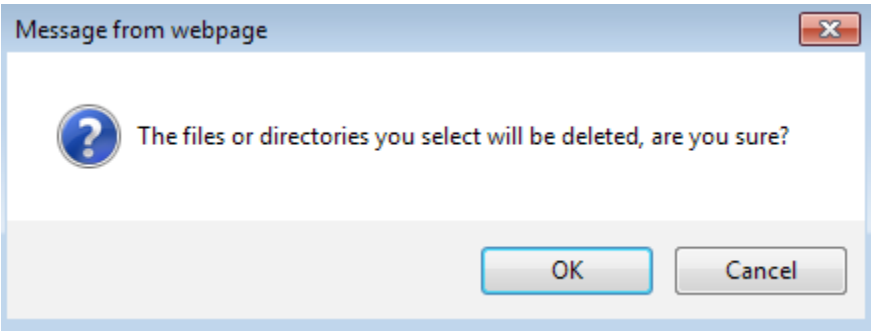

The file "README.txt" is now deleted.

Name	Last Modified	Size	Type	Rename	Select
Parent Directory		-	Directory		☐
Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
Guest	2014-Feb-25 08:04:59	-	Directory		☐
video	2014-Feb-25 07:04:18	-	Directory		☐
Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
newfile.txt	2014-Feb-25 07:45:39	0.0K	text/plain		☐
picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐




Create Directory/Folder

Directory is also known as Folder.


To delete a directory/folder, click on the **Create Directory** icon.

In the pop-up box, **enter the new directory name**. In this example, a new directory named **pictures** is to be created.

Click **OK** when done.

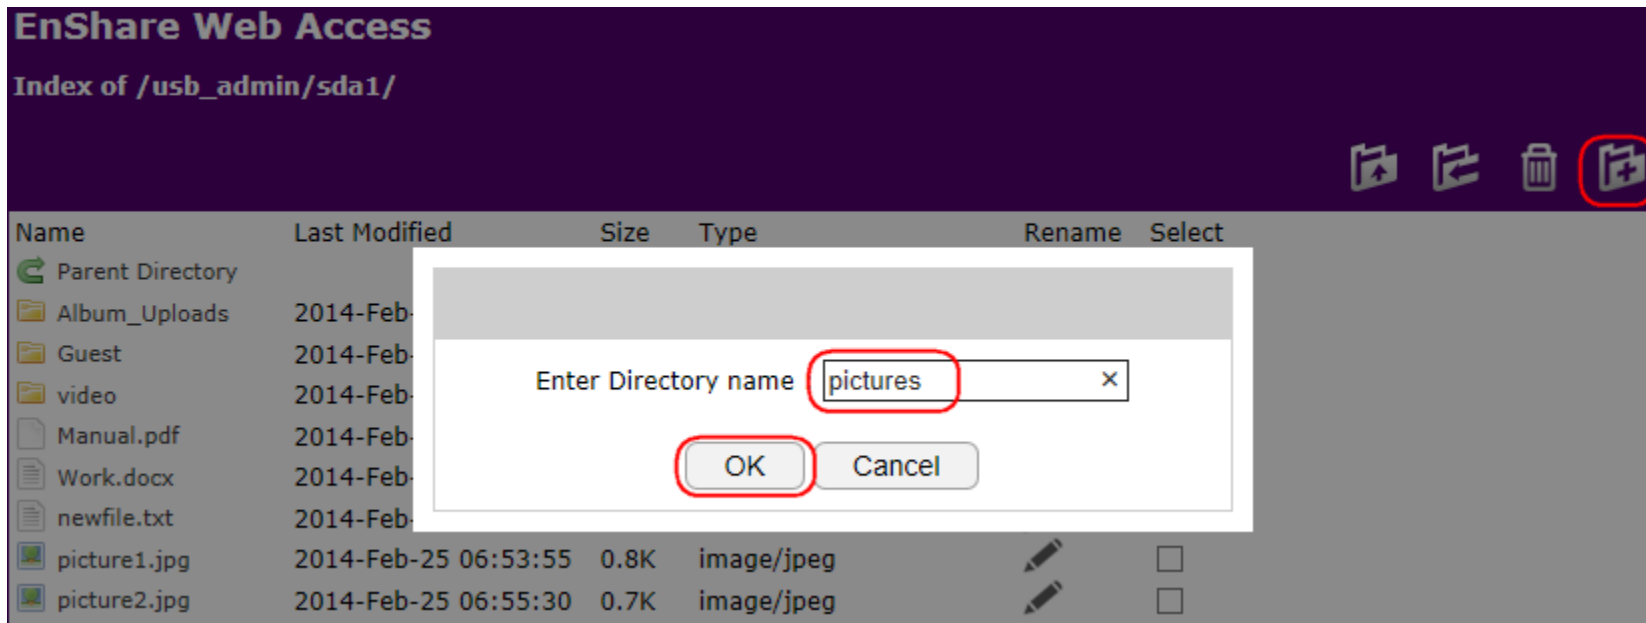

The new directory/folder is now created.

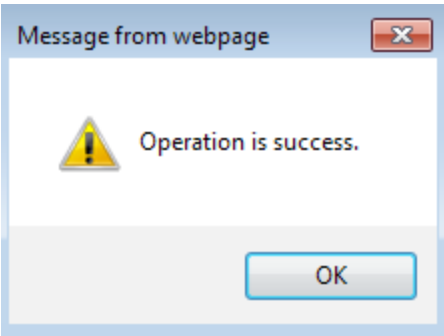

The new folder picture is now available for access.

EnShare Web Access
Index of /usb_admin/sda1/

Name	Last Modified	Size	Type	Rename	Select
Parent Directory		-	Directory		☐
Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
Guest	2014-Feb-25 08:04:59	-	Directory		☐
pictures	2014-Feb-25 08:17:07	-	Directory		☐
video	2014-Feb-25 07:04:18	-	Directory		☐
Manual.pdf	2014-Feb-07 14:34:34	7.5M	application/pdf		☐
Work.docx	2014-Feb-25 06:50:41	11.3K	application/octet-stream		☐
newfile.txt	2014-Feb-25 07:45:39	0.0K	text/plain		☐
picture1.jpg	2014-Feb-25 06:53:55	0.8K	image/jpeg		☐
picture2.jpg	2014-Feb-25 06:55:30	0.7K	image/jpeg		☐

Guest Access

To login as a Guest, you must first use the guest account user name and password. The default guest account user name is **guest** and the password is also **guest**. Please refer to Guest Account chapter for changing the guest account user name and password. In this example, we have changed the user name to **myguest** and password to “**12345678**”. If you did not change the guest password, then your password is “**12345678**”.

The guests are only allowed to access the files under the Guest folder of the attached USB storage device. Therefore, files that are not intended to share with the guests **MUST NOT** be placed under this folder.

Please select an account

EnGenius®

☐



Admin (The Admin user is allowed to access all the folders of the storage page)

☒



Guest (The Guest user has right to access the Guest folder only)

Start

Enter Guest account user name myguest and password **12345678**.
Click **OK** when done.



Once passed the security check, the guests can get access to the files as shown in the diagram.

EnShare Web Access

Index of /usb_guest/guest1/

Name	Last Modified	Size	Type	Rename	Select
 Parent Directory		-	Directory		☐
 Album_Uploads	2014-Feb-16 12:17:46	-	Directory		☐
 myMusic1.mp3	2013-Nov-10 13:31:30	10.7M	audio/mpeg		☐
 myMusic2.mp3	2013-Nov-16 11:28:18	3.3M	audio/mpeg		☐
 myMusic3.mp3	2013-Dec-13 19:38:56	6.0M	audio/mpeg		☐

Guests are also allowed to **upload**, **move** and **delete** files just like the administrator; however, the operation is limited to operations under guest folder. For more detail on using the file operation functions, please refer to **Administrator Access** section.



How to use FTP function?

File Server (FTP)

This Gateway has FTP server function embedded and allows user to share file locally and remotely. File Transfer Protocol (FTP) is a common protocol used to transfer files. Users can use FTP client software to get access to the files on the FTP server (which hosts the files of the USB storage device).

 USB Port
File Sharing
File Server
Guest Account
DLNA

File Server Configuration

☒ Enable FTP Service

Port Number

Login Timeout

Stay Timeout

Login Users (Max Users : 20)

Share Mode

☐ Use anonymous login

FTP Remote Access ☒ Enable ☐ Disable

Apply

Cancel

Enable FTP Service: Select this to enable the FTP service to share files on the USB device

Port Number: Define the port number (default: 21) to open for the FTP service.

Login Timeout: Define the period of inactivity (default: 90) before a user is logged out.

Stay Timeout: Define the lockout period (default: 90) before a user is allowed to attempt a login.

Login User: Define the number of concurrent users to access the service (Max: 20 users)

Share Mode: Define the type of share privilege: Read/Write, Read only.

Use Anonymous Login: Select this to allow anonymous user login.

FTP Remote Access: Select Enable if files are intended to be accessed over the Internet.

Please ensure **Enable FTP Service** box is checked and leave the other setting as default.



Note: If you want to open your files to all the users click on the Use Anonymous Login (not recommended).


Client: Windows

File Explorer on Windows XP/Vista/7 and 8 support basic FTP protocol functions. No additional software is required.


To access the files press  +  to run **File Explorer**.

The user interface may look slightly different between these Windows platforms.


Type in the FTP server address that begins with "ftp://" followed by the DDNS domain name address. In this example the address is **ftp://0f9e76a.engeniusddns.com**. Press Enter when finish.

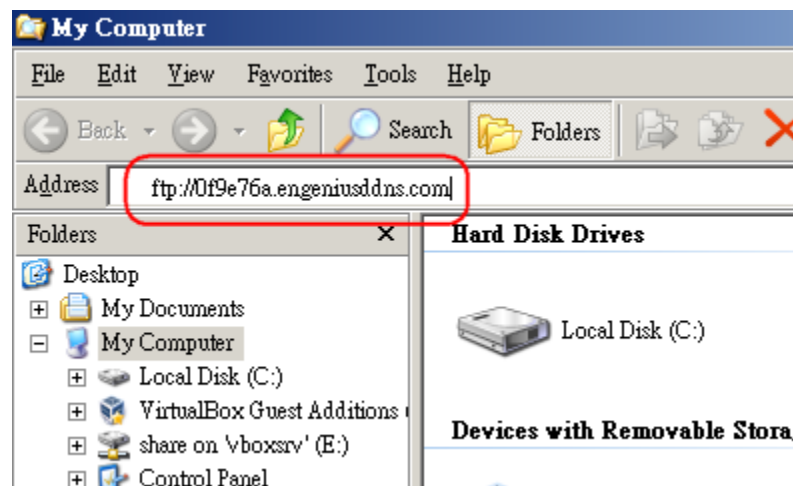


Windows XP File Explorer

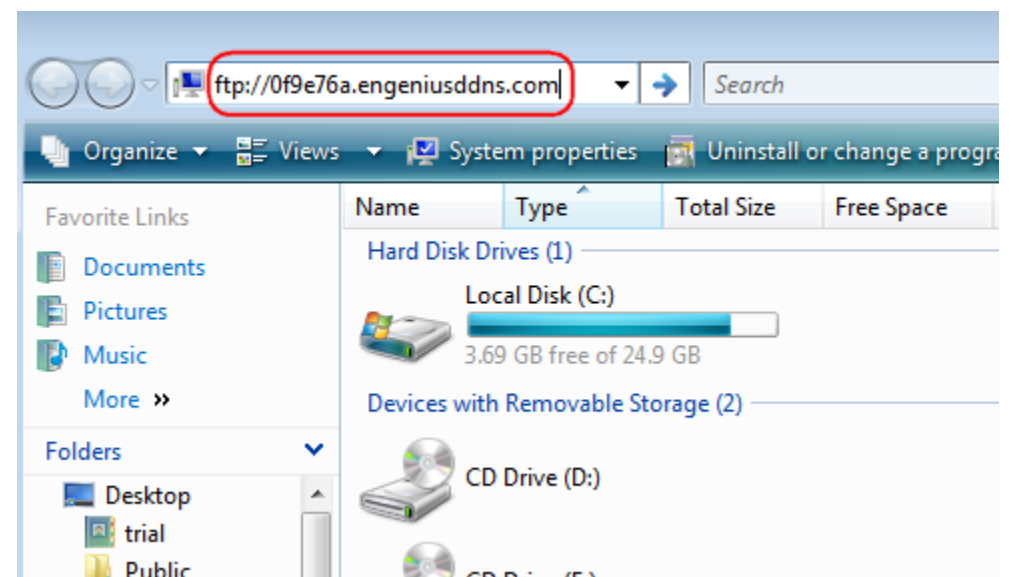


Windows Vista File Explorer

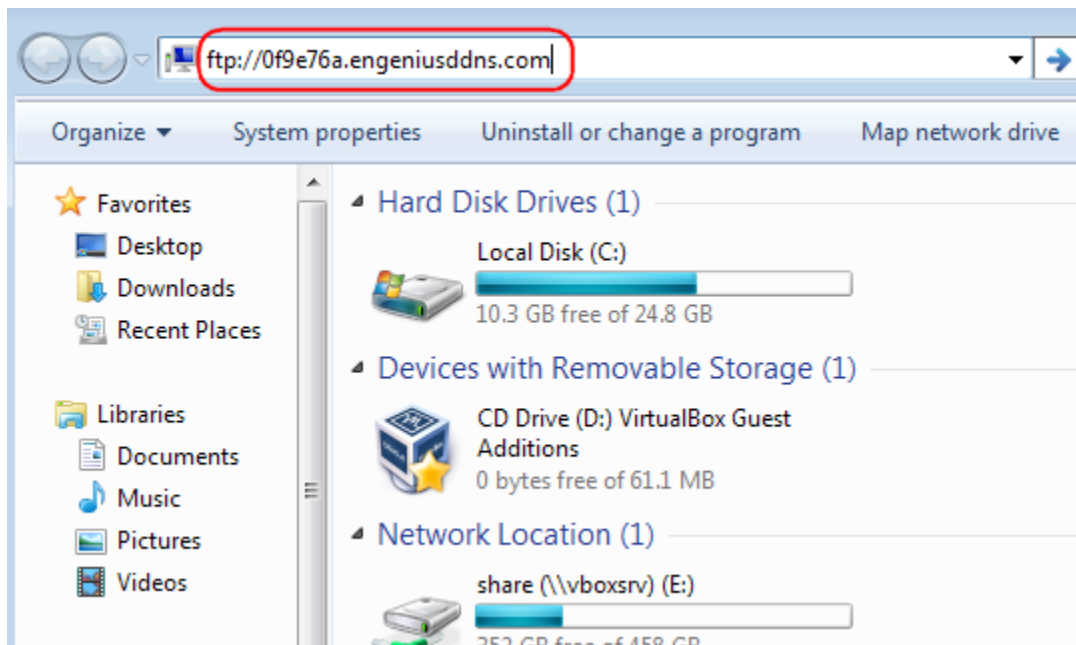

Windows 7 File Explorer

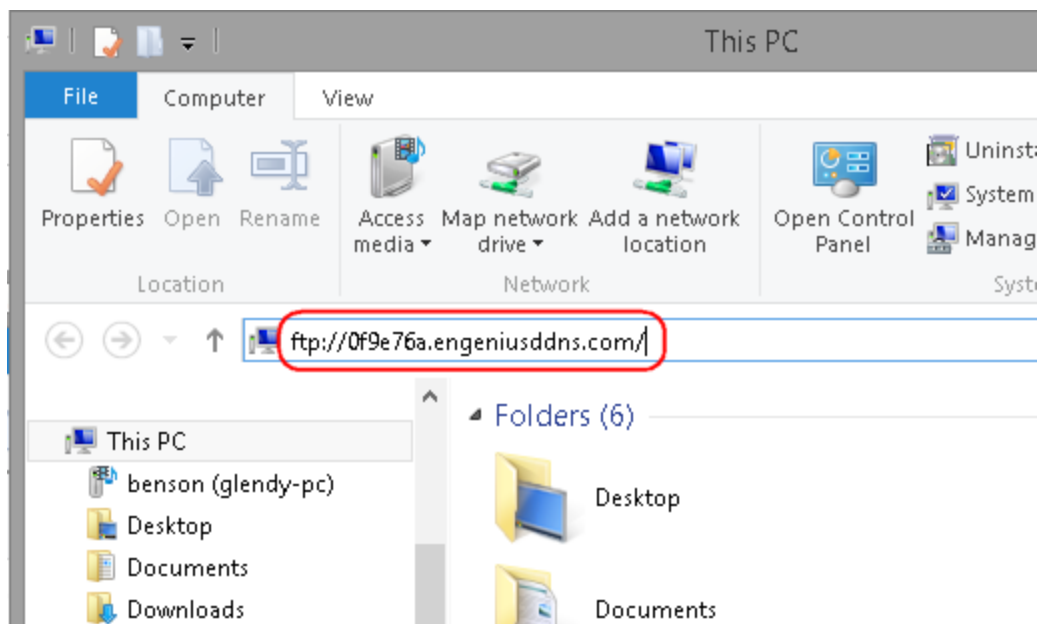

Windows 8 File Explorer

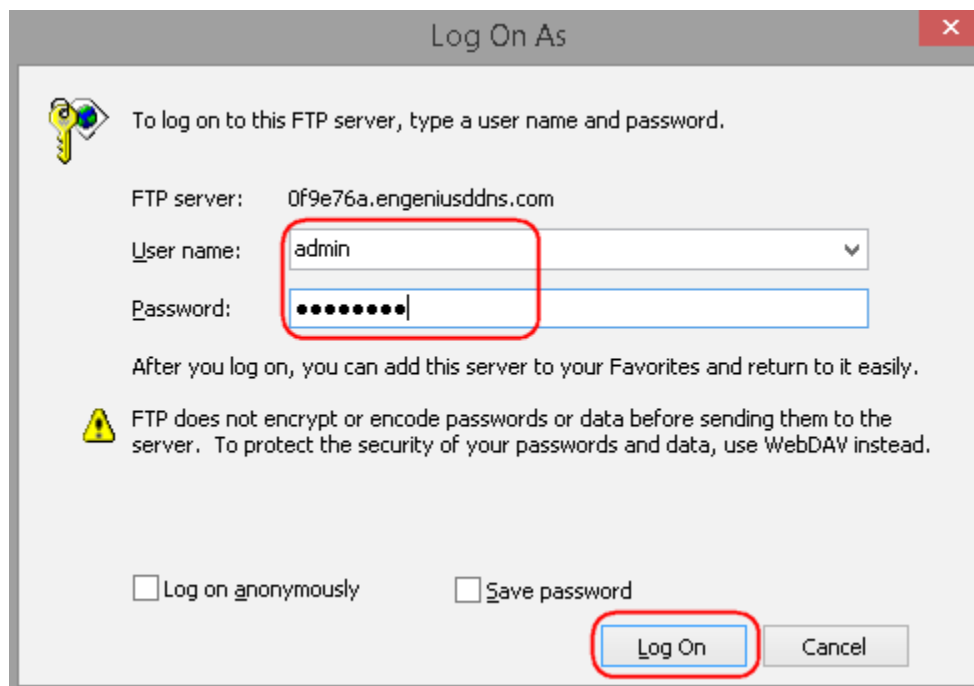

The dialog box is titled "Log On As" and contains a key icon. It prompts the user to log on to the FTP server "0f9e76a.engeniusddns.com". The "User name" field is set to "admin" and the "Password" field is filled with ten dots. A red rectangle highlights both the "User name" and "Password" fields. Below the fields, there is a warning icon and text stating that FTP does not encrypt passwords. At the bottom, there are two checkboxes: "Log on anonymously" (unchecked) and "Save password" (unchecked). A red rectangle highlights the "Log On" button, and a "Cancel" button is also present.

To log on to this FTP server, type a user name and password.

FTP server: 0f9e76a.engeniusddns.com

User name: admin


Password: ●●●●●●●●●●

After you log on, you can add this server to your Favorites and return to it easily.

FTP does not encrypt or encode passwords or data before sending them to the server. To protect the security of your passwords and data, use WebDAV instead.

☐ Log on anonymously ☐ Save password

Log On Cancel

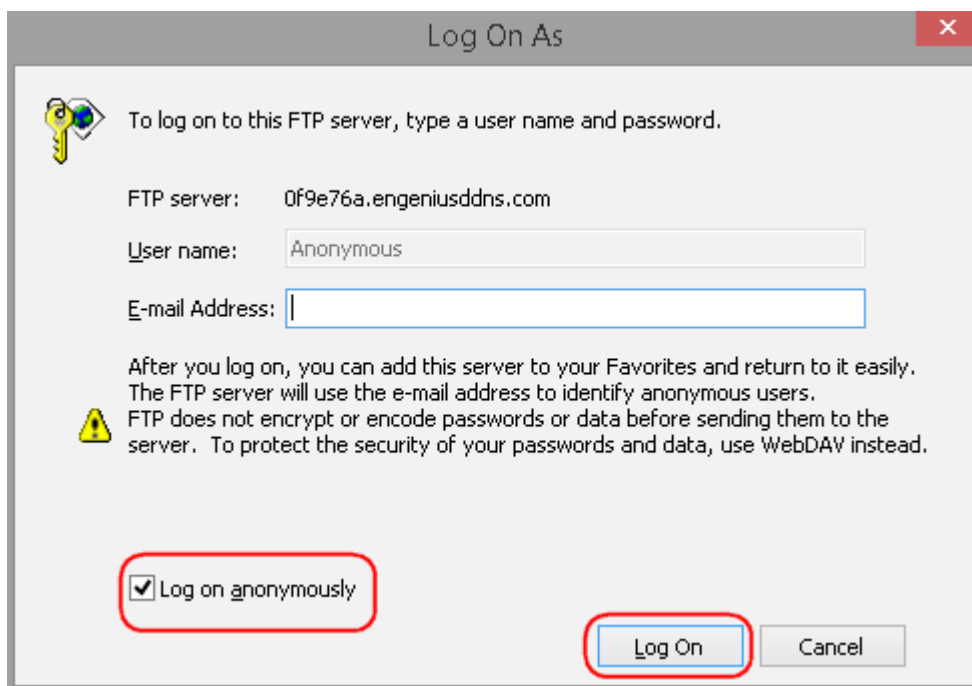

The dialog box is titled "Log On As" and contains a key icon. It prompts the user to log on to the FTP server "0f9e76a.engeniusddns.com". The "User name" field is set to "Anonymous" and the "E-mail Address" field is empty. A red rectangle highlights the "Log on anonymously" checkbox, which is checked. Below the fields, there is a warning icon and text stating that FTP does not encrypt passwords. At the bottom, a red rectangle highlights the "Log On" button, and a "Cancel" button is also present.

To log on to this FTP server, type a user name and password.

FTP server: 0f9e76a.engeniusddns.com

User name: Anonymous

E-mail Address:

After you log on, you can add this server to your Favorites and return to it easily. The FTP server will use the e-mail address to identify anonymous users.

FTP does not encrypt or encode passwords or data before sending them to the server. To protect the security of your passwords and data, use WebDAV instead.

☒ Log on anonymously


Log On Cancel

For administrator, please enter the Gateway's administrator **user name** and **password**.


If the **Anonymous Login** is set enabled on the Gateway(FTP server), then simply click on Log on anonymously and leave everything blank.

Click **Log On** button to proceed.

It may take a few seconds for the FTP server to respond.

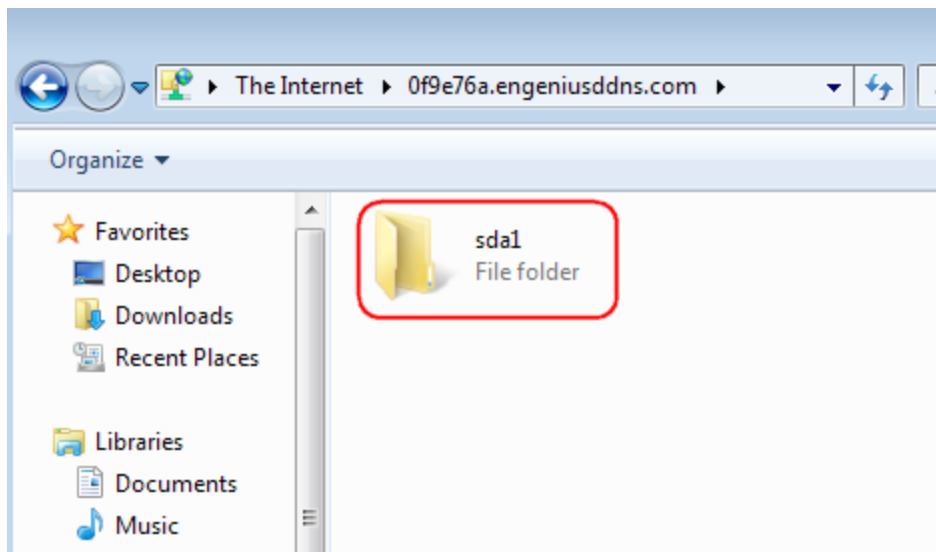

Once passed the security check, double click on **sda1 folder**. This is the place where files are stored.

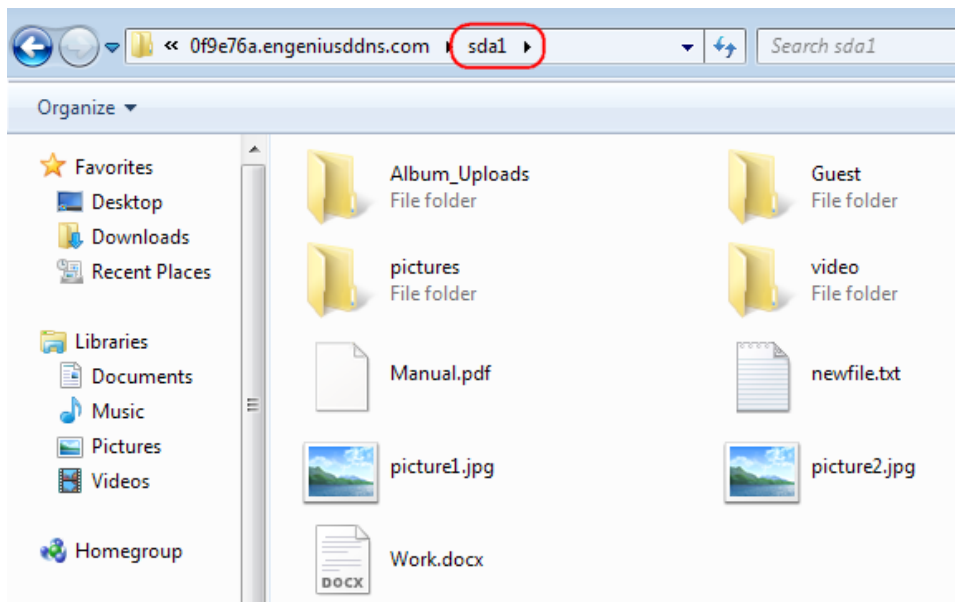

The snapshot below shows the shared files of the USB storage device plugged on the remote Gateway. The files can now be accessed exactly the same way as if they were on the local disks. Please note that since the files are stored at the remote site, therefore the file operations may take longer time to process.

If files are intend to be shared read/download only please go back to File Server section and set Share Mode to "Read-Only".

Client: FileZilla

FileZilla Client is a popular and free FTP client software downloadable at its official web-site **<https://filezilla-project.org/>**.

It can also be used to access the FTP server on the Gateway. FileZilla offers a convenient interface for user to transfer files between local and remote site. In comparison with the Windows File Explorer, FileZilla has many advanced features and allow user to manage local and remote site concurrently.




Start the FileZilla Client software.

Type in the **Host name** (which is the Gateway DDNS domain name or WAN IP address).

For Instance, DDNS domain name for this example is **ftp://0f9e76a.engeniusddns.com**.

Type in **Username** and **Password**.

Press **Enter** as soon as you finished typing the Password.

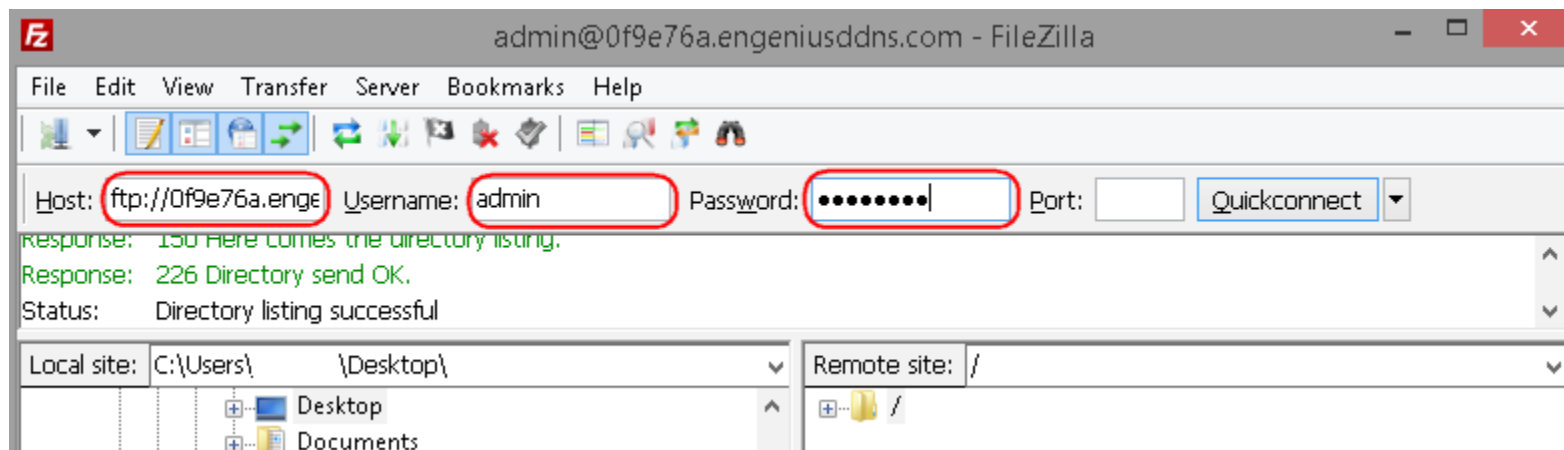


Click **OK** to proceed.




Please check the message box on the top and make sure the connection is successful.

On the left side of the window is the local file system. On the right side of the window is the remote site, which is the FTP server (Gateway) hosting the files on the USB storage device. Double click on **sda1** to see all the files under.

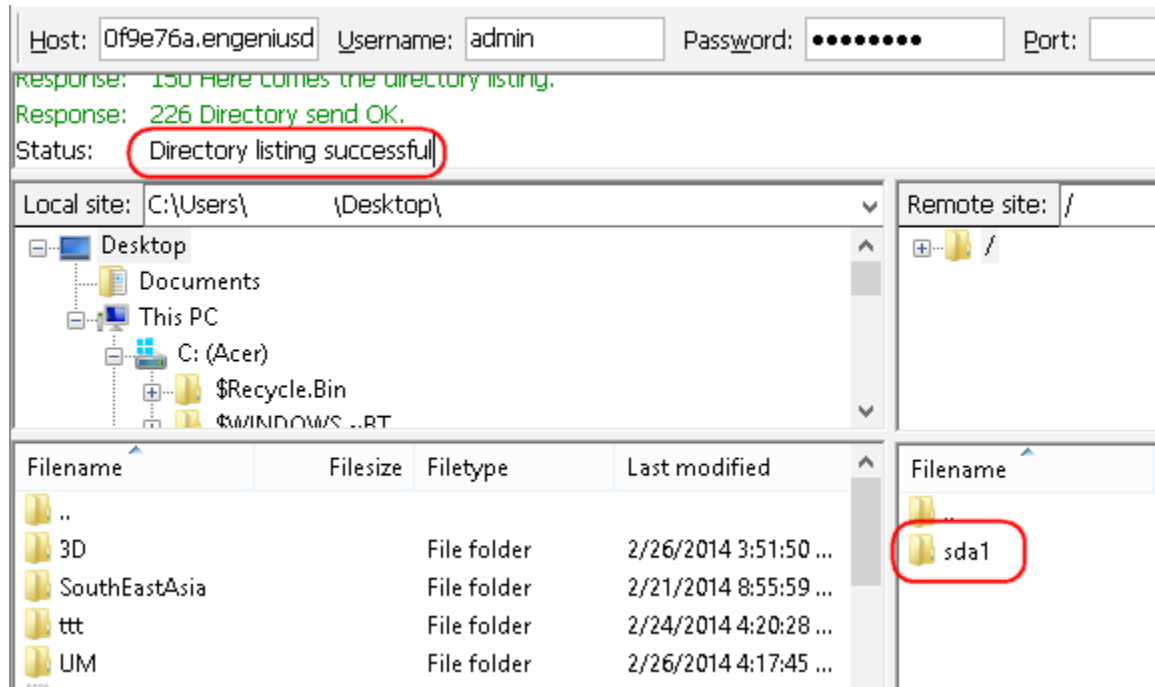

As shown in the snapshot there are 6 files and 4 directories.

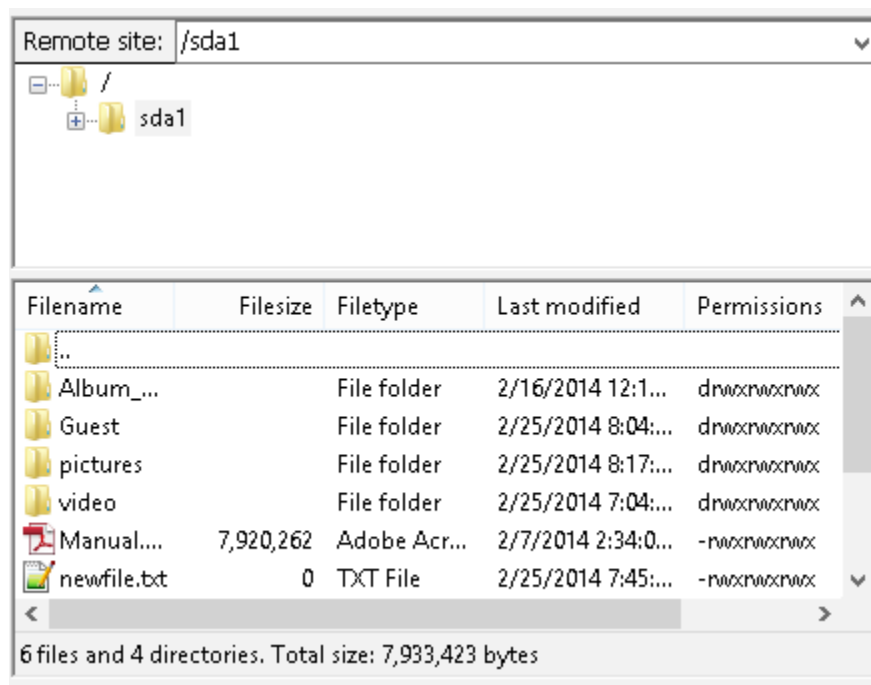

Remote site: /sda1

Tree view: /, sda1

Filename	Filesize	Filetype	Last modified	Permissions
..				
Album_...		File folder	2/16/2014 12:1...	drwxrwxrwx
Guest		File folder	2/25/2014 8:04:...	drwxrwxrwx
pictures		File folder	2/25/2014 8:17:...	drwxrwxrwx
video		File folder	2/25/2014 7:04:...	drwxrwxrwx
Manual....	7,920,262	Adobe Acr...	2/7/2014 2:34:0...	-rwxrwxrwx
newfile.txt	0	TXT File	2/25/2014 7:45:...	-rwxrwxrwx

6 files and 4 directories. Total size: 7,933,423 bytes


Download File

On the local site, click on the place where the file is going to be download to. In this case, **Desktop** is selected.

On the remote site, click on the file or folder which is to be downloaded. In this case, **Manual.pdf** is to be downloaded.

Once the file is selected, **right-click** on the file again.

Click on **Download** in the pop-up menu.

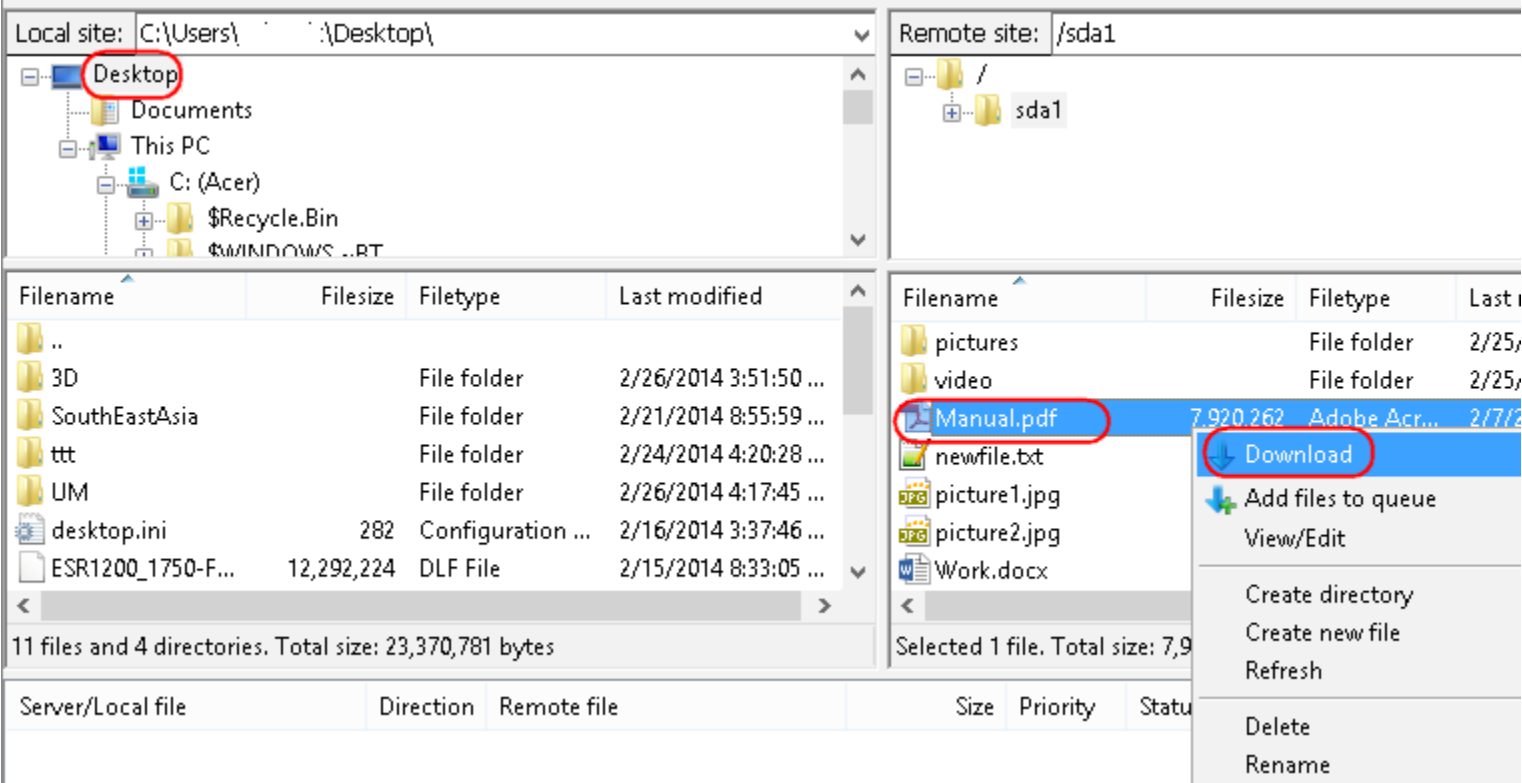

The file will transfer immediately. The download progress will be shown at the bottom. Depends on the download and upload speed of the Internet service of both local and remote site, it may take a while for a larger file.

Local site: C:\Users\ \Desktop\

Desktop

Documents

This PC

C: (Acer)

\$Recycle.Bin

\$WINDOWS ..RT

Filename	Filesize	Filetype	Last modified
..			
3D		File folder	2/26/2014 3:51:50 ...
SouthEastAsia		File folder	2/21/2014 8:55:59 ...
ttt		File folder	2/24/2014 4:20:28 ...
UM		File folder	2/26/2014 4:17:45 ...
desktop.ini	282	Configuration ...	2/16/2014 3:37:46 ...
ESR1200_1750-F...	12,292,224	DLF File	2/15/2014 8:33:05 ...

10 files and 4 directories. Total size: 20,373,853 bytes

Remote site: /sda1

/

sda1

Filename	Filesize	Filetype
pictures		File f
video		File f
Manual.pdf	7,920,262	Adobe PDF File
newfile.txt	0	TXT I
picture1.jpg	851	JPG F
picture2.jpg	730	JPG F
Work.docx	11,580	Micro

Selected 1 file. Total size: 7,920,262 bytes

Server/Local file	Direction	Remote file	Size	Priority	Status
admin@0f9e76a.engeniusd...					
C:\Users\ \Desktop...	<<--	/sda1/Manual.pdf	7,920,262	Normal	Transferring
00:00:24 elapsed	00:02:02 left	13.0%	1,035,276 bytes (56.1 KiB/s)		


Upload File

On the remote site, click on the **folder** where the file is going to be uploaded to. In this case, **Guest** folder is selected.

On the local site, click on the file which is to be uploaded. In this case, **map.html** is selected.

Once the file is selected, **right-click** on the file again.

Click on **Upload** in the pop-up menu.

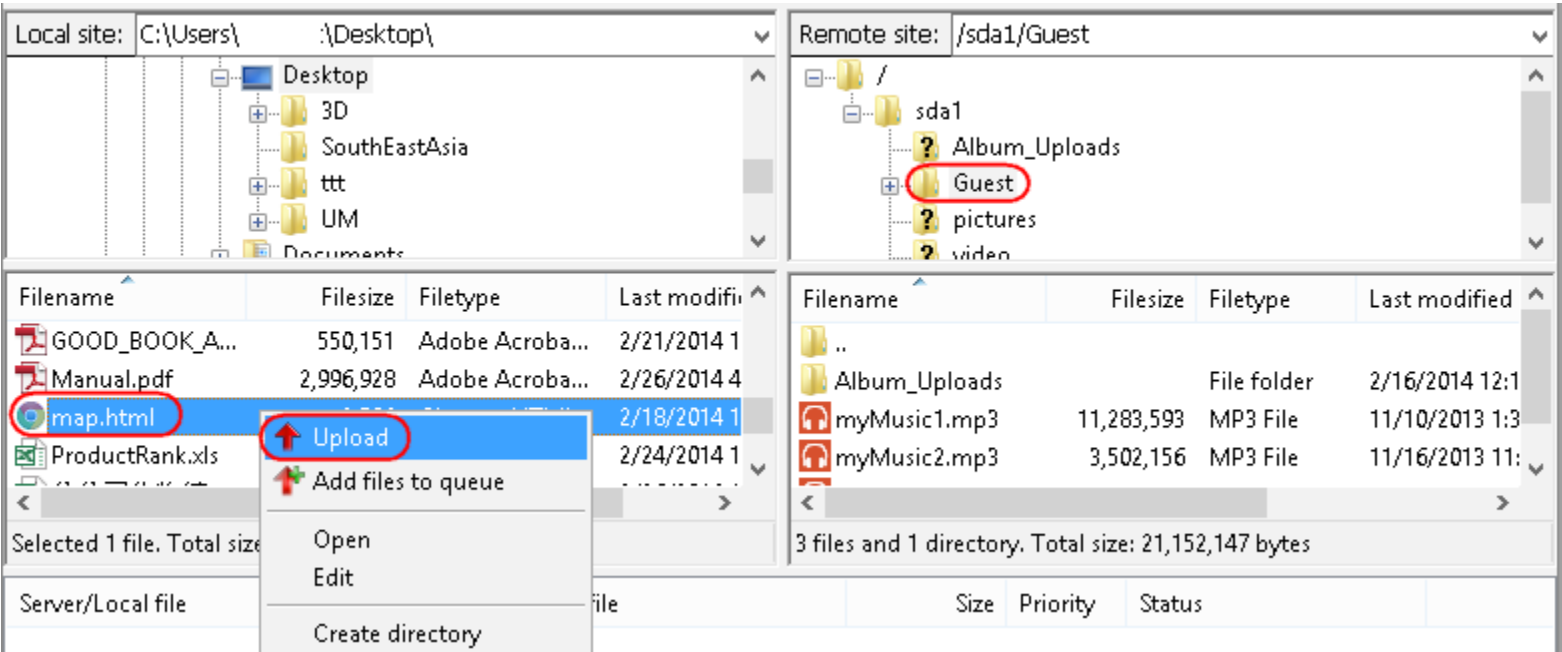

The file will transfer immediately. The download progress will be shown at the bottom.

Depends on the download and upload speed of the Internet service of both local and remote site, it may take a while for a larger file.

How to setup DLNA function?

DLNA

 USB Port
File Sharing
File Server
Guest Account
DLNA

To enable DLNA media support, please go to DLNA section.
DLNA is enabled by default.

Share Folder Name is the folder name in your external storage device that media files are placed.
For instance, you have placed all the media files inside a folder name called "video" on your external storage device.
Then, you should type in "video" here so that the Gateway knows where to locate the media files for DLNA service.

☒

Enable DLNA Media Server

Share Folder Name

video

Apply

Cancel

You can use Windows Media Player to view the media files you shared over DLNA. The Gateway name will be displayed on the left menu. In this example, EPG600 is shown.




Under EPG600 there are several items.

To view the video we shared inside the “video” folder, click on **Videos**.

The files are displayed on the right; in this example, there are two files: movieClip and RGPtest.

Simply **double-click** on one of the files to play the video.

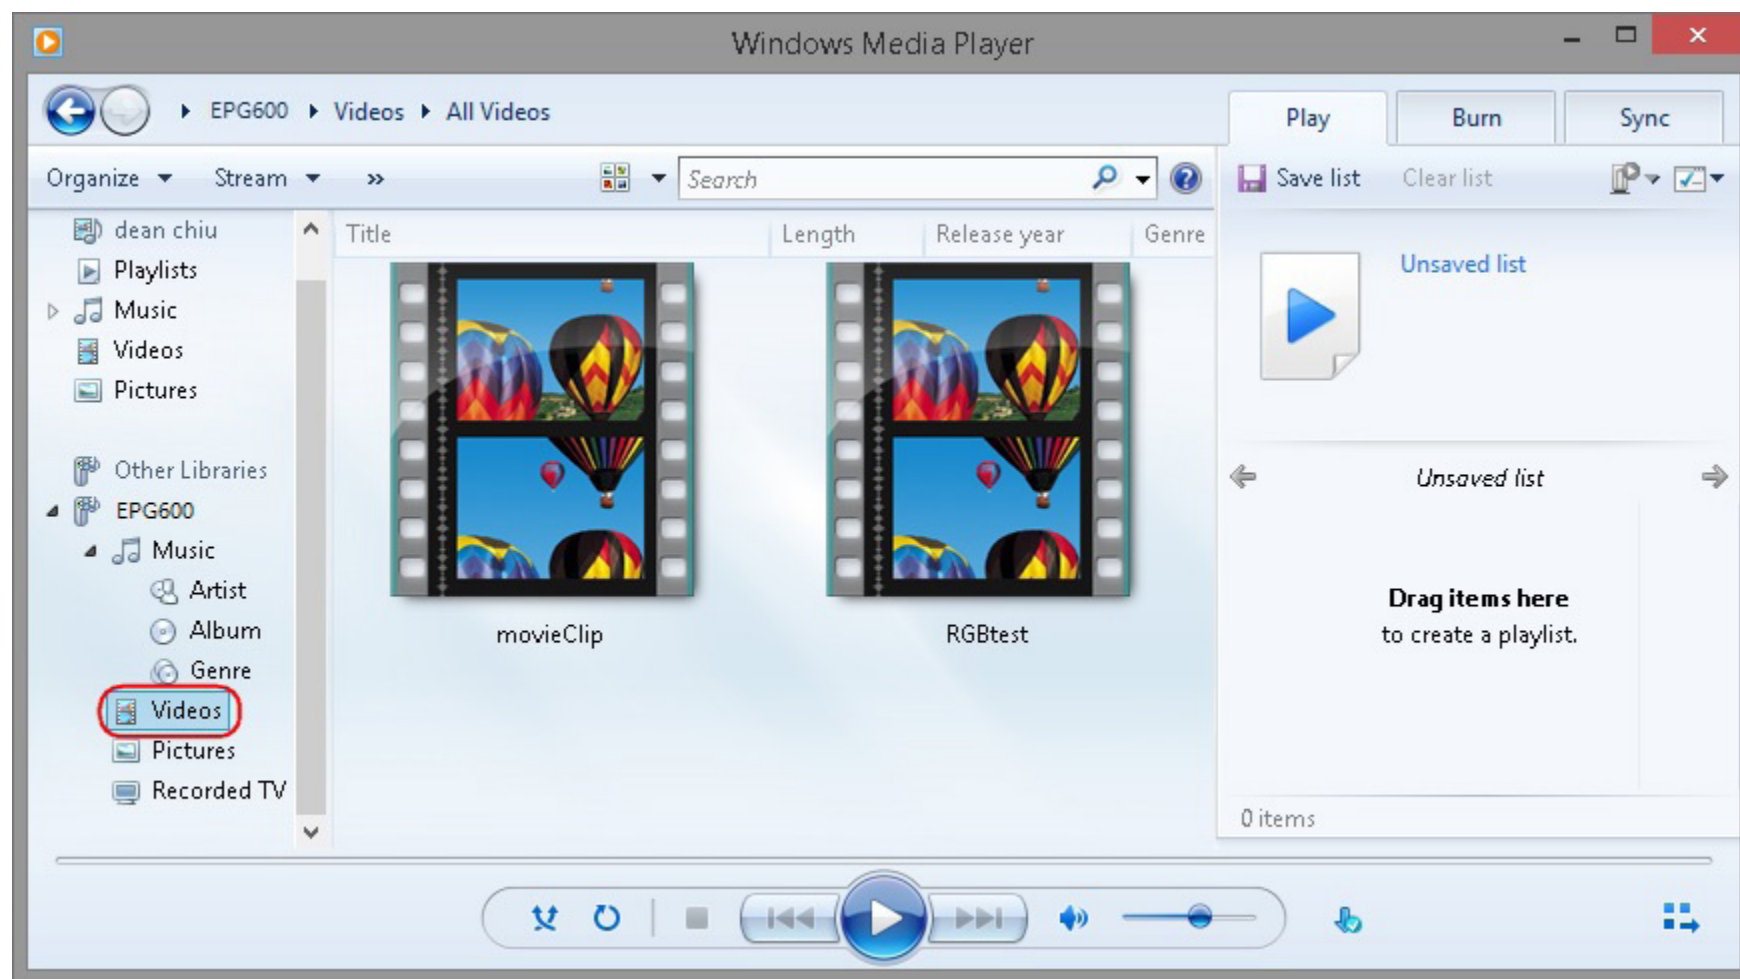

There are many DLNA enabled players and TVs available; the usage varies depends on the vendor.


Please refer to the vendor’s manual for detail DLNA setup.

How to setup Port forwarding function?

Configuring your Gateway /Router for Port Forwarding

When you have two or more devices on a network which connects to the internet using a broadband Gateway/Router, and if you want each device to be able to be accessed individually over the internet, you will need to configure your network Gateway/Router for Port Forwarding.

Setup Overview

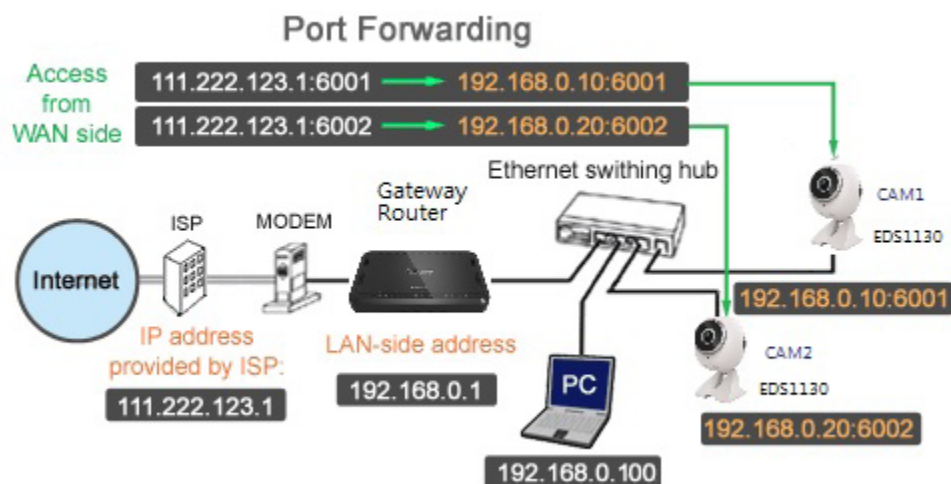

1. Configure your Gateway/Router that it can access the internet. (The explanation below assumes you have already done this.)
2. Configure each device connected to the Gateway/Router so that it can access the internet.
3. Configure your Gateway/Router Port Forwarding setting.

This sample configuration is for the following environment.

- Internet connection type: xDSL or cable internet
- Type of IP address provided by Internet Service Provider (ISP): static*
- IP address provided by ISP: 111.222.123.1 (sample only)
- Network devices: 1 computer, 2 Network Cameras
- IP address of computer: 192.168.0.100
- IP address of camera 1: 192.168.0.10
- IP address of camera 2: 192.168.0.20
- LAN-side address of Gateway/Router: 192.168.0.1 (sample only)
- Assign an IP address to each device. Also make sure you have assigned a port number to your Network Cameras. For this example, CAM1's port number is 6001, and CAM2's port number is 6002. For information on configuring a Network Camera, refer to the operating instructions.

Configuring Port Forwarding

1. Access the Gateway/Router's setup page by entering its **LAN-side IP address** in the address field of your web browser. (192.168.0.1, in this example.) The Gateway/Router setup page should appear. You may need to enter an **administrator username and password** in order to access the setup page.
2. Click on the link which opens the Port Forwarding setup page. This page is located within the **"Advanced" -> "Port Forwarding"** page.
3. Once you have opened the Gateway/Router's Port Forwarding setup page, you should see a number of data fields, such as "IP address", "Local Port" or "Public port", etc.

Here you will enter the **port numbers** you want to be forwarded, and the IP addresses of your network devices which you want those messages forwarded to. In this example:

Network Camera 1

IP address: 192.168.0.10

Local Port: 6001 (used to access the camera's integrated web server)

Public Port: 6001

Network Camera 2

IP address: 192.168.0.20

Local Port: 6002 (used to access the camera's integrated web server)

Public Port: 6002

4. Click **"Apply"** to save your Port Forwarding settings.
5. Test your settings.

To access the Local network device remotely, enter your Gateway/Router's static IP address followed by the port number of the device. In this example, by entering: **http://111.222.123.1:6001** in a web browser, you would see the top page of Network Camera 1.