

# Vertiv™ eSure™ Converter

C400/48-3500E3



## Key Features

- 3500 Watt high-efficiency converter designed to operate from a nominal 400V DC source to provide -48V DC load power
- High efficiency over 96.5% – reduces power consumption for lower operating costs
- Very high power density (50.2 W/inch<sup>3</sup>) saves costly space
- Hot pluggable – facilitates future extensions
- Wide input voltage range to operate during battery discharge down to 190 VDC
- Wide temperature operating range from -40°C to +75°C / -40°F to 167°F meets the harshest climatic environment requirements

*In addition to reducing power consumption and lowering operating cost, eSure™ high-efficiency converters offer superior performance and uncompromised reliability.*


## Description

The eSure™ C400/48-3500E3 high-efficiency converter is designed to operate from a nominal 400V DC source to provide nominal -48V DC load power, which is adjustable to application needs. The C400/48-3500E3 is a constant power converter designed with the latest patented switchmode technology, using Digital Signal Processing (DSP) functionality for efficient operation.

For a higher load capacity, converters can be connected in parallel, and intelligent control can be added with the help of a separate controller.



## % Efficiency

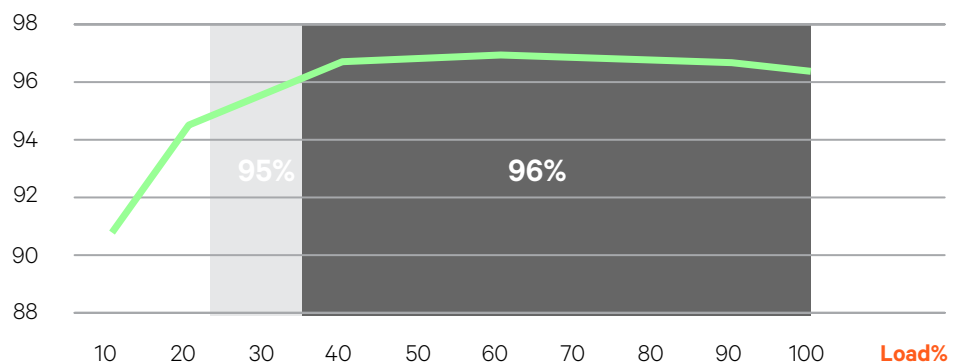

C400/48-3500E3 Efficiency Curve at 380 VAC Nominal

## Technical Specifications

<b>DC Input</b>	<b>C400/48-3500E3</b>
Voltage	190 VDC to 400 VDC (see figure 1), 400 VDC (nominal)
Maximum Current	22 A
<b>DC Output</b>	
Voltage	-42 VDC to -58 VDC
Maximum Power	3500 W @ Vout >48 VDC
Maximum Current	73 A @ 48 VDC (see figure 2)
Peak Efficiency	96.5%
Psophometric Noise (System)	<12 mV ; <38 dBrc
<b>Control and Monitoring</b>	
Alarms and Signaling	Alarm and status reported via CAN bus to system controller
Visual Indications	Green LED: Normal Operation Yellow LED: Alarm Red LED: Failure Flashing Red LED: Fan Failure
<b>Environmental</b>	
Operating Temperature	-40°C to +75°C / -40°F to +167°F (see figure 3)
Storage Temperature	-40°C to +70°C / -40°F to +158°F
Relative Humidity	0 to 95%
Altitude	2000 m / 6560 ft at full power
<b>Standards Compliance</b>	
Safety	EN 60950, IEC 60950, UL 60950
EMC	ETSI EN 300 386 class A, FCC CFR 47 Part 15 class A, Telcordia GR-1089-CORE class A
Environment	REACH, RoHS, WEEE
<b>Mechanics</b>	
Dimensions (H x W x D)	42 x 84.5 x 330 mm / 1.7 x 3.3 x 13.0 inches
Weight	1.7 kg / 3.7 lbs

## Figures

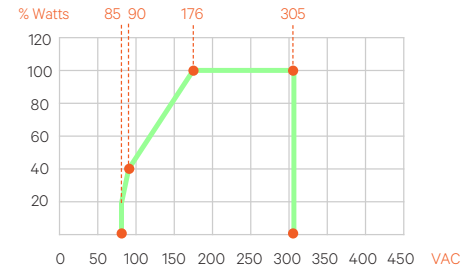


Figure 1: Output Power vs. Input Voltage at Tamb 45°C

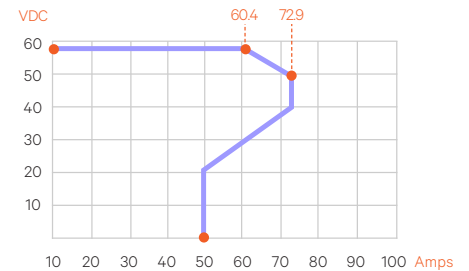


Figure 2: Output Voltage vs. Output Current at Maximum Output Power 3500 W

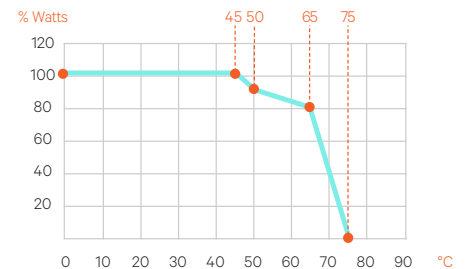


Figure 3: Output Power vs. Temperature at Uin ≥ 176 VAC

## Ordering Information

Part Number	Description
1C400483500E3	Converter, 400 to 48 VDC, 3500 W

Vertiv.com | Vertiv Headquarters, 1050 Dearborn Drive, Columbus, OH, 43085, USA

© 2021 Vertiv Group Corp. All rights reserved. Vertiv™ and the Vertiv logo are trademarks or registered trademarks of Vertiv Group Corp. All other names and logos referred to are trade names, trademarks or registered trademarks of their respective owners. While every precaution has been taken to ensure accuracy and completeness here, Vertiv Group Corp. assumes no responsibility, and disclaims all liability, for damages resulting from use of this information or for any errors or omissions. Specifications, rebates and other promotional offers are subject to change at Vertiv's sole discretion upon notice.