

WEISER®

SECURITY & INNOVATION SINCE 1904™

KEY CONTROL™ DEADBOLT

FEATURING **SMARTKEY**
Customized Security.

PROVIDING ONE-KEY CONTROL FOR MULTI-FAMILY APPLICATIONS

Key Control

- Top concealed cylinder provides one-key control for the property manager
- Lower exposed cylinder allows unique user keys for the tenant
- Re-key your user or control cylinder at any time in seconds
- Maintain key control throughout tenant and employee turnover

Increased Efficiency



- Re-key the lock without removing from the door
- Save time & money by re-keying yourself



Perfect for multi-family dwellings, student housing, assisted living & rental properties.

Key Control
cylinder
(property
manager)

User
cylinder
(tenant)

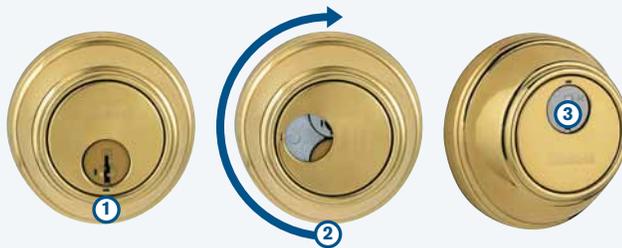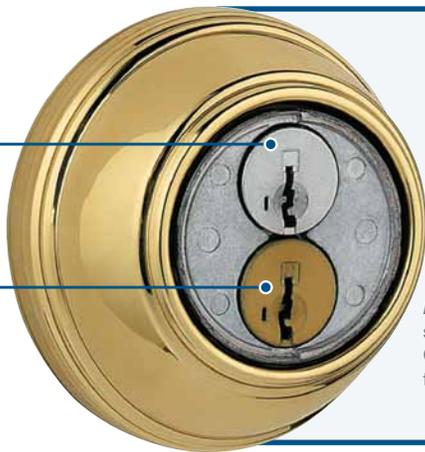

Easily access the Key Control cylinder: (1) Insert the SmartKey Tool into the slot at bottom of cylinder cover (2) Rotate cover clockwise to expose the Key Control cylinder. (3) Now you have access to the Key Control cylinder. Use tool to rotate counter-clockwise back to user's keyway when appropriate.

*Cylinder cap removed
to show both cylinders



SmartKey Tool

THE SMART ALTERNATIVE TO MASTER KEYING

BOTH CYLINDERS FEATURE SMARTKEY® RE-KEY TECHNOLOGY

- 1a Concealed Key Control cylinder has a unique patented keyway to provide increased security. Simply rotate the cylinder cap to expose the cylinder for use.
- 1b User cylinder utilizes the SmartKey keyway and keys.
- 1c Gear assembly enables both cylinders to lock or retract the deadbolt latch.

CERTIFIED GRADE 2 ANSI/BHMA SECURITY

BUMPGUARD™


- 2a Patented side locking bar technology offers improved security by protecting against lock bumping, an attack on conventional pin & tumbler locks.

DRILL RESISTANCE

- 2b Cylinder uses two steel balls inserted into the front of the key face to resist attacks from drilling.

PICK RESISTANCE


- 2c Superior SmartKey withstands the highest level of UL pick testing, the UL 437, Par. 11.6.

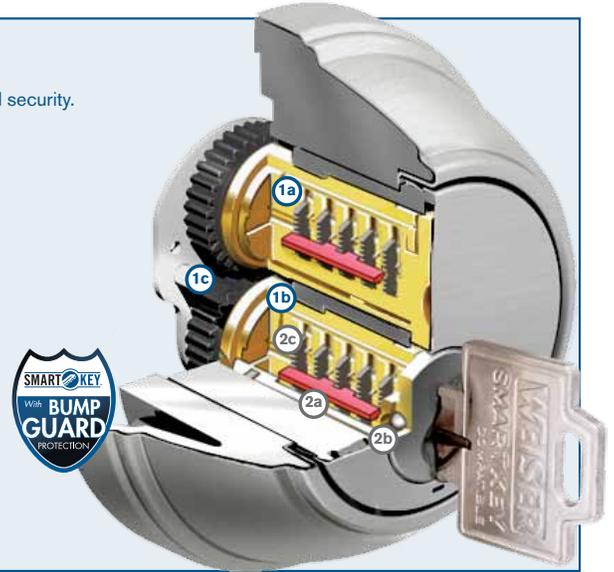

SPECIFICATIONS:

| | |
|---------------------------|--|
| Standard Door Prep | Cross Bore 2-1/8". Edge Bore 1" Latch Face 1" x 2-1/4" |
| Door Thickness | 1 3/8" – 1 3/4" |
| Cylinder | 2 SmartKey® cylinders: 1 standard SmartKey for users, 1 unique patented keyway for 1-Key Control |
| Faceplate | 1" x 2-1/4" |
| Strike | 1-1/8" x 2-3/4" |
| Bolt | 1" throw |
| ANSI/BHMA | A156.5 Grade 2 |
| ADA | Interior turn piece meets 4.13.9 ADA |
| UL | Meets 3 hour fire rating for all UL functions when fronted latches used. ULRef#R10923. Meets 20 minute with drive-in latch. |

FINISHES:

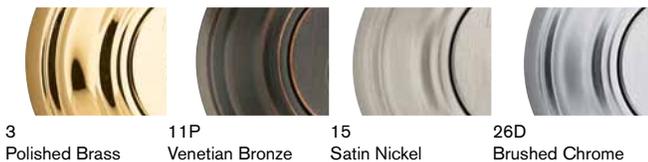


FUNCTIONS:



GCD 9571 Key Control Deadbolt
GCD 9571 UL Key Control Deadbolt
 Deadbolt operated by key outside and thumb turn inside.


DIMENSIONS:

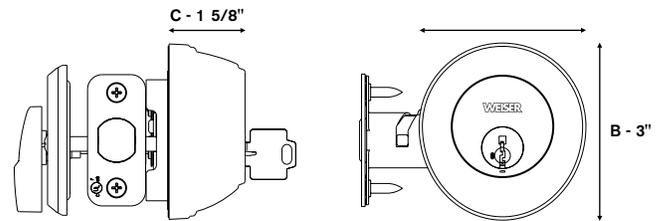


EASILY RE-KEY IN 3 SIMPLE STEPS:

-  Insert functioning key & turn 1/4 turn clockwise.
-  Insert & remove the SmartKey learn tool. Remove functioning key.
-  Insert new key and turn 1/2 turn counter-clockwise. Your lock is now re-keyed!

You must have your functioning key & your SmartKey tool for the system to work.



SmartKey Tool Functioning Key