



# THE WALL-MOUNT™ ONE TON AIR CONDITIONER

**WA121** **60Hz**  
**11,100 Btuh** **9.00 EER**  
**Right Side Control Panel** **Refrigerant 22**

The Bard Wall-Mount One Ton Air Conditioner is a self contained energy efficient heating and cooling system, which is designed to offer maximum indoor comfort at a minimal cost without using valuable indoor floor space or outside ground space. The One Ton is the ideal product for versatile applications such as: new construction, modular offices, school modernization, telecommunication structures, portable structures or correctional facilities. Factory or field installed accessories are available to meet specific job requirements.

## Engineered Features

### Aluminum Finned Copper Coils

#### Quiet Twin Blowers:

Designed to accept full ducted system or for non-ducted free blow installations.

#### High Efficiency Rotary Compressor

#### Galvanized 20 Gauge Zinc Coated Steel Cabinet:

Cleaned, rinsed, sealed and dried before the polyurethane primer is applied. The cabinet is handsomely finished with a baked on textured enamel, which allows it to withstand 1000 hours of salt spray tests per ASTM B117-03.

#### Electrical Components:

Are easily accessible for routine inspection and maintenance through a right side, service panel opening.

#### One Inch, Disposable Air Filter:

Easily removed for replacement from the outside. Optional two-inch pleated filter, factory or field installed.

#### Top Rain Flashing:

Standard feature on all models.

#### Slope Top:

Standard feature for water run-off.

#### High Pressure Switch is Auto-Reset:

Built-in lock-out circuit resets from the room thermostat. Provides commercial quality protection to the compressor.

#### Compressor Control Module:

Built-in off-delay timer adjustable from 30 second to 5-minutes. 2-minute on-delay if power interrupt. 120-second bypass for low pressure control, and both soft and manual lockouts for high and low pressure controls. Alarm output for alarm relay.

#### Barometric Fresh Air Damper:


Allows up to 100 CFM of fresh air.

#### Automatic Condensate Disposal System:

Eliminates the need to provide a separate condensate drain. The drain valve closes at temperatures above 40° and opens when the temperature drops below 40°. Built-in slinger ring fan blade.

#### Full Length Mounting Flanges:

Built into cabinet for improved appearance and easy installation.

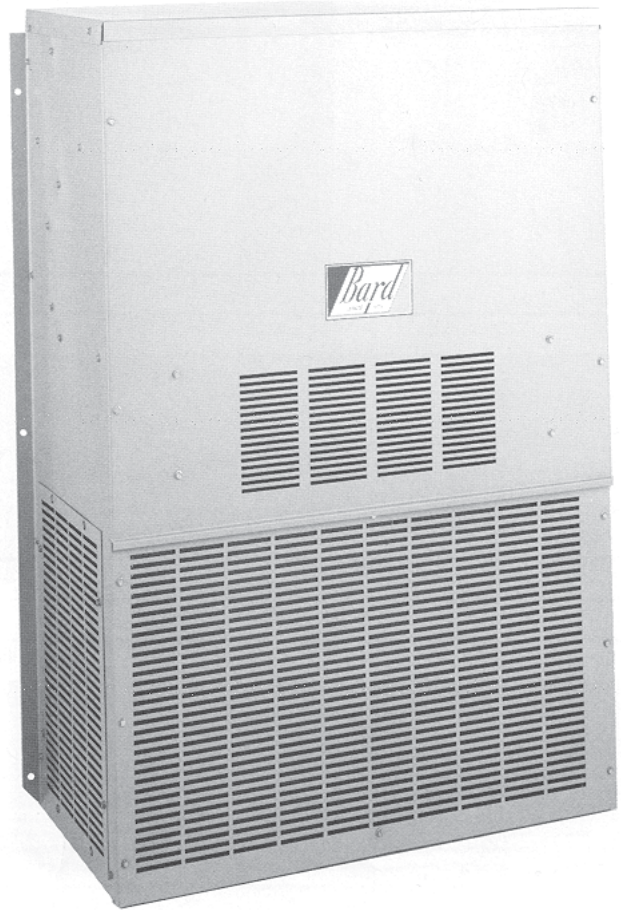

## Optional Product Features

#### Low Pressure Switch is Auto-Reset:

Built-in lock-out circuit and low pressure timed bypass circuit. Resets from room thermostat. Can be factory or field installed.

#### Alarm Relay:

Dry contacts for remote alarm on high or low pressure lockouts.

#### Low Ambient Control:

Permits operation down to 0° F outdoor ambient. Can be factory or field installed.

#### Fully Modulating Economizer:

Can be factory or field installed.

- Complies with efficiency requirements of ANSI/ASHRAE/IESNA 90.1-2007.
- Certified to ANSI/ARI Standard 390-2003 for SPVU (Single Package Vertical Units).
- Commercial Product - Not intended for Residential application.



## Capacity and Efficiency Ratings

Models	Volts	Phase	Heat Strip	Cooling Cap. BTUH ①	EER ②	SEER ③
WA121-A00	230/208	1	NONE	11,100	9.0	10.0
WA121-A03	230/208	1	3.6 KW	11,100	9.0	10.0
WA121-A05	230/208	1	5.0 KW	11,100	9.0	10.0
WA121-K00	115	1	NONE	11,100	9.0	10.0
WA121-K02	115	1	2.2 KW	11,100	9.0	10.0

① Capacity is certified in accordance with ANSI/ARI Standard 390-2003 and tested in accordance with ARI Standard 210/240-2006.

② EER = Energy Efficiency Ratio and is certified in accordance with ANSI/ARI Standard 390-2003.

③ SEER = Seasonal Energy Efficiency Ratio and is tested in accordance with ARI Standard 210/240-2006.

All ratings based on fresh air intake being 100% closed (no outside air introduction).

## Electrical Specifications

Models	Rated Volts and Phase	Operating Voltage Range	No. Field Power Ckts.	Minimum Circuit Ampacity	Maximum External Fuse or Circuit Breaker	Field Power Wire Size	Ground Wire Size
WA121-A00	230/208-1	197-253	1	8	15	14	14
A03			1	20	20	12	12
A05			1	27	30	10	10
WA121-K00	115-1	104-126	1	17	25	10	10
K02			1	26	30	10	10

① Maximum size of the time delay fuse or HACR type circuit breaker for protection of field wiring conductors.

② Based on 75°C copper wire. All wiring must conform to NEC and all local codes.

③ These "Minimum Circuit Ampacity" values are to be used for sizing the field power conductors.

Refer to the National Electrical Code (latest revision), article 310 for power conductor sizing.

Caution: When more than one field power conductor circuit is run through one conduit, the conductors must be derated. Pay special attention to note 8 of table 310 regarding Ampacity Adjustment Factors when more than 3 conductors are in a raceway.

## Specifications

Models	Electrical Rating - 60 HZ	Compressor		Outdoor Fan Motor		Indoor Blower Motor		CFM/ESP (Rated-WET Coil)	Shipping Weight
		RLA	LRA	HP/RPM	FLA	HP/RPM	FLA		
WA121-A	230/208-1	4.5/5.0	26.3	1/10-1075	.70	1/8-1650	.85	400/25	155 lbs.
WA121-K	115-1	9.20	54.0	1/10-1075	1.40	1/8-1650	1.60	400/25	155 lbs.

## Electric Heat Table

Models	WA121-A				WA121-K	
	240V-1		208V-1		120V-1	
	KW	AMPS	BTUH	AMPS	BTUH	AMPS
3.0	15.0	12,285	13.0	9,230	-	-
5.0	20.8	17,065	18.1	12,800	-	-
2.0	-	-	-	-	18.3	7,510

## Indoor Blower Performance - CFM at 230 Volts

E.S.P. IN H <sub>2</sub> O	WA121 Dry/Wet Coil
.0	530/500
.1	485/460
.2	440/425
.3	390/375
.4	325/300

## Cooling Application Data - Outdoor Temperature °F


Models	D.B./W.B. ②	Cooling Capacity	70°	75°	80°	85°	90°	95°	100°	105°	110°	115°	120°
WA121	75/	Total Cooling	12,490	11,790	11,200	10,590	10,090	9,660	9,290	8,990	8,760	8,590	8,300
	62	Sensible Cooling	9,120	9,070	8,980	8,850	8,690	8,490	8,260	7,990	7,680	7,345	7,100
	80/	Total Cooling	13,120	12,620	12,170	11,760	11,410	11,100	10,840	10,630	10,470	10,350	10,000
	67	Sensible Cooling	9,000	8,925	8,835	8,750	8,660	8,573	8,410	8,200	7,950	7,650	7,300
	85/	Total Cooling	15,870	15,010	14,220	13,510	12,880	12,320	11,840	11,440	11,120	10,870	9,900
	72	Sensible Cooling	9,070	9,030	8,940	8,800	8,630	8,400	8,130	7,810	7,450	7,040	6,650

① Below 65°F, unit requires a factory or field installed low ambient control.

② Return air temp. °F.

CAPACITY MULTIPLIER FACTORS		
% of Rated Air Flow	-10	Rated +10
Total BTUH	0.975	1.0 1.02
Sensible BTUH	0.950	1.0 1.05

## Air Conditioning Model Nomenclature

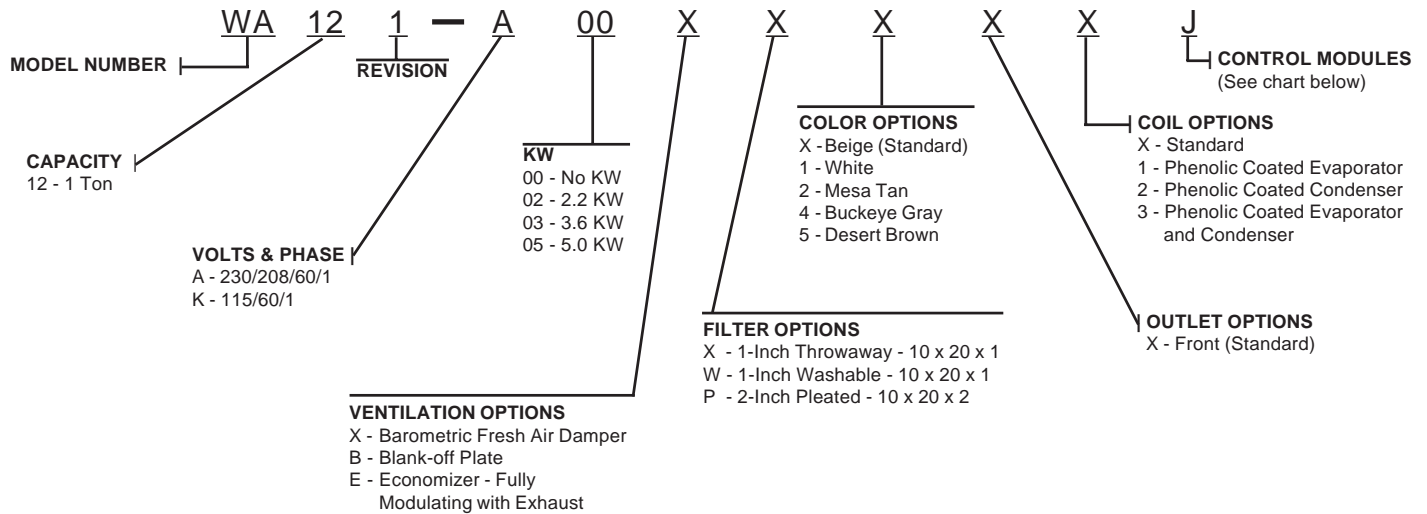

## Ventilation System Packages

Bard Wall-Mounts are designed to provide optional ventilation packages to meet all of your ventilation and indoor air quality requirements. All units are equipped with a barometric fresh air damper as the standard ventilation package. All ventilation packages can be built-in at the factory or field-installed at a later date.



Barometric Fresh Air Damper

### BAROMETRIC FRESH AIR DAMPER - BFAD-1

### STANDARD

The barometric fresh air damper is a standard feature on all models. It is installed on the inside of the service door and allows outside ventilation air, up to 25% of the total airflow rating of the unit, to be introduced through the air inlet openings and to be mixed with the conditioned air. The damper opens during blower operation and closes when the blower is off. Adjustable blade stops allow different amounts of outside air to be introduced into the building and can be easily locked closed if required.

**NOTE:** The above vent systems are intake only without built-in exhaust capability. Building will likely require separate field installed barometric relief or mechanical exhaust elsewhere within the conditioned space. Balancing dampers in the return air grille may be required to achieve specified amount of outdoor air intake.

### BLANK OFF PLATE - BOP-1A

### OPTIONAL

A blank off plate is installed on the inside of the service door. It covers the air inlet openings, which restricts any outside air from entering the unit. The blank off plate should be utilized in applications where outside air is not required to be mixed with the conditioned air.

### ECONOMIZER - EIFM-1B

### OPTIONAL

The built-in economizer system is internally mounted behind the service door and allows outdoor air to be introduced through the air inlet openings. The amount of outdoor air varies in response to the system controls and settings defined by the end user. It includes a built-in exhaust air damper. The economizer is designed to provide "free cooling" when outside air conditions are cool and dry enough to satisfy cooling requirements without running the compressor. This in turn provides lower operating costs, while extending the life of the compressor.



Economizer

### Standard Features:

- One Piece Construction - Easy to install with no mechanical linkage adjustment required.
- Exhaust Air Damper - Built in with positive closed position. Provides exhaust air capability to prevent pressurization of tight buildings.
- Actuator Motor - 24 volt, power open, spring return with built in torque limiting switch.
- Proportioning Type Control - for maximum "free cooling" economy and comfort.
- Moisture Eliminator & Prefilter - permanent, washable aluminum construction.
- Enthalpy Control - adjustable to monitor outdoor temperature and humidity.
- Minimum Position Potentiometer - adjustable to control minimum damper blade position for ventilation purposes.
- Mixed Air Sensor - to monitor outside and return air to automatically modulate damper position.

## Air Conditioning Control Modules



Factory Installed Code No.	Field Installed Part No.	MODULE DESCRIPTION				
		High Pressure Control	Compressor Control Module	Low Pressure Control	Low Ambient Control	Alarm Relay
E	CMA-25	STD	STD		•	
J	Factory only	STD	STD	•	•	•
G	CMA-16A	STD	STD	•		

STD: High pressure control and compressor control module with TDR are standard on all WA121-A and WA121-K models.

**NOTE: For electronic and communication equipment shelter application, control module "J" is recommended.**

# Dimensions of Basic Unit for Architectural and Installation Requirements (Nominal)

UNIT	WIDTH (W)	DEPTH (D)	HEIGHT (H)	SUPPLY		RETURN		E	F	G(*)	I	J	K	L	M
				A	B	C	B								
WA121	30-1/8	14-5/8	46	5	17	10	17	32	18-1/4	2 or 5	19-7/8	23-3/4 or 26-3/4	20-1/4	2-1/2	31-1/16

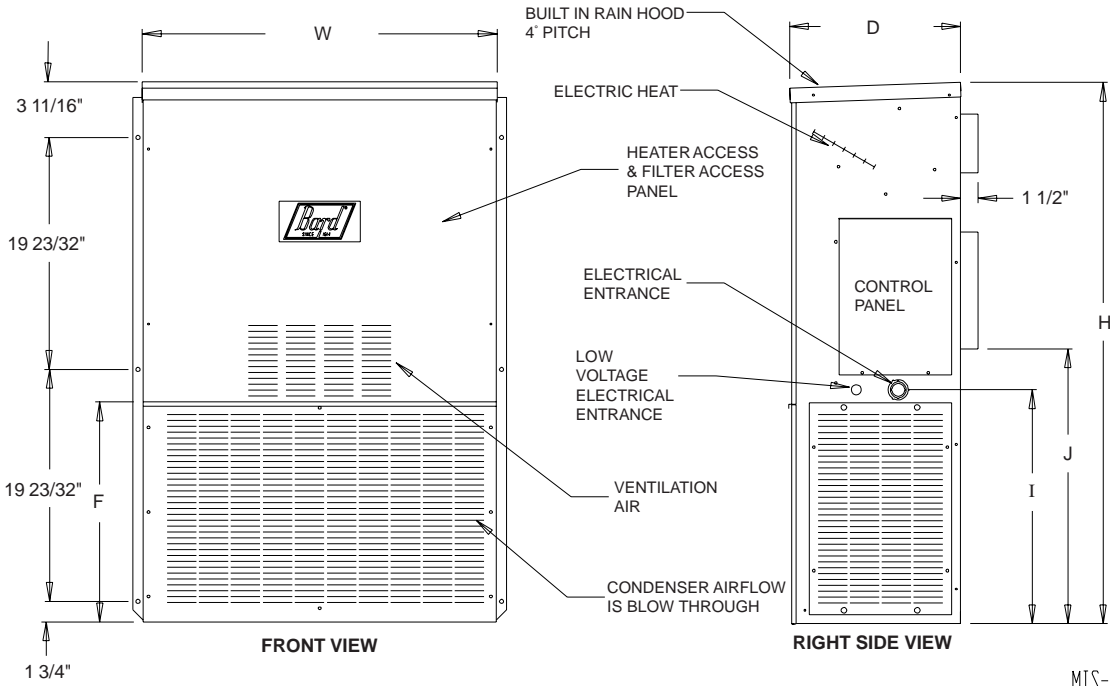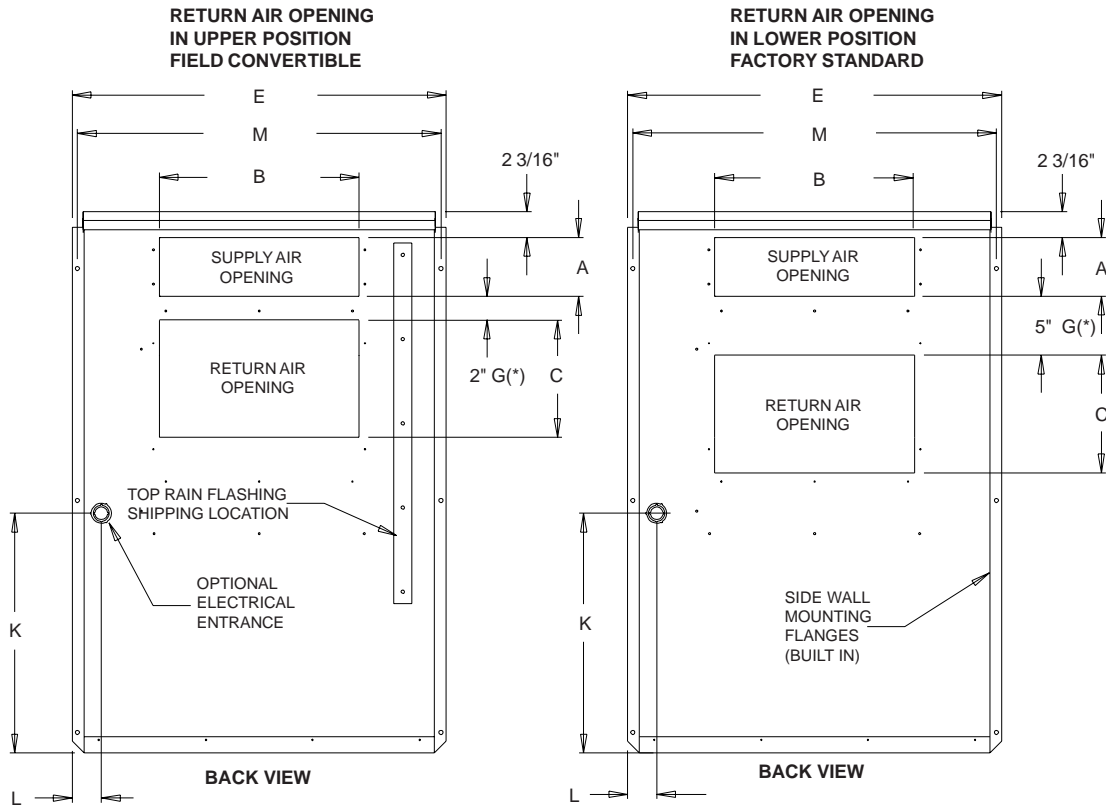

MIS-524 A

(\*) Position of return air flanges are interchangeable between two positions. Factory built at 5 inches.  
 NOTE: Maintain a minimum of 20 inches clearance on right side to allow access to control panel and allow proper airflow to outdoor condenser coil. Allow 15 inches on left side.



Bard Manufacturing Company, Inc.  
 Bryan, Ohio 43506  
 www.bardhvac.com

Due to our continuous product improvement policy, all specifications subject to change without notice.

Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.

<p><b>Form No.</b>  <b>S3233</b>  <b>June, 2008</b></p>
<p>Supersedes S3233-1007</p>