



HE-MUSTR-W

## Wire Instructions



- 1) Connect 2 pin (red/black) connector from the switch to the power supply port on controller.
- 2) Connect 2 pin (yellow) connector from the switch to the flash pattern port on controller.
- 3) Connect loose wires from switch, Red to +12V, Black to Chassis Ground.


- 4) Connect 1 extension wire to each of the light heads.
- 5) Connect the extension wires to the LED light head ports on the controller.



## Operation

On/Off Switch: Turns controller on and off. Will resume last flash pattern.

Button Switch: With controller on, each press of the button switch will cycle light heads to the next of the 15 flash patterns

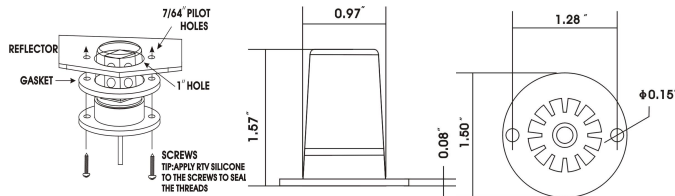

386-257-2956

[www.HeiseLED.com](http://www.HeiseLED.com)

460 Walker Street, Holly Hill, FL 32117