

3,500/4,000/4,500/5,000 /5,500kg Capacities

Engine Powered Forklift Trucks Pneumatic Tyre

MAIN VEHICLE SPECIFICATIONS

CHARACTERISTICS	2	Model			CD35S-5	CD40S-5	CD45S-5	CD50C-5	CD55C-5
	3	Load Capacity	at rated load centre	kg	3,500	4,000	4,500	5,000	5,500
	4	Load centre		mm	600	600	600	600	600
	5	Power type	Elec, Diesel, LPG, Gasoline		Diesel	Diesel	Diesel	Diesel	Diesel
	6	Operator type			Driver-seated	Driver-seated	Driver-seated	Driver-seated	Driver-seated
	7	Tyre type	P:Pnu, E:Solid Soft, C: Cush		P	P	P	P	P
	8	Wheels (x=Driven)	Front / Rear		x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2
	9	Max. Fork Height	with STD 2-stage mast	mm	3,000	3,000	3,000	3,050	3,050
DIMENSIONS	10	Free Lift		mm	160	160	160	170	170
	12	Fork Carriage	ISO Class		III	III	IV	IV	IV
	13	Forks	Length x Width x Thickness	mm	1,050x150x50	1,050x150x50	1,200x150x50	1,200x150x60	1,200x150x60
			Fork Spacing(Min x Max)	mm	310 x 1,182	310 x 1,182	340 x 1,290	340 x 1,290	340 x 1,290
	14	Tilt of Mast	Forward / Backward	deg	8 / 10	8 / 10	8 / 10	8 / 10	8 / 10
	15	Overall Dimensions	Length to Fork Face	mm	3,100	3,151	3,265	3,300	3,350
			Overall Width	mm	1,372	1,451	1,451	1,451	1,451
			Mast Lowered Height	mm	2,225	2,230	2,230	2,380	2,380
			Mast Extended Height	mm	4,265	4,270	4,420	4,470	4,470
			Overhead Guard Height	mm	2,225	2,230	2,230	2,230	2,230
			Seat Height	mm	1,248	1,255	1,255	1,255	1,255
	21	Turning Radius	Minimum outside	mm	2,770	2,820	2,865	2,930	2,990
	22	Load Moment centre		mm	561	561	561	571	571
	23	Aisle 90 degree stacking(add load length & clearance)		mm	3,331	3,381	3,426	3,501	3,561
PERFORMANCE	24	Travel Speed	Loaded / Unloaded	km/h	24 / 25	24 / 25	24 / 25	24 / 25	24 / 25
	25	Lifting Speed	Loaded / Unloaded	mm/s	520 / 540	520 / 540	520 / 540	470 / 540	470 / 540
	26	Lowering Speed	Loaded / Unloaded	mm/s	480 / 450	480 / 450	480 / 450	490 / 450	490 / 450
	28	Max. drawbar pull	Loaded at 1.0 mph (1.6km / h)	kg	3,300	3,300	3,400	3,500	3,600
	30	Max. gradeability	Loaded at 1.0 mph (1.7km / h)	%	38	35	32	30	28
WEIGHT	32	Total Service Weight, Unloaded		kg	5,790	6,180	6,550	7,050	7,390
	33	Axle Load	Loaded, Front / Rear	kg	8,215 / 1,075	8,980 / 1,200	9,800 / 1,250	10,680 / 1,370	11,370 / 1,520
			Unloaded, Front / Rear	kg	2,685 / 3,105	2,660 / 3,520	2,810 / 3,740	2,890 / 4,160	2,800 / 4,590
CHASSIS	35	Tyres	Number of wheels(F / R)		2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
	36		Size, Front		8.25x15-14	300x15-18	300x15-18	300x15-18	300x15-18
	37		Size, Rear		7.00x12-12	7.00x12-12	7.00x12-12	7.00x12-14	7.00x12-14
	38	Wheel Base	Distance	mm	2,000	2,000	2,100	2,100	2,100
	39	Tread Width	Front / Rear	mm	1,138 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115
	40	Ground Clearance	Loaded at the lowest point	mm	160	160	160	160	160
			Loaded at centre of wheelbase	mm	205	205	205	205	205
	42	Brakes	Service		shoe / disc	shoe / disc	shoe / disc	shoe / disc	shoe / disc
			Parking		ratchet	ratchet	ratchet	ratchet	ratchet
POWER TRAIN	45	Battery	Voltage / Ampere	V/AH	24 / 75	24 / 75	24 / 75	24 / 75	24 / 75
	49	Engine	Model		DB58S	DB58S	DB58S	DB58S	DB58S
	50		Rated Power(DIN)	HP/rpm	91 / 2,200	91 / 2,200	91 / 2,200	91 / 2,200	91 / 2,200
				kW/rpm	68 / 2,200	68 / 2,200	68 / 2,200	68 / 2,200	68 / 2,200
	51		Maximum Torque	kgm/rpm	33 / 1,600	33 / 1,600	33 / 1,600	33 / 1,600	33 / 1,600
	52	Cylinders / Displacements		CC	6 / 5,785	6 / 5,785	6 / 5,785	6 / 5,785	6 / 5,785
	55	Transmission	Type		powershift	powershift	powershift	powershift	powershift
			Number of Speed (Fwd / Rev)		2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
	57	Hydraulic Pressure	System	bar	190	190	210	210	230
			Attachment	bar	140	140	140	140	140

Note: Specification values quoted in this specification sheet has been rounded. Performance may vary due to operation conditions.
Products and specifications are subject to improvement and change without prior notices.

3,500/4,000/4,500/5,000/5,500 kg Capacities

Engine Powered Forklift Trucks Pneumatic & Cushion Tyre


CG35S-5	CG40S-5	CG45S-5	CG50C-5	CG55C-5
3,500	4,000	4,500	5,000	5,500
600	600	600	600	600
LPG	LPG	LPG	LPG	LPG
Driver-seated	Driver-seated	Driver-seated	Driver-seated	Driver-seated
p	p	p	p	P
x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2
3,000	3,000	3,000	3,050	3,050
160	160	160	170	170
III	III	IV	IV	IV
1,050x150x50	1,050x150x50	1,200x150x50	1,200x150x60	1,200x150x60
310 x 1,182	310 x 1,182	340 x 1,290	340 x 1,290	340 x 1,290
8 / 10	8 / 10	8 / 10	8 / 10	8 / 10
3,100	3,150	3,265	3,300	3,350
1,372	1,451	1,451	1,451	1,451
2,225	2,230	2,230	2,380	2,380
4,265	4,270	4,420	4,470	4,470
2,225	2,230	2,230	2,230	2,230
1,248	1,255	1,255	1,255	1,255
2,770	2,820	2,865	2,930	2,990
561	561	561	571	571
3,331	3,381	3,426	3,501	3,561
20 / 21	19.5 / 20.5	19.5 / 20.5	19.5 / 20.5	19.5 / 20.5
500 / 540	500 / 540	500 / 540	490 / 540	470 / 540
480 / 450	480 / 450	480 / 450	490 / 450	490 / 450
3,355	3,430	3,410	3,410	3,600
36	33.5	30.7	30.7	28
5,790	6,180	6,550	7,050	7,390
8,215 / 1,075	8,980 / 1,200	9,800 / 1,250	10,680 / 1,370	11,370 / 1,520
2,685 / 3,105	2,660 / 3,520	2,810 / 3,740	2,890 / 4,160	2,800 / 4,590
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
8.25x15-14	300x15-18	300x15-18	300x15-18	300x15-18
7.00x12-12	7.00x12-12	7.00x12-12	7.00x12-14	7.00x12-14
2,000	2,000	2,100	2,100	2,100
1,138 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115	1,153 / 1,115
160	160	160	160	160
205	205	205	205	205
shoe / disc	shoe / disc	shoe / disc	shoe / disc	shoe / disc
ratchet	ratchet	ratchet	ratchet	ratchet
12 / 75	12 / 75	12 / 75	12 / 75	12 / 75
G643(E)	G643(E)	G643(E)	G643(E)	G643(E)
93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450
69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450
31/ 1,400	31/ 1,400	31/ 1,400	31/ 1,400	31/ 1,400
6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294
powershift	powershift	powershift	powershift	powershift
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
190	190	210	210	230
140	140	140	140	140

3,500/4,000/4,500/5,000/5,500 kg Capacities

Engine Powered Forklift Trucks Pneumatic & Cushion Tyre

CGC35S-5	CGC40S-5	CGC45S-5	CGC50C-5	CGC55C-5
3,500	4,000	4,500	5,000	5,500
500	500	600	600	600
LPG	LPG	LPG	LPG	LPG
Driver-seated	Driver-seated	Driver-seated	Driver-seated	Driver-seated
C	C	C	C	C
x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2	x 2 / 2
2,880	2,880	2,880	2,630	2,630
160	160	160	160	160
III	III	IV	IV	IV
1,220x150x50	1,220x150x50	1,220x150x50	1,220x150x50	1,220x150x50
310 x 1,082	310 x 1,082	340 x 1,290	340 x 1,290	340 x 1,290
5 / 6	5 / 6	5 / 6	5 / 6	5 / 6
2,682	2,686	2,828	2,878	3,010
1,270	1,270	1,420	1,420	1,420
2,135	2,135	2,185	2,185	2,185
4,115	4,115	4,315	4,065	4,065
2,155	2,155	2,155	2,155	2,155
1,125	1,125	1,125	1,125	1,125
2,360	2,400	2,530	2,580	2,630
505	505	505	515	515
2,865	2,905	3,035	3,095	3,145
18 / 19	18 / 19	21 / 22	21 / 22	21 / 22
500 / 550	480 / 550	480 / 550	450 / 500	450 / 500
530 / 450	500 / 450	500 / 440	480 / 440	480 / 440
2,422	2,346	2,530	2,638	2,696
27	24	23	22	21
5,470	5,850	6,500	6,990	7,340
7,970 / 1,000	8,690 / 1,160	9,775 / 1,225	10,630 / 1,360	11,330 / 1,510
2,230 / 3,240	2,130 / 3,720	2,495 / 4,005	2,520 / 4,470	2,400 / 4,940
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
22x9x16	22x9x16	22x12x16	22x12x16	22x12x16
8x6x12-1 / 8	18x7x12-1 / 8	18x8x12.1	18x8x12.1	18x8x12.1
1,630	1,630	1,790	1,790	1,790
1,042 / 1,044	1,042 / 1,044	1,116 / 1,044	1,116 / 1,044	1,116 / 1,044
130	130	130	130	130
130	130	130	130	130
foot / hyd	foot / hyd	foot / hyd	foot / hyd	foot / hyd
hand / mech	hand / mech	hand / mech	hand / mech	hand / mech
12 / 75	12 / 75	12 / 75	12 / 75	12 /
G643E	G643E	G643E	G643E	G643E
93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450	93 / 2,450
69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450	69 / 2,450
31/ 1,400	31/ 1,400	31/ 1,400	31/ 1,400	31 / 1,400
6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294	6 / 4,294
powershift	powershift	powershift	powershift	powershift
2 / 2	2 / 2	2 / 2	2 / 2	2 / 2
190	210	210	210	230
140	140	140	140	140

DIMENSIONAL DRAWING

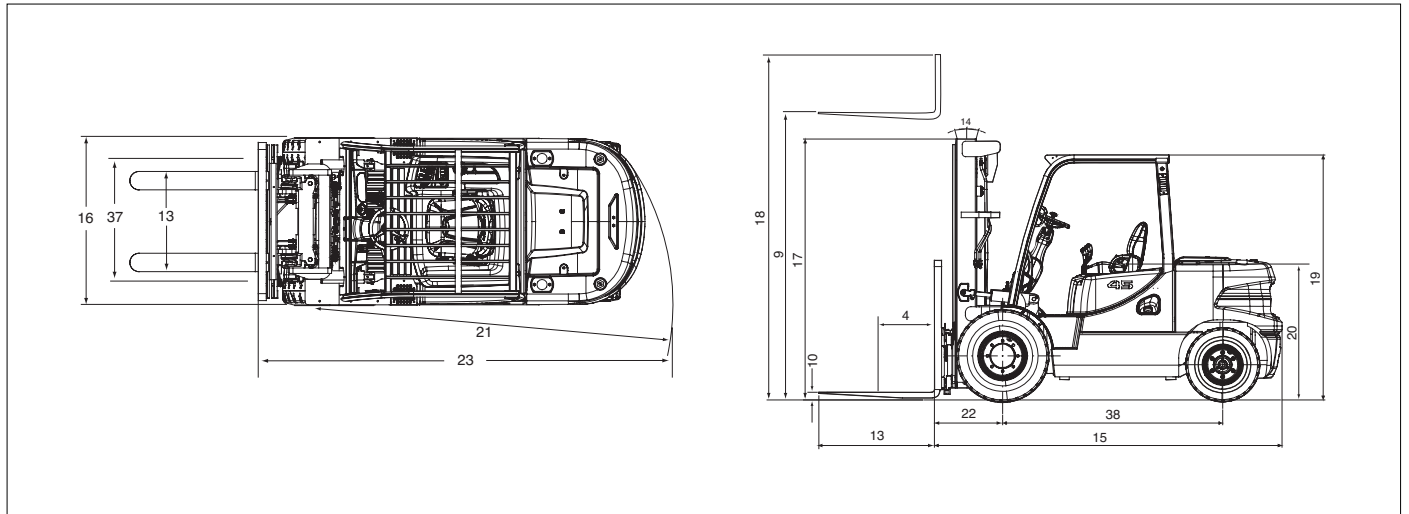

MAST SPECIFICATIONS and RATED CAPACITIES

CD/CG35S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities					
			With Load Backrest	With Load Backrest	CD,CG35S-5					
					Tilt Angle				Load Capacities	
					Single Pneu.		Double Pneu.		Single Pneu.	Double Pneu.
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC600mm	LC600mm
STD	3000	2225	4265	160	8	10	8	10	3655	3655
	3300	2375	4565	160	8	10	8	10	3655	3655
	3650	2550	4915	160	8	10	8	10	3655	3655
	4000	2875	5265	160	8	10	8	10	3655	3655
	4250	3000	5515	160	8	10	8	10	3655	3655
	4850	3450	6115	160	8	8	8	10	3520	3545
FF	3000	2205	4250	1005	8	10	8	10	3660	3660
FFT	4000	2090	5265	890	8	8	8	8	3645	3670
	4250	2175	5530	975	8	8	8	8	3575	3625
	4700	2325	5980	1125	8	8	8	8	3465	3485
	5150	2475	6430	1275	8	5	8	8	3350	3370
	5600	2625	6880	1425	8	3	8	8	3235	3255
	6050	2775	7330	1575	8	3	8	5	2820	3165

CD/CG40S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities					
			With Load Backrest	With Load Backrest	CD,CG40S-5					
					Tilt Angle				Load Capacities	
					Single Pneu.		Double Pneu.		Single Pneu.	Double Pneu.
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC600mm	LC600mm
STD	3000	2230	4270	160	8	10	8	10	4115	4115
	3300	2380	4570	160	8	10	8	10	4115	4115
	3650	2555	4920	160	8	10	8	10	4115	4115
	4000	2880	5270	160	8	10	8	10	4115	4115
	4250	3005	5520	160	8	10	8	10	4115	4115
	4850	3455	6120	160	8	8	8	10	4025	4045
FF	3000	2210	4255	1010	8	10	8	10	4115	4115
FFT	4000	2090	5270	890	8	8	8	8	4125	4125
	4250	2180	5535	980	8	8	8	8	4105	4125
	4700	2330	5985	1130	8	8	8	8	3965	3990
	5150	2480	6435	1280	8	5	8	5	3830	3875
	5600	2630	6885	1430	8	3	8	3	3715	3740
	6050	2780	7335	1580	8	3	8	3	3485	3440

CD/CG45S-5

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities					
					CD,CG45S-5					
			With Load Backrest	With Load Backrest	Tilt Angle				Load Capacities	
					Single Pneu.		Double Pneu.		Single Pneu.	Double Pneu.
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC600mm	LC600mm
					deg	deg	deg	deg	kg	kg
STD	3000	2230	4420	160	8	10	8	10	4570	4570
	3300	2380	4720	160	8	10	8	10	4570	4570
	3650	2555	5070	160	8	10	8	10	4570	4570
	4000	2880	5420	160	8	10	8	10	4570	4570
	4250	3005	5670	160	8	10	8	10	4570	4570
	4850	3455	6270	160	8	5	8	10	4480	4295
FF	3000	2210	4400	860	8	10	8	10	4575	4575
FFT	4000	2090	5415	740	8	8	8	8	4585	4585
	4250	2180	5680	830	8	8	8	8	4565	4585
	4700	2330	6130	980	8	8	8	8	4400	4450
	5150	2480	6580	1130	8	3	8	8	4265	4150
	5600	2630	7030	1280	8	3	8	5	4125	3785
	6050	2780	7480	1430	8	3	8	3	3280	3280

CD/CG50C-5(COMPACT)

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities					
					CD,CG50C-5(COMPACT)					
			With Load Backrest	With Load Backrest	Tilt Angle				Load Capacities	
					Single Pneu.		Double Pneu.		Single Pneu.	Double Pneu.
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC600mm	LC600mm
					deg	deg	deg	deg	kg	kg
STD	2750	2230	4170	170	8	10	8	10	5030	5030
	3050	2380	4470	170	8	10	8	10	5030	5030
	3400	2555	4820	170	8	10	8	10	5030	5030
	3750	2880	5170	170	8	10	8	10	5030	5030
	4000	3005	5420	170	8	10	8	10	5030	5030
	4600	3455	6020	170	8	8	8	10	5030	4690
FF	2875	2210	4275	870	8	10	8	10	5035	5035
FFT	3875	2090	5290	750	8	8	8	8	5050	5050
	4125	2180	5555	840	8	8	8	8	5050	5050
	4575	2330	6005	990	8	8	8	8	4935	4980
	5025	2480	6455	1140	8	5	8	8	4775	4220
	5475	2630	6905	1290	8	3	8	5	4270	3855
	5925	2780	7355	1440	8	3	8	5	3330	3005

CD/CG55C-5 (COMPACT)

Mast type	Maximum Fork Height	Maximum Lowered Height	Fully Extended Height	Free Lift	Rated Load Capacities					
					CD,CG55C-5 (COMPACT)					
			With Load Backrest	With Load Backrest	Tilt Angle				Load Capacities	
					Single Pneu.		Double Pneu.		Single Pneu.	Double Pneu.
	mm	mm	mm	mm	FWD	BWD	FWD	BWD	LC600mm	LC600mm
					deg	deg	deg	deg	kg	kg
STD	2750	2230	4170	170	8	10	8	10	5500	5500
	3050	2380	4470	170	8	10	8	10	5500	5500
	3400	2555	4820	170	8	10	8	10	5500	5500
	3750	2880	5170	170	8	10	8	10	5500	5500
	4000	3005	5420	170	8	10	8	10	5500	5500
	4600	3455	6020	170	8	8	8	10	5400	4900
FF	2875	2210	4275	870	8	10	8	10	5500	5500
FFT	3875	2090	5290	750	8	8	8	8	5500	5500
	4125	2180	5555	840	8	8	8	8	5500	5500
	4575	2330	6005	990	8	8	8	8	5500	5500
	5025	2480	6455	1140	8	5	8	8	5150	4425
	5475	2630	6905	1290	8	3	8	5	4500	4050
	5925	2780	7355	1440	8	3	8	5	3500	3125


Crown Equipment Pty Ltd

Australia Head office : Corner Long Cooper Streets Smithfield NSW
2164 Australia
Tel : +61 2 8788 0000 Fax : +61 2 9609 1702

www.crown.com

Copyright 2006 Crown Equipment Corporation
Ref : ASF0038
Printed in Australia.



TECHNICAL SPECIFICATIONS

Pneumatic Forklift Trucks

CD35S / CD40S / CD45S-5 & CD50C / CD55C-5

CG35S / CG40S / CG45S-5 & CG50C / CG55C-5

CGC35S / CGC40S / CGC45S-5 & CGC50C / CGC55C-5

3,500kg to 5,500kg Capacity

PRO5
SERIES

