



KIP 1200 SPECIFICATIONS



Space, Electrical, and Environmental Requirements


Compatible with	KIP 71 Series, KIP 75 Series, KIP 79 Series
Weight	80 kg
Dimensions	1040 mm (w) x 860 mm (d) x 740-860 mm (h)
Print Rack	Adjustable to fit E size / A0 prints
Minimum Distance from Wall	
Rear	250 - 860 mm
Left	150 mm
Right	150 mm
Front	See Printer Spec
Total Space	1350 mm (w) x 1730 mm (d)
Electrical (Dedicated)	120 V, 5 Amps
Print Rack	Capacity: Up to 1000 sheets (20 lb./75 gsm Plain Bond Paper)
Spatial Requirements	<p>24" / 610 mm</p> <p>10" / 250 mm</p> <p>44" or 63" / 1120 mm or 1730 mm</p> <p>Printer</p> <p>See Printer</p>



REAR PRINT RECEIVING TRAY



Space, Electrical, and Environmental Requirements

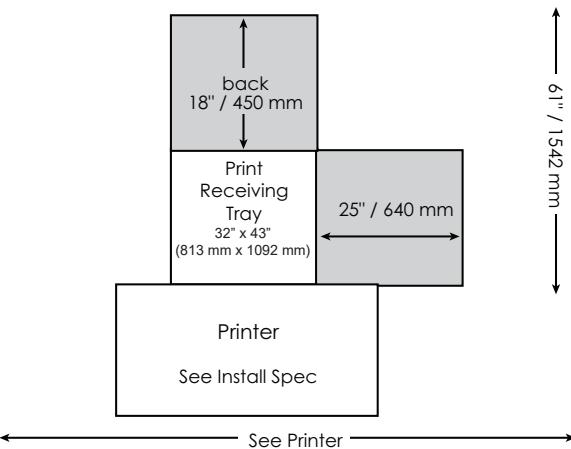Compatible with	KIP 71 Series
Dimensions	813 mm (w) x 1092 mm (d)
Minimum Distance from Wall rear (with flat output down)	450 mm
Left	N/A
Right	640 mm
Front	See Printer Spec
Print Rack	Capacity: 100 D / A1 size prints, 75 E / A0 size prints
Spatial Requirements	



KIP PRINT AND ORIGINAL RECEIVING TRAY



Space, Electrical, and Environmental Requirements



Compatible with	KIP 71 Series
Weight	18 kg
Dimensions	1,051 mm (w) x 1,102 mm (d) x 1,192 mm (h)
Minimum Distance from Wall rear (with flat output down)	450 mm
Left	N/A
Right	640 mm
Front	See Printer Spec
Print Rack	Adjustable to fit up to 100 (with modification on next page) A – E / A4 - A0 size prints plain paper
Scan Rack	10 sheets A – E / A4 - A0 size prints plain paper NOTE: Originals should be moved toward the tray by hand at every scan completion.
Spatial Requirements	<p>Diagram illustrating spatial requirements:</p> <ul style="list-style-type: none"> Printer: See Install Spec Print & Original Receiving Tray (1051 mm x 1102 mm): 18" / 450 mm (back), 25" / 640 mm (side), 161" / 1552 mm (height) Total width: See Printer



ORIGINAL & PRINT TRAY ADJUSTMENT PROCEDURE

These instructions show how to increase the print capacity of the KIP 71 Series Print Receiving tray to up to 100 sheets. NOTE: The total stacking capacity may vary due to environmental conditions, media type and weight

1. Remove the following 4 items from the centre of the KIP 7170 Print Receiving tray.

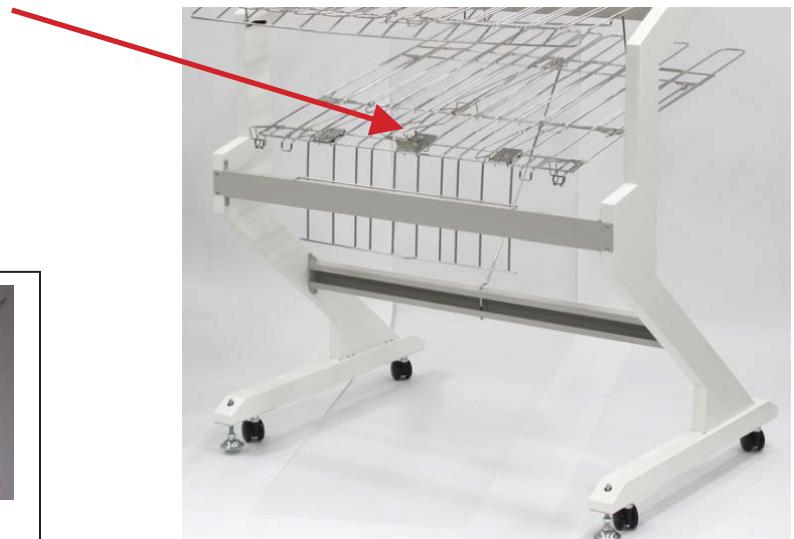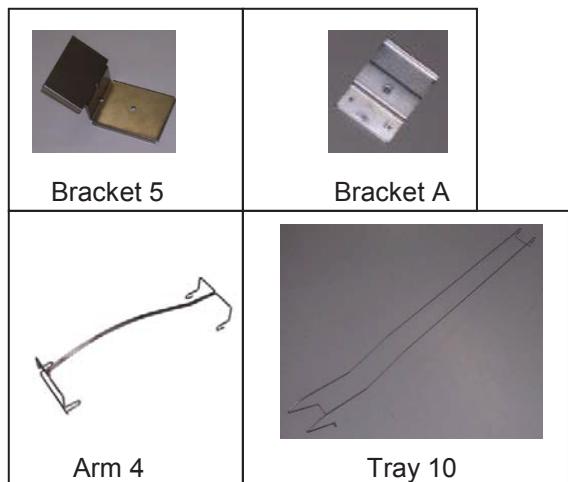

2. Print Receiving Tray without centre guides



3. 100 D-size / A1 prints stacked



NOTE: The centre guides are used to prevent the prints from rolling up as they exit the printer. This can occur in high humidity environments and or near the end of a paper roll where the curl is more progressive. Reinstall the centre guides if necessary.



KIP 800 SERIES STACKER SPECIFICATIONS



Space, Electrical, and Environmental Requirements

Compatible with	KIP 860, KIP 870, KIP 880, KIP 890
Capacity	200 sheets of plain paper
Input Power	24Vdc, 1A
Dimensions	41" (W) x *35" (D) x **25" (H) / 1,036mm (W) x *880mm (D) x **621mm (H) * 49" / 1,241mm with using Paper Support ** 17" / 414mm (When it is set to the lowest position.)
Weight	77 lbs. / 35kg
Spatial Requirements	



KIP 900 SERIES STACKER SPECIFICATIONS



Space, Electrical, and Environmental Requirements

Compatible with	KIP 970, 980, 990
Capacity	Up to 700 ISO standard page size documents (20# 70-90gms Bond)
Wait Time	None
Power Supply	Connection to printer, no additional power is required
Power Consumption	Included with printer specifications (2A)
Noise	Less than 60db (impulse)
Dimensions	1,027mm (W) x 1,245mm (D) x 1,120mm (H) (with trays extended)
Weight	151 Kgs

Spatial Requirements	
----------------------	--