IT'S WHAT'S NEXT





THE FLEX ADVANTAGE

The FLEX 24V platform brings power output to the next level and features industry leading Lithium-Ion and Sensor-Free brushless motor technologies with 20% more power, 25% longer runtime and up to 50% faster charging.



20% MORE POWER

Innovative design evenly distributes power to overperform in the most challenging conditions



25% LONGER RUNTIME


State-of-the-art THERMA-TECH™ material prevents overheating and promotes longer runtime



50% FASTER CHARGING


Industry-leading recharge times get you back to work in as little as 30 minutes

BATTERY POWER TO CRUSH JOB AFTER JOB

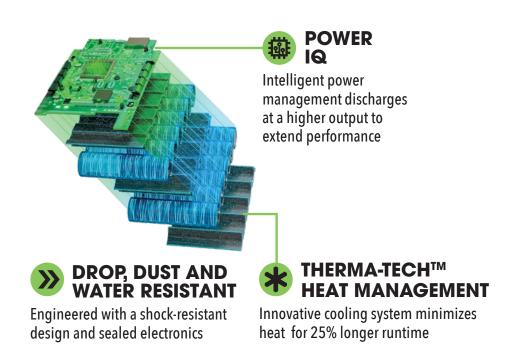



THE FASTEST CHARGERS

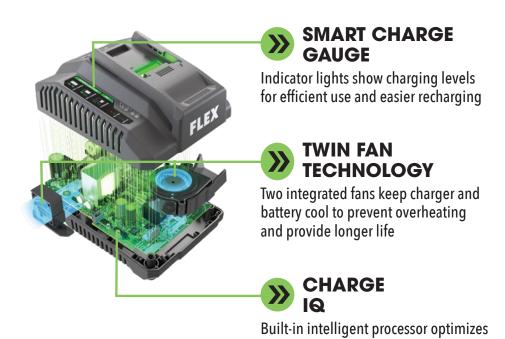

UNMATCHED PERFORMANCE

power flow for accelerated charge time



Software enabled processing to calculate motor partitioning for maximum performance

FLEX



"[FLEX tools] have already proved how well they work...then you put the lifetime warranty on top of that? It's kind of a no-brainer."





FLEX 24V CROSS COMPATIBILITY

Compatible with all FLEX 24V batteries, chargers and tools



24V 2.5Ah LITHIUM-ION BATTERY



24V 5.0Ah LITHIUM-ION BATTERY



24V 8.0Ah LITHIUM-ION BATTERY



24V 12.0Ah LITHIUM-ION BATTERY



24V 160W **FAST CHARGER**



24V 280W **RAPID CHARGER**

FLEX



DRILLING, DRIVING & FASTENING
CUTTING
SURFACING
SPECIALTY
SYSTEM SUPPORT 30
COMBO KITS
POWER
ACCESSORIES









1/2" 2-SPEED DRILL DRIVER WITH TURBO MODE KIT



FX1171T-2B

- **UNRIVALED TORQUE** Industry-leading torque at 1,400 in-lbs
- ANTI-KICKBACK Advanced braking technology lets you work with confidence
- 1/2" FULL-METAL **PRATCHETING CHUCK** WITH CARBIDE TEETH Long-lasting and reliable

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-550/0-2,000 RPM
- TURBO Speed: 0-700/0-2,500 RPM
- Max. Torque: 1,400 in-lbs, 158 Nm
- Clutch Settings: 22+D
- Chuck Capacity: 1/2 in
- Chuck Type: Metal single-sleeve keyless ratchet with carbide teeth
- Tool Length: 7 in, 178 mm
- Tool Weight (without battery): 3.7 lbs, 1.7 kg

WHAT'S IN THE BOX

1/2" 2-Speed Drill Driver with Turbo Mode, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, Side Handle, Bit Holder, Belt Clip, FLEX Case





1/2" 2-SPEED HAMMER DRILL WITH TURBO MODE KIT



FX1271T-2B

FLEX Case

- **UNRIVALED TORQUE** Industry-leading torque at 1,400 in-lbs
- **ANTI-KICKBACK** Advanced braking technology lets you work with confidence
- 1/2" FULL-METAL RATCHETING CHUCK WITH CARBIDE TEETH Long-lasting and reliable

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-550/0-2,000 RPM
- TURBO Speed: 0-700/0-2,500 RPM
- Impact Rate: 0-8,800/0-32,000 IPM
- TURBO Impact Rate: 0-11,200/0-40,000 IPM
- Max. Torque: 1,400 in-lbs, 158 Nm
- Clutch Settings: 22+D+H
- Chuck Capacity: 1/2 in
- Chuck Type: Metal single-sleeve keyless ratchet with carbide teeth



Tool Length: 7.2 in, 182 mm Tool Weight (without battery): 3.7 lbs, 1.7 kg WHAT'S IN THE BOX 1/2" 2-Speed Hammer Drill Driver with Turbo Mode, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, Side Handle, Bit Holder, Belt Clip,





1/2" 2-SPEED DRILL DRIVER KIT



FX1151-2A

- **OMPACT SIZE** Conquers tight spaces
- **EXCEPTIONAL RUNTIME** Up to 85 5/16" holes in concrete with 2.5Ah battery
- 1/2" ALL-METAL RATCHETING CHUCK Long-lasting and reliable

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-600/0-2,200 RPM
- Peak Torque: 750 in-lbs, 85 Nm
- Clutch Settings: 22+D
- Chuck Capacity: 1/2 in
- Chuck Type: Metal single-sleeve keyless ratchet
- Tool Length: 6.9 in, 174 mm
- Tool Weight (without battery): 3.2 lbs, 1.5 kg



WHAT'S IN THE BOX

1/2" 2-Speed Drill Driver, (2) 2.5Ah Lithium-Ion Battery, 160W Fast Charger, Bit Holder, Belt Clip, FLEX Bag



1/2" **2-SPEED HAMMER DRILL KIT**

FX1251-2A

- **OMPACT SIZE** Conquers tight spaces
- **EXCEPTIONAL RUNTIME** Up to 85 5/16" holes in concrete with 2.5Ah battery
- 1/2" ALL-METAL RATCHETING CHUCK Long-lasting and reliable

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-600/0-2,200 RPM
- Impact Rate: 0-9,600/0-35,200 IPM
- Peak Torque: 750 in-lbs, 85 Nm
- Clutch Settings: 24+D+H
- Chuck Capacity: 1/2 in
- Chuck Type: Metal single-sleeve keyless ratchet
- Tool Length: 7 in, 178 mm
- Tool Weight (without battery): 3.3 lbs, 1.5 kg



WHAT'S IN THE BOX

1/2" 2-Speed Hammer Drill, (2) 2.5Ah Lithium-Ion Battery, 160W Fast Charger, Bit Holder, Belt Clip, FLEX Bag







1/4" QUICK EJECT HEX IMPACT DRIVER WITH MULTI-MODE KIT



FX1371A-2B

■ 3 SPEED MODES More control while fastening screws

QUICK EJECTCOLLET

Quickly insert or release bit with one hand

SELF-TAPPING SCREW MODE

Optimized to avoid over-tightening, breaking or stripping

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-1,900/2,700/4,000 RPM
- Impact Rate: 0-4,450 IPM
- Max. Torque: 2,500 in-lbs, 282 Nm
- Collet: 1/4 in Hex
- Tool Length: 4.7 in, 119 mm
- Tool Weight (without battery): 2.7 lbs, 1.2 kg

WHAT'S IN THE BOX

1/4" Quick Eject Hex Impact Driver with Multi-Mode, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, Bit Holder, Belt Clip, #2 Philip Bit + T25 Bit, FLEX Case









1/4" HEX IMPACT DRIVER KIT



FX1351-2A

EXCEPTIONAL RUNTIME

Up to 85 5/16" holes in concrete with 2.5Ah battery

● COMPACT SIZE

Conquers tight spaces

SPECIFICATIONS

Integrated LED Light

No-Load Speed: 0-3,400 RPM Impact Rate: 0-4,000 IPM

Max. Torque: 1,800 in-lbs, 203 Nm

Collet: 1/4 in Hex

• Tool Length: 5.2 in, 131 mm

. Tool Weight (without battery): 2.4 lbs, 1.1 kg



WHAT'S IN THE BOX

1/4" Hex Impact Driver, (2)2.5Ah Lithium-Ion Battery, 160W Fast Charger, Bit Holder, Belt Clip, #2 Phillips Bit + T25 Bit, FLEX Bag



1/2" HIGH TORQUE **IMPACT WRENCH KIT**

FX1471-1C

VIBRATION SUPPRESSION

Isolates tool and user from vibration

REMOVAL MODE

Stops the tool when the bolt is loosened

3 SPEED MODES

More control while fastening bolts

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-500/1,000/2,000 RPM
- Impact Rate: 0-2,450 IPM
- Fastening Torque: 800 ft-lbs, 1,084 Nm
- Nut-Busting Torque: 1,150 ft-lbs, 1,558 Nm
- Anvil Size: 1/2 in
- Tool Length: 8.7 in, 222 mm
- Tool Weight (without battery): 6.9 lbs, 3.1 kg





WHAT'S IN THE BOX

1/2" High Torque Impact Wrench, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Case





%" SDS PLUS ROTARY HAMMER KIT

FX1531-1C

MAXIMUM POWER AND EFFICIENCY

Brushless motor and constant speed control that provides 1.3 ft-lbs of torque

SOLUTION SWITCH WITH FOUR MODES

Transition smoothly between drilling, hammer drilling, chiseling and chisel adjustment for maximum efficiency and productivity

EXCEPTIONALRUNTIME

Up to 75 5/16" holes in industrial concrete with a 5.0Ah battery

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-1,400 RPM
- Blows/Min: 0-4,500 BPM
- Max. Drilling Diameter:
 7/8 in, 22 mm (Concrete); 1/2 in,
 13 mm (Steel); 1-7/16 in (Wood)
- Max. Impact Energy: 1.3 ft-lbs, 1.7 joules
- Tool Weight (without battery): 4.6 lbs, 2.1 kg





WHAT'S IN THE BOX

7/8" Rotary Hammer, 5.0Ah Lithium-lon Battery, 160W Fast Charger, Depth Guide, Size Handle, FLEX Case







1" SDS PLUS ROTARY HAMMER



FX1551A-Z

♦ INTERCHANGEABLE CHUCK

Quickly and easily change from SDS to a keyless 1/2" full metal chuck for optimal efficiency.

VIBRATIONSUPPRESSION

Isolates tool and user from vibration

TOOL ONLY

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 0-980 RPM
- Blows/Min: 0-4,350 BPM
- Max. Drilling Diameter:
 1 in, 26 mm (Concrete);
 1/2 in, 1 mm (Steel); 1-3/16 in,
 26 mm (Wood)
- Max. Impact Energy: 1.9 ft-lbs, 2.6 joules
- Tool Weight (without battery): 7 lbs, 3.2 kg



WHAT'S IN THE BOX

1" SDS Rotary Hammer, Depth Guide, Side Handle, Detachable 1/2" Full Metal Chuck





CUTTING







6½" IN-LINE CIRCULAR SAW KIT

FX2131A-1C

WORLD'S FIRST IN-LINE CIRCULAR SAW

Provides superior balance, clear visibility on each side of the blade, and control for a more accurate cut

EXCEPTIONAL RUNTIME

Up to 430 cuts in 2x4 lumber with a 5.0Ah battery

MAXIMUM CUTTING CAPACITY

Cuts 3x lumber in one pass (2-9/16" depth of cut)

SPECIFICATIONS

- Integrated LED Light
- Saw Blade: 6-1/2 in, 165 mm
- No-Load Speed: 5,500 RPM
- Bevel Capacity: 0-47°
- Arbor: 5/8 in, 16 mm
- Cut Capacity at 90°: 2-9/16 in, 65 mm
- Cut Capacity at 45°: 1-9/16 in, 40 mm
- Tool Weight (without battery): 7.1 lbs, 3.2 kg



WHAT'S IN THE BOX

6-1/2" In-Line Circular Saw, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, 6-1/2" 24T FLEX Blade, Hook Cover, Blade Wrench, FLEX Bag







71/4" CIRCULAR SAW KIT

FX2141-1D

EXCEPTIONAL RUNTIME

Up to 520 cuts in 2x4 lumber with an 8.0Ah battery

● MAXIMUM CUTTING CAPACITY

Cuts 3x lumber in one pass (2-5/8" depth of cut)

MAGNESIUM FOOTPLATE AND GUARDS

Lightweight and durable

SPECIFICATIONS

- Integrated LED Light
- Saw Blade: 7-1/4 in, 184 mm
- No-Load Speed: 5,800 RPM
- Bevel Capacity: 0-56°
- Arbor: 5/8 in, 16 mm
- Cut Capacity at 90°: 2-5/8 in, 66 mm
- Cut Capacity at 45°: 1-7/8 in, 48 mm
- Tool Weight (without battery): 9lbs, 4kg





WHAT'S IN THE BOX

7-1/4" Circular Saw, 8.0Ah Lithium-Ion Battery, 280W Rapid Charger, 7-1/4" 24T FLEX Blade, Vacuum Adaptor & Lower Guard Lever, Blade Wrench, FLEX Bag



RECIPROCATING SAW KIT

FX2271-1C

► KEYLESS **BLADE EJECT**

Allows quick blade changes without having to touch hot blades

ORBITAL ACTION Provides faster cutting speed

VIBRATION **SUPPRESSION**

Up to 40% less vibration for maximum control

SPECIFICATIONS

Integrated LED Light

Stroke: 1-1/4 in, 32 mm

No-Load Speed: 0-3,000 SPM

 Tool Weight (without battery): 7.4 lbs, 3.4 kg



WHAT'S IN THE BOX

Reciprocating Saw, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, 9" (229 mm) 6TPI Nail-Embedded Wood Demolition Blade, 6" (152 mm) 8/11TPI Thick Metal Demolition Blade, FLEX Bag





D-HANDLE JIGSAW

FX2231-Z

ONE-TOUCH BLADE EJECT

Allows quick blade changes

Double rollers ensure maximum cut accuracy

Power your light mid-use

TOOL ONLY

SPECIFICATIONS

- Integrated LED Light
- Stroke Length: 1 in, 25 mm
- No-Load Speed: 0-3,500 SPM
- Orbital Settings: 3
- Speed Settings: 4+A
- Tool Weight (without battery): 5.1 lbs, 2.3 kg



D-Handle Jig Saw, Hex Key, Base Plate Cover, Guard, Anti-Splinter Insert, Dust Port, 3-1/4" (83 mm) 20 TPI T-Shank FLEX Blade, 4" (100 mm) 5~6 Progressive TPI T-Shank FLEX Blade







BARREL GRIP JIGSAW

FX2221-Z

ONE-TOUCH **BLADE EJECT**

Allows quick blade changes

DUAL GUIDE Double rollers ensure

maximum cut accuracy

ACCESSIBLE LED Power your light mid-use

TOOL ONLY

SPECIFICATIONS

- Integrated LED Light
- Stroke Length: 1 in, 25 mm
- No-Load Speed: 800-3,500 SPM
- **Orbital Settings: 3** Speed Settings: 4+A
- Tool Weight (without battery): 4.9 lbs, 2.2 kg



WHAT'S IN THE BOX

Barrel Grip Jigsaw, Hex Key, Base Plate Cover, Chip Guard, Anti-Splinter Insert, Dust Port, 3-1/4" (83 mm) 20 TPI T-Shank FLEX Blade, 4" (100 mm) 5~6 Progressive TPI T-Shank FLEX Blade

OSCILLATING MULTI-TOOL KIT

FX4111-1A



Isolates tool and user from vibration

2 3D STARLOCK CONNECTION

> Maximizes power transfer from motor to blade

► KEYLESS **BLADE EJECT**

> Allows quick blade changes without having to touch hot blades

SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 10,000-20,000 OPM
- Oscillating Angle Left/Right: 4° (+/-2°)
- Accessory System: Starlock Max
- Blade Compatibility: Starlock, Starlock Plus, Starlock Max
- Number of Speed Settings: 5
- Tool Weight (without battery): 2.8 lbs, 1.3 kg



WHAT'S IN THE BOX

Oscillating Multi-Tool, 2.5Ah Battery, 160W Fast Charger, Depth Guide, 1-1/4" (32 mm) Bi-Metal Plunge Cut Blade, 1-1/4" (32 mm) High Carbon Steel Plunge Cut Blade, FLEX Bag













5" VARIABLE SPEED ANGLE GRINDER WITH PADDLE SWITCH KIT



FX3171A-1C

- ➤ TOUCH CONTROL Adjustable speeds match the application for optimal precision
- ANTI-KICKBACK
 Advanced braking
 technology lets you
 work with confidence
- ONE-STEP GUARD
 ADJUSTMENT
 Fast guard adjustments
 for every application
- HANDLE
 Vibration suppression for maximum control

ANTI-VIBRATION

ERGONOMIC DESIGN Made slim for improved comfort that lasts for hours

SPECIFICATIONS


- Wheel Diameter: 4-1/2 5 in,
 115 mm -125 mm
- No-Load Speed: 3,500 / 5,000 / 7,000 / 10,000 RPM
- Switch Type: Paddle Switch, No-Lock
- Speed Settings: 4
- Arbor Size: 5/8 in, 16 mm
- Tool Weight (without battery):4.2 lbs, 1.9 kg



5" Variable Speed Angle Grinder with Paddle Switch, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, Grinding Guard, (2) Flanges, Wrench, Anti-Vibration Handle, FLEX Bag





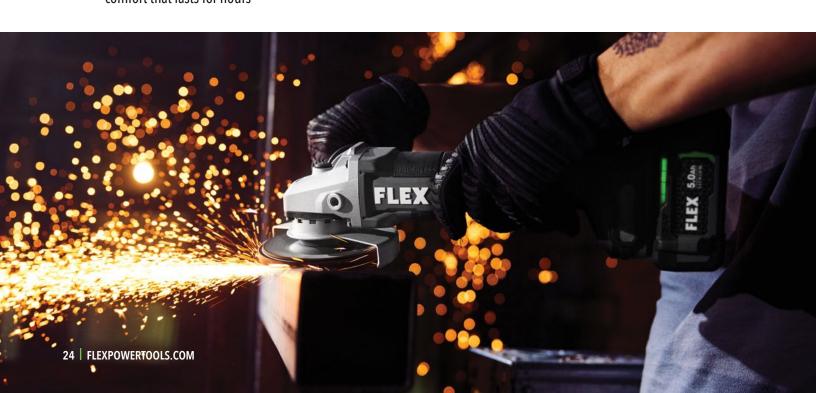



5" VARIABLE SPEED ANGLE GRINDER WITH PADDLE SWITCH



FX3171A-Z

D TOUCH CONTROL Adjustable speeds match the application for optimal precision

- **ANTI-KICKBACK** Advanced braking technology lets you work with confidence
- **P** ERGONOMIC DESIGN Made slim for improved comfort that lasts for hours

TOOL ONLY

SPECIFICATIONS

- Wheel Diameter: 4-1/2 5 in, 115 mm -125 mm
- No-Load Speed: 3,500 / 5,000 / 7,000 / 10,000 RPM
- Switch Type: Paddle Switch, No-Lock
- Speed Settings: 4
- Arbor Size: 5/8 in, 16 mm
- Tool Weight (without battery): 4.2 lbs, 1.9 kg



with Paddle Switch, Grinding Guard, (2) Flanges, Wrench, Anti-Vibration Handle

5" Variable Speed Angle Grinder



5" VARIABLE SPEED ANGLE GRINDER WITH SIDE SWITCH

FX3181A-Z

ANTI-KICKBACK

Advanced braking technology lets you work with confidence

ERGONOMIC DESIGN

Made slim for improved comfort that lasts for hours

ONE-STEP GUARD **ADJUSTMENT**

Fast quard adjustments for every application

TOOL ONLY

SPECIFICATIONS

- Wheel Diameter: 4-1/2 5 in, 115 mm -125 mm
- Switch Type: Side Switch, With Lock
- Speed Settings: 4
- Arbor Size: 5/8 in, 16 mm
- Tool Weight (without battery): 4.2 lbs, 1.9 kg

WHAT'S IN THE BOX

5" Variable Speed Angle Grinder with Side Switch, Grinding Guard, (2) Flanges, Wrench, Anti-Vibration Handle





SPECIALTY







DRYWALL SCREW GUN WITH MAGAZINE ATTACHMENT



FX1611-Z

- LOCK-ON SWITCH Provides continuous power for productive, uninterrupted use
- **▶ ERGONOMIC DESIGN**Lightweight for maximum comfort and control
- Simple, tool-free attachment adjustments for optimal efficiency

TOOL ONLY

SPECIFICATIONS

- Integrated LED Light
- Bit Type: 1/4" Hex
- No-Load Speed: 0-4,500 RPM
- Tool Weight (without magazine and battery): 2.5 lbs, 1.1 kg
- Magazine Length: 8-5/16 in
- Collated Screw Length: 1-2 in,
 Collated Screw Size: #6, #7 and #8
- Max. Screws Per Strip: 50 pcs
- Attachment Weight (without battery): 0.7 lbs, 0.3 kg



WHAT'S IN THE BOX

Drywall Screw Gun, Magazine Attachment For Collated Screws, Belt Clip, Bit Holder, Magnetic Bit Holder, Long PR2 Bit, Short PH2 Bit





DRYWALL CUT OUT TOOL

FX2471-Z

EXCEPTIONAL RUNTIME

Up to 150 outlet box cuts per charge with 2.5Ah battery (Battery sold separately)



SPECIFICATIONS

- Integrated LED Light
- No-Load Speed: 28,000 RPM
- Collet Diameters (Included): 1/4 in & 1/8 in, 6 mm & 3 mm
- Tool Length: 9 in, 229 mm





WHAT'S IN THE BOX

Drywall Cut Out Tool, Belt Clip, Wrench, (2) Collets 1/8" (3 mm) & 1/4" (6 mm), (2) 1/8" (3 mm) Drywall Bits

MUD MIXER

FX6151-Z

2 MECHANICAL GEAR SPEEDS

Conquers thick mortar, mixes effortlessly

3 ELECTRONIC SPEED MODES

Precision mix control

№ KEYED1/2" CHUCK

Grips common paddles securely

TOOL ONLY

SPECIFICATIONS

- Tool Capacity: 1/2" Chuck
- No-Load Speed 1st Gear: 0-210/325/530 RPM
- No-Load Speed 2nd Gear: 0-320/490/780 RPM
- Tool Weight (without battery): 9.5 lbs, 4.3 kg

WHAT'S IN THE BOX

Mud Mixer, Chuck Key, Key Holder





FLEX







FLEX

FLOOD LIGHT

FX5131-Z

- ◆ 360° ADJUSTABILITY

 Adjusting to light in all directions

 **Title Control

 **Title C
- **◆ ULTIMATE DURABILITY**Aluminum frame
 for optimal strength
- **◆ ADAPTABLE MOUNTS** Flexibility to light just right

TOOL ONLY

SPECIFICATIONS

- Max. Lumens: 2,000 lm
- Runtime: Up to 5 hours with 5.0Ah Battery In High Mode
- Rotation: 360°
- Tool Weight (without battery):
 5.6 lbs, 2.6 kg

WHAT'S IN THE BOX

Flood Light







JOBSITE RADIO

FX5351-Z

WEATHER RESISTANT IP64-rated protection withstands wet and dusty jobsite conditions

- **BLUETOOTH®** Connect and stream audio wirelessly up to 150 feet
- **IMPACT PROTECTION** Reinforced roll cage shields against heavy impact

TOOL ONLY

SPECIFICATIONS

- Bluetooth Version: 5.0
- Bluetooth Distance: Up to 150 ft
- IP (Ingress Protection) Rate: IP64
- Tool Weight (without battery): 7.7 lbs, 3.5 kg
- · AM/FM Digital Tuner



WHAT'S IN THE BOX

Jobsite Radio, 3.5mm AUX cord, 120V AV Adapter

1.6 GALLON **WET/DRY VACUUM**

FX5221-Z

PREVERSE FLOW FUNCTION

Keeps filter clear for consistent, powerful suction

D ECO & BOOST MODES Extends runtime when endurance matters most

ON-BOARD STORAGE Keeps all attachments organized and within reach

TOOL ONLY

SPECIFICATIONS

- Dry Capacity: 1.6 gal, 6.1 L
- Wet Capacity: 0.8 gal, 3 L
- Max. Air Flow: 41 CFM, 1,161 I/min
- Water Lift: 42 in, 10,451 Pa
- Nozzle Diameter: 1-3/8 in, 35 mm
- Tool Weight (without battery): 7.3 lbs, 3.3 kg
- HEPA Filter Captured 99.97% of Particles

WHAT'S IN THE BOX

1.6 Gallon Wet/Dry Vacuum, 8' x 1-3/8" Flexible Hose, 1-3/8" to 1-1/4 Hose Adapter, Round Brush, Utility Nozzle, Crevice Tool, Washable HEPA Filter, **Carrying Strap**











HAMMER DRILL, IMPACT DRIVER, 7¼" CIRCULAR SAW, OSCILLATING MULTI-TOOL, RECIPROCATING SAW AND WORK LIGHT KIT



FXM601-2B

1/2" 2-SPEED HAMMER DRILL

№" FULL-METAL RATCHETING **CHUCK WITH CARBIDE TEETH** Long-lasting and reliable

SPECIFICATIONS

- No-Load Speed: 0-550/0-2,000 RPM
- TURBO Speed: 0-700/0-2,500 RPM
- Impact Rate: 0-8,800/0-32,000 IPM
- TURBO Impact Rate: 0-11,200/0-40,000 IPM
- Max. Torque: 1,400 in-lbs, 158 Nm
- Tool Length: 7.2 in, 182 mm
- Tool Weight (without battery): 3.7 lbs, 1.7 kg

7¼" CIRCULAR SAW

MAXIMUM CUTTING CAPACITY

Cuts 3x lumber in one pass (2-5/8" depth of cut)

SPECIFICATIONS

- Saw Blade: 7-1/4 in, 184 mm
- No-Load Speed: 5,800 RPM
- Cut Capacity at 90°: 2-5/8 in, 66 mm
- Cut Capacity at 45°: 1-7/8 in, 48 mm
- Tool Weight (without battery): 9lbs, 4kg

RECIPROCATING SAW

O KEYLESS BLADE EJECT

Allows quick blade changes without having to touch hot blades

SPECIFICATIONS

- Stroke: 1-1/4 in, 32 mm
- No-Load Speed: 0-3,000 SPM
- Tool Weight (without battery): 7.4 lbs, 3.4 kg

1/4" HEX IMPACT DRIVER

O EXCEPTIONAL RUNTIME

Up to 85 5/16" holes in concrete with 2.5Ah battery

SPECIFICATIONS

- No-Load Speed: 0-3,400 RPM
- Impact Rate: 0-4,000 IPM
- Max. Torque: 1,800 in-lbs, 203 Nm
- Tool Length: 5.2 in, 131 mm
- Tool Weight (without battery): 2.4 lbs, 1.1 kg

OSCILLATING MULTI-TOOL

9 3D STARLOCK CONNECTION

Maximizes power transfer from motor to blade

SPECIFICATIONS

- No-Load Speed: 10,000-20,000 OPM
- Oscillating Angle Left/Right: 4° (+/-2°)
- · Blade Compatibility: Starlock, Starlock Plus, Starlock Max
- Number of Speed Settings: 5
- Tool Weight (without battery): 2.8 lbs, 1.3 kg

WORK LIGHT

D BELT CLIP AND HANGING HOOK

Hand-free flexibility

SPECIFICATIONS

- Max. Lumens 300 lm
- Rotation 104°
- Runtime Up to 10.5 hours on high mode with 2.5Ah Battery

WHAT'S IN THE BOX

1/2" 2-Speed Hammer Drill, 1/4" Hex Impact Driver, 7-1/4" Circular Saw, Oscillating Multi-Tool, Reciprocating Saw, Work Light, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Bag



DRILL DRIVER WITH TURBO MODE AND QUICK EJECT IMPACT DRIVER KIT

FXM204-2B

1/2" 2-SPEED DRILL DRIVER WITH TURBO MODE

O UNRIVALED TORQUE

Industry-leading torque at 1,400 in-lbs

SPECIFICATIONS

- No-Load Speed: 0-550/0-2,000 RPM
- TURBO Speed: 0-700/0-2,500 RPM
- Max. Torque: 1,400 in-lbs, 158 Nm
- Chuck Type: Metal single-sleeve keyless ratchet with carbide teeth
- Tool Length: 7 in, 178 mm
- Tool Weight (without battery): 3.7 lbs, 1.7 kg

1/4" QUICK EJECT HEX IMPACT DRIVER WITH MULTI-MODE

3 SPEED MODES

More control while fastening screws


SPECIFICATIONS

- No-Load Speed: 0-1,900/2,700/4,000 RPM
- Impact Rate: 0-4,450 IPM
- Max. Torque: 2,500 in-lbs, 282 Nm
- Tool Length: 4.7 in, 119 mm
- Tool Weight (without battery)
 2.7 lbs, 1.2 kg



WHAT'S IN THE BOX

1/2" 2-Speed Drill Driver with Turbo Mode, 1/4" Quick Eject Hex Impact Driver with Multi-Mode, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Bag

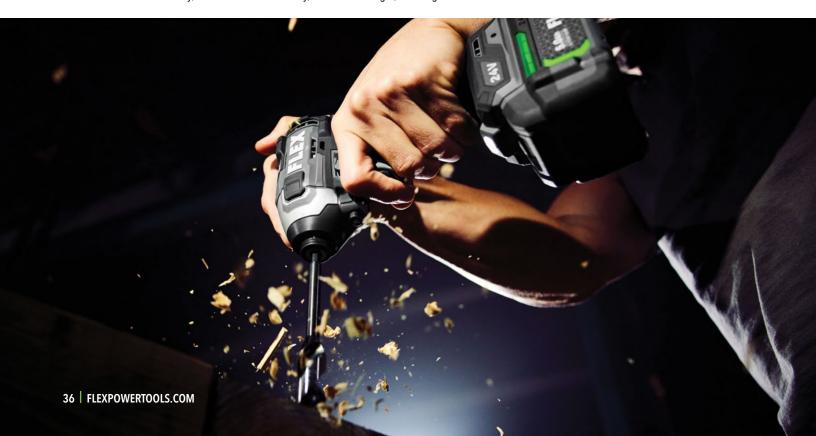



HAMMER DRILL WITH TURBO MODE AND QUICK EJECT IMPACT DRIVER KIT

FXM202-2B

1/2" 2-SPEED HAMMER DRILL WITH TURBO MODE

● UNRIVALED TORQUE Industry-leading torque at 1,400 in-lbs

SPECIFICATIONS

- No-Load Speed: 0-550/0-2,000 RPM
- TURBO Speed: 0-700/0-2,500 RPM
- Impact Rate: 0-8,800/0-32,000 IPM
- TURBO Impact Rate: 0-11,200/0-40,000 IPM
- Max. Torque: 1,400 in-lbs, 158 Nm
- Tool Length: 7.2 in, 182 mm
- Tool Weight (without battery): 3.7 lbs, 1.7 kg

1/4" QUICK EJECT HEX IMPACT DRIVER WITH MULTI-MODE

3 SPEED MODES

More control while fastening screws

SPECIFICATIONS

- No-Load Speed: 0-1,900/2,700/4,000 RPM
- Impact Rate: 0-4,450 IPM
- Max. Torque: 2,500 in-lbs, 282 Nm
- Tool Length: 4.7 in, 119 mm
- Tool Weight (without battery):
 2.7 lbs, 1.2 kg



WHAT'S IN THE BOX

1/2" 2-Speed Hammer Drill Driver with Turbo Mode, 1/4" Quick Eject Hex Impact Driver with Multi-Mode, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Bag





CIRCULAR SAW, RECIPROCATING SAW, ANGLE GRINDER AND DRILL DRIVER KIT



FXM402-2B

7%" CIRCULAR SAW

MAXIMUM CUTTING CAPACITY

Cuts 3x lumber in one pass (2-5/8" depth of cut)

SPECIFICATIONS

- Saw Blade: 7-1/4 in, 184 mm
- No-Load Speed: 5,800 RPM
- Cut Capacity at 90°: 2-5/8 in, 66 mm
- Cut Capacity at 45°: 1-7/8 in, 48 mm
- Tool Weight (without battery): 9lbs, 4kg

RECIPROCATING SAW

● KEYLESS BLADE EJECT

Allows quick blade changes without having to touch hot blades

SPECIFICATIONS

- Stroke: 1-1/4 in, 32 mm
- No-Load Speed: 0-3,000 SPM
- Tool Weight (without battery): 7.4 lbs, 3.4 kg

5" FIXED SPEED ANGLE GRINDER WITH SIDE SWITCH

O ANTI-KICKBACK

Advanced braking technology lets you work with confidence

SPECIFICATIONS

- Wheel Diameter: 4-1/2 5 in,
- 115 mm -125 mm
- Switch Type: Side Switch, With Lock
- Speed Settings: 4
- Arbor Size: 5/8 in, 16 mm
- Tool Weight (without battery):
 4.2 lbs, 1.9 kg

1/2" 2-SPEED DRILL DRIVER

O UNRIVALED TORQUE

Industry-leading torque at 1,400 in-lbs

SPECIFICATIONS

- No-Load Speed: 0-600/0-2,200 RPM
- Peak Torque: 750 in-lbs, 85 Nm
- Tool Length: 6.9 in, 174 mm
- Tool Weight (without battery):
 3.2 lbs, 1.5 kg



WHAT'S IN THE BOX

7-1/4" In-Line Circular Saw, Reciprocating Saw, 5" Fixed Speed Angle Grinder with Side Switch, 1/2" 2-Speed Drill Driver, 2.5Ah Lithium-Ion Battery, 5.0Ah Lithium-Ion Battery, 160W Fast Charger, 6-1/2" 24T FLEX Blade, Hook Cover, Blade Wrench, FLEX Bag







DRILL DRIVER, IMPACT DRIVER, RECIPROCATING SAW AND WORK LIGHT KIT



FXM401-2A

1/2" 2-SPEED DRILL DRIVER

O UNRIVALED TORQUE

Industry-leading torque at 1,400 in-lbs

SPECIFICATIONS

- No-Load Speed: 0-600/0-2,200 RPM
- Peak Torque: 750 in-lbs, 85 Nm
- Chuck Type: Metal single-sleeve keyless ratchet
- Tool Length: 6.9 in, 174 mm
- Tool Weight (without battery): 3.2 lbs, 1.5 kg

1/4" HEX IMPACT DRIVER

O EXCEPTIONAL RUNTIME

Up to 85 5/16" holes in concrete with 2.5Ah battery

SPECIFICATIONS

- No-Load Speed: 0-3,400 RPM
- Impact Rate: 0-4,000 IPM
- Max. Torque: 1,800 in-lbs, 203 Nm
- Tool Length: 5.2 in, 131 mm
- Tool Weight (without battery): 2.4 lbs, 1.1 kg

RECIPROCATING SAW

O KEYLESS BLADE EJECT

Allows quick blade changes without having to touch hot blades

SPECIFICATIONS

- Stroke: 1-1/4 in, 32 mm
- No-Load Speed: 0-3,000 SPM
- Tool Weight (without battery): 7.4 lbs, 3.4 kg

WORK LIGHT

BELT CLIP AND HANGING HOOK Hand-free flexibility

iana nee nexion

SPECIFICATIONS

- Max. Lumens 300 lm
- Rotation 104°
- Runtime Up to 10.5 hours on high mode with 2.5Ah Battery



WHAT'S IN THE BOX

1/2" 2-Speed Drill Driver, 1/4" Hex Impact Driver, Reciprocating Saw, Work Light, (2) 2.5Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Bag





DRYWALL SCREWGUN WITH MAGAZINE ATTACHMENT AND CUT OUT TOOL KIT

FXM203-2A

DRYWALL SCREW GUN WITH MAGAZINE ATTACHMENT

O LOCK-ON SWITCH

Provides continuous power for productive, uninterrupted use

SPECIFICATIONS

- Bit Type: 1/4" Hex
- No-Load Speed: 0-4,500 RPM
- Tool Weight (without magazine and battery): 2.5 lbs, 1.1 kg
- Magazine Length: 8-5/16 in
- Collated Screw Length: 1-2 in, Collated Screw Size: #6, #7 and #8
- Max. Screws Per Strip: 50 pcs
- Attachment Weight (without battery): 0.7 lbs, 0.3 kg

DRYWALL CUT OUT TOOL

O EXCEPTIONAL RUNTIME

Up to 150 outlet box cuts per charge with 2.5Ah battery

SPECIFICATIONS

- No-Load Speed: 28,000 RPM
- Collet Diameters (Included):
- 1/4 in & 1/8 in, 6 mm & 3 mm
- Tool Length: 9 in, 229 mm



WHAT'S IN THE BOX

Drywall Screw Gun, Magazine Attachment For Collated Screws, Drywall Cut Out Tool, (2) 2.5Ah Lithium-Ion Batteries, 160W Fast Charger, FLEX Bag





DRILL DRIVER AND IMPACT DRIVER KIT

FXM201-2A

1/2" 2-SPEED DRILL DRIVER

● ½" FULL-METAL RATCHETING CHUCK WITH CARBIDE TEETH Long-lasting and reliable

SPECIFICATIONS

- No-Load Speed: 0-600/0-2,200 RPM
- Peak Torque: 750 in-lbs, 85 Nm
- Chuck Type: Metal single-sleeve keyless ratchet
- Tool Length: 6.9 in, 174 mm
- Tool Weight (without battery): 3.2 lbs, 1.5 kg

1/4" HEX IMPACT DRIVER

● EXCEPTIONAL RUNTIME Up to 85 5/16" holes in concrete with 2.5Ah battery

SPECIFICATIONS

- No-Load Speed: 0-3,400 RPM
- Impact Rate: 0-4,000 IPM
- Max. Torque: 1,800 in-lbs, 203 Nm
- Tool Length: 5.2 in, 131 mm
- Tool Weight (without battery): 2.4 lbs, 1.1 kg



WHAT'S IN THE BOX

1/2" 2-Speed Drill Driver, 1/4" Hex Impact Driver, (2) 2.5Ah Lithium-Ion Battery, 160W Fast Charger, FLEX Bag



FLEX

POWER







FLEX

24V 2.5Ah LITHIUM-ION BATTERY

FX0111-1

SPECIFICATIONS

 Power: 480W Energy: 60Wh

• Battery Weight: 1.3 lbs, 0.6 kg



24V 5.0Ah LITHIUM-ION BATTERY

FX0121-1

SPECIFICATIONS

 Power: 960W • Energy: 120Wh

Battery Weight: 2.1 lbs, 1 kg



24V 8.0Ah LITHIUM-ION BATTERY

FX0221-1

SPECIFICATIONS

Power: 1,680W • Energy: 192Wh

• Battery Weight: 3 lbs, 1.4 kg



24V 12.0Ah LITHIUM-ION BATTERY

FX0231-1

SPECIFICATIONS

• Power: 2,520W • Energy: 288Wh

Battery Weight: 4 lbs, 1.8 kg





24V 160W FAST CHARGER

FX0411-Z

SPECIFICATIONS

- Charging Current: 5A
- Input Voltage & Frequency: 120V, 60Hz
- Charger Weight: 1.8 lbs, 0.8 kg



FX0421-Z

SPECIFICATIONS

- Charging Current: 9.4A
- Input Voltage & Frequency: 120V, 60Hz
- Charger Weight: 2.2 lbs, 1 kg





BATTERY CHARGING TIME	160W FAST CHARGER	280W RAPID CHARGER
24V 2.5Ah LITHIUM	30 MINUTES	30 MINUTES
24V 5.0Ah LITHIUM	60 MINUTES	30 MINUTES
24V 8.0Ah LITHIUM	90 MINUTES	50 MINUTES
24V 12.0Ah LITHIUM	140 MINUTES	75 MINUTES

FLEX









7%" 24T CARBIDE CIRCULAR SAW BLADE

FA201001

SPECIFICATIONS

- Blade Type: Construction Framing + Forming
- Materials: Wood, Treated Wood, Hardwood, Plywood
- Number of Teeth: 24T
- Max. RPM: 8,000 RPM
- Arbor Diameter: 5/8" Round With 13/16" Diamond Knockout
- For Use With Cordless And Corded Circular Saws

12 PC. DEMOLITION **RECIPROCATING** SAW BLADE SET

FAM20201-12

SPECIFICATIONS

- Blade Type: Bi-Metal Blade Construction
- Clear Case for blade storage
- 12 pieces of 6" and 9" blades for a variety of demanding applications Tapered Body for easy plunge cutting Thick Body blades for beam strength
- of blade in heavy-duty demolition applications
- USA made

10 PC. JIGSAW **BLADE KIT**

FAM20301-10

SPECIFICATIONS

- Blade Type: T-shank Hi Speed Steel and High Carbon Steel Blades
- Variety of blades for key applications
- Precision ground
- Swiss Made

5 PC. TRIMMING PROJECT SET

FAM40001-5

SPECIFICATIONS

- Starlock interface
- Max compatibility
- Arched blade
- Unrivaled performance

41 PC. SANDING **PROJECT SET**

FAM40003-41

SPECIFICATIONS

- Starlock interface
- For various sanding projects
- Aluminum oxide open coat
- Unrivaled performance



FLEX WOOD ISLUT OUT 3X MINES

FLEX woos cause out) (FLEX wood calast cut 3)(---

FLEX woos cases cut 3% ----

61/2" 24T CARBIDE **CIRCULAR SAW BLADE**

FA201002

SPECIFICATIONS

- Blade Type: Construction Framing + Forming
- Materials: Wood, Treated Wood, Hardwood, Plywood
- Number of Teeth: 24T
- Max. RPM: 8,800 RPM
- Arbor Diameter: 5/8" Round With 13/16" Diamond Knockout
- For Use With Cordless And Corded Circular Saws

9" CARBIDE **RECIPROCATING SAW BLADE**

FA202006

SPECIFICATIONS

- Blade Type: Demolition Carbide Tooth Blade
- Material: Extreme Metal, Stainless Steel, Cast Iron
- Blade Length: 9 in, 229 mm
- Teeth Per Inch: 8TPI
- Body thickness 0.50

3 PC. PLUNGE CUT **BLADE SET**

FAM40101-3

SPECIFICATIONS

- Starlock interface
- Max compatibility
- Arched blade
- Unrivaled performance

5 PC. TILING PROJECT SET

FAM40002-5

SPECIFICATIONS

- Starlock interface
- Max compatibility
- Arched blade
- Unrivaled performance



FLEX









6" IMPACT MAGNETIC EXTENSION

FA105001

SPECIFICATIONS

- Bit Grade: Impact Rated
- Bit Length: 6 in, 152 mm
- Magnetic
- 1/4" Hex Shank
- C-Ring
- Stainless Steel body

2%16" 4 PC. **IMPACT MAGNETIC NUT DRIVER SET**

FAM10301-4

SPECIFICATIONS

- Bit Grade: Impact Rated Bit Length: 2-9/16 in, 65 mm
- All 1/4" Hex Shank Bits work for both Drill and Impact Driver
- Magnetic



41 PC. IMPACT **DRIVER BIT SET**

FAM10102-41

SPECIFICATIONS

- Bit Grade: Impact Rated
- Bit Types Included: Philips (PH), Square (SQ), Star (Torx)
- All 1/4" Hex Shank Bits work for both Drill and Impact Driver
- 2" Premium Magnetic Nut Setter (Hex) included
- 3" magnetic extension included
- 6" premium magnetic extension included





12" IMPACT MAGNETIC **EXTENSION**

FA105002

SPECIFICATIONS

- Bit Grade: Impact Rated
- Bit Length: 12 in, 305 mm
- Magnetic
- 1/4" Hex Shank
- C-Ring
- Stainless Steel body

29 PC. IMPACT **DRIVER BIT SET**

FAM10101-29



SPECIFICATIONS

- Bit Grade: Impact Rated
- Bit Types Included: Philips (PH), Square (SQ), Star (Torx)
- All 1/4" Hex Shank Bits work for both Drill and Impact Driver



31 PC. IMPACT DRILL AND DRIVE BIT SET

FAM10001-31


SPECIFICATIONS

- Bit Grade: Impact Rated
- Bit Types Included: Philips (PH),
- Square (SQ), Star (Torx) All 1/4" Hex Shank Bits work for both Drill and Impact Driver
- 5 pieces Titanium 1/4" hex drill bits, 1/8" x 2, 5/32", 3/16", 1/4"
- 3" magnetic extension included











SCAN HERE TO LEARN MORE ABOUT THE FLEX STACK PACK™





IT'S WHAT'S NEXT



SCAN TO SEE WHAT'S NEXT

FLEXPOWERTOOLS.COM

22-0103_748310537 FLEX_Catalog_4