

 **suprabeam®**
| DENMARK

Q2_r

PROTECTED INTERNAL USB CHARGING

SLIDING HYPERFOCUS™

ELECTRONIC DIMMING + MEMORY

MORE THAN 50 % HIGHER BATTERY
CAPACITY THAN A TYPICAL AA LI-ION

SAME SIZE AS ORDINARY Q2



450
LUMENS



Li-Po
1100 mAh




175 m



67 g



10° - 70°

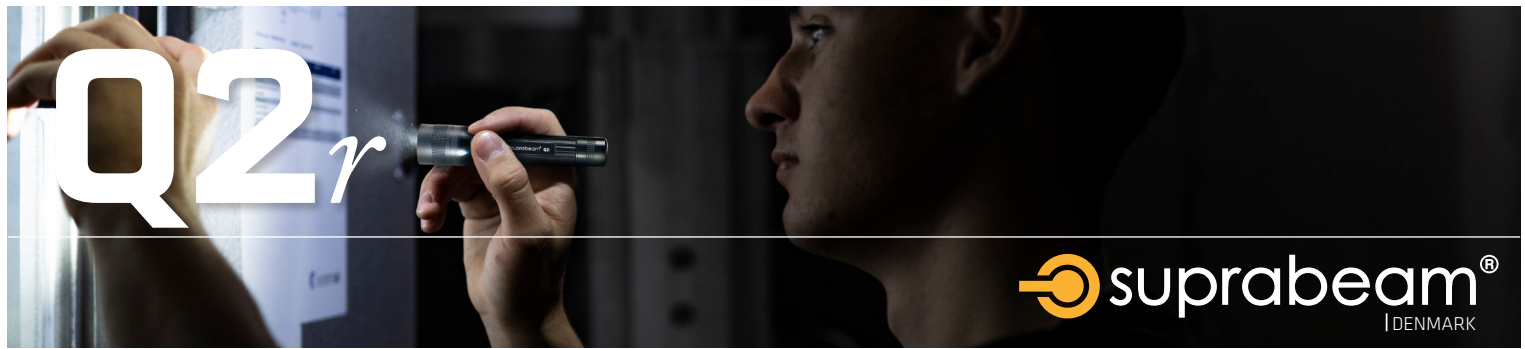

PACKAGING



450 LUMENS

SPECIFICATIONS



WHAT'S IN THE BOX

TORCH



POUCH




USB CABLE



BATTERY



MANUAL



UNIQUE SELLING POINTS (USP)



PROTECTED INTERNAL USB CHARGING

Compatible with USB. This enables you to charge everywhere, either with our 5V/2A adapter, through your computer or with a car charger. Charge up to 80% in only 1h 45min. The micro USB Port is protected by a high speed twist cover.



HIGH POWER LI-PO BATTERY

With the high power 1100 mAh Li-Po battery you get more than 50% higher capacity than a comparable standard AA Li-Ion battery.



DIMMING + MEMORY

The new electronic task switch combined with our new dimming control, offers simple and stepless power adjustment from 250 down to 6 lumens. It memorizes the last used light output and with one single click it activates maximum power again.



SLIDING HYPERFOCUS™

Focus from wide floodlight to narrow spot light. With the sliding Hyperfocus™ optical system it is easy to get the correct light output with a minimum loss of light. Just slide the head of the torch for the correct light setting and you are good to go.



ERGONOMIC TASK SWITCH


The tactile ergonomic task switch is easy to operate and gives you a tactile feedback. The electronic task switch with solid silicone cover is specially designed to have a long lifetime.



INTELLIGENT LIGHT CONTROL

The advanced electronic micro controller offers dimming of the light power by simple switch operation. In addition, it controls the light output for optimized battery lifetime.

LIGHT CURVE AND RUNTIMES

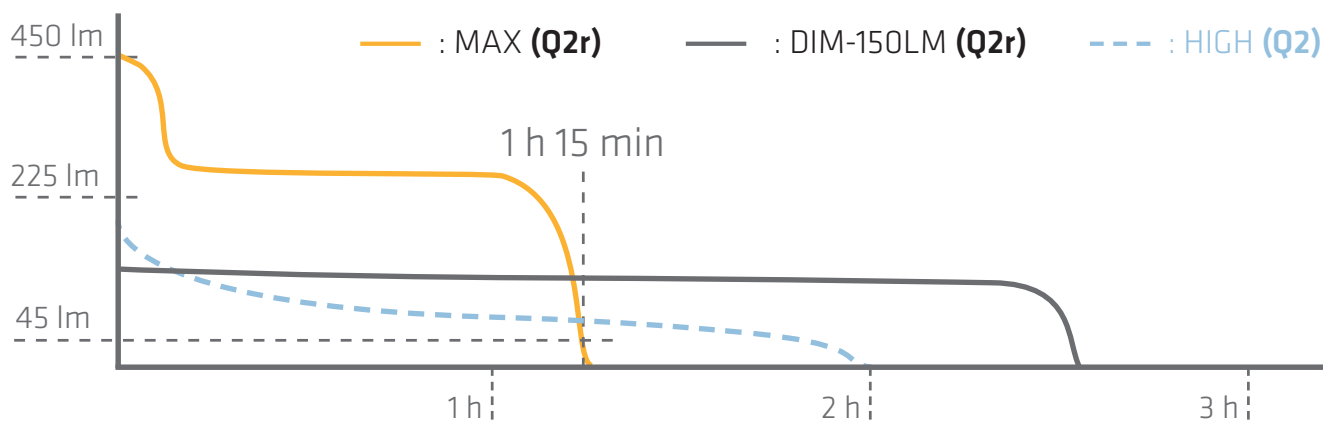

MAX

450 LUMENS
45

1 h | 15 min

DIMMING

250 LUMENS
6

1 ³⁰/_{min} - 70 h

DIM-150LM

150 LUMENS
15

2 h | 30 min

Q2 - HIGH

200 LUMENS
20

2 h

SPECIFICATIONS

LED / Focus configuration:	1 CREE Power Chip / Sliding Hyperfocus™
Case Material / Surface Treatment:	Anodized, High Strength Aluminium
Case Color:	Anthracite Dark Grey
Switch at rear:	Electronic Task Switch With Solid Silicone Cover
Dimensions:	L: 116mm, ø: 26mm
Weight incl. battery:	67g
Ingress Protection Rating:	Splash Waterproof IPx4
Temperature (Operation):	-20°C to +50°C

ELECTRONICS

Built in Controller:	Yes, DIM and STEP mode
Standard Power Source:	1 x Li-Po (1100 mAh)
Beam / Distance:	Variable from Spot to Floodlight / 175 Meters
Luminous Flux:	Max: 450 lm / Dim: 250-6 lm
Lighting Time:	Max: 1 h 15m. / Low dim: 70 h.
Accessories included:	Pro. Quality Pouch with Velcro and Press Stud, USB-Cable
Charging time:	To 80%: 1h 45m To 100% : 3h 15m
Charging temperature:	0°C - +45°C

PACKAGING

Customs Tariff Number:	8513 1000
Packaging:	Presentation tube
Single Box Content / Size / Weight:	1 pcs, height/diameter, 18 x 8.5 cm / 283 g
Master Box Content / Size / Weight:	32 pcs, 35 x 35 x 40 cm / 9,05 kg
Order's Address:	info@suprabeam.com
Part. No.:	502.5005
EAN-CODE:	5704049907508



PRESENTATION TUBE

REUSABLE LABEL

FEATURES



INTELLIGENT LIGHT CONTROL (ILC)

Our intelligent light control lets you switch between different light outputs



COOLING CORE

The high strength aluminium cooperates with the "heatsink" to cool off the LED




ELECTRONIC DIMMING

Our electronic dimming lets you dim the light to the desired level with ease



WATER RESISTENT - IPX4

This IP-rating indicates that your product is water resistant



SLIDING FOCUS

Focus from wide floodlight to narrow spot light with the one handed sliding focus



RECHARGEABLE

Rechargeable products will prevent you from using and throwing away alkaline batteries



USB CHARGER

All of our rechargeable products are compatible with USB. This enables you to charge everywhere

RECOMMENDED ACCESSORIES



COLOUR FILTERS

High quality filters for night operations. Compatible with Q2, Q3-series and V-series with the colour filter adapter.



12/24V -1A USB CHARGER

With the 12/24V, 1 Amp USB charger you can recharge your rechargeable Suprabeam products while you are on the go.



230VAC / 10W USB ADAPTER

With this premium quality wall adapter, you can charge your rechargeable Suprabeam light directly from the plug.