

# Arrow Hart watertight locking plugs, connectors & receptacles

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:



60W33




60W48DPLX



14W47




15W47



5-15R

6-15R



5-20R

6-20R

## Design features for watertight locking devices

- Thermoplastic elastomeric exterior out-performs rubber when exposed to moisture, chemicals, oils, and the effects of UV exposure and ozone attack
- Mated plug and connector or plug and receptacle form a watertight seal that meets NEMA and IEC IP ratings (see specification sheet for details) and withstands water spray test at 1000 psi
- High visibility safety yellow for identification. Also available in black
- Power contacts, blades and terminal screws nickel-plated for corrosion resistance
- Quick-drive stainless steel assembly screws for corrosion resistance and fast installation
- Multiple color coded neoprene grommets for a watertight seal on a wide range of cord sizes
- Receptacles have self-closing spring loaded flip lid covers
- Santoprene™ grommets ensure watertight seal at cord entrance
- Wide range cord diameter 0.30" – 0.65"

## 2-pole, 3-wire grounding

15A, 125/250V/AC; 20A, 125/250V/AC  
NEMA 5-15, 6-15, 5-20, 6-20

**Table 1. Straight blade plugs, connectors & receptacles  
2-pole, 3-wire**

Plug	Catalog no.		Receptacle		Cord diameter	Rating		
	Connector	Single	Duplex	A		V/AC	NEMA	
<input type="checkbox"/> 14W47	<input type="checkbox"/> 15W47	<input type="checkbox"/> 60W47	<input type="checkbox"/> 60W47DPLX	0.30-0.65" (7.6-16.5mm)	15	125	5-15	
<input type="checkbox"/> 14W49	<input type="checkbox"/> 15W49	<input type="checkbox"/> 60W49	<input type="checkbox"/> 60W49DPLX	0.30-0.65" (7.6-16.5mm)	15	250	6-15	
<input type="checkbox"/> 14W33	<input type="checkbox"/> 15W33	<input type="checkbox"/> 60W33	<input type="checkbox"/> 60W33DPLX	0.30-0.65" (7.6-16.5mm)	20	125	5-20	
<input type="checkbox"/> 14W48	<input type="checkbox"/> 15W48	<input type="checkbox"/> 60W48	<input type="checkbox"/> 60W48DPLX	0.30-0.65" (7.6-16.5mm)	20	250	6-20	

Compliances, specifications and availability are subject to change without notice.




Powering Business Worldwide

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:



L530RW



65W47DPLX



24W47



25W47



L1020PW

### 2-pole, 3-wire grounding

15A, 125/250/277V/AC; 20A, 125/250/277/480V/AC; 30A, 125/250/277/480V/AC  
NEMA L5-15, L6-15, L7-15, L5-20, L6-20, L7-20, L8-20, L5-30, L6-30, L7-30, L8-30

**Table 2. Locking devices – 2-pole, 3-wire**

Plug	Catalog no.		Receptacle		Cord diameter	Rating		
	Connector	Single	Duplex	A		V/AC	NEMA	
<input type="checkbox"/> 24W47	<input type="checkbox"/> 25W47	<input type="checkbox"/> 65W47	<input type="checkbox"/> 65W47DPLX		0.30-0.65" (7.6-16.5mm)	15	125	L5-15
<input type="checkbox"/> 24W49	<input type="checkbox"/> 25W49	<input type="checkbox"/> 65W49	<input type="checkbox"/> 65W49DPLX		0.30-0.65" (7.6-16.5mm)	15	250	L6-15
<input type="checkbox"/> 24W34	<input type="checkbox"/> 25W34	<input type="checkbox"/> 65W34	<input type="checkbox"/> 65W34DPLX		0.30-0.65" (7.6-16.5mm)	15	277	L7-15
<input type="checkbox"/> L520PW	<input type="checkbox"/> L520CW	<input type="checkbox"/> L520RW			0.36-0.84" (9.1-21.3mm)	20	125	L5-20
<input type="checkbox"/> L620PW	<input type="checkbox"/> L620CW	<input type="checkbox"/> L620RW			0.36-0.84" (9.1-21.3mm)	20	250	L6-20
<input type="checkbox"/> L720PW	<input type="checkbox"/> L720CW	<input type="checkbox"/> L720RW*			0.36-0.84" (9.1-21.3mm)	20	277	L7-20
<input type="checkbox"/> L820PW	<input type="checkbox"/> L820CW	<input type="checkbox"/> L820RW*			0.36-0.84" (9.1-21.3mm)	20	480	L8-20
<input type="checkbox"/> L530PW	<input type="checkbox"/> L530CW	<input type="checkbox"/> L530RW			0.43-1.15" (10.9-29.2mm)	30	125	L5-30
<input type="checkbox"/> L630PW	<input type="checkbox"/> L630CW	<input type="checkbox"/> L630RW			0.43-1.15" (10.9-29.2mm)	30	250	L6-30
<input type="checkbox"/> L730PW	<input type="checkbox"/> L730CW	<input type="checkbox"/> L730RW			0.43-1.15" (10.9-29.2mm)	30	277	L7-30
<input type="checkbox"/> L830PW	<input type="checkbox"/> L830CW	<input type="checkbox"/> L830RW			0.43-1.15" (10.9-29.2mm)	30	480	L8-30


\*Not NOM certified

### 3-pole, 3-wire non-grounding 3-pole, 4-wire grounding

20A; 125/250, 3Ø 250, 3Ø 480V/AC  
30A; 125/250, 3Ø 250, 3Ø 480, 3Ø 600V/AC  
Non-NEMA L10-20, L11-20, L10-30, L11-30

**Table 3. Locking devices – 3-pole, 3-wire**

Plug	Catalog no.		Cord diameter	Rating		
	Connector	Single receptacle		A	V/AC	NEMA
<input type="checkbox"/> 9965PW	<input type="checkbox"/> 7314CW	<input type="checkbox"/> 7314RW	0.36-0.84" (9.1-21.3mm)	20	125/250	Non-NEMA
<input type="checkbox"/> L1020PW	<input type="checkbox"/> L1020CW	<input type="checkbox"/> L1020RW	0.36-0.84" (9.1-21.3mm)	20	125/250	L10-20
<input type="checkbox"/> L1120PW	<input type="checkbox"/> L1120CW	<input type="checkbox"/> L1120RW	0.36-0.84" (9.1-21.3mm)	20	3Ø 250	L11-20
<input type="checkbox"/> L1030PW	<input type="checkbox"/> L1030CW	<input type="checkbox"/> L1030RW	0.43-1.15" (10.9-29.2mm)	30	125/250	L10-30
<input type="checkbox"/> 3331PW	<input type="checkbox"/> 3333CW	<input type="checkbox"/> 3333RW	0.43-1.15" (10.9-29.2mm)	30	125/250	Non-NEMA
<input type="checkbox"/> L1130PW	<input type="checkbox"/> L1130CW	<input type="checkbox"/> L1130RW	0.43-1.15" (10.9-29.2mm)	30	3Ø 250	L11-30

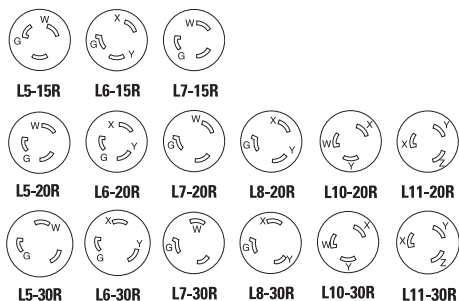

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:



L1420CW



L1620RW



L1820PW



L1820CW




L2030RW



L14-20R L15-20R L16-20R



L18-20R L19-20R L20-20R



L14-30R L15-30R L16-30R L17-30R



L18-30R L19-30R L20-30R



Receptacle Plug Receptacle Plug  
Non-NEMA Non-NEMA  
20A 125/250V 30A 125/250V

**3-pole, 3-wire non-grounding**  
**3-pole, 4-wire grounding**

20A; 125/250, 3Ø 250, 3Ø 480V/AC  
30A; 125/250, 3Ø 250, 3Ø 480, 3Ø 600V/AC  
NEMA L14-20, L15-20, L16-20, L14-30, L15-30, L16-30, L17-30

**Table 4. Locking devices – 3-pole, 4-wire**

Plug	Catalog no.			Cord diameter	Rating		NEMA
	Connector	Single receptacle			A	V/AC	
<input type="checkbox"/> L1420PW	<input type="checkbox"/> L1420CW	<input type="checkbox"/> L1420RW		0.36-0.84" (9.1-21.3mm)	20	125/250	L14-20
<input type="checkbox"/> L1520PW	<input type="checkbox"/> L1520CW	<input type="checkbox"/> L1520RW		0.36-0.84" (9.1-21.3mm)	20	3Ø 250	L15-20
<input type="checkbox"/> L1620PW	<input type="checkbox"/> L1620CW	<input type="checkbox"/> L1620RW		0.36-0.84" (9.1-21.3mm)	20	3Ø 480	L16-20
<input type="checkbox"/> L1430PW	<input type="checkbox"/> L1430CW	<input type="checkbox"/> L1430RW		0.43-1.15" (10.9-29.2mm)	30	125/250	L14-30
<input type="checkbox"/> L1530PW	<input type="checkbox"/> L1530CW	<input type="checkbox"/> L1530RW		0.43-1.15" (10.9-29.2mm)	30	3Ø 250	L15-30
<input type="checkbox"/> L1630PW	<input type="checkbox"/> L1630CW	<input type="checkbox"/> L1630RW		0.43-1.15" (10.9-29.2mm)	30	3Ø 480	L16-30
<input type="checkbox"/> L1730PW	<input type="checkbox"/> L1730CW	<input type="checkbox"/> L1730RW		0.43-1.15" (10.9-29.2mm)	30	3Ø 600	L17-30

**4-pole, 4-wire non-grounding**

20A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
30A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
Non-NEMA L18-20, L19-20, L20-20, L18-30, L19-30, L20-30

**Table 5. Locking devices – 4-pole, 4-wire**

Plug	Catalog no.			Cord diameter	Rating		NEMA
	Connector	Single receptacle			A	V/AC	
<input type="checkbox"/> 7411PW	<input type="checkbox"/> 7413CW	<input type="checkbox"/> 7413RW		0.36-0.84" (9.1-21.3mm)	20	3ØY 120/208	Non-NEMA
<input type="checkbox"/> L1820PW	<input type="checkbox"/> L1820CW	<input type="checkbox"/> L1820RW		0.36-0.84" (9.1-21.3mm)	20	3ØY 120/208	L18-20
<input type="checkbox"/> L1920PW	<input type="checkbox"/> L1920CW	<input type="checkbox"/> L1920RW		0.36-0.84" (9.1-21.3mm)	20	3ØY 277/480	L19-20
<input type="checkbox"/> L2020PW	<input type="checkbox"/> L2020CW	<input type="checkbox"/> L2020RW		0.36-0.84" (9.1-21.3mm)	20	3ØY 347/600	L20-20
<input type="checkbox"/> 3433PW	<input type="checkbox"/> 3433CW	<input type="checkbox"/> 3433RW		0.43-1.15" (10.9-29.2mm)	30	3ØY 120/208	Non-NEMA
<input type="checkbox"/> L1830PW	<input type="checkbox"/> L1830CW	<input type="checkbox"/> L1830RW		0.43-1.15" (10.9-29.2mm)	30	3ØY 120/208	L18-30
<input type="checkbox"/> L1930PW	<input type="checkbox"/> L1930CW	<input type="checkbox"/> L1930RW		0.43-1.15" (10.9-29.2mm)	30	3ØY 277/480	L19-30
<input type="checkbox"/> L2030PW	<input type="checkbox"/> L2030CW	<input type="checkbox"/> L2030RW		0.43-1.15" (10.9-29.2mm)	30	3ØY 347/600	L20-30

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:



#### 4-pole, 4-wire non-grounding

20A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
30A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
Non-NEMA L18-20, L19-20, L20-20, L18-30, L19-30, L20-30

**Table 6. Locking devices – 4-pole, 4-wire**


Catalog no.		Single receptacle	Cord diameter	Rating		NEMA
Plug	Connector			A	V/AC	
<input type="checkbox"/> 7411PW	<input type="checkbox"/> 7413CW	<input type="checkbox"/> 7413RW	0.36-0.84" (9.1-21.3mm)	20	3ØY 120/208	Non-NEMA
<input type="checkbox"/> L1820PW	<input type="checkbox"/> L1820CW	<input type="checkbox"/> L1820RW				
<input type="checkbox"/> L1920PW	<input type="checkbox"/> L1920CW	<input type="checkbox"/> L1920RW	0.36-0.84" (9.1-21.3mm)	20	3ØY 277/480	L19-20
<input type="checkbox"/> L2020PW	<input type="checkbox"/> L2020CW	<input type="checkbox"/> L2020RW				
<input type="checkbox"/> 3433PW	<input type="checkbox"/> 3433CW	<input type="checkbox"/> 3433RW	0.43-1.15" (10.9-29.2mm)	30	3ØY 120/208	Non-NEMA
<input type="checkbox"/> L1830PW	<input type="checkbox"/> L1830CW	<input type="checkbox"/> L1830RW				
<input type="checkbox"/> L1930PW	<input type="checkbox"/> L1930CW	<input type="checkbox"/> L1930RW	0.43-1.15" (10.9-29.2mm)	30	3ØY 277/480	L19-30
<input type="checkbox"/> L2030PW	<input type="checkbox"/> L2030CW	<input type="checkbox"/> L2030RW				
			0.43-1.15" (10.9-29.2mm)	30	3ØY 347/600	L20-30

#### 4-pole, 5-wire grounding

20A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
30A; 3ØY 120/208, 3ØY 277/480, 3ØY 347/600V/AC  
NEMA L21-20, L22-20, L23-20, L21-30, L22-30, L23-30

**Table 7. Locking devices – 4-pole, 5-wire**

Catalog no.		Single receptacle	Cord diameter	Rating		NEMA
Plug	Connector			A	V/AC	
<input type="checkbox"/> L2120PW	<input type="checkbox"/> L2120CW	<input type="checkbox"/> L2120RW	0.36-0.84" (9.1-21.3mm)	20	3ØY 120/208	L21-20
<input type="checkbox"/> L2220PW	<input type="checkbox"/> L2220CW	<input type="checkbox"/> L2220RW				
<input type="checkbox"/> L2320PW	<input type="checkbox"/> L2320CW	<input type="checkbox"/> L2320RW	0.36-0.84" (9.1-21.3mm)	20	3ØY 347/600	L23-20
<input type="checkbox"/> L2130PW	<input type="checkbox"/> L2130CW	<input type="checkbox"/> L2130RW				
<input type="checkbox"/> L2230PW	<input type="checkbox"/> L2230CW	<input type="checkbox"/> L2230RW	0.43-1.15" (10.9-29.2mm)	30	3ØY 120/208	L21-30
<input type="checkbox"/> L2330PW	<input type="checkbox"/> L2330CW	<input type="checkbox"/> L2330RW				
			0.43-1.15" (10.9-29.2mm)	30	3ØY 277/480	L22-30
			0.43-1.15" (10.9-29.2mm)	30	3ØY 347/600	L23-30

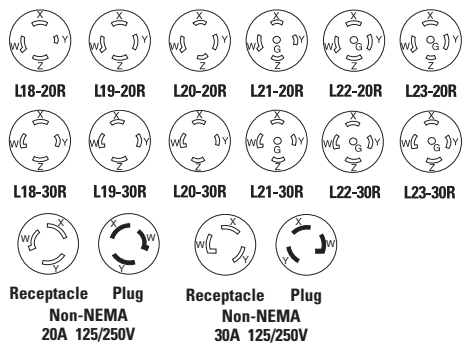

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

## Applications

Industrial specification grade watertight devices are ideal for applications in food and beverage, agriculture, chemical processors, shipyards, marinas and wastewater treatment environments. Watertight receptacles feature spring-loaded flip-lid covers that provide watertight protection even under 1,000 psi water spray. Plugs, connectors and receptacles comply with various NEMA and IEC ratings as listed below.

**Table 8. Specifications**

Device type	Watertight plugs & connectors, straight blade & locking	Watertight receptacles, straight blade & 15A locking	Watertight receptacles, 20A & 30A locking
<b>Wiring type</b>	Back wire	Back wire	Back wire
<b>Testing &amp; code compliance</b>	<ul style="list-style-type: none"> <li>Listed to UL 498, file no. E3663</li> <li>cUL Certified to C22.2, no. 182.2</li> </ul>	<ul style="list-style-type: none"> <li>Listed to UL 498, file no. E2369</li> <li>cUL Certified to CAN/CSA C22.2 no. 42-99</li> </ul>	<ul style="list-style-type: none"> <li>Listed to UL 498, file no. E2369</li> <li>NOM certified</li> </ul>
<b>Environmental specifications</b>	<p><b>Flammability:</b> Meets UL 94 requirements; V2 rated</p> <p><b>Temperature rating:</b> -40°C to 75°C (-40°F to 167°F)</p> <p><b>Protection:</b> NEMA 4, 4X, 6, 6P &amp; IP67</p>	<p><b>Flammability:</b> Meets UL 94 requirements; V2 rated</p> <p><b>Temperature rating:</b> -40°C to 75°C (-40°F to 167°F)</p> <p><b>Protection:</b> NEMA 3, 3R, 4, 4X, 12 &amp; IP66</p>	<p><b>Flammability:</b> Meets UL 94 requirements; V2 rated</p> <p><b>Temperature rating:</b> -40°C to 75°C (-40°F to 167°F)</p> <p><b>Protection:</b> NEMA 3, 3R, 4, 4X, 12 &amp; IP66</p>
<b>Electrical specifications</b>	<p><b>High pressure water test:</b> 1000 psi spray (mated or closed)</p> <p><b>Dielectric voltage:</b> Withstands 1500V per UL 498</p> <p><b>Current interrupting:</b> Yes, at full-rated current</p> <p><b>Temperature rise:</b> Max. 30°C (86°F) after 250 cycles of overload</p>	<p><b>High pressure water test:</b> 1000 psi spray (mated or closed)</p> <p><b>Dielectric voltage:</b> Withstands 1554V per UL 498</p> <p><b>Current interrupting:</b> Yes, at full-rated current</p> <p><b>Temperature rise:</b> Max. 30°C (86°F) after 250 cycles of overload</p>	<p><b>High pressure water test:</b> 1000 psi spray (mated or closed)</p> <p><b>Dielectric voltage:</b> Withstands 1696 - 2200V per UL 498</p> <p><b>Current interrupting:</b> Yes, at full-rated current</p> <p><b>Temperature rise:</b> Max. 30°C (86°F) after 250 cycles of overload</p>
<b>Mechanical specifications</b>	<p><b>Terminal accommodation:</b> #18 - 10 AWG</p> <p><b>Voltage ratings:</b> Permanently marked on device</p>	<p><b>Terminal accommodation:</b> #18 - #10 AWG</p> <p><b>Voltage ratings:</b> Permanently marked on device</p>	<p><b>Terminal accommodation:</b> #14 - #8 AWG</p> <p><b>Voltage ratings:</b> Permanently marked on device</p>

**Table 9. Materials**

<b>Receptacle flip lid cover &amp; base</b>	N/A	Thermoplastic, glass-filled nylon	Thermoplastic, glass-filled nylon
<b>Receptacle cover spring</b>	N/A	Stainless steel, self-closing	Stainless steel, self-closing
<b>Receptacle lid liner &amp; mounting gasket</b>	N/A	Santoprene™ thermoplastic elastomeric	Santoprene™ thermoplastic elastomeric
<b>Plug/connector outer shell</b>	Santoprene™ thermoplastic elastomeric over glass filled polypropylene	N/A	N/A
<b>Interior body</b>	Nylon	Glass-filled nylon	Glass-filled nylon
<b>Terminal retainer</b>	Clear polycarbonate	Clear polycarbonate	Clear polycarbonate
<b>Blades</b>	.060" thick brass, nickel plated	N/A	N/A
<b>Line contacts</b>	.032" thick copper alloy, nickel plated	.032" thick copper alloy, nickel plated	.032" thick copper alloy, nickel plated
<b>Ground shunt</b>	N/A	Solid brass	Solid brass
<b>Terminal clamps</b>	Steel, nickel plated	Steel, nickel plated	Steel, nickel plated
<b>Terminal screws</b>	#10-32 brass, neutral screw nickel plated	#8-32 brass, neutral screw nickel plated	#10-32 brass, neutral screw nickel plated
<b>Ground contact</b>	N/A	.032" thick brass, nickel plated	.032" thick brass, nickel plated
<b>Ground screw</b>	#10-32 brass, zinc plated (green)	#8-32 brass (green)	#10-32 brass (green)
<b>Assembly/mounting screws</b>	Stainless steel	Stainless steel	Stainless steel
<b>Compression nut</b>	Nylon	N/A	N/A
<b>Compression nut grommet</b>	Santoprene™	N/A	N/A
<b>Receptacle mounting plate</b>	N/A	Stainless steel	Stainless steel

Project Name:	Prepared By:
Project Number:	Date:
Catalog Number:	Type:

## Certifications & compliances

Catalog no. Receptacles				UL <sup>us</sup>	NAFTA	RoHS	NOM 421
Single	Duplex	Plugs	Connectors				
60W47	60W47DPLX			•	•	•	•
60W49	60W49DPLX			•	•	•	•
60W33	60W33DPLX			•	•	•	•
60W48	60W48DPLX			•	•	•	•
14W47	15W47			•	•	•	•
14W49	15W49			•	•	•	•
14W33	15W33			•	•	•	•
14W48	15W48			•	•	•	•
65W47	65W47DPLX	24W47	25W47	•	•	•	•
65W49	65W49DPLX	24W49	25W49	•	•	•	•
65W34	65W34DPLX	24W34	25W34	•	•	•	•
L520RW		L520PW	L520CW	•	•	•	•
L620RW		L620PW	L620CW	•	•	•	•
L720RW		L720PW	L720CW	•	•	•	•
L820RW		L820PW	L820CW	•	•	•	•
L530RW		L530PW	L530CW	•	•	•	•
L630RW		L630PW	L630CW	•	•	•	•
L730RW		L730PW	L730CW	•	•	•	•
L830RW		L830PW	L830CW	•	•	•	•
7314RW		9965PW	7314CW	•	•	•	•
L1020RW		L1020PW	L1020CW	•	•	•	•
L1120RW		L1120PW	L1120CW	•	•	•	•
L1030RW		L1030PW	L1030CW	•	•	•	•
3333RW		3333PW	3333CW	•	•	•	•

Catalog no. Receptacles				UL <sup>us</sup>	NAFTA	RoHS	NOM 421
Single	Duplex	Plugs	Connectors				
L1130RW		L1130PW	L1130CW	•	•	•	•
L1420RW		L1420PW	L1420CW	•	•	•	•
L1520RW		L1520PW	L1520CW	•	•	•	•
L1620RW		L1620PW	L1620CW	•	•	•	•
L1430RW		L1430PW	L1430CW	•	•	•	•
L1530RW		L1530PW	L1530CW	•	•	•	•
L1630RW		L1630PW	L1630CW	•	•	•	•
L1730RW		L1730PW	L1730CW	•	•	•	•
7413RW		7411PW	7413CW	•	•	•	•
L1820RW		L1820PW	L1820CW	•	•	•	•
L1920RW		L1920PW	L1920CW	•	•	•	•
L2020RW		L2020PW	L2020CW	•	•	•	•
3433RW		3431PW	3433CW	•	•	•	•
L1830RW		L1830PW	L1830CW	•	•	•	•
L1930RW		L1930PW	L1930CW	•	•	•	•
L2030RW		L2030PW	L2030CW	•	•	•	•
L2120RW		L2120PW	L2120CW	•	•	•	•
L2220RW		L2220PW	L2220CW	•	•	•	•
L2320RW		L2320PW	L2320CW	•	•	•	•
L2130RW		L2130PW	L2130CW	•	•	•	•
L2230RW		L2230PW	L2230CW	•	•	•	•
L2330RW		L2330PW	L2330CW	•	•	•	•

**KEY:** cULus NAFTA ROHS NOM 421

Parts are manufactured and designed in accordance with article 4 of the European Union's RoHS2 directive 2011/65/EU

### Table 10. Color ordering information

For ordering devices, include Cat. no. followed by the color code: (Black), Y (Yellow)

<b>BK</b>	<b>Y</b>
Black	Yellow

Electrical Sector  
203 Cooper Circle  
Peachtree City, GA 30269  
United States  
Eaton.com  
Eaton.com/arrowhart

Electrical Sector  
Canada Operations  
5925 McLaughlin Road  
Mississauga, Ontario, L5R 1B8  
Canada  
EatonCanada.ca  
Eaton.com/arrowhart

Electrical Sector  
Mexico Operations  
Carr. Tlalnepantla -  
Cuautitlán Km 17.8 s/n  
Col. Villa Jardín esq.  
Cerrada 8 de Mayo  
Cuautitlán, México CP 54800  
México  
Eaton.mx  
Eaton.com/arrowhart