

SAMSUNG

Climate Solutions

Product Catalogue

Eco Heating Systems



20/21

Highlights for 2020–2021

WindFree™

Samsung extends its WindFree™ Technology with a completely new WindFree™ wall-mounted model for its EHS TDM Plus product range. The latest TDM Plus WindFree™ Deluxe is equipped with WindFree™ Cooling technology, spreading fresh air gently and evenly through thousands of micro-holes to create "Still Air" conditions¹.



TDM Plus WindFree™ Deluxe



- WindFree™ Cooling
- Wi-Fi Control (optional)
- Fast Cooling
- Equipped with NASA communication protocol.
- Available in capacity range 2.2–5.6 kW with optional EEV kit.

Wi-Fi Control

The new optional Wi-Fi Kit allows users to control up to 16 connectable indoor units via smartphone with the Samsung SmartThings app². The app checks indoor temperature, outdoor temperature and air quality levels, and then recommends the optimal operating mode. It also offers the option of adding user scenes such as working, walking or resting. The geofencing functionality allows the room temperature to be automatically set at the desired level when the user approaches within a preset distance of 100 m – 150 km from the building.



Wi-Fi Kit

- Wi-Fi control up to 16 indoor units through Samsung SmartThings.
- Welcome Cooling or Heating through geofencing functionality.
- Individual energy monitoring for up to 16 outdoor units.
- The voice command feature is available through a smartphone with Bixby³.



¹ASHRAE (the American Society of Heating, Refrigeration, and Air-Conditioning Engineers) defines "Still Air" as air currents moving at speeds below 0.15 m/s, with no cold drafts.
²A Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.
³Currently Voice control is supported in English (US, UK, Indian), Chinese, Korean, French, German, Italian, Spanish and Portuguese.

ClimateHub TDM Plus

The Samsung EHS (Eco Heating System) extends the compact and modular Tank Integrated Hydro Unit for TDM Plus in addition to Mono and Split. The ClimateHub with Tank Integrated Hydro Unit saves space, but also reduces the time of installation. With a 2-zone control and advanced functions, energy efficiency and sustainability performance are optimised. Its Time Division Multi Operation means it can supply hot water while also cooling spaces.



ClimateHub TDM Plus




- Floor heating
- Radiator
- Hot water
- Quiet operation
- Smooth installation
- Wi-Fi Control (optional)
- Compact unit size with large water tank (200 L and 260 L).
- Intuitive, colour screen touch controller in multiple languages¹.
- Energy monitoring through touch controller.
- 2-zone control, suitable for floor heating and radiators.
- SmartThings compatible with optional Wi-Fi kit².
- Backup heater is included to ensure continuous heating.
- Solar Power (PV) and Smart Grid ready.
- Smooth servicing through the front-mounted service window.

¹Available languages: English, German, Spanish, French, Italian and Polish. ²A Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.

Product overview


Mono

The EHS Mono can connect to third party equipment such as a Domestic Hot Water (DHW) tank thanks to the Samsung Mono control kit. The Mono Control kit includes a controller, flow sensor, DHW sensor and leaving and return water sensors.

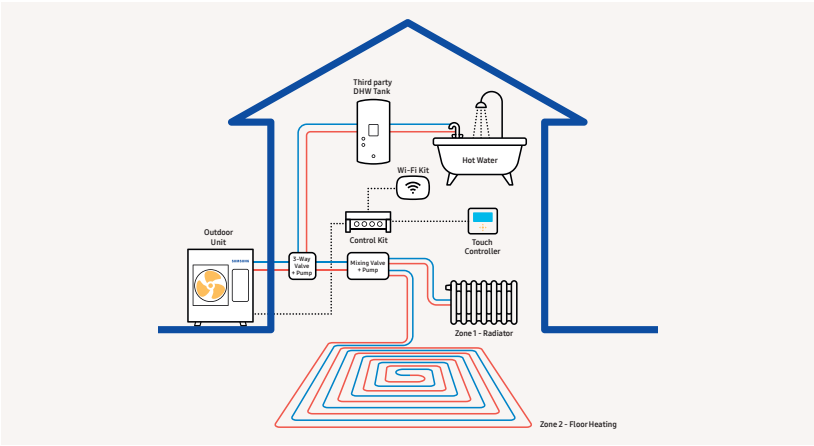


Split

The EHS Split outdoor unit is connected to a wall-mounted Hydro Unit to combine with a third party Domestic Hot Water (DHW) tank to suit all requirements. When used with the Hydro Unit, the Split enables production of domestic hot water and underfloor heating/cooling, and heating of radiators.

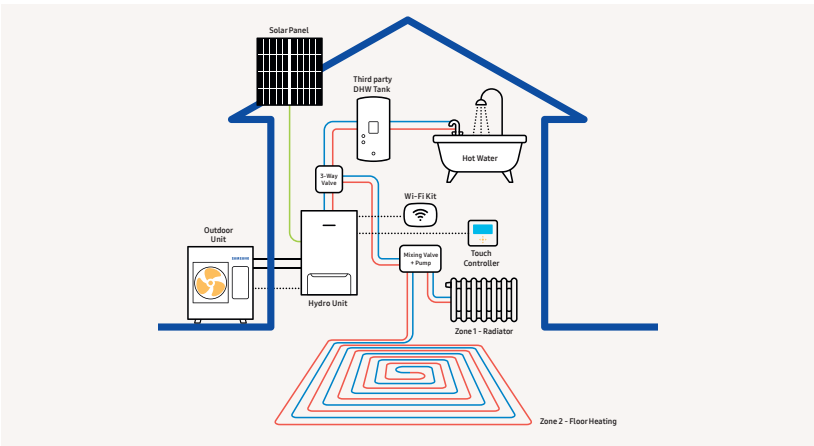



TDM Plus



The EHS TDM Plus outdoor unit can connect to a third party Domestic Hot Water Tank (DHW) via a wall-mounted Hydro Unit. TDM Plus with a third party connection offers A2W and A2A home climate comfort.

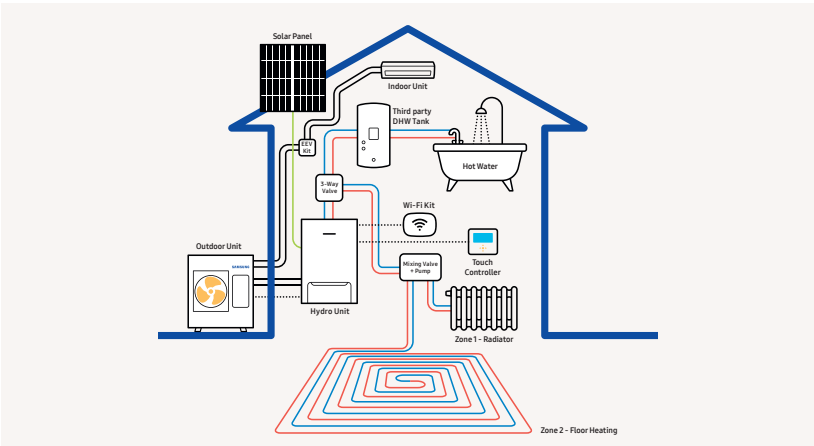

Schematic drawings are for illustrative purposes only. For accurate installation information please consult the technical data book. The selection of the exact product is subject to specific application conditions. Solar panels, underfloor heating panels, radiators and non-integrated components are not provided by Samsung unless specified otherwise. For more detailed product information and technical specifications, please consult the respective product pages of this Product Catalogue.

Indoor Units			Available Samsung product range			
			Outdoor Units	Controls		
						
Tank Integrated Hydro Unit	Wall-Mounted Hydro Unit	Third party DHW Tank		Wireless	Wired	Centralised
						
Wall-Mounted	Duct	Console		R410A	Mono Control Kit	Wi-Fi Kit


Indoor Units			Available Samsung product range			
			Outdoor Units	Controls		
						
Tank Integrated Hydro Unit	Wall-Mounted Hydro Unit	Third party DHW Tank	R32	Wireless	Wired	Centralised
						
Wall-Mounted	Duct	Console	R410A	Mono Control Kit	Wi-Fi Kit	

Indoor Units			Available Samsung product range			
			Outdoor Units	Controls		
						
Tank Integrated Hydro Unit	Wall-Mounted Hydro Unit	Third party DHW Tank	R32	Wireless	Wired	Centralised
						
Wall-Mounted	Duct	Console	R410A	Mono Control Kit	Wi-Fi Kit	

Product overview


ClimateHub Mono

The ClimateHub Mono configuration has a single outdoor unit that includes the hydronic system, making it easy to install and use. The system's potential can be maximised by connecting to Smart Grid or Solar Power (PV).

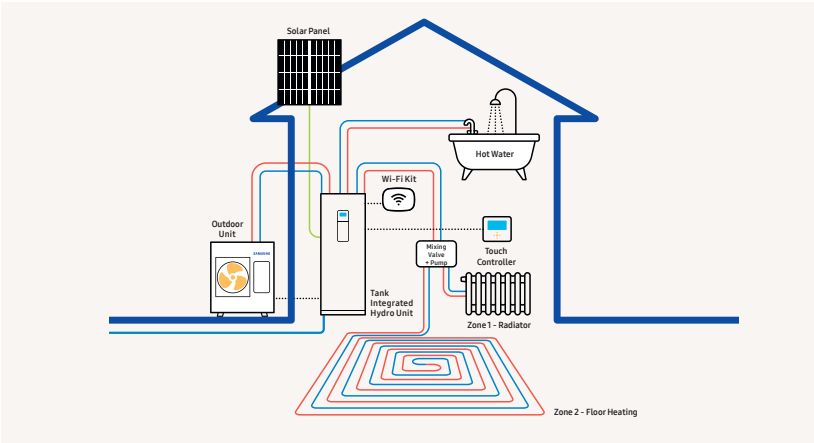


ClimateHub Split

The ClimateHub Split configuration has a single outdoor unit, connected by refrigerant pipes to the tank integrated hydro unit. To maximise its potential, the system can be connected to Smart Grid or Solar Power (PV).

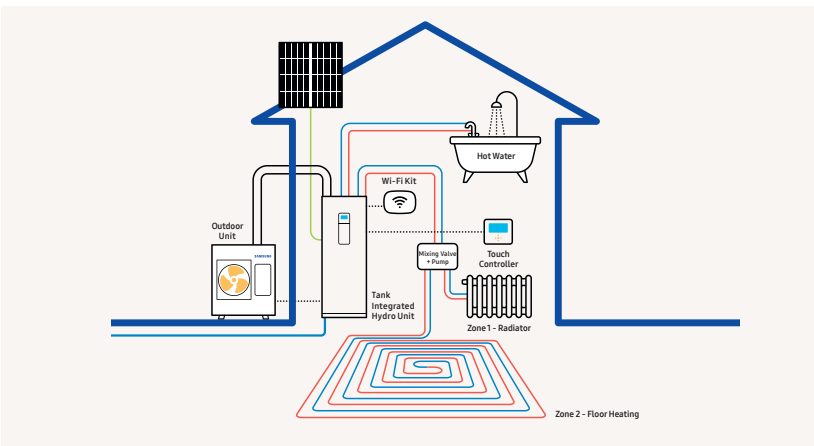

ClimateHub TDM Plus NEW

The TDM Plus system is an 'All-In-One' Air-to-Water (A2W) and Air-to-Air (A2A) system for a complete home climate solution. It can be used throughout the year for cooling and heating to meet a variety of different user situations and needs. It enables underfloor heating/cooling and radiator heating, as well as offering A2A cooling with various options for air conditioning. The system's potential can be maximised by connecting to Smart Grid or Solar Power (PV).

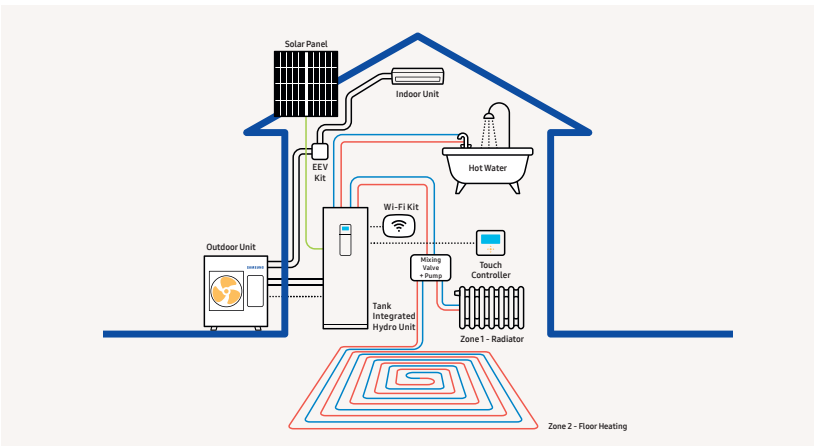

Schematic drawings are for illustrative purposes only. For accurate installation information please consult the technical data book. The selection of the exact product is subject to specific application conditions. Solar panels, underfloor heating panels, radiators and non-integrated components are not provided by Samsung unless specified otherwise. For more detailed product information and technical specifications, please consult the respective product pages of this Product Catalogue.



Project: Atico en el Retiro (Spain)
Project Architecture: ÁBATON
Interior Design: BATAVIA
Photography: Belén Imaz



Project: Casa L (Spain)
Project Architecture: ABATON
Interior Design: BATAVIA
Photography: Carlos Muntadas

Table of contents

Introduction

Samsung Climate Solutions at a glance
Reference projects in the spotlight
Regulations and Standards
Certifications **NEW**

Eco Heating Systems (EHS)

Product Line-up
Selecting the right heating system
Nomenclature
ClimateHub Features

Mono

ClimateHub Mono
Mono with Third Party DHW Tank

Split

ClimateHub Split
Split with Third Party DHW Tank

TDM Plus

ClimateHub TDM Plus **NEW**
TDM Plus with Third Party DHW Tank
TDM Plus WindFree™ Deluxe **NEW**
TDM Plus Slim Duct
TDM Plus MSP Duct
TDM Plus Console

Controls

Line-up
Features

Accessories

Line-up

Design and support


Samsung Climate Solutions Partner Portal
DVM Pro 2.0 **NEW**
Samsung Climate Solutions Academy
Hydraulic Schematics **NEW**

This document may either contain preliminary values or may lack some values that were not yet available at the time of creation. To obtain the latest information, please consult the Samsung Climate Solutions Partner Portal at partnerhub.samsung.com/climate or contact your direct Samsung representative.

Samsung Climate Solutions at a glance

At Samsung, we focus on providing cutting-edge innovations in indoor climate comfort and being a leader in intelligent digital connectivity solutions.

The solutions that we offer

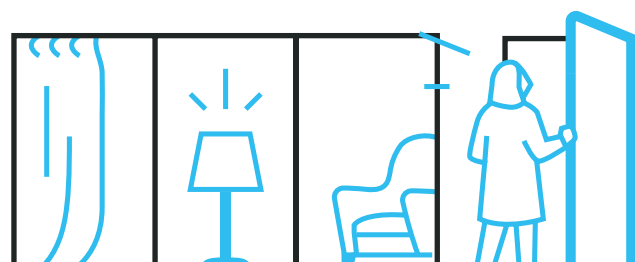

Our market-centric product ranges

	Home	Hotel	Retail	Office	Restaurant	Education
Residential	RAC FJM					
Light Commercial	CAC FJM				CAC	
Commercial			DVM HVM ERV			
Heating	EHS					
Controls						CONTROLS



Services we provide to empower our partners

Corporate and Technology milestones that make us proud

1974

Samsung introduces its first air conditioner.


2005

Samsung Electronics enters the European market for commercial air conditioning.

2017

Samsung Electronics opens Samsung Electronics Air Conditioner Europe B.V. (SEACE) in Amsterdam.

2014

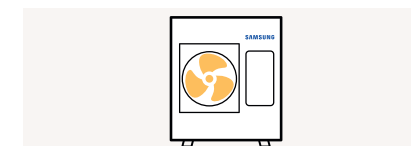


Arrival of the Samsung TDM concept, an all-in-one heat pump solution for heating, cooling and domestic hot water supply.

2015




Introduction of the Samsung 360 Cassette, the world's first circular air conditioner that fits seamlessly into the design of any space.

2017

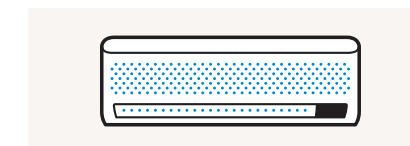

Samsung WindFree™ technology comes onto the market, gently and evenly dispersing fresh air through thousands of micro-holes to limit cold drafts.

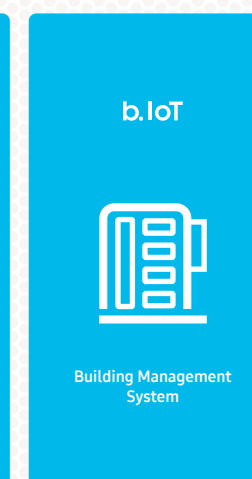

Our flagship innovations that enrich people's lives

Our European footprint with the locations from which we operate

1 | Samsung Electronics Air Conditioner Europe B.V.
16 | Samsung offices 8 | Warehouses 9 | Training centres



Samsung reference projects in the spotlight

Project Etopia



Joseph Daniels

CEO
Project Etopia Group

"A big step in our Samsung partnership is working collaboratively on the heat pump technology. Through this partnership we are able to provide not only heating, cooling and hot water, but we can do this all whilst utilising renewable energy sources. Our class leading pilot project at the BRE innovation park in Watford, UK, uses this system and has been engineered to be more than energy positive. The real game changer for this product specifically is the ability to intelligently control and harmonise it with our smart home system, providing unseen thermal, energy and environmental control with a positive impact on both cost savings and lifestyle."

Application



Residential

Samsung products installed



TDM Plus
Outdoor Unit



Wall-Mounted
Hydro Unit



SmartThings

Regulations and standards

Samsung strives to provide customers with new eco-friendly experiences and lead the way to a sustainable future for the global community through innovative and eco-friendly products and technology. We monitor applicable environmental standards and laws and regulations in the context of our climate solutions operations. Samsung also conducts environmental improvement activities across all product development, production, distribution, use and disposal phases.


Energy Label

Space heaters, combination heaters, packages of space heater, temperature control and solar device and packages of combination heater, temperature control and solar device are subject to Energy labelling EU Regulation No. 811/2013 and Ecodesign EU Regulation No. 813/2013 requirements.

As of September 2019, the energy efficiency scale for seasonal space heating ranges from A+++ to D, with A+++ being the most efficient. The water heating energy efficiency scale for the declared load profile for combination heat pumps ranges from A+ to F, with A+ being the most efficient.

The energy labels should provide minimum necessary information such as; supplier's name, product model code, the rated output under three European climates (average, colder and warmer) for medium- and/or low-temperature applications (55 °C and 35 °C), European map displaying the three temperature zones, the sound power level indoors and/or outdoors. In addition, just for combination heat pumps, the energy label should also include a pictogram showing to be able to work only during off-peak hours.


Energy Label

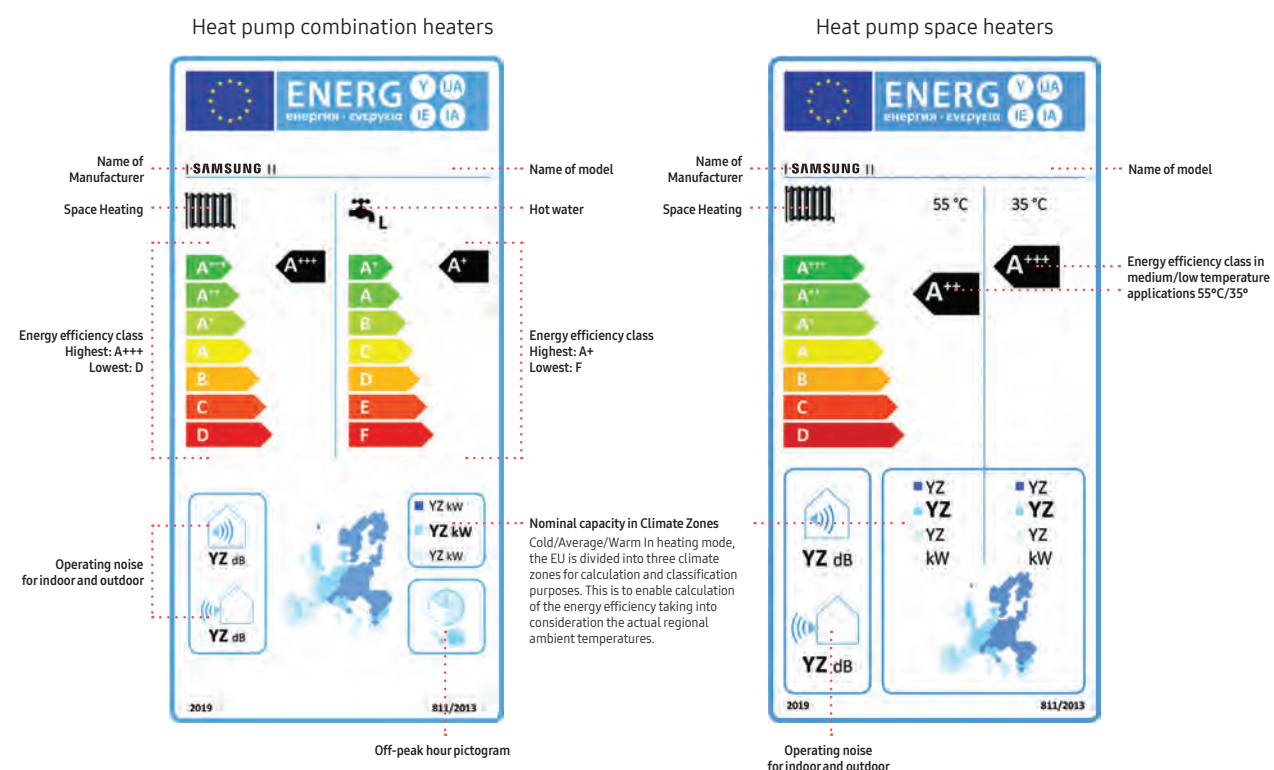

F-Gas regulation

The EU aims to reduce the environmental impact of F-gases through the reduction of the CO₂ equivalent consumption of HFCs (hydrofluorocarbons). EU regulation 517/2014 prescribes a phase-down of HFCs, where the quantities of HFCs that are placed on the market are gradually reduced through the allocation of quotas by the European Commission. The phase-down targets are expressed in CO₂ equivalents (= kg x GWP - Global Warming Potential) and aim to reduce HFC


consumption by 79 % in 2030. For new installations of single split air conditioners with a refrigerant charge below 3 kg, the GWP limit is set at 750 starting in 2025. The regulation has been put into force to encourage the industry and its users to transition to refrigerants with a lower GWP. Samsung is accelerating the transition towards lower GWP refrigerants, such as R32, and will continue to invest in environmentally friendly alternatives.

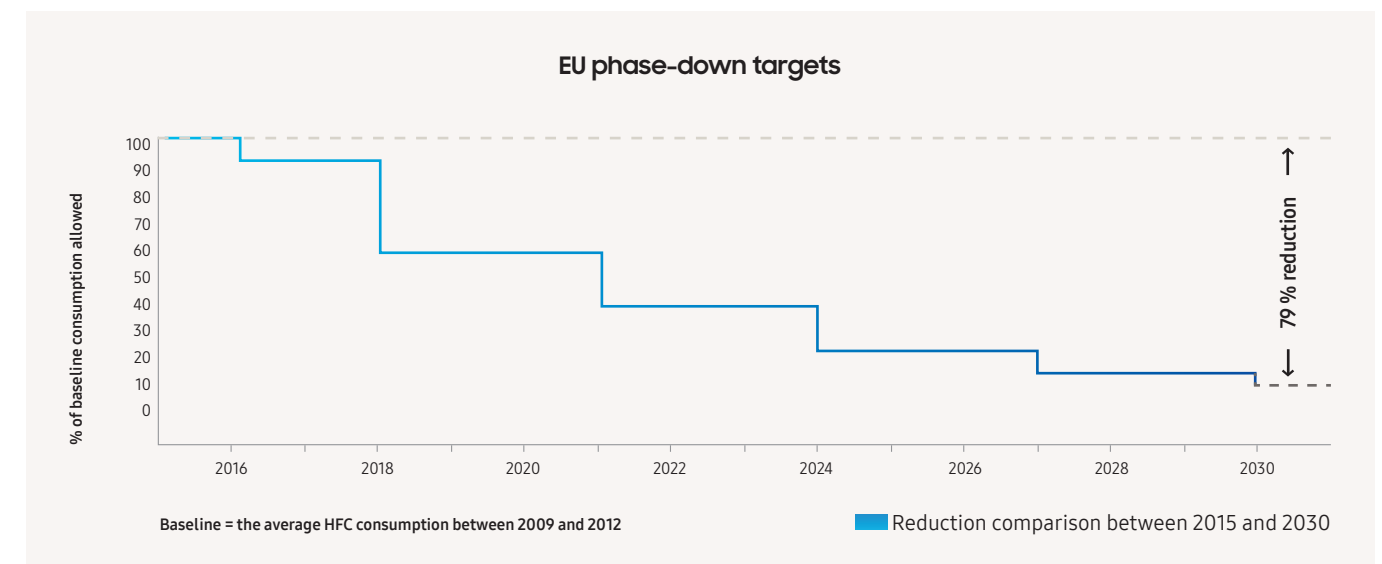

R32 Refrigerant

R32 refrigerant contributes to meeting the F-gas regulation targets as described in EU regulation 517/2014. Air conditioners with R32 refrigerant have a Global Warming Potential (GWP) of 675, which is significantly lower than the GWP of R410A (2,088). While refrigerants are an essential part of today's air conditioners, R32 would have a 68 % lower environmental impact¹ than R410A if leaked into the atmosphere. It has an Ozone Depletion Potential (ODP) of zero, a high refrigeration capacity and a high thermal conductivity; meaning a high efficiency and a reduction in charging volume. Samsung's single split Residential (RAC), Multi Split (FJM) and Commercial (CAC) product ranges up to 12 kW all feature R32 refrigerant.

¹ Comparison between R410A and R32 GWP. Source: European Commission.

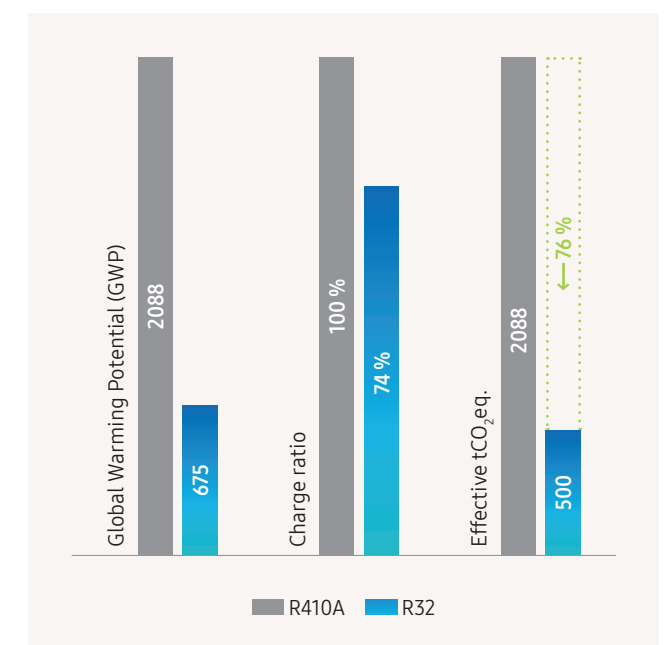



WEEE: Electronic Waste

Samsung adheres to the WEEE (Waste Electrical and Electronic Equipment) Directive. This Directive applies the principles of extended producer responsibility. It stipulates the safe collection, treatment, recycling and environmentally sound disposal of all electrical and electronic equipment. By working with collective recycling schemes in each EU member state Samsung co-finances the take-back and recycling of electronic products.

Batteries

Samsung has been giving new life to used batteries by funding collection, treatment and recycling by local battery recycling organisations.

Packaging

Samsung works together with recycling schemes and governmental organisations to collect, separate and reuse all packaging materials at various points in the distribution chain. Many materials can be recycled into new products and recycling helps to save natural resources. Recycling packaging helps to reuse valuable raw materials and to reduce the overall impact on the environment.

Certifications

Heat Pump KEYMARK Certificate

The Heat Pump KEYMARK is a voluntary, independent, European certification mark (ISO type 5 certification) for all heat pumps, combination heat pumps and hot water heaters (as covered by Ecodesign, EU Regulation 813/2013 and 814/2013). It is based on independent, third-party testing and demonstrates compliance with product requirements as set in the Heat Pump KEYMARK scheme rules and with efficiency requirements as set by Ecodesign. It is aimed at certifying the product performances declared by the manufacturers.

The Heat Pump KEYMARK scheme is owned by the European Committee for standardization (CEN). The certificates are granted by independent certification bodies to products fulfilling all requirements of the scheme.

Samsung's Eco Heating Systems and the ClimateHub range are certified with a Heat Pump KEYMARK. This certification is recognised in a number of European countries which include France, Germany, the United Kingdom, Slovakia and Czech Republic.



Eurovent Certificate

Eurovent is globally known for its quality mark 'Eurovent Certified Performance' which certifies performance ratings of air-conditioning and refrigeration products according to European and international standards. The 'Eurovent Certified Performance' mark indicates that the prescribed quality requirement has been fulfilled and should not require the need to be proven after the customer's decision and after the manufacturer's production process.

Eurovent is an accredited third-party certification body. It builds customer confidence by leveling the competitive playing field for all manufacturers and by increasing the integrity and accuracy of the industrial performance ratings. Thus providing trustworthy services to the entire ecosystem.

Samsung air conditioning products ranging from the Residential Air-Conditioning (RAC), Multi Split (FJM), Commercial Air Conditioning (CAC), Digital Variable Multi S (DVM S) and Eco Heating System (EHS) line-up in the 'Air-to-Water' (A2W) heat pump category are all Eurovent certified.

To check the ongoing validity of the Eurovent certified products from Samsung, please visit: www.eurovent-certification.com



Product Line-up



Line-up

ClimateHub



Outdoor Unit

Tank Integrated Hydro Unit

Type	Power	Model Name	Capacity	Tank Integrated Hydro Unit (Split)			Tank Integrated Hydro Unit (Mono)			Tank Integrated Hydro Unit (TDM Plus)	
				200 L(1Φ) AE200RNWSEG/EU	260 L(1Φ) AE260RNWSEG/EU	260 L(3Φ) AE260RNWSGG/EU	200 L(1Φ) AE200RNWMEG/EU	260 L(1Φ) AE260RNWMEG/EU	260 L(3Φ) AE260RNWMGG/EU	200 L(1Φ) AE200TNWTEH/EU	260 L(1Φ) AE260TNWTEH/EU
R32 Outdoor Unit	Mono	1Φ	AE050RXYDEG/EU	5.0 kW				•			
			AE080RXYDEG/EU	8.0 kW				•	•		
			AE120RXYDEG/EU	12.0 kW				•	•		
			AE160RXYDEG/EU	16.0 kW				•	•		
	3Φ		AE080RXYDGG/EU	8.0 kW					•		
			AE120RXYDGG/EU	12.0 kW					•		
			AE160RXYDGG/EU	16.0 kW					•		
	Split	1Φ	AE040RXEDEG/EU	4.0 kW	•	•					
			AE060RXEDEG/EU	6.0 kW	•	•					
			AE090RXEDEG/EU	9.0 kW	•	•					
		3Φ	AE090RXEDGG/EU	9.0 kW			•				
R410A Outdoor Unit	TDM Plus	1Φ	AE044MXTPPEH/EU	4.4 kW						•	•
			AE066MXTPPEH/EU	6.6 kW						•	•
			AE090MXTPPEH/EU	9.0 kW						•	•
			AE120MXTPPEH/EU	12.0 kW							•
			AE160MXTPPEH/EU	16.0 kW							•
		3Φ	AE090MXTPPGH/EU	9.0 kW						•	•
			AE120MXTPPGH/EU	12.0 kW							•
			AE160MXTPPGH/EU	16.0 kW							•

TDM Plus Indoor



Type		WindFree™ Deluxe	Slim Duct	MSP Duct	Console
Capacity	2.2 kW	•	•		•
	2.8 kW	•	•		•
	3.6 kW	•	•		•
	5.6 kW	•	•		•
	7.1 kW	•		•	
	9.0 kW			•	

Optional Controller



Model	MIM-H04EN
Model name	Wi-Fi Kit 2.0
Maximum connectible Indoor Units	16
App	SmartThings
Voice recognition	Bixby
Welcome Cooling/Heating	Geofencing
Automation	Customised control with a variety of execution rules
Add scene	Easy control throughout customised user mode
Energy monitoring	Individual energy monitoring up to 16 outdoor units
Product dimensions (mm) W x H x D	185 x 130 x 29



Model	MWR-WW10*N
Model name	Touch Controller
Screen size/type	4.3" Color LCD display
Intuitive user interface	Dynamic navigation with simplified buttons
Operation	Heating / Cooling/ Auto / DHW
Functions	Smart Grid Ready / PV Ready / 2-zone Control / Energy consumption monitor / Energy saving
Smart connectivity	SmartThings via optional Wi-Fi Kit 2.0
Languages	
MWR-WW10N	English, German, French, Italian, Spanish, Polish (EN, DE, FR, IT, ES, PL)
MWR-WW10JN NEW IN Q1'21	English, Portuguese, Dutch, Greek, Czech, Slovak (EN, PT, NL, EL, CS, SK)
MWR-WW10KN NEW IN Q2'21	English, Finnish, Swedish, Norwegian, Danish, Lithuanian (EN, FI, SV, NO, DA, LT)
Product dimensions (mm) W x H x D	120x120x19

Line-up

EHS with Third Party DHW Tank

Mono with Third Party DHW Tank					
  					
Type	Power	Model Name	Capacity	Mono MIM-E03CN	
R32 Outdoor Unit	Mono	1Φ	AE050RXYDEG/EU	5.0 kW	•
			AE080RXYDEG/EU	8.0 kW	•
			AE120RXYDEG/EU	12.0 kW	•
			AE160RXYDEG/EU	16.0 kW	•
	3Φ		AE080RXYDGG/EU	8.0 kW	•
			AE120RXYDGG/EU	12.0 kW	•
			AE160RXYDGG/EU	16.0 kW	•

Split with Third Party DHW Tank					
  					
Type	Power	Model Name	Capacity	Split(1Φ) AE090RNYDEG/EU	Split(3Φ) AE090RNYDGG/EU
R32 Outdoor Unit	1Φ	AE040RXEDEG/EU	4.0 kW	•	
		AE060RXEDEG/EU	6.0 kW	•	
		AE090RXEDEG/EU	9.0 kW	•	
	3Φ	AE090RXEDGG/EU	9.0 kW	•	•
				AE160JNYDEH/EU	AE160JNYDGH/EU
R410A Outdoor Unit	1Φ	AE120JXEDEH/EU	12.0 kW	•	
		AE160JXEDEH/EU	16.0 kW	•	
	3Φ	AE120JXEDGH/EU	12.0 kW		•
		AE160JXEDGH/EU	16.0 kW		•

TDM Plus with Third Party DHW Tank

TDM Plus with Third Party DHW Tank							
  							
Type	Power	Model Name	Capacity	Split(1Φ) AE090MNYDEH/EU AE160MNYDEH/EU		Split(3Φ) AE090MNYDGH/EU AE160MNYDGH/EU	
R410A TDM Plus Outdoor Unit	1Φ	AE044MXTPEH/EU	4.4 kW	•			
		AE066MXTPEH/EU	6.6 kW	•			
		AE090MXTPEH/EU	9.0 kW	•			
		AE120MXTPEH/EU	12.0 kW		•		
		AE160MXTPEH/EU	16.0 kW		•		
	3Φ	AE090MXTPGH/EU	9.0 kW			•	
		AE120MXTPGH/EU	12.0 kW				•
		AE160MXTPGH/EU	16.0 kW				•

Selecting the right heating system

		ClimateHub	
			

Third Party DHW Tank solutions			
		 	
Mono R32	Split R32	Split R410A	TDM Plus R410A
●	●	●	●
●	●	●	●
●	●	●	●
			●
			up to 7 Indoor unit
●	●		
●	●		●
●	●	●	●
●	●	●	●
●	●	●	●
●	●	●	●
● ²	●	●	●
● ³	●	● ³	● ³
●	●	●	●
● ⁴	● ⁴	● ⁴	● ⁴
●	●	●	●
●	●	●	●
●	●		
	●		
●	●		
●	●	●	●

¹ Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.
² Wired Remote Controller to be ordered separately. ³ In combination with an external room sensor. ⁴ Not provided by Samsung.

Nomenclature

Indoor units

AE	260	R	N	W	S	E	G
1	2	3	4	5	6	7	8

1	Classification	AE	EHS
2	Capacity	x1/10 kW (3 digits)	
		x Litre (3 digits)	
3	Year	J	2015
		M	2017
		R	2019
		T	2020
4	Product Type	N	Indoor Unit (NASA)
5	Product Notation	A/X	RAC Wall-Mounted
		J	Console
		L	LSP Duct
		M	MSP Duct
		W	Tank Integrated Hydro Unit
		Y	Wall-Mounted Hydro Unit
6	Feature	D	Standard
		P	
		M	Mono
		S	Split
		T	TDM Plus
7	Rating Voltage	E	1Φ, 220~240 V, 50 Hz
		G	3Φ, 380~415 V, 50 Hz
8	Mode	G	R32 Heat Pump
		H	R410A Heat Pump

Outdoor units

AE	090	R	X	E	D	E	G
1	2	3	4	5	6	7	8

1	Classification	AE	EHS
2	Capacity	x1/10 kW (3 digits)	
3	Year	J	2015
		M	2017
		R	2019
4	Product Type	X	Outdoor Unit (NASA)
5	Product Notation	E	Split
		T	TDM Plus
		Y	Mono
6	Feature	D	Standard
		P	
7	Rating Voltage	E	1Φ, 220~240 V, 50 Hz
		G	3Φ, 380~415 V, 50 Hz
8	Mode	G	R32 Heat Pump
		H	R410A Heat Pump

ClimateHub Features

Compact Design



The Samsung ClimateHub solution is built around a compact tank integrated hydro unit, with a large volume domestic hot water tank of either 200 L or 260 L. The compact and modular design makes for straightforward kitchen or utility room integration.



Intuitive Control

Samsung's touch controller comes equipped with multiple language options and bright colour display – enabling temperature settings, energy monitoring, summer time setting and quick error monitoring.¹


¹ The image shows an application example and is for illustrative purposes only. Please always check latest information for understanding availability of language versions.

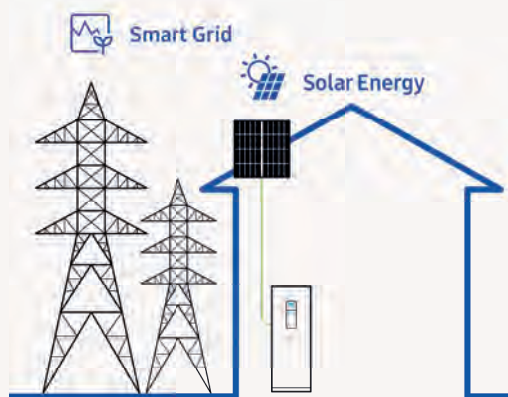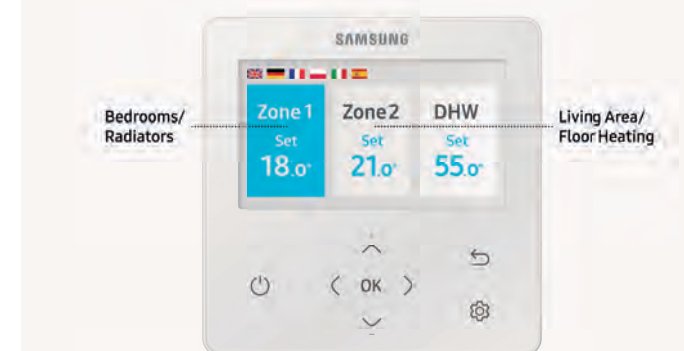

Smart Grid Ready and PV Enabled

A Smart Grid efficiently integrates the behaviour and actions of all the users connected to it. Smart Grid readiness enables users to benefit from an economically efficient and sustainable power supply. Thanks to the PV (Photovoltaic or 'solar' energy) enabled feature, the system can be connected to solar panels, saving energy through renewable sources.¹

¹ The usage of the PV Enabled feature requires additional third party equipment to be installed.

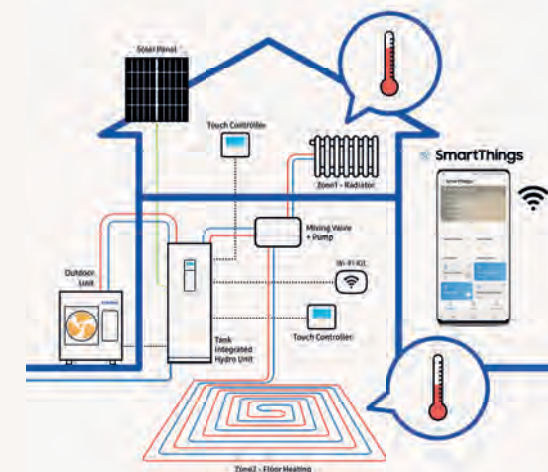

Smart Connectivity


The touch controller enables users to manage different temperature settings per zone, meaning high-temperature radiators and low-temperature floor heating can be utilised efficiently. With the optional Wi-Fi Kit, different aspects of the system, including controlling and monitoring up to 16 indoor units through the Samsung SmartThings App.¹

¹ A Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.

Smooth Servicing

With a conveniently placed servicing window and intuitive servicing options available through the use of a Micro SD card or the Samsung S-Checker Mobile App, troubleshooting and start-up can be done easily from the front of the unit.¹


¹ Please refer to your direct Samsung contact person for more information about the S-Checker Mobile App.

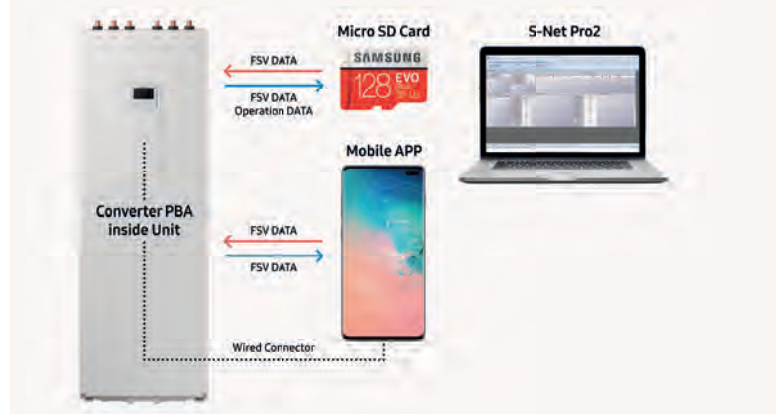

Quiet Operation

In order to meet increasingly strict sound level requirements, Samsung ClimateHub allows to reduce noise levels using the 4-Step Quiet Operation mode¹. Subject to specific models and particular operation conditions, it is possible to achieve levels as low as 35 dB(A)².

¹ ClimateHub Mono and TDM Plus has a 3-Step Quiet Operation mode. ² Sound pressure levels are subject to execution and operating conditions.

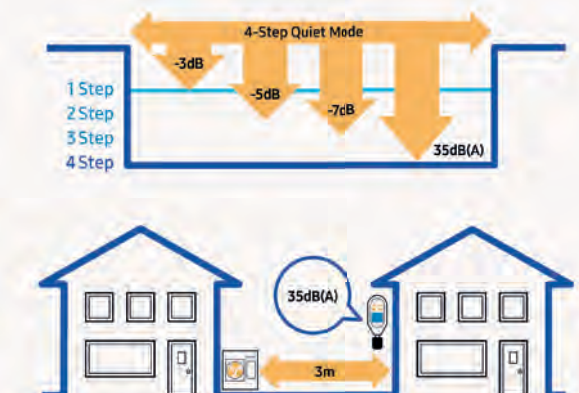

SAMSUNG

WindFree™ Deluxe



Comfortably cool. Surprisingly still.

Samsung introduces a completely new WindFree™ wall-mounted model for its EHS TDM Plus product range. Equipped with WindFree™ technology, the micro-holes spread fresh air gently and evenly to enhance indoor comfort for ultimate indoor climate convenience.



Step 1

The front panel opens, and Fast Cooling mode cools the room quickly from corner to corner.



Step 2

The set temperature is reached in Fast Cooling mode, and the front panel closes.



Step 3

WindFree™ mode spreads fresh air uniformly through thousands of micro-holes.



WindFree™ Cooling

WindFree™ technology enhances your indoor comfort by using thousands of micro-holes to disperse fresh air uniformly without any unpleasant blasts of cold wind. In WindFree™ mode, air is spread softly and silently, creating a 'Still Air' environment¹ that provides you total well-being day and night.



Easy Control

Samsung WindFree™ is designed to make life easier. It can be operated via wired or wireless controllers that feature advanced functions for a convenient control of indoor climates. Temperatures can also be managed remotely using the SmartThings App². Turning it on and off, selecting the cooling mode or scheduling its operation is just one touch away.



Easy Installation

The WindFree™ Deluxe can be easily mounted through its snap-fit design and roller bracket. The installation process is simplified to fit in effortlessly to the exact position. With an easy-to-remove front grill and a separate cover panel, installers can minimise product damage and reduce service time.

¹ ASHRAE (American Society of Heating, Refrigerating, and Air-Conditioning Engineers) defines "Still Air" as air currents at speeds below 0.15m/s which lacks the presence of cold drafts.
² A Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later.

SmartThings



Wi-Fi Kit 2.0 – Mobile Remote Control and Monitoring Solution

You can remotely control and monitor up to 16 indoor units with ease by using the SmartThings App².

Enhanced Convenience

The voice command feature is available through a smartphone with Bixby¹. Temperatures can also be managed remotely anytime, and anywhere, using the SmartThings app².

Personalised Climate Environment

Operates in your preferred mode according to the user settings. The geofencing functionality allows the room temperature to be automatically set at the desired level when the user approaches within a preset distance from the building. The Wi-Fi-Kit (optional) is mandatory to enable a multi-device experience interoperable with smart appliances.

Energy Usage Monitoring³

Energy usage can be monitored daily, weekly and monthly at a glance.

Provides ease of installation

Allows for easy setup possible for up to 16 indoor units.



¹ App Voice Recognition: Bixby voice is an intelligent voice assistant that helps you use the device more conveniently.

¹ Currently Voice control is supported in English (US, UK, Indian), Chinese, Korean, French, German, Italian, Spanish and Portuguese. ² A Wi-Fi connection and Samsung SmartThings application account are required. Wi-Fi Kit to be ordered separately. Requires iOS 10.0 or later & Android 5.0 or later. ³ Current and daily, weekly or monthly energy usage of the outdoor unit is reference data calculated for information and reference purposes only.

Energy monitoring

Allows you to view your daily, weekly, and monthly energy usage at a glance



Energy service

Allows you to quickly check the energy usage of multiple devices in your home



Automation

Operates in your preferred mode according to the user settings



Welcome cooling/heating

Pre-cooling and pre-heating before your arrival at home



Mono



Specifications

ClimateHub Mono R32

- Integrated solution for heating and domestic hot water
 - Compact unit size with large water tank (200 L & 260 L)
 - Intuitive, colour screen touch controller in multiple languages
 - Energy monitoring through touch controller
 - Smooth servicing through the front-mounted service window
- PV and Smart Grid ready
 - 2-zone Control, suitable for floor heating and radiators
 - SCOP rating of A+++*
 - SmartThings compatible with optional Wi-Fi kit
 - Backup heater is included to ensure continuous heating

																
Indoor Unit				AE200RNWMEG/EU				AE200RNWMEG/EU				AE200RNWMEG/EU				
Outdoor Unit				AE050RXYDEG/EU				AE080RXYDEG/EU				AE120RXYDEG/EU				
Controller				MWR-WW10N				MWR-WW10N				MWR-WW10N				
System	Operation	Nominal Capacity	Heating A7/W35 ¹ / A7/W55 ²	kW	5.0/4.3				8.0/7.1				12.0/11.3			
			Cooling A35/W18 ¹	kW	5.0				7.5				12.0			
		Power Input (Nominal)	Heating A7/W35 ¹ / A7/W55 ²	kW	1.03/1.52				1.77/2.53				2.65/3.73			
			Cooling A35/W18 ¹	kW	1.14				1.90				2.77			
		COP (Nominal Heating) A7/W35 ¹ / A7/W55 ²	W/W	4.85/2.83				4.52/2.81				4.53/3.03				
		EER (Nominal Cooling) A35/W18 ¹	W/W	4.39				3.95				4.33				
		SCOP LWT 35°C/ 55°C	W/W	4.46/3.2				4.44/3.23				4.69/3.51				
		Seasonal Space Heating enr.efficiency ηs LWT 35°C/ 55°C	ETA%	175/ 125				175/ 126				185/ 138				
		Seasonal Space Heating Eff. class * LWT 35°C/ 55°C	-	A+++ / A++				A+++ / A++				A+++ / A++				
		Current	MCA	A	16.00				22.00				28.00			
	MFA		A	20.00				27.50				35.00				
	Functions	Water Flow Rate	Low / Medium temperature	l/min	14.4/7.8				23.1/12.8				34.6/20.4			
		Leaving Water Temperature ³	Heating	°C	15~65				15~65				15~65			
			Cooling	°C	5~25				5~25				5~25			
Smart Grid Ready / PV Enabled		-	●				●				●					
	3-Step Quiet Mode	-	●				●				●					
	2-zone Control	-	●				●				●					
Tank Integrated Hydro Unit	Power Supply			Φ, #, V, Hz	1Φ, 2, 220~240 V, 50 Hz				1Φ, 2, 220~240 V, 50 Hz				1Φ, 2, 220~240 V, 50 Hz			
	Water Tank Volume			litres	200				200				200			
	Declared Load Profile			L/XL	L				L				L			
	Average water heating efficiency ηwh			ETA%	115				115				110			
	Average Energy Efficiency Class			-	A				A				A			
	Sound	Sound Pressure ⁴	Heating Std	dB(A)	26				26				30			
			Cooling Std	dB(A)	26				26				30			
		Sound Power	Heating Std	dB(A)	40				40				44			
	Heater	Back-up heater Capacity	Default (Option)	kW	2 (4/6)				2 (4/6)				2 (4/6)			
	Piping	Water Pipe (Space Heating)	Inlet/ Outlet	Φ, mm	28/28				28/28				28/28			
		Water pipe (DHW)	Inlet/ Outlet	Φ, mm	22/22				22/22				22/22			
	Dimensions	Net Weight		kg	130.0				130.0				130.0			
		Net Dimensions (WxHxD)		mm	595 x 1,800 x 700				595 x 1,800 x 700				595 x 1,800 x 700			
Outdoor Unit	Power Supply			Φ, V, Hz	1Φ, 220~240 V, 50 Hz				1Φ, 220~240 V, 50 Hz				1Φ, 220~240 V, 50 Hz			
	Compressor	Type	-	BLDC Twin Rotary				BLDC Twin Rotary				BLDC Twin Rotary				
	Base Heater	Capacity	kW	-				0.15				0.15				
	Sound	Sound Pressure ⁴	Heating Std	dB(A)	45				48				50			
			Cooling Std	dB(A)	45				48				50			
		Sound Power	Heating Std	dB(A)	61				63				64			
	Dimensions	Net Weight		kg	58.5				76.0				110.0			
		Net Dimensions (WxHxD)		mm	880 x 798 x 310				940 x 998 x 330				940 x 1,420 x 330			
	Refrigerant	Type	R32 (Fluorinated greenhouse gas, GWP=675)													
		Factory Charging	tCO ₂ e	0.68				0.78				1.49				
			kg	1.00				1.15				2.20				
	Piping	Water Pipe (Space Heating)	Inlet/ Outlet	Φ, mm	28/28				28/28				28/28			
	Operation	Ambient Temperature	Heating	°C	-25~35				-25~35				-25~35			
			Cooling	°C	10~46				10~46				10~46			
			DHW	°C	-25~43				-25~43				-25~43			

Accessories					
					
Touch Controller	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor	Backup Heater (4/6kW)
MWR-WW10N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MHC-*00FE

AE200RNWMEG/EU AE160RXYDEG/EU MWR-WW10N	AE260RNWMEG/EU AE080RXYDEG/EU MWR-WW10N	AE260RNWMEG/EU AE120RXYDEG/EU MWR-WW10N	AE260RNWMEG/EU AE160RXYDEG/EU MWR-WW10N
16.0/15.0	8.0/7.1	12.0/11.3	16.0/15.0
14.0	7.5	12.0	14.0
3.62/5.18	1.77/2.53	2.65/3.73	3.62/5.18
3.28	1.90	2.77	3.28
4.42/2.90	4.52/2.81	4.53/3.03	4.42/2.90
4.27	3.95	4.33	4.27
4.48/3.53	4.44/3.23	4.69/3.51	4.48/3.53
176/ 138	175/ 126	185/ 138	176/ 138
A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
32.00	22.00	28.00	32.00
40.00	27.50	35.00	40.00
46.2/27.1	23.1/12.8	34.6/20.4	46.2/27.1
15~65	15~65	15~65	15~65
5~25	5~25	5~25	5~25
•	•	•	•
•	•	•	•
•	•	•	•
1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
200	260	260	260
L	XL	XL	XL
110	123	117	117
A	A	A	A
30	26	30	30
30	26	30	30
44	40	44	44
2 (4/6)	2 (4/6)	2 (4/6)	2 (4/6)
28/28	28/28	28/28	28/28
22/22	22/22	22/22	22/22
130.0	140.0	140.0	140.0
595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700
1Φ, 220~240 V, 50 Hz	1Φ, 220~240 V, 50 Hz	1Φ, 220~240 V, 50 Hz	1Φ, 220~240 V, 50 Hz
BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary
0.15	0.15	0.15	0.15
52	48	50	52
54	48	50	54
66	63	64	66
110.0	76.0	110.0	110.0
940 x 1,420 x 330	940 x 998 x 330	940 x 1,420 x 330	940 x 1,420 x 330
1.49	0.78	1.49	1.49
2.20	1.15	2.20	2.20
28/28	28/28	28/28	28/28
-25~35	-25~35	-25~35	-25~35
10~46	10~46	10~46	10~46
-25~43	-25~43	-25~43	-25~43



*A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³65°C down to +10°C (max. 60°C down to -5°C)

⁴Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

Specifications

ClimateHub Mono (Continued) R32

   												
Indoor Unit				AE260RNWMGG/EU		AE260RNWMGG/EU		AE260RNWMGG/EU				
Outdoor Unit				AE080RXYDGG/EU		AE120RXYDGG/EU		AE160RXYDGG/EU				
Controller				MWR-WW10N		MWR-WW10N		MWR-WW10N				
System	Operation	Nominal Capacity	Heating A7/W35 ¹ / A7/W55 ²	kW	8.0/7.1		12.0/11.3		16.0/15.0			
			Cooling A35/W18 ¹	kW	7.5		12.0		14.0			
		Power Input (Nominal)	Heating A7/W35 ¹ / A7/W55 ²	kW	1.77/2.53		2.65/3.73		3.62/5.18			
			Cooling A35/W18 ¹	kW	1.90		2.77		3.28			
		COP (Nominal Heating) A7/W35 ¹ / A7/W55 ²		W/W	4.52/2.81		4.53/3.03		4.42/2.90			
		EER (Nominal Cooling) A35/W18 ¹		W/W	3.95		4.33		4.27			
		SCOP LWT 35°C/ 55°C		W/W	4.44/3.23		4.69/3.51		4.48/3.53			
		Seasonal Space Heating enr.efficiency ηs LWT 35°C/ 55°C		ETA%	175/ 126		185/ 138		176/ 138			
		Seasonal Space Heating Eff. class * LWT 35°C/ 55°C		-	A+++ / A++		A+++ / A++		A+++ / A++			
		Current	MCA	A	10.00		10.00		12.00			
			MFA	A	16.10		16.10		16.10			
		Water Flow Rate	Low / Medium temperature	l/min	23.1/12.8		34.6/20.4		46.2/27.1			
	Leaving Water Temperature ³	Heating	°C	15~65		15~65		15~65				
		Cooling	°C	5~25		5~25		5~25				
Functions	Smart Grid Ready / PV Enabled		-	●		●		●				
	3-Step Quiet Mode		-	●		●		●				
	2-zone Control		-	●		●		●				
Tank Integrated Hydro Unit	Power Supply		Φ, #, V, Hz	3Φ, 4, 380~415 V, 50 Hz		3Φ, 4, 380~415 V, 50 Hz		3Φ, 4, 380~415 V, 50 Hz				
	Water Tank Volume		litres	260		260		260				
	Declared Load Profile		L/XL	XL		XL		XL				
	Average water heating efficiency ηwh		ETA%	123		117		117				
	Average Energy Efficiency Class		-	A		A		A				
	Sound	Sound Pressure ⁴	Heating Std	dB(A)	26		30		30			
			Cooling Std	dB(A)	26		30		30			
	Sound Power	Heating Std	dB(A)	40		44		44				
		Heater Back-up heater Capacity Default (Option)		kW	6		6		6			
	Piping	Water Pipe (Space Heating)	Inlet/ Outlet	Φ, mm	28/28		28/28		28/28			
Water pipe (DHW)		Inlet/ Outlet	Φ, mm	22/22		22/22		22/22				
Dimensions	Net Weight		kg	140.0		140.0		140.0				
	Net Dimensions (WxHxD)		mm	595 x 1,800 x 700		595 x 1,800 x 700		595 x 1,800 x 700				
Outdoor Unit	Power Supply		Φ, V, Hz	3Φ, 380~415 V, 50 Hz		3Φ, 380~415 V, 50 Hz		3Φ, 380~415 V, 50 Hz				
	Compressor	Type	-	BLDC Twin Rotary		BLDC Twin Rotary		BLDC Twin Rotary				
	Base Heater	Capacity	kW	0.15		0.15		0.15				
	Sound	Sound Pressure ⁴	Heating Std	dB(A)	48		50		52			
			Cooling Std	dB(A)	48		50		54			
		Sound Power	Heating Std	dB(A)	63		64		66			
	Dimensions	Net Weight	kg	75.0		111.0		111.0				
		Net Dimensions (WxHxD)		mm	940 x 998 x 330		940 x 1,420 x 330		940 x 1,420 x 330			
	Refrigerant	Type	R32 (Fluorinated greenhouse gas, GWP=675)									
		Factory Charging	tCO ₂ e	0.78		1.49		1.49				
			kg	1.15		2.20		2.20				
	Piping	Water Pipe (Space Heating)	Inlet/ Outlet	Φ, mm	28/28		28/28		28/28			
	Operation	Ambient Temperature	Heating	°C	-25~35		-25~35		-25~35			
			Cooling	°C	10~46		10~46		10~46			
			DHW	°C	-25~43		-25~43		-25~43			



*A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³65°C down to +10°C (max. 60°C down to -5°C)

⁴Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.



Specifications

Mono with Third Party DHW Tank R32

- Intuitive, colour screen touch controller in multiple languages
- Energy monitoring through touch controller
- PV and Smart Grid ready
- 2-zone Control, suitable for floor heating and radiators
- SmartThings compatible with optional Wi-Fi kit

				Outdoor Unit	AE050RXYDEG/EU	AE080RXYDEG/EU		
				Control Kit	MIM-E03CN	MIM-E03CN		
System	Operation	Nominal Capacity	Heating A7/W35 ¹ / A7/W55 ²	kW	5.0/4.3	8.0/7.1	12.0/11.3	
			Cooling A35/W18 ¹	kW	5.0	7.5	12.0	
		Power Input (Nominal)	Heating A7/W35 ¹ / A7/W55 ²	kW	1.03/1.52	1.77/2.53	2.65/3.73	
			Cooling A35/W18 ¹	kW	1.14	1.90	2.77	
		COP (Nominal Heating) A7/W35 ¹ / A7/W55 ²	W/W	4.85/2.83	4.52/2.81	4.55/3.03		
		EER (Nominal Cooling) A35/W18 ¹	W/W	4.39	3.95	4.33		
		Seasonal space heating enr. efficiency η _s LWT 35°C/ 55°C	ETA%	175/ 125	175/ 126	185/ 138		
		Seasonal space heating eff. class** LWT 35°C/ 55°C	-	A+++ / A++	A+++ / A++	A+++ / A++		
		Current	MCA	A	16.00	22.00	28.00	
			MFA	A	20.00	27.50	35.00	
	Leaving Water Temperature ²	Heating	°C	15-65	15-65	15-65		
		Cooling	°C	5-25	5-25	5-25		
	Functions	Smart Grid Ready / PV Enabled	-	●	●	●		
		3-Step Quiet Mode	-	●	●	●		
		2-zone Control	-	●	●	●		
Outdoor Unit	Power Supply			Φ, V, Hz	1Φ, 220-240 V, 50 Hz	1Φ, 220-240 V, 50 Hz	1Φ, 220-240 V, 50 Hz	
	Compressor	Type			-	BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary
	Base Heater	Capacity			kW	-	0.15	0.15
	Sound	Sound Pressure ⁴	Heating Std	dB(A)	45	48	50	
			Cooling Std	dB(A)	45	48	50	
		Sound Power	Heating Std	dB(A)	61	63	64	
	Dimensions	Net Weight			kg	58.5	76.0	110.0
		Net Dimensions (WxHxD)			mm	880 x 798 x 310	940 x 998 x 330	940 x 1,420 x 330
	Piping	Water Pipe	Inlet/ Outlet	Φ, mm	25/ 25	25/ 25	25/ 25	
	Refrigerant	Type	R32 (Fluorinated greenhouse gas, GWP=675)					
		Factory Charging			tCO ₂ e	0.68	0.78	1.49
					kg	1.00	1.15	2.20
	Operation	Ambient Temperature	Heating	°C	-25-35	-25-35	-25-35	
			Cooling	°C	10-46	10-46	10-46	
			DHW	°C	-25-43	-25-43	-25-43	

Accessories				
				
Mono Control Kit	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor
MIM-E03CN	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA

AE160RXYDEG/EU	AE080RXYDGG/EU	AE120RXYDGG/EU	AE160RXYDGG/EU
MIM-E03CN	MIM-E03CN	MIM-E03CN	MIM-E03CN
16.0/15.0	8.0/7.1	12.0/11.3	16.0/15.0
14.0	7.5	12.0	14.0
3.62/5.18	1.77/2.53	2.65/3.73	3.62/5.18
3.28	1.90	2.77	3.28
4.42/2.90	4.52/2.81	4.53/3.03	4.42/2.90
4.27	3.95	4.33	4.27
176/ 138	175/ 126	185/ 138	176/ 138
A+++ / A++	A+++ / A++	A+++ / A++	A+++ / A++
32.00	10.00	10.00	12.00
40.00	16.10	16.10	16.10
15~65	15~65	15~65	15~65
5~25	5~25	5~25	5~25
•	•	•	•
•	•	•	•
•	•	•	•
1Φ, 220~240 V, 50 Hz	3Φ, 380~415 V, 50 Hz	3Φ, 380~415 V, 50 Hz	3Φ, 380~415 V, 50 Hz
BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary
0.15	0.15	0.15	0.15
52	48	50	52
54	48	50	54
66	63	64	66
110.0	75.0	111.0	111.0
940 x 1,420 x 330	940 x 998 x 330	940 x 1,420 x 330	940 x 1,420 x 330
25/ 25	25/ 25	25/ 25	25/ 25
	R32 (Fluorinated greenhouse gas, GWP=675)		
1.49	0.78	1.49	1.49
2.20	1.15	2.20	2.20
-25~35	-25~35	-25~35	-25~35
10~46	10~46	10~46	10~46
-25~43	-25~43	-25~43	-25~43



*A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].


²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³65°C down to +10°C (max. 60°C down to -5°C)

⁴Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.


Dimensional Drawings

Mono Tank Integrated Hydro Unit

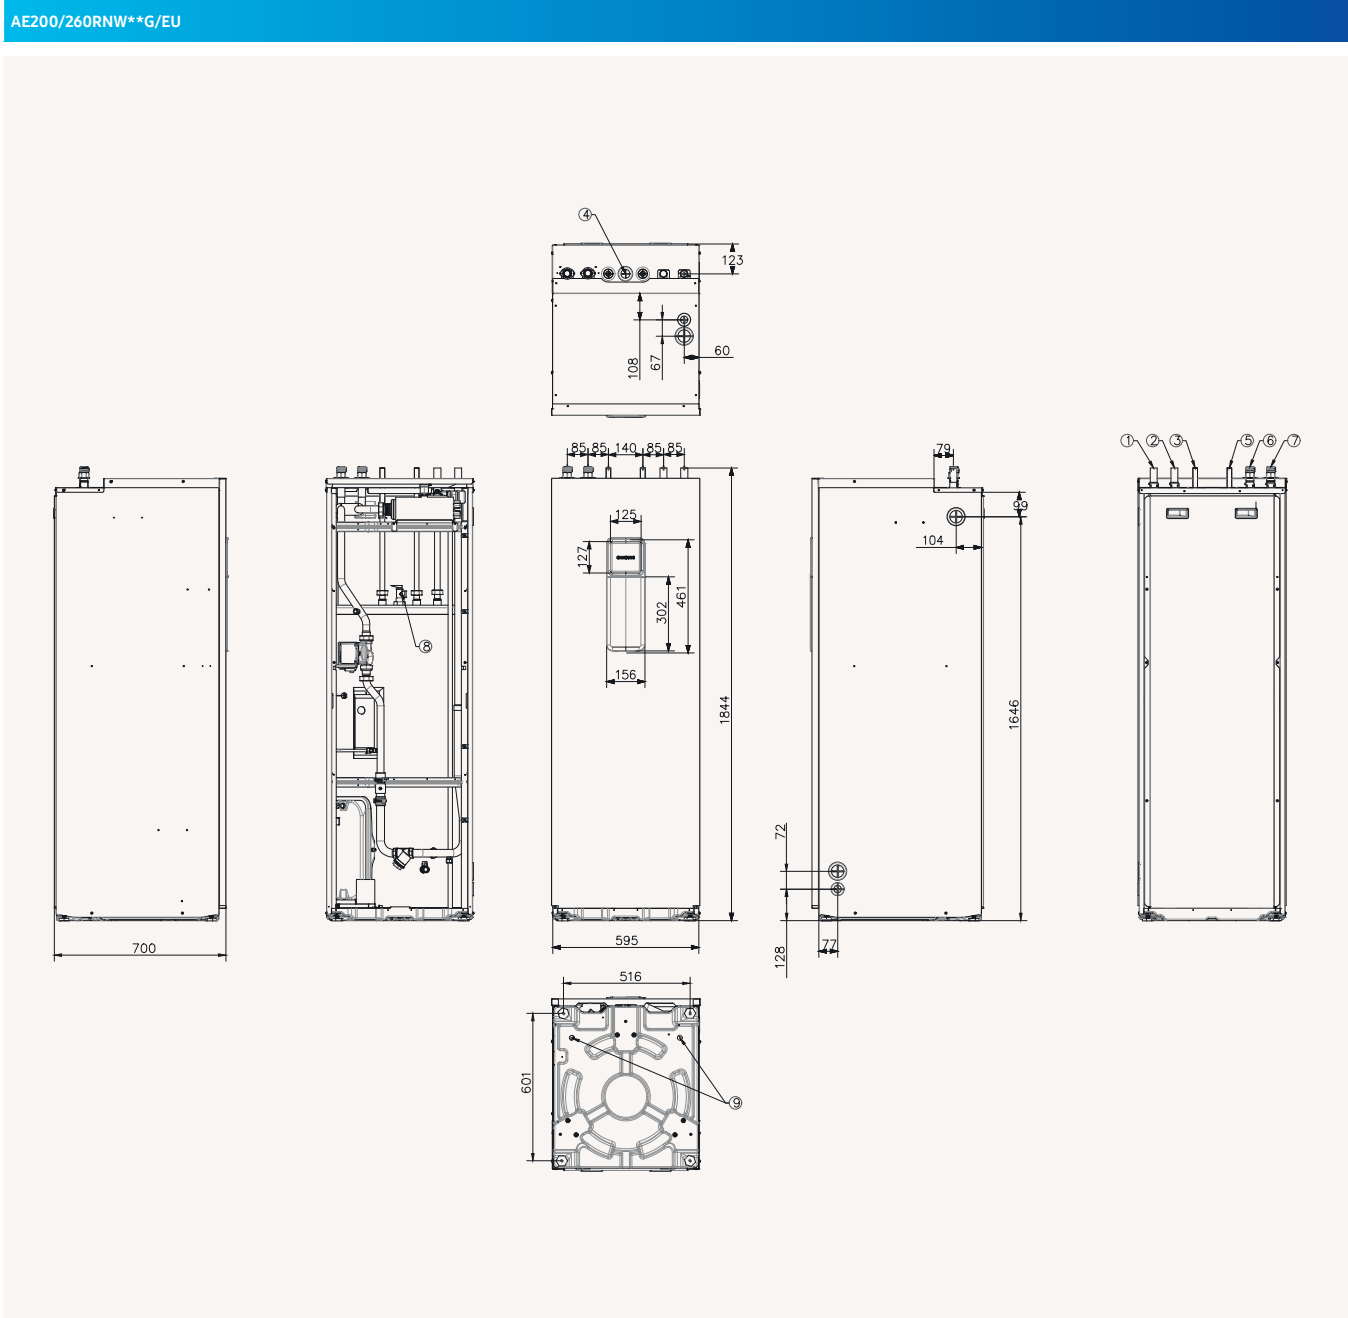

NO	Name	Description
		AE200RNWMEG/EU
1	Space heating Inlet	ø28
2	Space heating Outlet	ø28
3	DHW Inlet	ø22
4	Secondary water return	N/A
5	DHW Outlet	ø22
6	Heat Pump In	ø28
7	Heat Pump Out	ø28
8	T/Pv/v	Female PT 1/2"
9	Drain Holes	(Option) Connect with the provided drain plug


Mono Outdoor

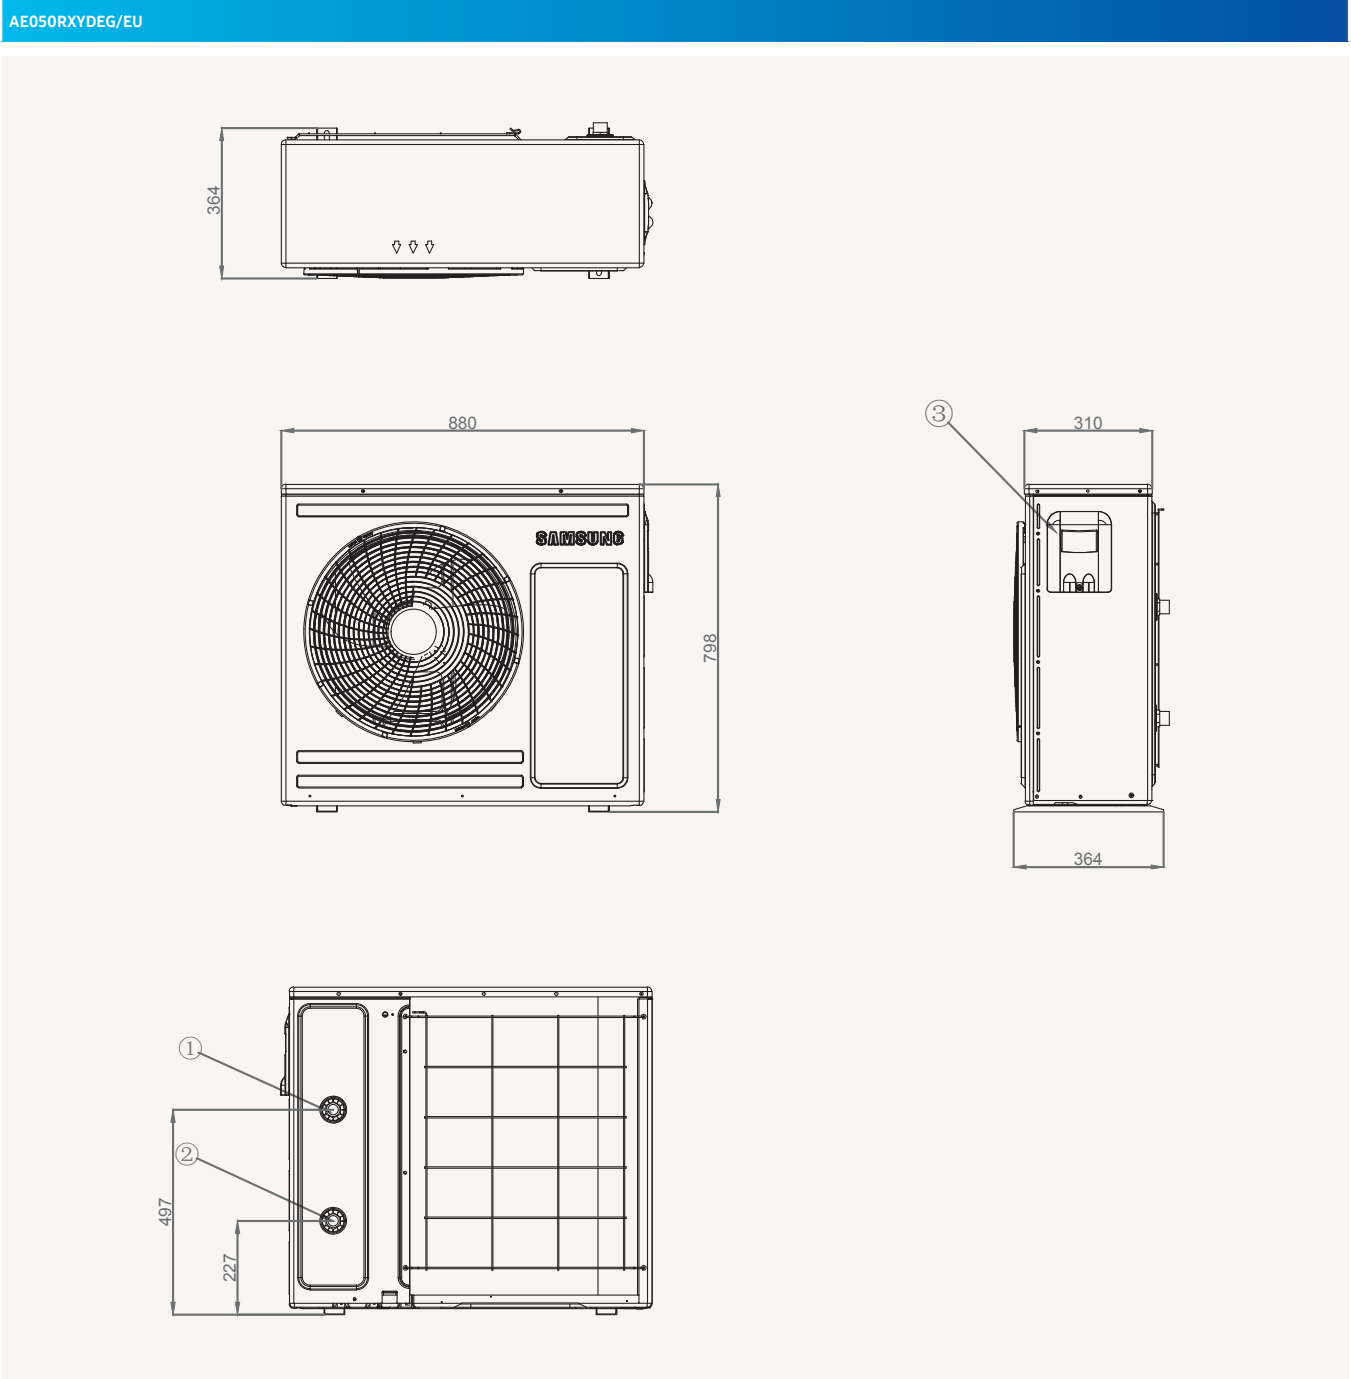

NO	Name	Description
1	Water Pipe(Out)	BSPP male 1"
2	Water Pipe(In)	BSPP male 1"
3		Power & Communication Wiring Conduit Holes


Dimensional Drawings

Mono Outdoor

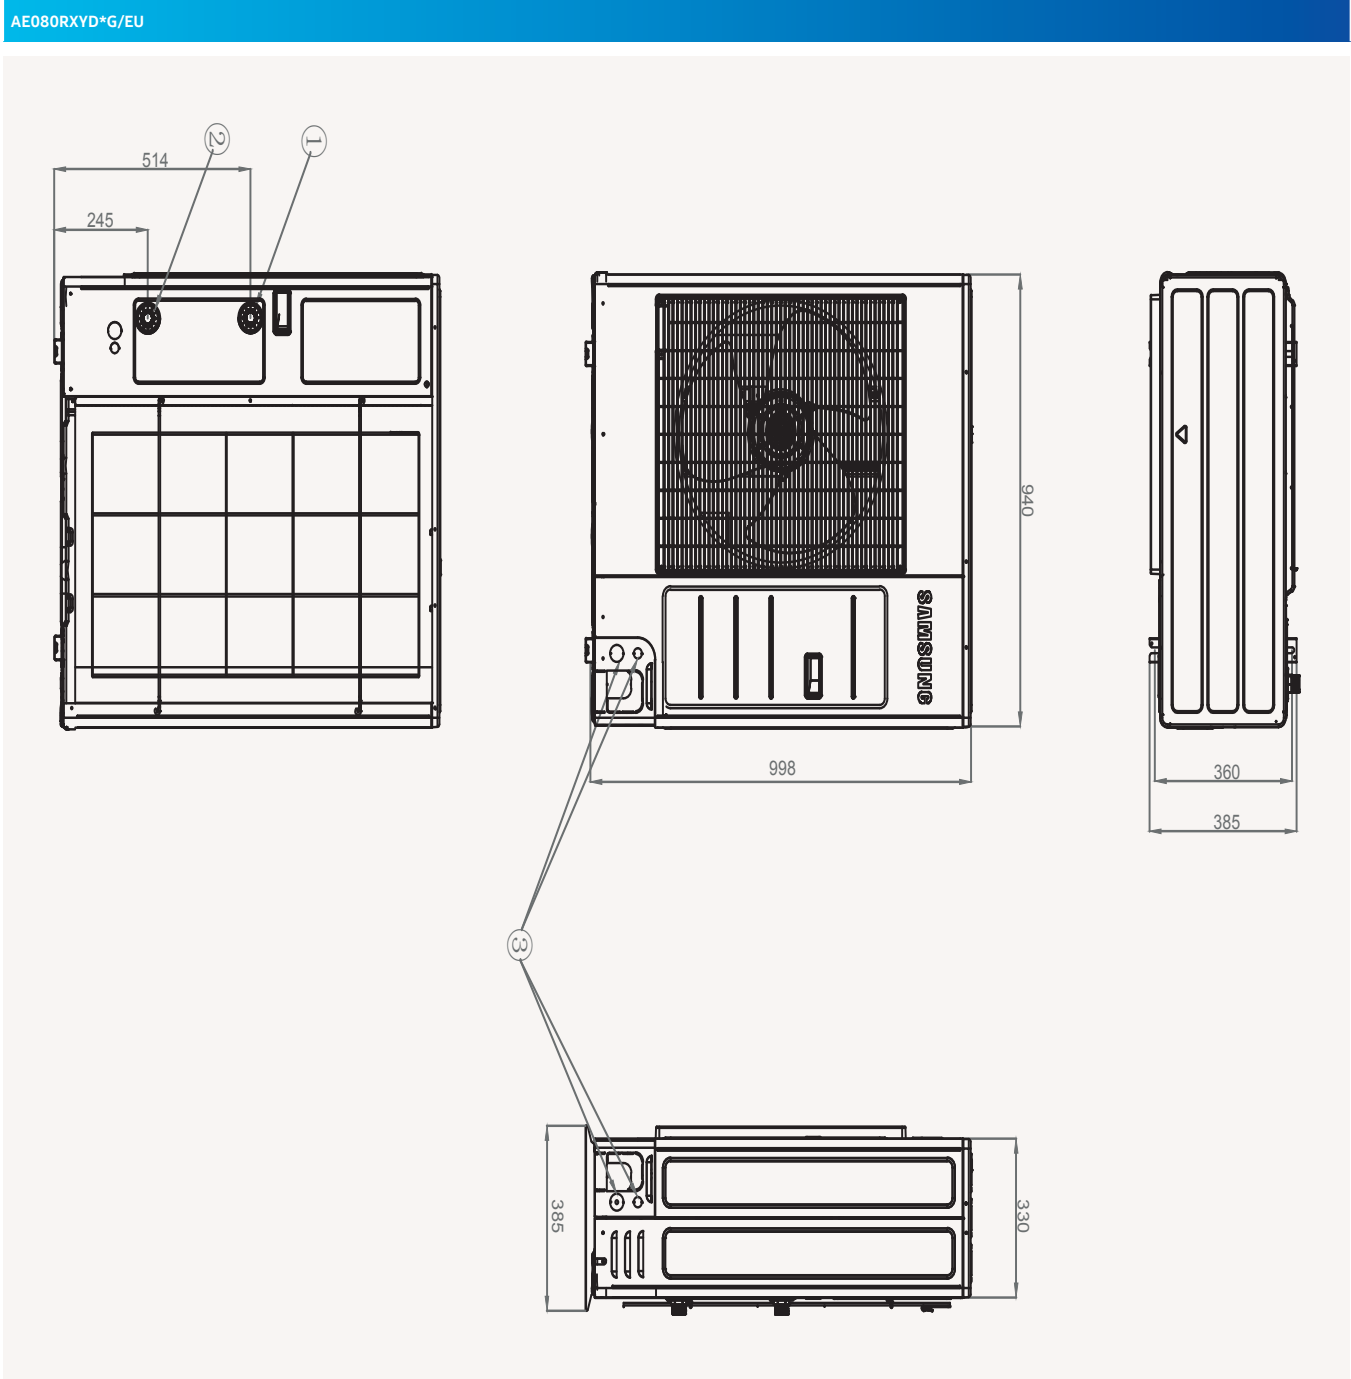

NO	Name	Description
1	Water Pipe(Out)	BSPP male 1"
2	Water Pipe(In)	BSPP male 1"
3	Power & Communication Wiring Conduit Holes	


Mono Outdoor

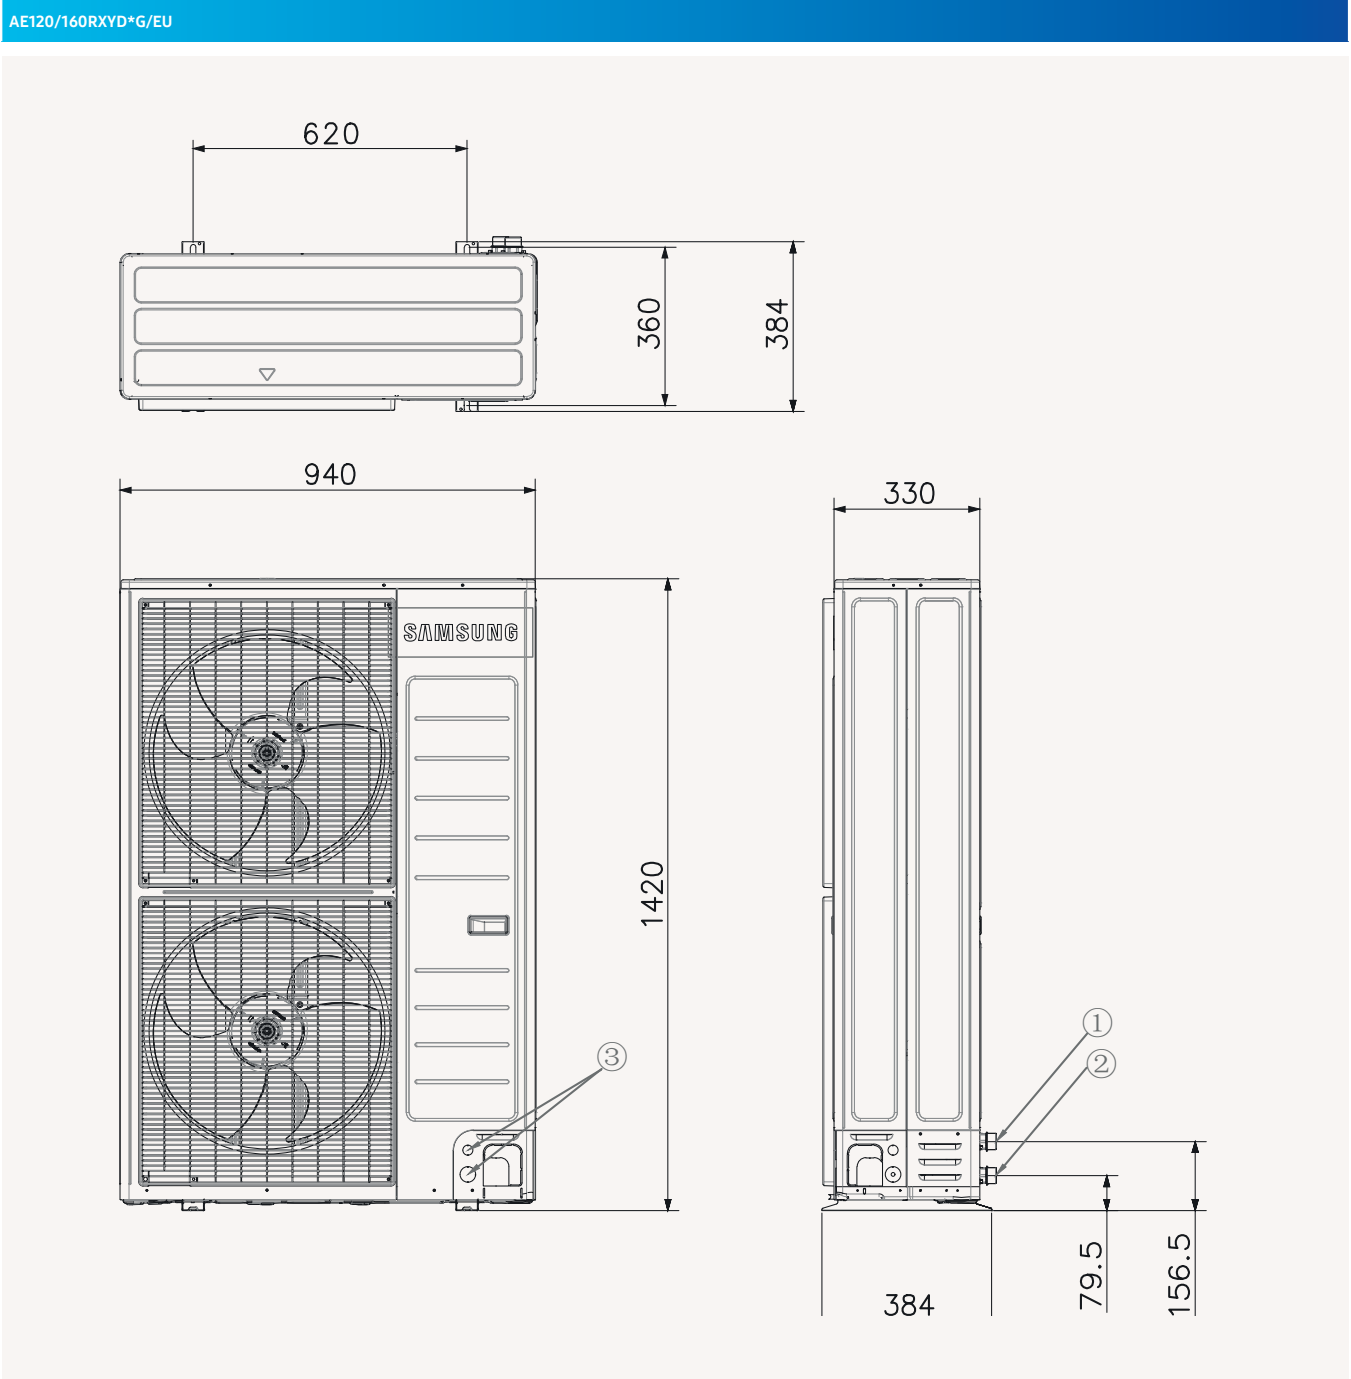

NO	Name	Description
1	Water Pipe(Out)	BSPP male 1"
2	Water Pipe(In)	BSPP male 1"
3	Power & Communication Wiring Conduit Holes	

Dimensional Drawings

Mono Control Kit

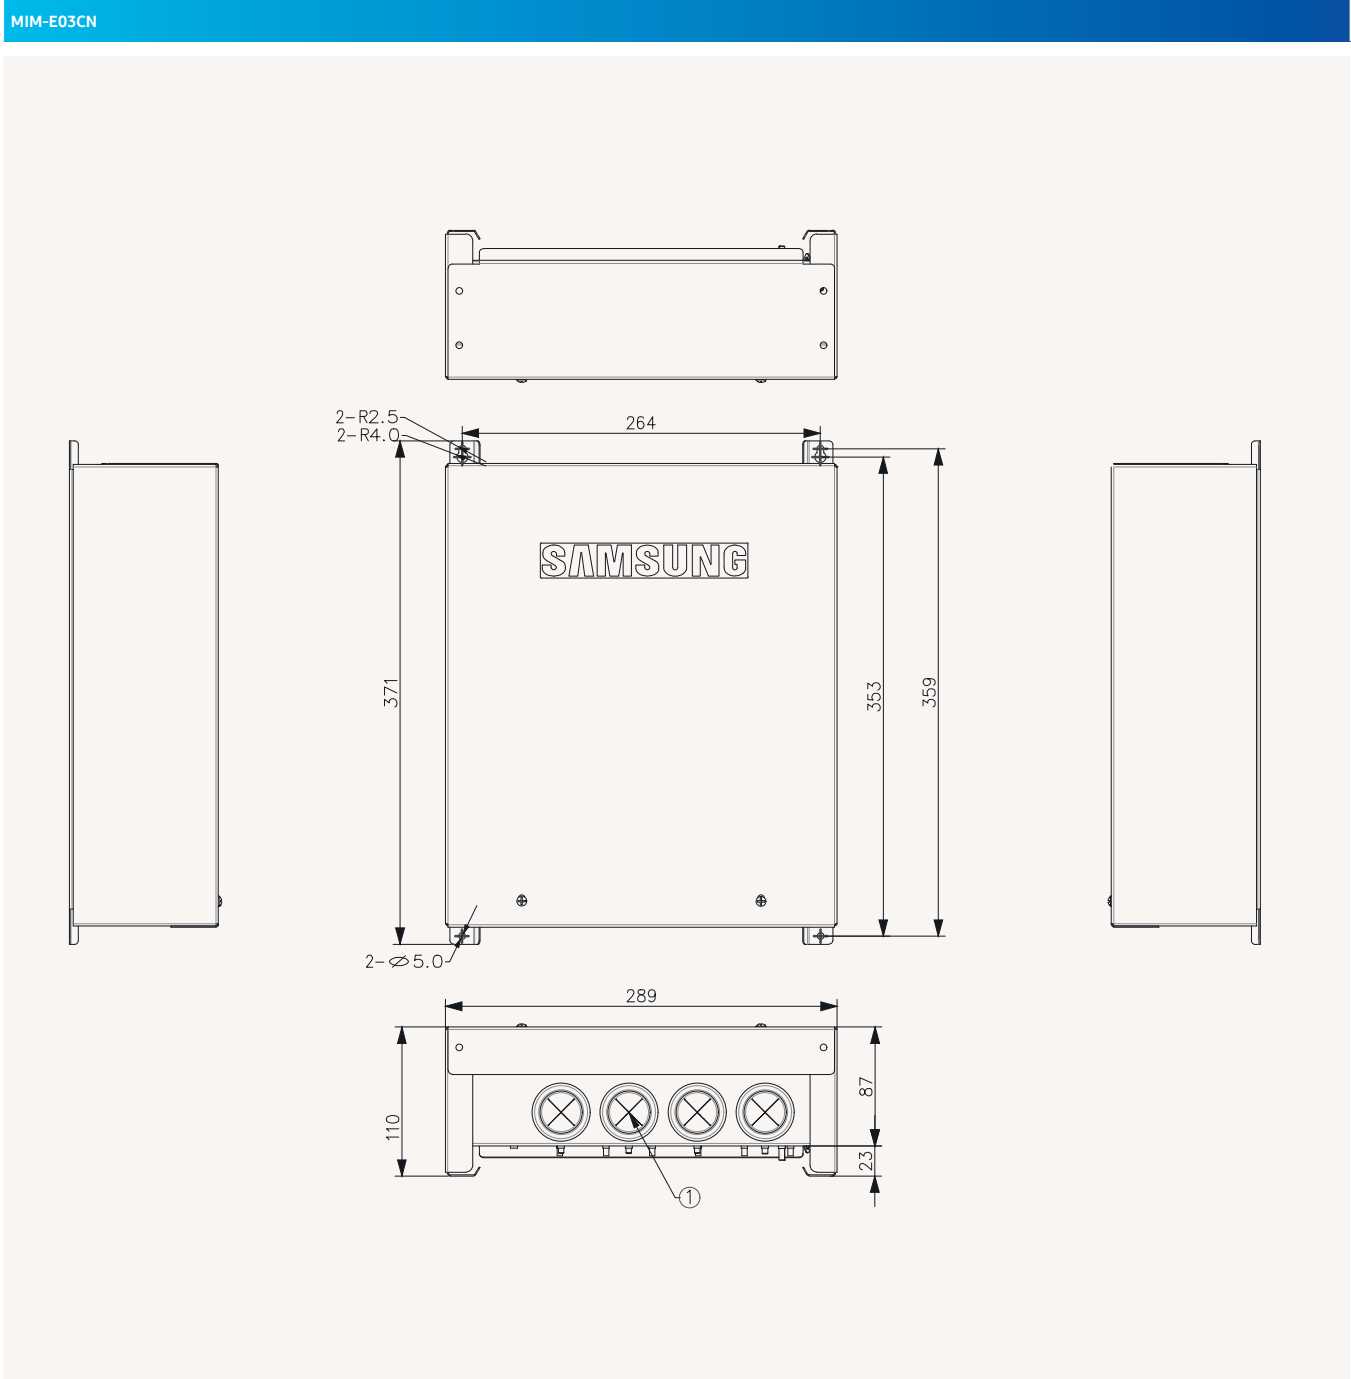

NO	Name
1	Conduit Holes for Wiring (Rubber)



Split

Specifications

ClimateHub Split

R32

- Integrated solution for heating and domestic hot water
- 4-step quiet operation mode (down to 35 db(A)¹)
- Compact unit size with large water tank (200 L & 260 L)

   												
		Indoor Unit			AE200RNWSEG/EU		AE200RNWSEG/EU		AE200RNWSEG/EU			
		Outdoor Unit			AE040RXEDEG/EU		AE040RXEDEG/EU		AE090RXEDEG/EU			
		Controller			MWR-WW10N		MWR-WW10N		MWR-WW10N			
System	Operation	Nominal Capacity	Heating A7/W35¹ / A7/W55²		kW		4.4/3.9		6.0/5.2		9.0/8.0	
			Cooling A35/W18¹		kW		5.0		6.5		8.7	
		Power Input (Nominal)	Heating A7/W35¹ / A7/W55²		kW		0.85/1.32		1.22/1.81		1.87/2.73	
			Cooling A35/W18¹		kW		1.09		1.47		2.11	
		COP (Nominal Heating) A7/W35¹ / A7/W55²		W/W		5.20/2.95		4.92/2.87		4.81/2.93		
		EER (Nominal Cooling) A35/W18¹		W/W		4.59		4.42		4.12		
		SCOP LWT 35°C/ 55°C		W/W		4.58/3.25		4.58/3.31		4.45/3.24		
		Seasonal space heating enr. efficiency ηs LWT 35°C/ 55°C		ETA%		180/ 127		180/ 129		175/ 127		
		Average Seasonal space heating eff. class ** LWT 35°C/ 55°C		-		A+++ / A++		A+++ / A++		A+++ / A++		
		Current	MCA	A	16.00		16.00		22.00			
	MFA		A	20.00		20.00		27.50				
	Leaving Water Temperature³	Heating	°C	15~65		15~65		15~65				
		Cooling	°C	5~25		5~25		5~25				
	Functions	Smart Grid Ready / PV Enabled		-		●		●		●		
		4-Step Quiet Mode		-		●		●		●		
2-zone Control		-		●		●		●				
Tank Integrated Hydro Unit	Power Supply		Φ, #, V, Hz		1Φ, 2, 220~240 V, 50 Hz		1Φ, 2, 220~240 V, 50 Hz		1Φ, 2, 220~240 V, 50 Hz			
	Water Tank Volume		litres		200		200		200			
	Declared Load Profile		L/XL		L		L		L			
	Average water heating efficiency ηwh		ETA%		120		120		119			
	Average Energy Efficiency Class				A+		A+		A+			
	Heater	Back-up heater Capacity	Default (Option)	kW	2 (4/6)		2 (4/6)		2 (4/6)			
	Sound	Sound Pressure⁴	Heating Std	dB(A)	26		26		26			
			Cooling Std	dB(A)	26		26		26			
		Sound Power	Heating Std	dB(A)	40		40		40			
	Piping	Water pipe (Space Heating)	Inlet/Outlet	Φ, mm	28/28		28/28		28/28			
Water pipe (DHW)		Inlet/Outlet	Φ, mm	22/22		22/22		22/22				
Dimensions	Net Weight			kg		136		136				
	Net Dimensions (WxHxD)			mm		595 x 1,800 x 700		595 x 1,800 x 700				
Outdoor Unit	Power Supply		Φ, V, Hz		1Φ, 220~240 V, 50 Hz		1Φ, 220~240 V, 50 Hz		1Φ, 220~240 V, 50 Hz			
	Compressor	Type	-		BLDC Twin Rotary		BLDC Twin Rotary		BLDC Twin Rotary			
	Base Heater	Capacity	kW		-		-		0.15			
	Sound	Sound Pressure⁴	Heating Std	dB(A)	44		47		49			
			Cooling Std	dB(A)	46		47		49			
			Night Mode	dB(A)	<35		35		35			
		Sound Power	Heating Std	dB(A)	58		60		64			
	Dimensions	Net Weight	kg		46.5		46.5		73.0			
		Net Dimensions (WxHxD)	mm		880 x 638 x 310		880 x 638 x 310		940 x 998 x 330			
		Refrigerant	Type	-		R32 (Fluorinated greenhouse gas, GWP=675)						
		Factory Charging		tCO₂e	0.81		0.81		0.95			
				kg	1.2		1.2		1.4			
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	6.35 (1/4")		6.35 (1/4")		6.35 (1/4")			
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")		15.88 (5/8")		15.88 (5/8")			
		Piping length (ODU-IDU)⁵	Max.[Equiv.]	m	30.00		30.00		35.00			
			Level difference (IDU-IDU)⁵	Max.	m	20.00		20.00		20.00		
		Operation	Ambient Temperature	Heating	°C	-25~35		-25~35		-25~35		
	Cooling			°C	10~46		10~46		10~46			
	DHW			°C	-25~43		-25~43		-25~43			

Specifications

Split with Third Party DHW Tank R32

- Connectable with R32 Split Outdoor Unit in combination of third party Tank
- Competible with thermostats, solar panels and back-up boilers
- Intuitive, colour screen touch controller in multiple languages
- Energy monitoring through touch controller
- PV and Smart Grid ready
- 2-zone Control, suitable for floor heating and radiators
- SmartThings compatible with optional Wi-Fi kit



	Indoor Unit		Outdoor Unit		AE090RNYDEG/EU	AE090RNYDEG/EU	AE090RNYDEG/EU
					AE040RXDEG/EU	AE060RXDEG/EU	AE090RXDEG/EU
System	Operation	Nominal Capacity	Heating A7/W35 ¹ / A7/W55 ²	kW	4.4/3.9	6.0/5.2	9.0/8.0
			Cooling A35/W18 ¹	kW	5.0	6.5	8.7
		Power Input (Nominal)	Heating A7/W35 ¹ / A7/W55 ²	kW	0.85/1.32	1.22/1.81	1.87/2.73
			Cooling A35/W18 ¹	kW	1.09	1.47	2.11
		COP (Nominal Heating) A7/W35 ¹		W/W	5.20/2.95	4.92/2.87	4.81/2.93
		EER (Nominal Cooling) A35/W18 ¹		W/W	4.59	4.42	4.12
		Seasonal space heating enr. efficiency η _s LWT 35°C/ 55°C		ETA%	180/ 127	180/ 129	175/ 127
		Seasonal Space Heating Eff. Class LWT 35°C/ 55°C		-	A+++ / A++	A+++ / A++	A+++ / A++
		Current	MCA	A	16.00	16.00	22.00
			MFA	A	20.00	20.00	27.50
		Leaving Water Temperature ²	Heating	°C	15~65	15~65	15~65
			Cooling	°C	5~25	5~25	5~25
	Functions	Smart Grid Ready / PV Enabled		-	•	•	•
		4-Step Quiet Mode		-	•	•	•
		2-zone Control		-	•	•	•
Wall-Mounted Hydro Unit	Power Supply			Φ, V, Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
	Heater	Back-up heater Capacity	Default (Option)	kW	4	4	4
	Sound	Sound Pressure ³	Heating Std	dB(A)	26	26	26
			Cooling Std	dB(A)	26	26	26
			Heating Std	dB(A)	40	40	40
	Dimensions	Net Weight		kg	45,0	45,0	45,0
		Net Dimensions (WxHxD)		mm	510 x 850 x 315	510 x 850 x 315	510 x 850 x 315
Outdoor unit	Piping	Water pipe	Inlet/Outlet	Φ, inch	1+1/4"	1+1/4"	1+1/4"
	Compressor	Type		-	BLDC Twin Rotary	BLDC Twin Rotary	BLDC Twin Rotary
	Base Heater	Capacity		kW	-	-	0.15
	Sound	Sound Pressure ³	Heating Std	dB(A)	44	47	49
			Cooling Std	dB(A)	46	47	49
			Heating Std	dB(A)	58	60	64
	Dimensions	Net Weight		kg	46.5	46.5	73.0
		Net Dimensions (WxHxD)		mm	880 x 638 x 310	880 x 638 x 310	940 x 998 x 330
	Refrigerant	Type			R32 (Fluorinated greenhouse gas, GWP=675)		
		Factory Charging		tCO ₂ e	1.2	1.2	1.4
				kg	0.81	0.81	0.95
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
		Piping length (ODU-IDU) ⁴	Max. [Equiv.]	m	30	30	35
		Level difference (IDU-IDU) ⁴	Max.	m	20	20	20
		Chargeless Length		Φ, mm	15	15	15
	Operation	Ambient Temperature	Heating	°C	-25~35	-25~35	-25~35
			Cooling	°C	10~46	10~46	10~46
			DHW	°C	-25~43	-25~43	-25~43

Accessories



Touch Controller (included)	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor
MWR-WW10N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA



AE090RNYDGG/EU	AE090RXEDGG/EU
9.0/8.0	
8.7	
1.87/2.73	
2.11	
4.81/2.93	
4.12	
175/127	
A+++ / A++	
10.00	
16.10	
15~65	
5~25	
•	
•	
•	
3Φ, 2, 380~415 V, 50 Hz	
6	
26	
26	
40	
46.5	
510 x 850 x 315	
1+1/4"	
BLDC Twin Rotary	
0.15	
49	
49	
64	
72.0	
940 x 998 x 330	
R32 (Fluorinated greenhouse gas, GWP=675)	
1.4	
0.95	
6.35 (1/4")	
15.88 (5/8")	
35	
20	
15	
-25~35	
10~46	
-25~43	



**A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

⁴ODU : Outdoor Unit, IDU : Indoor Unit

Specifications

Split with Third Party DHW Tank (R410A)

- Connectable with R410A Split Outdoor Unit in combination of third party Tank
- Competitive with room thermostats, solar pumps, 2- or 3-way valves and back-up boilers

															
	Indoor Unit			AE160JNYDEH/EU		AE160JNYDGH/EU		AE160JNYDEH/EU							
	Outdoor Unit			AE120JXEDEH/EU		AE120JXEDGH/EU		AE160JXEDEH/EU							
System	Operation	Nominal Capacity	Heating A7/W35 ¹	kW	12.0		12.0		16.0						
			Cooling A35/W18 ¹	kW	12.0		12.0		15.0						
		Power Input (Nominal)	Heating A7/W35 ¹	kW	2.59		2.59		3.76						
			Cooling A35/W18 ¹	kW	3.10		3.10		4.14						
		COP (Nominal Heating) A7/W35 ¹		W/W	4.63		4.63		4.26						
		EER (Nominal Cooling) A35/W18 ¹		W/W	3.87		3.87		3.62						
		Seasonal space heating enr.efficiency ηs LWT 35°C/ 55°C		ETA%	184/ 107		184/ 107		173/ 115						
		Seasonal Space Heating Eff. Class LWT 35°C/ 55°C		-	A+++ / A+		A+++ / A+		A++ / A+						
		Current	MCA	A	28.00		10.00		32.00						
			MFA	A	35.00		16.10		37.50						
	Leaving Water Temperature	Heating	°C	25-55		25-55		25-55							
		Cooling	°C	5-25		5-25		5-25							
	Functions	Smart Grid Ready/PV Enabled		-	-		-		-						
		3-Step Quiet Mode		-	●		●		●						
		2-zone Control ²		-	●		●		●						
	Wall-Mounted Hydro Unit	Power Supply			Φ, V, Hz	1Φ, 2, 220-240 V, 50 Hz		3Φ, 2, 380-415 V, 50 Hz		1Φ, 2, 220-240 V, 50 Hz					
Heater		Capacity		kW	6		6		6						
Sound		Sound Pressure ³	Heating Std	dB(A)	33		33		33						
			Cooling Std	dB(A)	33		33		33						
Sound Power		Heating Std	dB(A)	47		47		47							
			dB(A)	47		47		47							
Piping		Water pipe	Inlet/Outlet	Φ, inch	1+1/4"		1+1/4"		1+1/4"						
Dimensions		Net Weight		kg	45.0		46.5		45.0						
		Net Dimensions (WxHxD)		mm	510 x 850 x 315		510 x 850 x 315		510 x 850 x 315						
Outdoor unit	Compressor	Type	-							BLDC Twin Rotary		BLDC Twin Rotary		BLDC Twin Rotary	
	Base Heater	Capacity		kW	0.15		0.15		0.15		0.15		0.15		
	Sound	Sound Pressure ³	Heating Std	dB(A)	50		50		50		52		54		
			Cooling Std	dB(A)	50		50		50		54				
	Sound Power	Heating Std	dB(A)	64		64		64		66		66			
			dB(A)	64		64		64		66					
	Dimensions	Net Weight		kg	100.0		101.5		100.0		100.0		100.0		
		Net Dimensions (WxHxD)		mm	940 x 1,420 x 330		940 x 1,420 x 330		940 x 1,420 x 330		940 x 1,420 x 330		940 x 1,420 x 330		
	Refrigerant	Type	R410A (Fluorinated greenhouse gas, GWP=2,088)												
		Factory Charging		tCO ₂ e	6.22		6.22		6.22		6.22		6.22		
				kg	2.98		2.98		2.98		2.98		2.98		
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	9.52 (3/8")		9.52 (3/8")		9.52 (3/8")		9.52 (3/8")		9.52 (3/8")		
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")		15.88 (5/8")		15.88 (5/8")		15.88 (5/8")		15.88 (5/8")		
		Piping length (ODU-IDU) ⁴	Max.[Equiv.]	m	50		50		50		50		50		
		Level difference (IDU-IDU) ⁴	Max.	m	30		30		30		30		30		
Operation	Ambient Temperature	Chargeless Length	Φ, mm	15		15		15		15		15			
		Heating	°C	-25-35		-25-35		-25-35		-25-35		-25-35			
		Cooling	°C	10-46		10-46		10-46		10-46		10-46			
		DHW	°C	-25-43		-25-43		-25-43		-25-43		-25-43			

Accessories				
				
EHS Controller (included)	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor
MWR-WW00N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA

AE160JNYDGH/EU
AE160JXEDGH/EU
16.0
15.0
3.76
4.14
4.26
3.62
173/ 115
A++ / A+
12.00
16.10
25~55
5~25
-
•
•
3Φ, 2, 380~415 V, 50 Hz
6
33
33
47
1+1/4"
46.5
510 x 850 x 315
BLDC Twin Rotary
0.15
52
54
66
101.5
940 x 1,420 x 330
R410A (Fluorinated greenhouse gas, GWP=2,088)
6.22
2.98
9.52 (3/8")
15.88 (5/8")
50
30
15
-25~35
10~46
-25~43



¹A2W Conditions : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].


² Not provided by Samsung.

³ Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

⁴ ODU: Outdoor Unit, IDU: Indoor Unit


Dimensional Drawings

Split Tank Integrated Hydro Unit

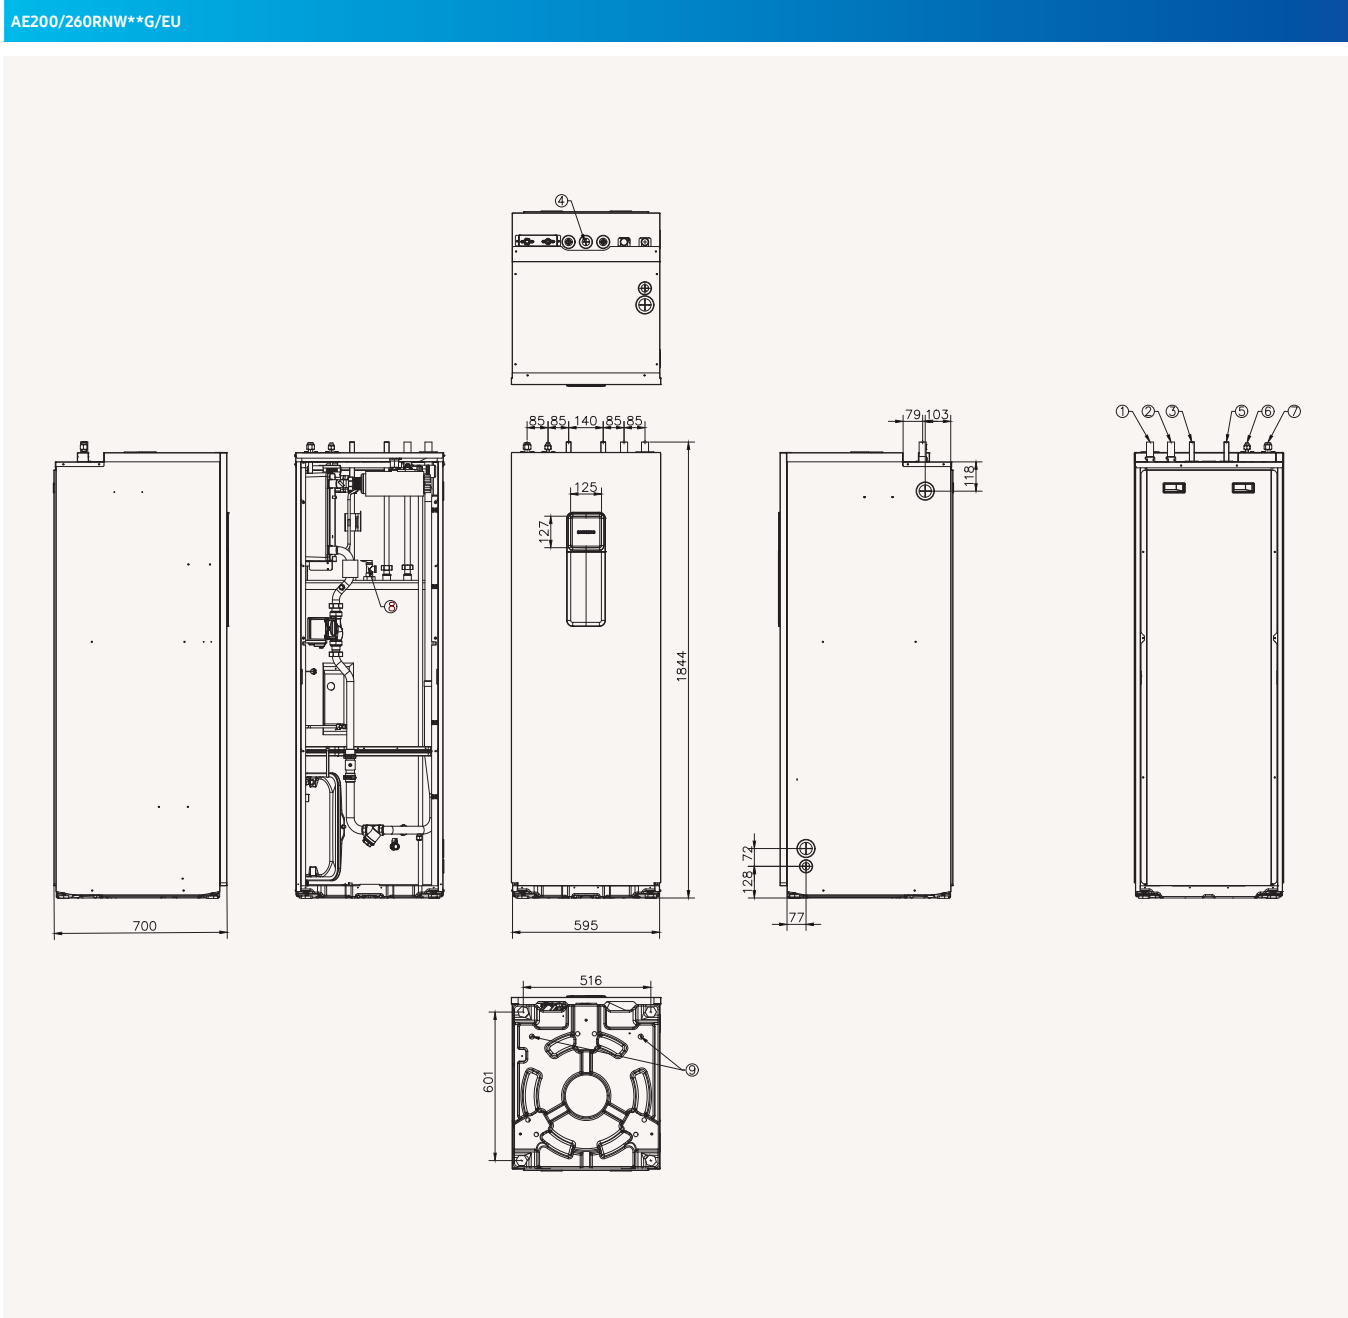

NO	Name	Description	
		AE200RNWSEG/EU	AE260RNWS*G/EU
1	Space heating Inlet	Ø28	Ø28
2	Space heating Outlet	Ø28	Ø28
3	DHW Inlet	Ø22	Ø22
4	Secondary water return	N/A	Ø22
5	DHW Outlet	Ø22	Ø22
6	Refrigerant liquid pipe	Ø9.52	Ø9.52
7	Refrigerant gas pipe	Ø15.88	Ø15.88
8	T/Pv/v	Female PT1/2"	Female PT1/2"
9	Drain Holes	(Option) Connect with the provided drain plug	

Split Outdoor

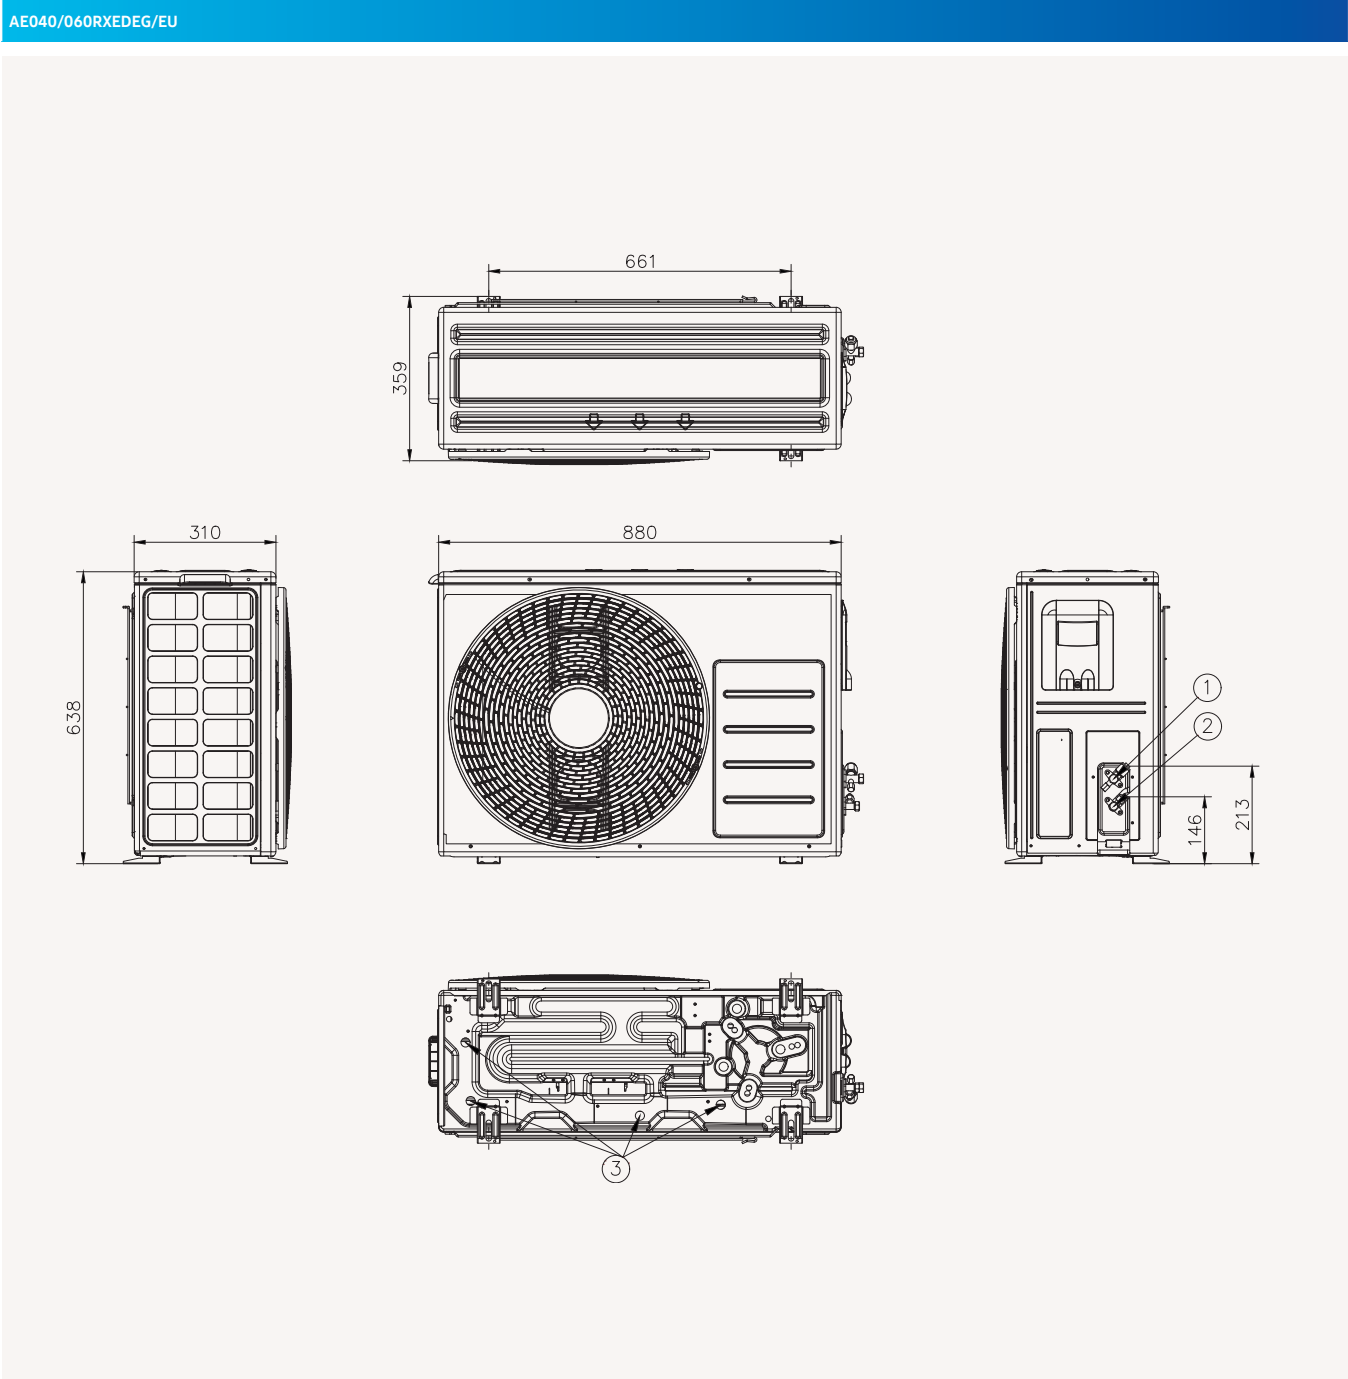


NO	Name	Description
1	Refrigerant liquid pipe	Ø6.35(1/4)
2	Refrigerant gas pipe	Ø15.88(5/8)
3	Drain holes	Connect with the provided drain plug.

Dimensional Drawings

Split Outdoor


AE090RXED*G/EU

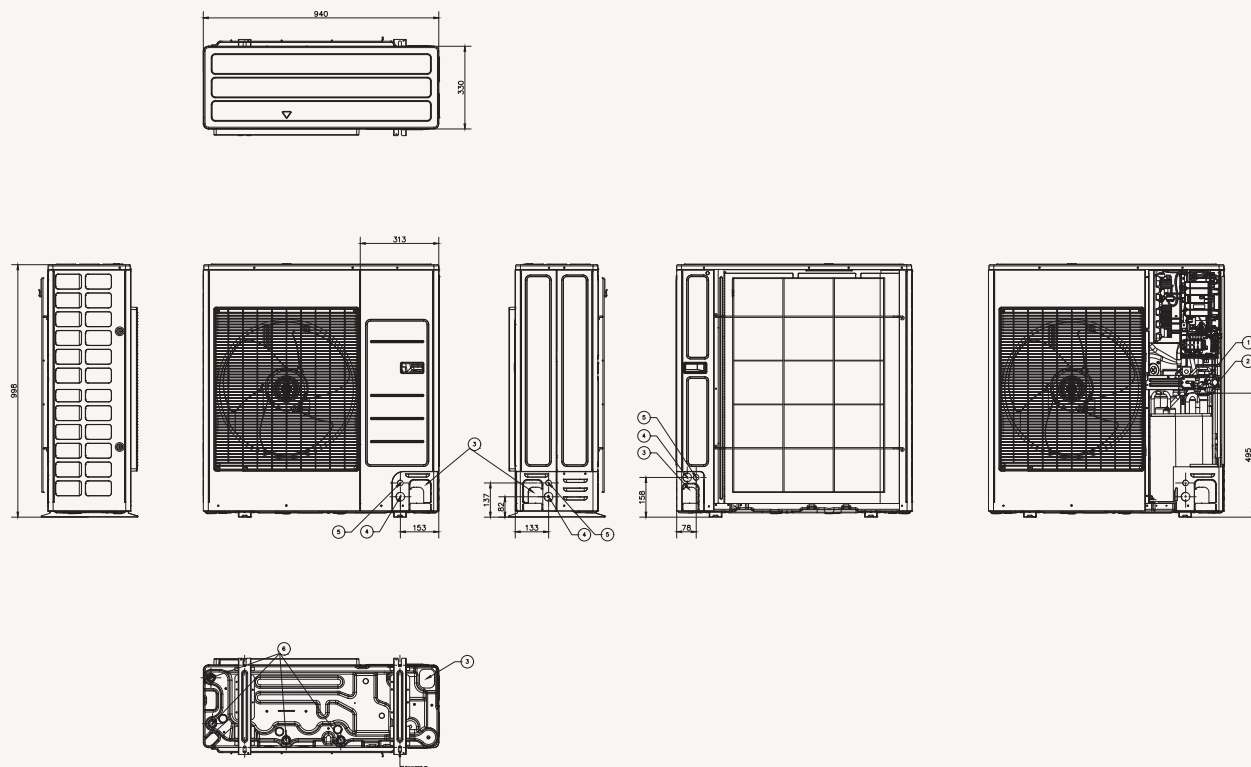

NO	Name	Description
1	Refrigerant gas pipe	Φ6.35(1/4)
2	Refrigerant liquid pipe	Φ15.88(5/8)
3	Piping intake knockout hole	Front / Side / Rear / Bottom
4	Power wiring conduit	Front / Side / Rear, Φ34 [1-3/8]
5	Communication wiring conduit	Front / Side / Rear, Φ22 [7/8]
6	Drain Hole	Connect with the provided drain plug

Split Outdoor

AE120/160JXED*H/EU

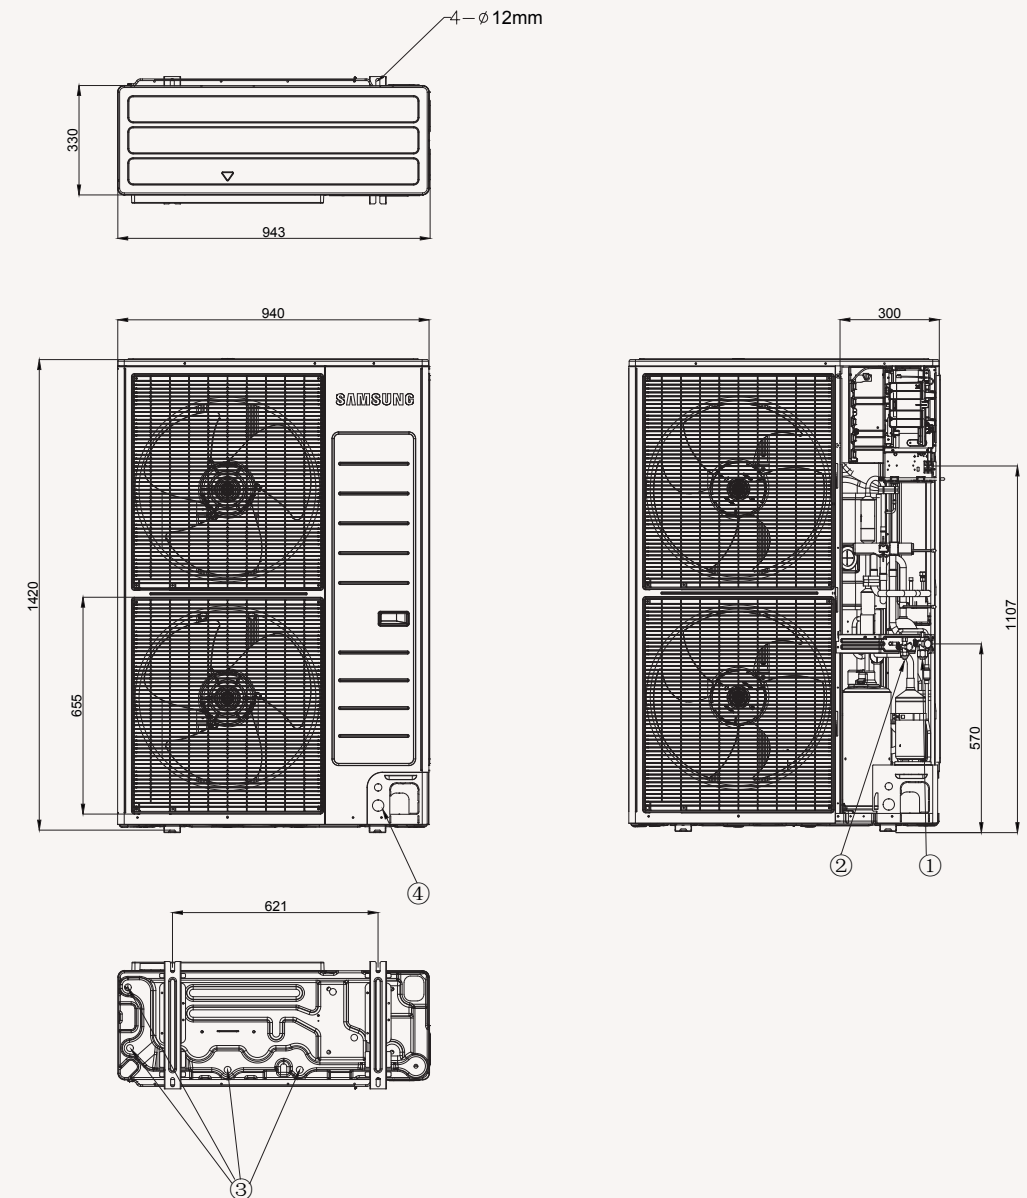


NO	Name	Description
1	Refrigerant gas pipe	φ 15.88
2	Refrigerant liquid pipe	φ 9.52
3	Drain Hole	Connect with the provided drain plug
4	Power wiring conduit	N/A

Dimensional Drawings

Split Wall-Mounted Hydro Unit

AE090RNYD*G/EU, AE160JNYD*H/EU

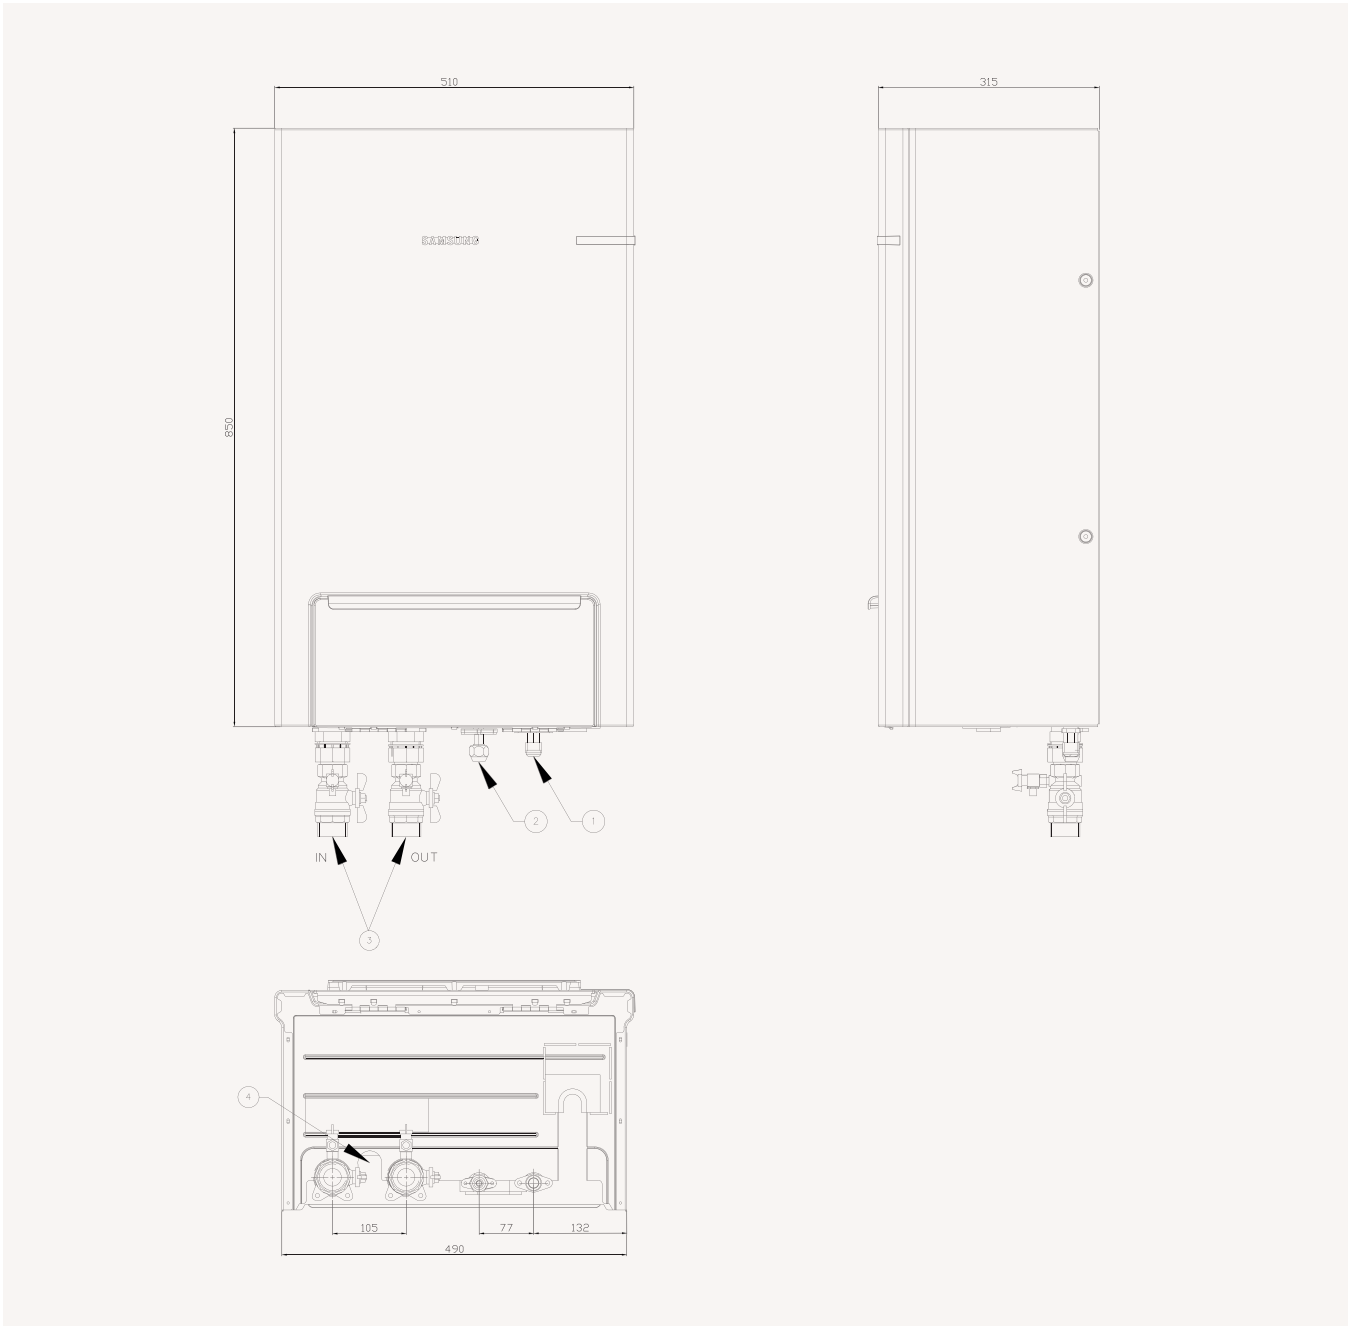

NO	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Water pipe inlet/outlet
4	Drain Hose Connector




TDM Plus



ClimateHub TDM Plus (R410A)

- All in one' air-to-water and air-to-air system
- PV and Smart Grid ready
- Compact unit size with large water tank (200L & 260L)
- 2-zone control, suitable for floor heating and radiators
- Intuitive, colour screen touch controller in multiple languages
- SCOP rating of A++++
- Energy monitoring through touch controller
- SmartThings compatible with optional Wi-Fi kit
- Smooth servicing through the front-mounted service window
- Backup heater is included to ensure continuous heating

								
					AE200TNWTEH/EU		AE200TNWTEH/EU	
					AE044MXTPEH/EU		AE046MXTPEH/EU	
					MWR-WW10N		MWR-WW10N	
System	Operation	Nominal Capacity	Heating A7/W35¹ / A7/W55²	kW	4.4/ 3.8	6.6/ 4.8		
			Cooling A35/W18¹	kW	5.1	6.7		
		Power Input (Nominal)	Heating A7/W35¹ / A7/W55²	kW	0.93/ 1.37	1.47/ 1.85		
			Cooling A35/W18¹	kW	1.03	1.48		
		COP (Nominal Heating) A7/W35¹ / A7/W55²	W/W	4.73/ 2.80	4.49/ 2.59			
		EER (Nominal Cooling) A35/W18¹	W/W	4.95	4.53			
		SCOP LWT 35°C/ 55°C	W/W	4.41/ 2.83	4.41/ 2.96			
		Seasonal space heating enr. efficiency ηs LWT 35°C/ 55°C	ETA%	173/ 110	173/ 115			
		Average Seasonal space heating eff. class ** LWT 35°C/ 55°C	-	A++ / A+	A++ / A+			
		Current	MCA	A	18.00	20.00		
			MFA	A	25.00	25.00		
		Maximum allowable IDU⁵ connections (Hydro A2W unit not included)	Max. number of IDU⁵	EA	2	3		
			Total capacity Min. (Cooling)	kW	2.20	3.30		
	Total capacity Min. (Cooling)		kW	4.40	6.60			
	Leaving Water Temperature³		Heating	°C	15-55	15-55		
		Cooling	°C	5-25	5-25			
	Functions	Smart Grid Ready / PV Enabled	-	●	●			
		3-Step Quiet Mode	-	●	●			
		2-zone Control	-	●	●			
Tank Integrated Hydro Unit	Power Supply	Φ, #, V, Hz		1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz			
	Water Tank Volume	litres		200	200			
	Declared Load Profile	L/XL		L	L			
	Average water heating efficiency gwh	ETA%		115	115			
	Average Energy Efficiency Class			A+	A+			
	Heater	Back-up heater Capacity	Default (Option)	kW	2 (4/6)	2 (4/6)		
	Sound	Sound Pressure⁴	Heating Std	dB(A)	29	29		
			Cooling Std	dB(A)	29	29		
		Sound Power	Heating Std	dB(A)	43	43		
	Piping	Water pipe (Space Heating)	Inlet/Outlet	Φ, inch	1+1/4"	1+1/4"		
	Dimensions	Net Weight	kg		137	137		
Net Dimensions (WxHxD)		mm		595 x 1,800 x 700	595 x 1,800 x 700			
Outdoor Unit	Power Supply	Φ, V, Hz		1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz			
	Compressor	Type		Rotary Comp	Rotary Comp			
	Base Heater	Capacity		kW	-	-		
	Sound	Sound Pressure⁴	Heating Std	dB(A)	47	48		
			Cooling Std	dB(A)	46	47		
		Sound Power	Heating Std	dB(A)	65	67		
	Dimensions	Net Weight	kg		61.0	61.0		
		Net Dimensions (WxHxD)	mm		880 x 793 x 310	880 x 793 x 310		
	Refrigerant	Type	R410A (Fluorinated greenhouse gas, GWP=2,088)					
		Factory Charging	tCO₂e	5.43	5.43			
			kg	2.6	2.6			
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	9.52 (3/8")	9.52 (3/8")		
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")	15.88 (5/8")		
		Piping length (ODU-IDU)⁵	Max.[Equiv.]	m	30	30		
		Level difference (IDU-IDU)⁵	Max.	m	20	20		
		Chargeless length	m	10	10			
		Operation	Ambient Temperature A2W	Heating	°C	-25-35	-25-35	
	Cooling			°C	10-46	10-46		
	DHW			°C	-25-43	-25-43		
	Ambient Temperature A2A		Heating	°C	-25-24	-25-24		
Cooling			°C	10-46	10-46			

Accessories



Touch Controller	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor	Backup Heater (4/6kW)
MWR-WW10N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MHC-*00FE



AE200TNWTEH/EU AE090MXTPEH/EU MWR-WW10N	AE200TNWTEH/EU AE090MXTPGH/EU MWR-WW10N	AE260TNWTEH/EU AE044MXTPEH/EU MWR-WW10N	AE260TNWTEH/EU AE066MXTPEH/EU MWR-WW10N
9.0/ 7.7	9.0/ 7.7	4.4/ 3.8	6.6/ 4.8
8.0	8.0	5.1	6.7
2.12/ 2.82	2.12/ 2.82	0.93/ 1.37	1.47/ 1.85
1.85	1.86	1.03	1.48
4.25/ 2.72	4.25/ 2.69	4.73/ 2.80	4.49/ 2.59
4.32	4.30	4.95	4.53
4.42/ 3.01	4.44/ 2.86	4.41/ 2.83	4.41/ 2.96
174/ 117	175/ 111	173/ 110	173/ 115
 / 	 / 	 / 	 / 
22.00	10.00	18.00	20.00
27.50	16.10	25.00	25.00
4	4	2	3
4.50	4.50	2.20	3.30
9.00	9.00	4.40	6.60
15-55	15-55	15-55	15-55
5-25	5-25	5-25	5-25
			
			
			
1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz
200	200	260	260
L	L	XL	XL
115	115	105	105
			
2 (4/6)	2 (4/6)	2 (4/6)	2 (4/6)
29	29	29	29
29	29	29	29
43	43	43	43
1+1/4"	1+1/4"	1+1/4"	1+1/4"
137	137	147	147
595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700
1Φ, 2, 220-240 V, 50 Hz	3Φ, 4, 380-415 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz
Rotary Comp	Rotary Comp	Rotary Comp	Rotary Comp
-	-	-	-
51	51	47	48
50	50	46	47
69	69	65	67
74.0	76.0	61.0	61.0
940 x 998 x 330	940 x 998 x 330	880 x 793 x 310	880 x 793 x 310
R410A (Fluorinated greenhouse gas, GWP=2,088)			
5.01	5.01	5.43	5.43
2.4	2.4	2.6	2.6
9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
30	30	30	30
20	20	20	20
10	10	10	10
-25-35	-25-35	-25-35	-25-35
10-46	10-46	10-46	10-46
-25-43	-25-43	-25-43	-25-43
-25-24	-25-24	-25-24	-25-24
10-46	10-46	10-46	10-46



*35dB(A) is only applicable for 6kW and 9kW outdoor units down to +4°C stated in 3 m distance in an anechoic environment.

**A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹ A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³65°C down to +10°C (max. 60°C down to -5°C)

⁴Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

⁵ODU : Outdoor Unit, IDU : Indoor Unit

Specifications

ClimateHub TDM Plus (R410A) (Continued)

																													
				Indoor Unit								AE260TNWTEH/EU								AE260TNWTEH/EU									
				Outdoor Unit								AE090MXTPEH/EU								AE120MXTPEH/EU									
				Controller								MWR-WW10N								MWR-WW10N									
System	Operation	Nominal Capacity	Heating A7/W35¹ / A7/W55²		kW	9.0/ 7.7				12.0/ 10.7																			
			Cooling A35/W18¹		kW	8.0				12.0																			
		Power Input (Nominal)	Heating A7/W35¹ / A7/W55²		kW	2.12/ 2.82				2.72/ 3.91																			
			Cooling A35/W18¹		kW	1.85				2.90																			
		COP (Nominal Heating) A7/W35¹ / A7/W55²		W/W	4.25/ 2.72				4.41/ 2.74																				
		EER (Nominal Cooling) A35/W18¹		W/W	4.32				4.14																				
		SCOP LWT 35°C/ 55°C		W/W	4.42/ 3.01				4.65/ 2.92																				
		Seasonal space heating enr. efficiency ηs LWT 35°C/ 55°C		ETA%	174/ 117				183/ 114																				
		Average Seasonal space heating eff. class ** LWT 35°C/ 55°C		-	A++ / A+				A+++ / A+																				
		Current	MCA	A	22.00				28.00																				
			MFA	A	27.50				35.00																				
		Maximum allowable IDU⁵ connections (Hydro A2Wunit not included)	Max. number of IDU⁵	EA	4				5																				
			Total capacity Min. (Cooling)	kW	4.50				6.00																				
			Total capacity Min. (Cooling)	kW	9.00				12.10																				
	Leaving Water Temperature³	Heating	°C	15-55				15-55																					
		Cooling	°C	5-25				5-25																					
	Functions	Smart Grid Ready / PV Enabled		-	●				●																				
		3-Step Quiet Mode		-	●				●																				
		2-zone Control		-	●				●																				
Tank Integrated Hydro Unit	Power Supply		Φ, #, V, Hz	1Φ, 2, 220-240 V, 50 Hz				1Φ, 2, 220-240 V, 50 Hz																					
	Water Tank Volume		litres	260				260																					
	Declared Load Profile		L/XL	XL				XL																					
	Average water heating efficiency ηwh		ETA%	105				95																					
	Average Energy Efficiency Class		-	A				A																					
	Heater	Back-up heater Capacity	Default (Option)	kW	2 (4/6)				2 (4/6)																				
	Sound	Sound Pressure⁴	Heating Std	dB(A)	29				29																				
			Cooling Std	dB(A)	29				29																				
	Sound Power	Heating Std	Heating Std	dB(A)	43				47																				
Piping	Water pipe (Space Heating)	Inlet/Outlet	Φ, inch	1+1/4"				1+1/4"																					
Dimensions	Net Weight		kg	147				147																					
	Net Dimensions (WxHxD)		mm	595 x 1,800 x 700				595 x 1,800 x 700																					
Outdoor Unit	Power Supply		Φ, V, Hz	1Φ, 2, 220-240 V, 50 Hz				1Φ, 2, 220-240 V, 50 Hz																					
	Compressor		Type	Rotary Comp				Rotary Comp																					
	Base Heater		Capacity	kW	-				-																				
	Sound	Sound Pressure⁴	Heating Std	dB(A)	51				52																				
			Cooling Std	dB(A)	50				51																				
			Heating Std	dB(A)	69				70																				
	Dimensions	Net Weight		kg	74.0				107.0																				
		Net Dimensions (WxHxD)		mm	940 x 998 x 330				940 x 1,420 x 330																				
	Refrigerant	Type		Type	R410A (Fluorinated greenhouse gas, GWP=2,088)																								
		Factory Charging		tCO₂e	5.01				7.31																				
				kg	2.4				3.5																				
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	9.52 (3/8")				9.52 (3/8")																				
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")				15.88 (5/8")																				
		Piping length (ODU-IDU)⁵	Max.[Equiv.]	m	30				70																				
			Level difference (IDU-IDU)⁵	Max.	m	20				30																			
		Chargeless length		m	10				10																				
	Operation	Ambient Temperature A2W	Heating	°C	-25-35				-25-35																				
			Cooling	°C	10-46				10-46																				
			DHW	°C	-25-43				-25-43																				
		Ambient Temperature A2A	Heating	°C	-25-24				-25-24																				
Cooling			°C	10-46				10-46																					

Accessories					
					
Touch Controller	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor	Backup Heater (4/6kW)
MWR-WW10N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MHC-*00FE
					
AE260TNWTEH/EU AE160MXTPEH/EU MWR-WW10N	AE260TNWTEH/EU AE090MXTPGH/EU MWR-WW10N	AE260TNWTEH/EU AE120MXTPGH/EU MWR-WW10N	AE260TNWTEH/EU AE160MXTPGH/EU MWR-WW10N		
16.0/ 14.6	9.0/ 7.7	12.0/ 10.7	16.0/ 14.6		
14.5	8.0	12.0	14.5		
3.95/ 5.32	2.12/ 2.82	2.72/ 3.91	3.95/ 5.32		
3.84	1.86	2.90	3.84		
4.05/2.74	4.25/2.69	4.41/ 2.74	4.05/2.74		
3.78	4.30	4.14	3.78		
4.63/3.06	4.44/2.86	4.65/2.92	4.63/ 3.06		
182/ 119	175/ 111	183/ 114	182/ 119		
A+++ / A+	A+++ / A+	A+++ / A+	A+++ / A+		
32.00	10.00	10.00	12.00		
40.00	16.10	16.10	16.10		
7	4	5	7		
7.70	4.50	6.00	7.70		
15.40	9.00	12.10	15.40		
15~55	15~55	15~55	15~55		
5~25	5~25	5~25	5~25		
●	●	●	●		
●	●	●	●		
●	●	●	●		
1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz		
260	260	260	260		
XL	XL	XL	XL		
95	105	95	95		
A	A	A	A		
2 (4/6)	2 (4/6)	2 (4/6)	2 (4/6)		
29	29	29	29		
29	29	29	29		
47	43	47	47		
1+1/4"	1+1/4"	1+1/4"	1+1/4"		
147	147	147	147		
595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700	595 x 1,800 x 700		
1Φ, 2, 220~240 V, 50 Hz	3Φ, 4, 380~415 V, 50 Hz	3Φ, 4, 380~415 V, 50 Hz	3Φ, 4, 380~415 V, 50 Hz		
Rotary Comp	Rotary Comp	Rotary Comp	Rotary Comp		
-	-	-	-		
55	51	52	55		
54	50	51	54		
73	69	70	73		
107.0	76.0	107.0	107.0		
940 x 1,420 x 330	940 x 998 x 330	940 x 1,420 x 330	940 x 1,420 x 330		
R410A (Fluorinated greenhouse gas, GWP=2,088)					
7.31	5.01	7.31	7.31		
3.5	2.4	3.5	3.5		
9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")		
15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")		
70	30	70	70		
30	20	30	30		
10	10	10	10		
-25~35	-25~35	-25~35	-25~35		
10~46	10~46	10~46	10~46		
-25~43	-25~43	-25~43	-25~43		
-25~24	-25~24	-25~24	-25~24		
10~46	10~46	10~46	10~46		



¹35dB(A) is only applicable for 6kW and 9kW outdoor units down to +4°C stated in 3 m distance in an anechoic environment.

^{**}A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

¹A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

²A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

³65°C down to +10°C (max. 60°C down to -5°C)

⁴Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

⁵ODU : Outdoor Unit, IDU : Indoor Unit

Specifications

TDM Plus with Third party tank connection (R410A)

- ‘All in one’ air-to-water and air-to-air system
- Connectable with R410A Split ODU in combination of third party Tank
- Compatible with room thermostats, solar pumps, 2- or 3-way valves and back-up boilers

													
		Indoor Unit		AE090MNYDEH/EU		AE090MNYDEH/EU		AE090MNYDEH/EU		AE090MNYDGH/EU			
		Outdoor Unit		AE044MXTPEH/EU		AE066MXTPEH/EU		AE090MXTPEH/EU		AE090MXTPGH/EU			
System	Operation	Nominal Capacity	Heating A7/W35¹ / A7/W55²	kW	4.4/ 3.8		6.6/ 4.8		9.0/ 7.7		9.0/ 7.7		
			Cooling A35/W18¹	kW	5.1		6.7		8.0		8.0		
		Power Input (Nominal)	Heating A7/W35¹ / A7/W55²	kW	0.93/ 1.37		1.47/ 1.85		2.12/ 2.82		2.12/ 2.82		
			Cooling A35/W18¹	kW	1.03		1.48		1.85		1.86		
		COP (Nominal Heating) A7/W35¹		W/W	4.73/2.80		4.49/2.59		4.25/2.72		4.25/2.69		
		EER (Nominal Cooling) A35/W18¹		W/W	4.95		4.53		4.32		4.30		
		SCOP LWT 35°C/ 55°C		W/W	4.41/ 2.83		4.41/2.96		4.42/ 3.01		4.44/ 2.86		
		Seasonal space heating enr. efficiency η _s LWT 35°C/ 55°C		ETA%	173/ 110		173/ 115		174/ 117		175/ 111		
		Seasonal Space Heating Eff. Class LWT 35°C/ 55°C				A++ / A+		A++ / A+		A++ / A+		A+++ / A+	
		Current	MCA	A	18		20		22		10		
			MFA	A	25.0		25.0		27.5		16.1		
		Maximum Allowable IDU ⁶ Connections (Hydro A2W Unit Not Included)	Max. Number of IDU ⁶	EA	2		3		4		4		
			Total Capacity Min. (Cooling)	kW	2.2		3.3		4.5		4.5		
			Total Capacity Min. (Cooling)	kW	4.4		6.6		9.0		9.0		
	Leaving Water Temperature ³		Heating	°C	15–55 (H/P : 25–55)		15–55 (H/P : 25–55)		15–55 (H/P : 25–55)		15–55 (H/P : 25–55)		
		Cooling	°C	5–25		5–25		5–25		5–25			
	Functions	Smart Grid Ready/ PV Enabled		-	-		-		-		-		
		3-Step Quiet Mode		-	●		●		●		●		
		2-zone Control ⁴		-	●		●		●		●		
Wall-Mounted Hydro Unit	Power Supply		Φ, #, V, Hz	1Φ, 2, 220–240 V, 50 Hz		1Φ, 2, 220–240 V, 50 Hz		1Φ, 2, 220–240 V, 50 Hz		3Φ, 4, 380–415 V, 50 Hz			
	Expansion Vessel		litres	8		8		8		8			
	Heater	Back-up heater Capacity		kW	4		4		4		6		
	Sound	Sound Pressure ⁵	Std	dB(A)	31		31		31		31		
		Sound Power	Std	dB(A)	48		48		48		48		
	Piping	Water pipe	Inlet/Outlet	Φ, inch	1+1/4"		1+1/4"		1+1/4"		1+1/4"		
	Dimensions	Net Weight		kg	45.5		45.5		45.5		46.5		
		Net Dimensions (WxHxD)		mm	510 x 850 x 315		510 x 850 x 315		510 x 850 x 315		510 x 850 x 315		
Outdoor Unit	Power Supply		Φ, V, Hz	1Φ, 2, 220–240 V, 50 Hz		1Φ, 2, 220–240 V, 50 Hz		1Φ, 2, 220–240 V, 50 Hz		3Φ, 4, 380–415 V, 50 Hz			
	Compressor	Type	-	Rotary Comp		Rotary Comp		Rotary Comp		Rotary Comp			
	Base Heater	Capacity		kW	-		-		-		-		
	Sound	Sound Pressure ⁵	Heating Std	dB(A)	47		48		51		51		
			Cooling Std	dB(A)	46		47		50		50		
		Sound Power	Heating Std	dB(A)	65		67		69		69		
	Dimensions	Net Weight		kg	61		61		74		76		
		Net Dimensions (WxHxD)		mm	880 x 793 x 310		880 x 793 x 310		940 x 998 x 330		940 x 998 x 330		
	Refrigerant	Type		-	R410A (Fluorinated greenhouse gas, GWP=2,088)								
		Factory Charging		tCO ₂ e	5.43		5.43		5.01		5.01		
				kg	2.6		2.6		2.4		2.4		
	Piping	Piping Connections	Liquid Pipe	Φ, mm (inch)	9.52 (3/8")		9.52 (3/8")		9.52 (3/8")		9.52 (3/8")		
			Gas Pipe	Φ, mm (inch)	15.88 (5/8")		15.88 (5/8")		15.88 (5/8")		15.88 (5/8")		
		Piping Length (ODU-IDU) ⁵	Max.[Equiv.]	m	30		30		30		30		
		Level Difference (IDU-IDU) ⁵	Max.	m	20		20		20		20		
		Chargeless Length		m	10		10		10		10		
Operation	Ambient Temperature A2W	Heating	°C	-25–35		-25–35		-25–35		-25–35			
		Cooling	°C	10–46		10–46		10–46		10–46			
		DHW	°C	-25–43		-25–43		-25–43		-25–43			
	Ambient Temperature A2A	Heating	°C	-25–24		-25–24		-25–24		-25–24			
		Cooling	°C	10–46		10–46		10–46		10–46			

Accessories				
EHS Controller (included)	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor
MWR-WW00N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA

AE160MNYDEH/EU AE120MXTPEH/EU	AE160MNYDGH/EU AE120MXTPGH/EU	AE160MNYDEH/EU AE160MXTPEH/EU	AE160MNYDGH/EU AE160MXTPGH/EU
12.0/ 10.7	12.0/ 10.7	16.0/ 14.6	16.0/ 14.6
12.0	12.0	14.5	14.5
2.72/ 3.91	2.72/ 3.91	3.95/ 5.32	3.95/ 5.32
2.90	2.90	3.84	3.84
4.41/2.74	4.41/2.74	4.05/2.74	4.05/2.74
4.14	4.14	3.78	3.78
4.65/ 2.92	4.65/ 2.92	4.63/ 3.06	4.63/ 3.06
183/ 114	183/ 114	182/ 119	182/ 119
A+++ / A+	A+++ / A+	A+++ / A+	A+++ / A+
28	10	32	12
35.0	16.1	40.0	16.1
5	5	7	7
6.0	6.0	7.7	7.7
12.1	12.1	15.4	15.4
15–55 (H/P : 25–55)	15–55 (H/P : 25–55)	15–55 (H/P : 25–55)	15–55 (H/P : 25–55)
5–25	5–25	5–25	5–25
-	-	-	-
•	•	•	•
•	•	•	•
1Φ, 2, 220–240 V, 50 Hz	3Φ, 4, 380–415 V, 50 Hz	1Φ, 2, 220–240 V, 50 Hz	3Φ, 4, 380–415 V, 50 Hz
8	8	8	8
6	6	6	6
38	38	38	38
55	55	55	55
1+1/4"	1+1/4"	1+1/4"	1+1/4"
46.5	46.5	46.5	46.5
510 x 850 x 315	510 x 850 x 315	510 x 850 x 315	510 x 850 x 315
1Φ, 2, 220–240 V, 50 Hz	3Φ, 4, 380–415 V, 50 Hz	1Φ, 2, 220–240 V, 50 Hz	3Φ, 4, 380–415 V, 50 Hz
Rotary Comp	Rotary Comp	Rotary Comp	Rotary Comp
-	-	-	-
52	52	55	55
51	51	54	54
70	70	73	73
107	107	107	107
940 x 1,420 x 330	940 x 1,420 x 330	940 x 1,420 x 330	940 x 1,420 x 330
7.31	7.31	7.31	7.31
3.5	3.5	3.5	3.5
9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
15.88 (5/8")	15.88 (5/8")	15.88 (5/8")	15.88 (5/8")
70	70	70	70
30	30	30	30
10	10	10	10
-25–35	-25–35	-25–35	-25–35
10–46	10–46	10–46	10–46
-25–43	-25–43	-25–43	-25–43
-25–24	-25–24	-25–24	-25–24
10–46	10–46	10–46	10–46



¹35dB(A) is only applicable for 6kW and 9kW outdoor units down to +4°C stated in 3 m distance in an anechoic environment.

²A+++ energy label is available according to EU No. 811/2013 label classification 2019, on a scale from D to A+++

³A2W Condition : (Heating) Water In/Out 30°C/35°C, Outdoor Air 7°C[DB]/6°C[WB]; (Cooling) Water In/Out 23°C/18°C, Outdoor Air 35°C[DB].

⁴A2W Condition : (Heating) Water In/Out 47°C/55°C, Outdoor Air 7°C[DB]/6°C[WB].

⁵65°C down to +10°C (max. 60°C down to -5°C)


⁶Not provided by Samsung.

⁷Sound pressure level is obtained in an anechoic room. Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

⁸ODU : Outdoor Unit, IDU : Indoor Unit

TDM Plus WindFree™ Deluxe

- Equipped with NASA communication protocol
- Equipped with Easy Filter Plus

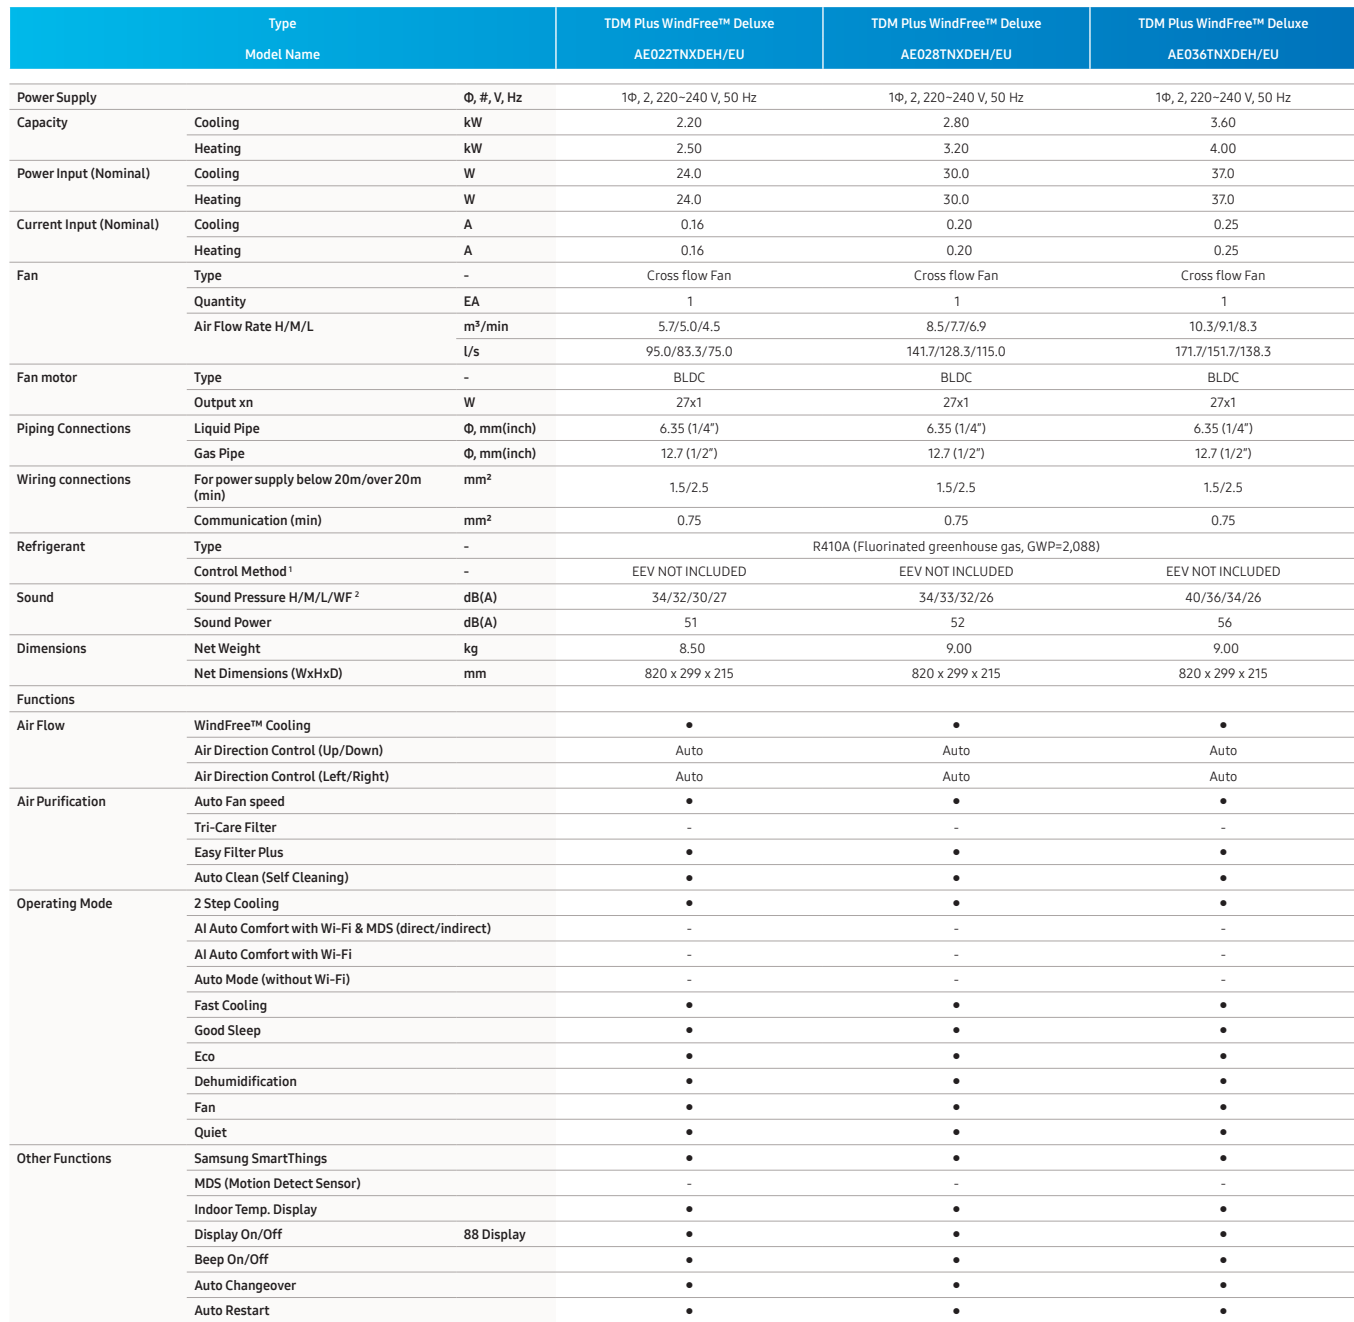

1-room EEV Kit	2/3 Room EEV Kit	Wireless Remote Controller (included)	Touch Controller	Wired Remote Controller	DMS2.5	Wi-Fi Kit
MEV-E**SA	MXD-E**K***A	AR-EH03E	MWR-SH11N	MWR-WE13N	MIM-D01AN	MIM-H04EN



1Φ, 2, 220-240 V, 50 Hz	1Φ, 2, 220-240 V, 50 Hz
5.60	6.80
6.30	7.00
52.0	60.0
52.0	60.0
0.35	0.40
0.35	0.40
Cross flow Fan	Cross flow Fan
1	1
15.7/13.8/12.0	16.8/15.0/13.2
261.7/230.0/200.0	280.0/250.0/220.0
BLDC	BLDC
27x1	27x1
6.35 (1/4")	9.52 (3/8")
12.7 (1/2")	15.88 (5/8")
1.5/2.5	1.5/2.5
0.75	0.75
R410A (Fluorinated greenhouse gas, GWP=2.088)	
EEV NOT INCLUDED	EEV NOT INCLUDED
40/37/34/29	43/40/37/29
58	62
11.50	11.50
1,055 x 299 x 215	1,055 x 299 x 215
●	●
Auto	Auto
Auto	Auto
●	●
-	-
●	●
●	●
●	●
-	-
-	-
-	-
●	●
●	●
●	●
●	●
●	●
●	●
-	-
●	●
●	●
●	●
●	●
●	●

² Sound pressure level is obtained in an anechoic room.
Sound pressure level is a relative value, depending on the distance and acoustic environment. Sound pressure level may differ depending on operation conditions.

Specifications

TDM Plus Slim Duct

- Slim design with thickness of just 199 mm
- Antibacterial filter included



Type				Slim Duct	Slim Duct	Slim Duct	Slim Duct
Model Name				AE022MNLDEH/EU	AE028MNLDEH/EU	AE036MNLDEH/EU	AE056MNLDEH/EU
Power Supply		Φ, #, V, Hz		1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
Performance	Capacity	Cooling / Heating	kW	2.2/2.5	2.8/3.2	3.6/4.0	5.6/6.3
Power	Power Input	Cooling / Heating	W	55/55	60/60	65/65	95/95
	Current Input	Cooling / Heating	A	0.30/0.30	0.32/0.32	0.33/0.33	0.53/0.53
Fan	Type	-		Sirocco Fan	Sirocco Fan	Sirocco Fan	Sirocco Fan
	Quantity	EA		2	2	2	2
	Air Flow Rate	H/M/L (UL)	m³/min	7.0 / 6.1 / 5.3	7.5 / 6.6 / 5.6	7.5 / 6.6 / 5.6	12.0 / 10.5 / 9.0
	External Pressure	Max. (Min/Std/Max)	mmAq	0/1/3	0/1/3	0/1/3	0/2/4
			Pa	0/9.8/29.4	0/9.8/29.4	0/9.8/29.4	0/19.6/39.2
Fan Motor	Type	-		SSR non-feedback	SSR non-feedback	SSR non-feedback	SSR non-feedback
	Output x n	W		28x1	28x1	28x1	28x1
Piping Connections	Liquid Pipe	Φ, mm (inch)		6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
	Gas Pipe	Φ, mm (inch)		12.7 (1/2")	12.7 (1/2")	12.7 (1/2")	12.7 (1/2")
Refrigerant	Type	-		R410A (Fluorinated greenhouse gas, GWP=2,088)			
Sound	Sound Pressure	H/M/L	dB(A)	26 / 24 / 21	28 / 26 / 23	32 / 30 / 27	36 / 34 / 31
	Sound Power		dB(A)	49	49	51	55
Dimensions	Net Weight	kg		19	19	19,5	24,5
	Net Dimensions (W×H×D)	mm		700 x 199 x 600	700 x 199 x 600	700 x 199 x 600	900x199x600
Optional Accessories	Drain Pump	Model	-	MDP-E075SEE3D (Built-in)	MDP-E075SEE3D (Built-in)	MDP-E075SEE3D (Built-in)	MDP-E075SEE3D (Built-in)
		Max. lifting Height/ Displace-ment	mm / Litre/h	750 / 24	750 / 24	750 / 24	750 / 24

Accessories									
MDP-E075SEE3D	AR-EH00	MWR-SH11N	MWR-WE13N	MRK-A10N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MXJ-YA1509M

Specifications

TDM Plus MSP Duct

- External static pressure range from 0 to 1.4 mmAq
- Built-in electronic expansion valve (EEV) for refrigerant flow control (2000 step)
- Long-life washable permanent filter is included
- Auto Restart function.
- Built-in condensation drain pump (750 mmH2O)
- SPI Ioniser device (optional)



Type				MSP Duct	MSP Duct
Model Name				AE071MNMPEH/EU	AE090MNMPEH/EU
Power Supply			Φ, #, V, Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
Performance	Capacity	Cooling / Heating	kW	71/8.0	9.0/10.0
Power	Power Input	Cooling / Heating	W	120/120	145/145
	Current Input	Cooling / Heating	A	1.0/1.0	1.2/1.2
Fan	Type	-		Sirocco Fan	Sirocco Fan
	Quantity	EA		2	2
	Air Flow Rate	H/M/L (UL)	m³/min	22 / 19 / 16	29 / 25 / 22
	External Pressure	Max. (Min/Std/Max)	mmAq	0 / 3 / 15	0 / 4 / 15
Pa			0 / 29.4 / 147.2	0 / 29.4 / 147.2	
Fan Motor	Type	-		BLDC Feedback	BLDC Feedback
	Output x n	W		153x1	153x1
Piping Connections	Liquid Pipe	Φ, mm (inch)		9.52 (3/8")	9.52 (3/8")
	Gas Pipe	Φ, mm (inch)		15.88 (5/8")	15.88 (5/8")
Refrigerant	Type	-		R410A (Fluorinated greenhouse gas, GWP=2,088)	
Sound	Sound Pressure	H/M/L	dB(A)	37 / 33 / 29	38 / 35 / 32
	Sound Power		dB(A)	57	58
Dimensions	Net Weight	kg		25,5	33
	Net Dimensions (W×H×D)	mm		850x250x700	1,200x250x700
Optional Accessories	Drain Pump	Model	-	MDP-G075SQ (Built-in)	MDP-G075SQ (Built-in)
				MDP-G075SP (External)	MDP-G075SP (External)
		Max. lifting Height/ Displacement	mm / Litre/h	750 / 24	750 / 24

Accessories										
MDP-G075SQ	MDP-G075SP	AR-EH00	MWR-SH11N	MWR-WE13N	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MRK-A10N	MXJ-YA1509M

Specifications

TDM Plus Console

- SPI Ioniser device (included)
 - Slim design with 199mm in depth
 - Built-in electronic expansion valve (EEV) for refrigerant flow control (2,000 step)
- Long-life washable permanent filter
 - Auto Restart function
 - Two separate air outlets, upper (cooling) and bottom (heating) to avoid stratifications



Type				Console	Console	Console	Console
Model Name				AE022MNJDEH/ EU	AE028MNJDEH/ EU	AE036MNJDEH/ EU	AE056MNJDEH/ EU
Power Supply				Φ, #, V, Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz	1Φ, 2, 220~240 V, 50 Hz
Performance	Capacity	Cooling / Heating	kW	2.2/2.5	2.8/3.2	3.6/4.0	5.6/6.3
Power	Power Input	Cooling / Heating	W	16/16	30/30	35/35	62/62
	Current Input	Cooling / Heating	A	0.13/0.13	0.25/0.25	0.29/0.29	0.49/0.49
Fan	Type	-		Turbo Fan	Turbo Fan	Turbo Fan	Turbo Fan
	Quantity	EA		1	1	1	1
	Air Flow Rate	H/M/L (UL)	m³/min	6.3 / 5.4 / 4.9	7.0 / 6.0 / 5.0	8.50 / 7.50 / 6.50	13.0 / 11.5 / 10.0
Piping Connections	Liquid Pipe	Φ, mm (inch)		6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
	Gas Pipe	Φ, mm (inch)		12.7 (1/2")	12.7 (1/2")	12.7 (1/2")	12.7 (1/2")
Refrigerant	Type	-		R410A (Fluorinated greenhouse gas, GWP=2,088)			
Sound	Sound Pressure	H/M/L	dB(A)	34 / 32 / 30	38 / 36 / 34	39 / 37 / 34	43 / 40 / 37
	Sound Power		dB(A)	52	58	59	64
Dimensions	Net Weight	kg		15,5	16	16	16
	Net Dimensions (W×H×D)	mm		720 x 620 x 199	720 x 620 x 199	720 x 620 x 199	720 x 620 x 199


Accessories

Touch Controller	Remote Control (Included)	Touch Controller	DMS2.5	Wi-Fi Kit	External Room Sensor	Wired Remote Control	Y-joint
MWR-SH11N	MR-EH00	MCM-A300N	MIM-D01AN	MIM-H04EN	MRW-TA	MWR-WE13N	MXJ-YA1509M

Dimensional Drawings

TDM Plus Tank Integrated Hydro Unit

AE200TNWTEH/EU, AE260TNWTEH/EU

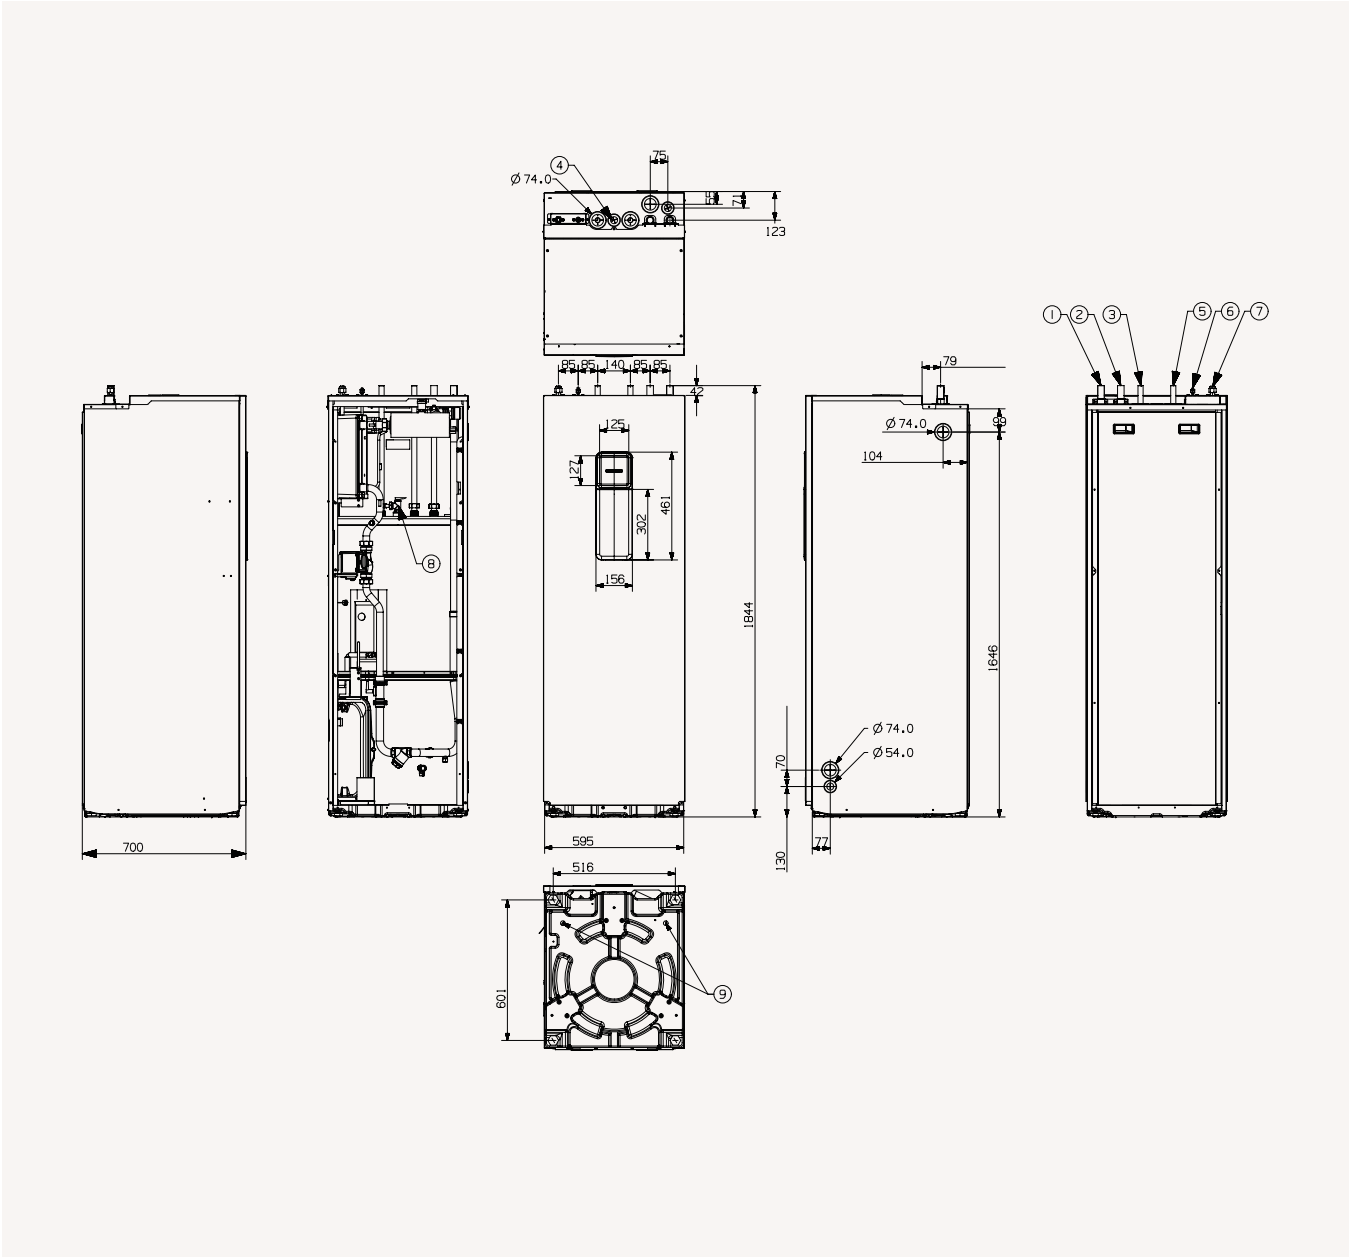


NO	Name	Description	
		AE200TNWTEH/EU	AE260TNWTEH/EU
1	Space heating Inlet	Ø28	Ø28
2	Space heating Outlet	Ø28	Ø28
3	DHW Inlet	Ø22	Ø22
4	Secondary water return	N/A	Ø22
5	DHW Outlet	Ø22	Ø22
6	Refrigerant liquid pipe	Ø9.52	Ø9.52
7	Refrigerant Gas pipe	Ø15.88	Ø15.88
8	T/Pv/v	Female PT1/2"	Female PT1/2"
9	Drain Holes	(Option) Connect with the provided drain plug	

Dimensional Drawings

TDM Plus Outdoor


AE044/066MXTPEH/EU

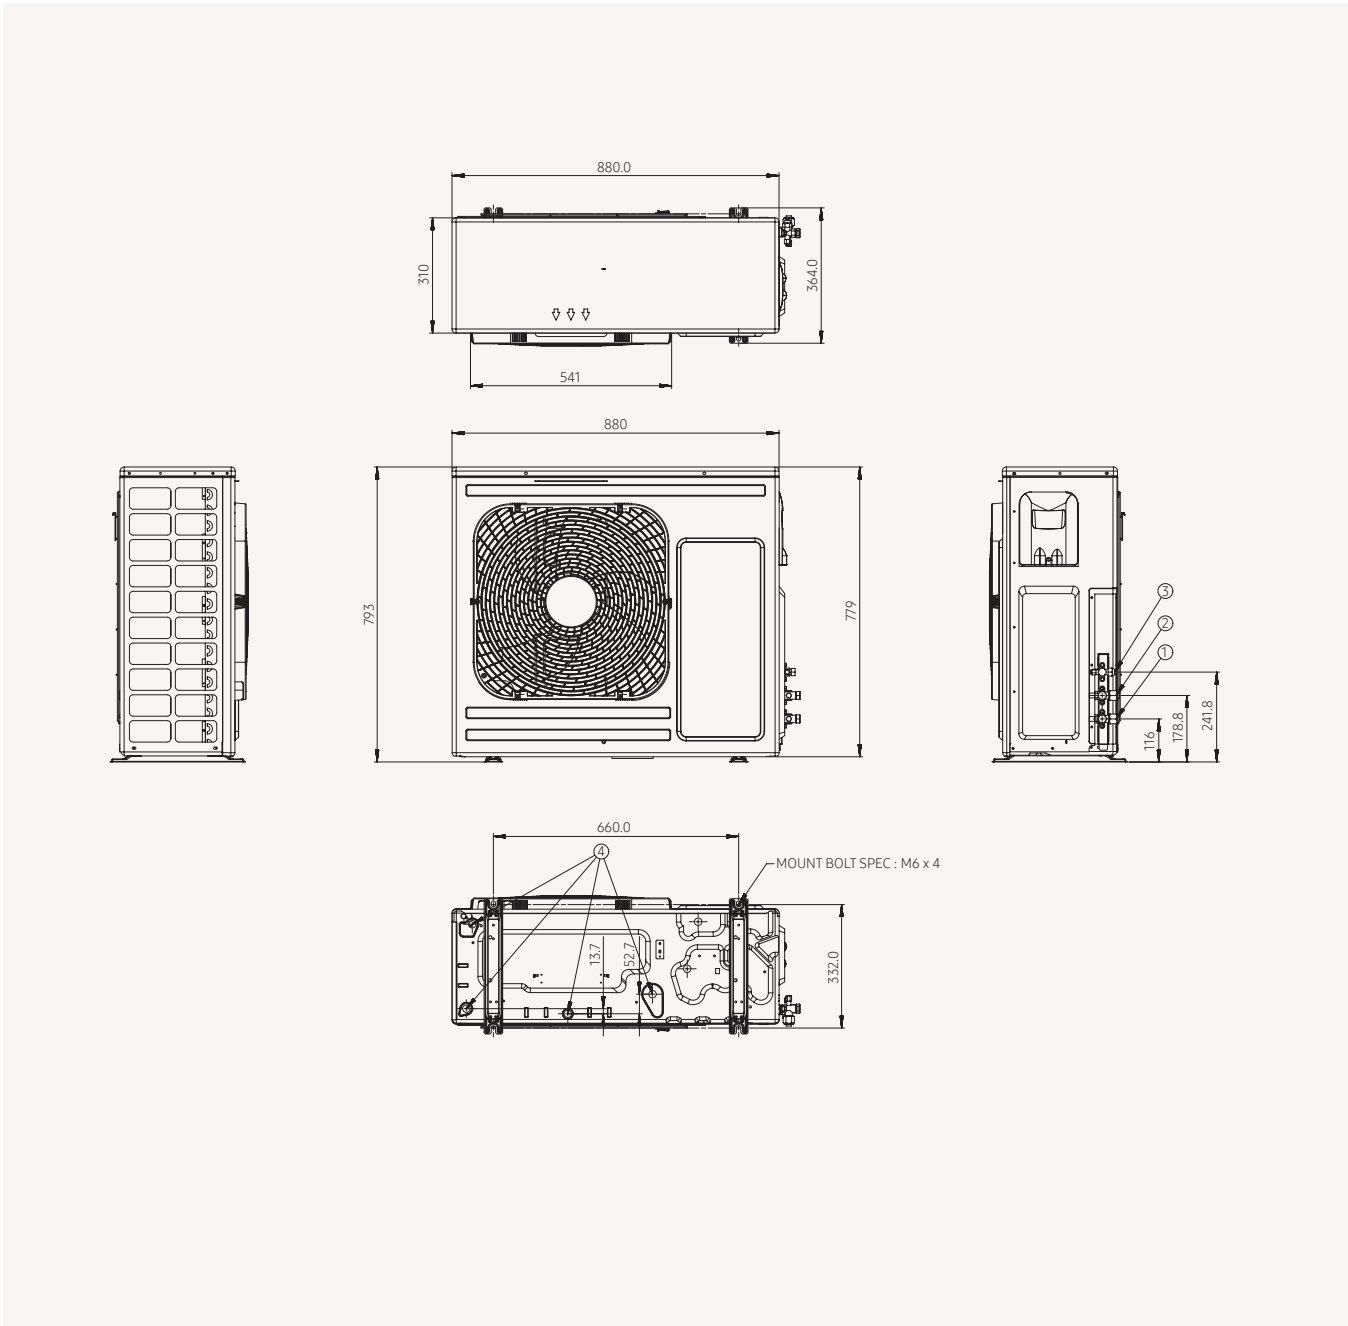

NO	Name	Description	
		4.4 kW	6.6 kW
1	Refrigerant gas pipe for air	Φ15.88("5/8)	
2	Refrigerant gas pipe for water	Φ15.88("5/8)	
3	Refrigerant liquid pipe	Φ9.52("3/8)	
4	Drain holes	Connect with the provided drain plug.	

TDM Plus Outdoor

AE090MXTPT*H/EU

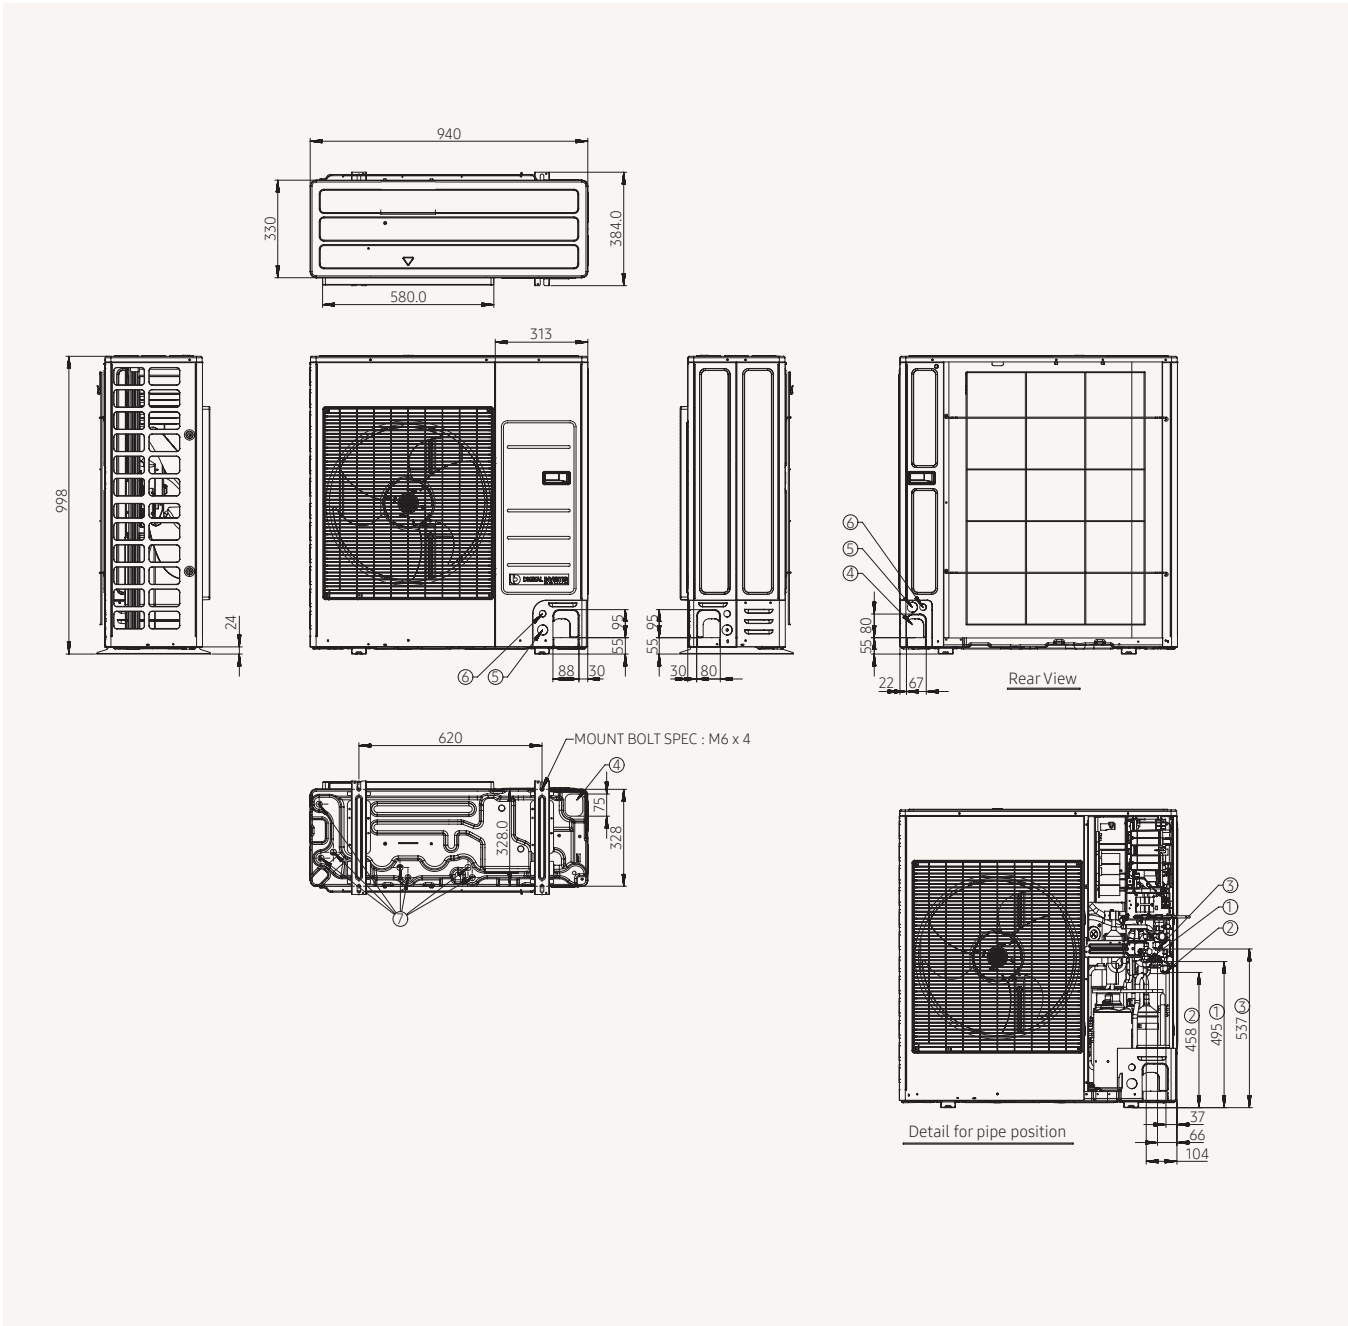


NO	Name	Description	
		9 kW	
1	Refrigerant liquid pipe	Φ9.52("3/8)	
2	Refrigerant gas pipe for air	Φ15.88("5/8)	
3	Refrigerant gas pipe for water	Φ15.88("5/8)	
4	Knockout hole for pipe intake	Front / Side / Rear / Bottom	
5	Power wiring conduits	Front / Side / Rear, Φ34("1-3/8)	
6	Communication wiring conduits	Front / Side / Rear, Φ22("7/8)	
7	Drain holes	Connect with the provided drain plug.	

Dimensional Drawings

TDM Plus Outdoor


AE120/160MXT*H/EU

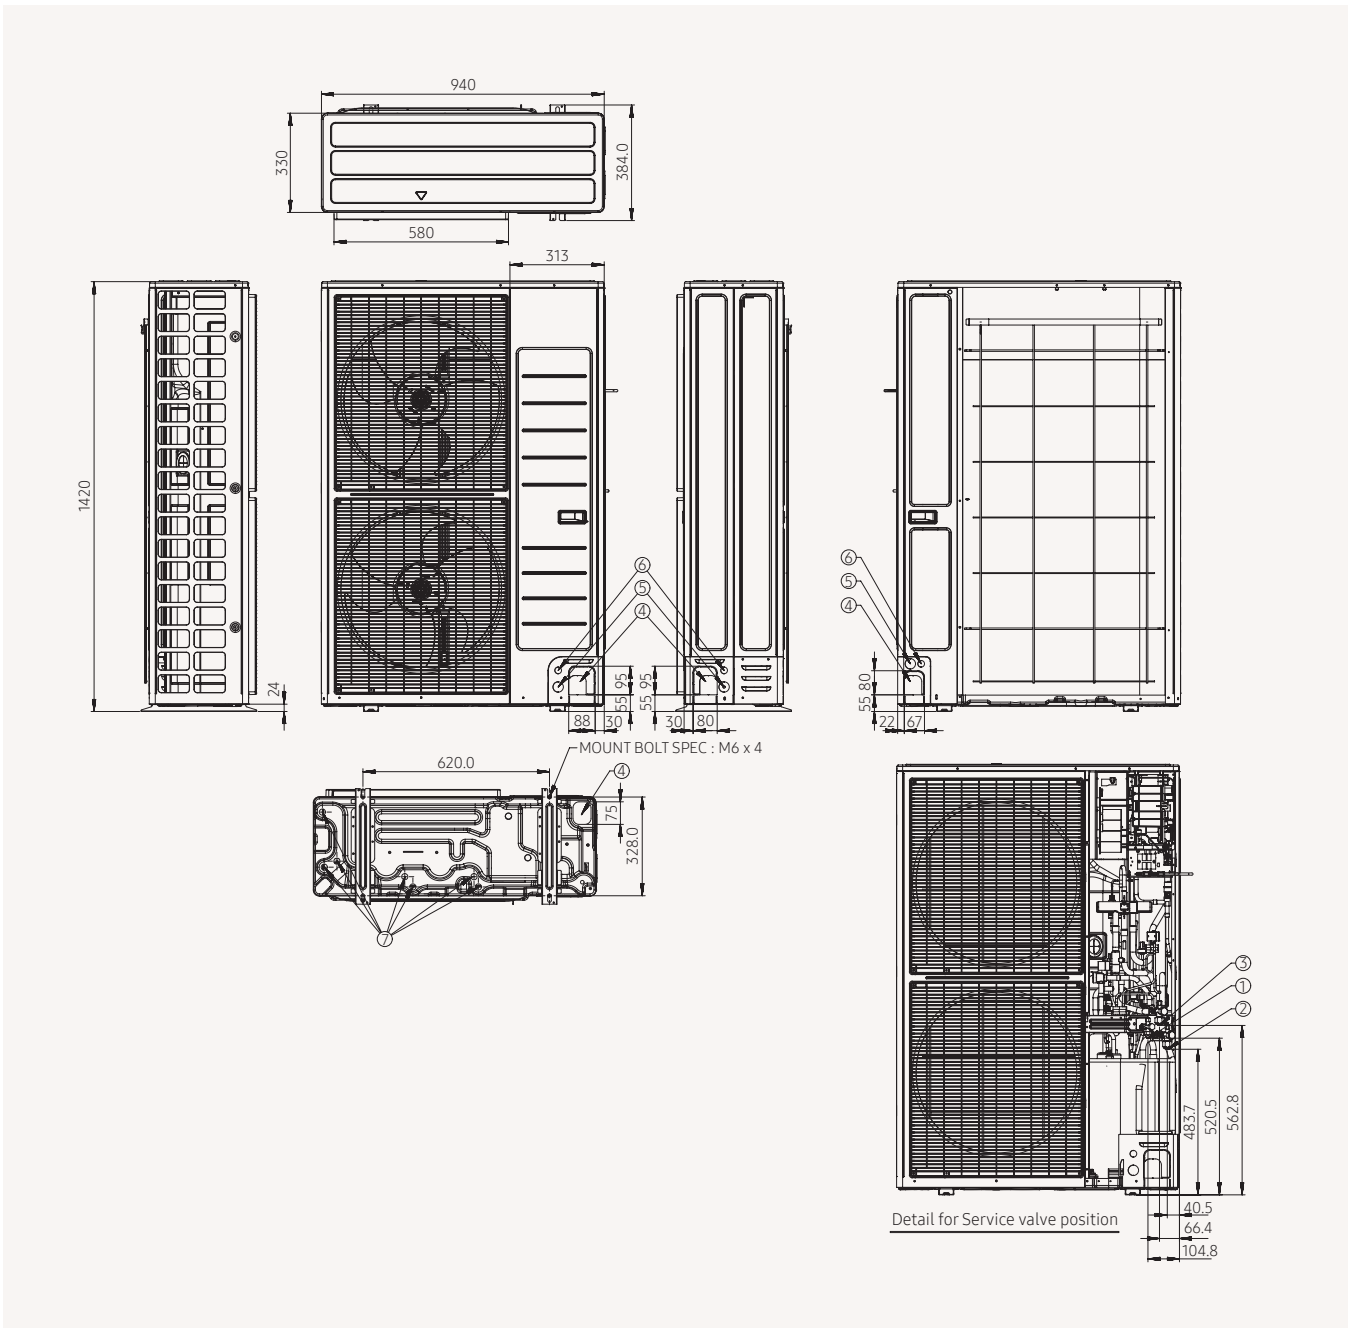

NO	Name	Description	
		12 kW	16 kW
1	Refrigerant liquid pipe	Φ9.52("3/8)	
2	Refrigerant gas pipe for air	Φ15.88("5/8)	Φ15.88("5/8)
3	Refrigerant gas pipe for water	Φ15.88("5/8)	Φ15.88("5/8)
4	Knockout hole for pipe intake	Front / Side / Rear / Bottom	Front / Side / Rear / Bottom
5	Power wiring conduits	Front / Side / Rear, Φ34("1-3/8)	Front / Side / Rear, Φ34("1-3/8)
6	Communication wiring conduits	Front / Side / Rear, Φ22("7/8)	Front / Side / Rear, Φ22("7/8)
7	Drain holes	Connect with the provided drain plug.	Connect with the provided drain plug.

WindFree™ Deluxe


AE022/028/036TNXDEH/EU

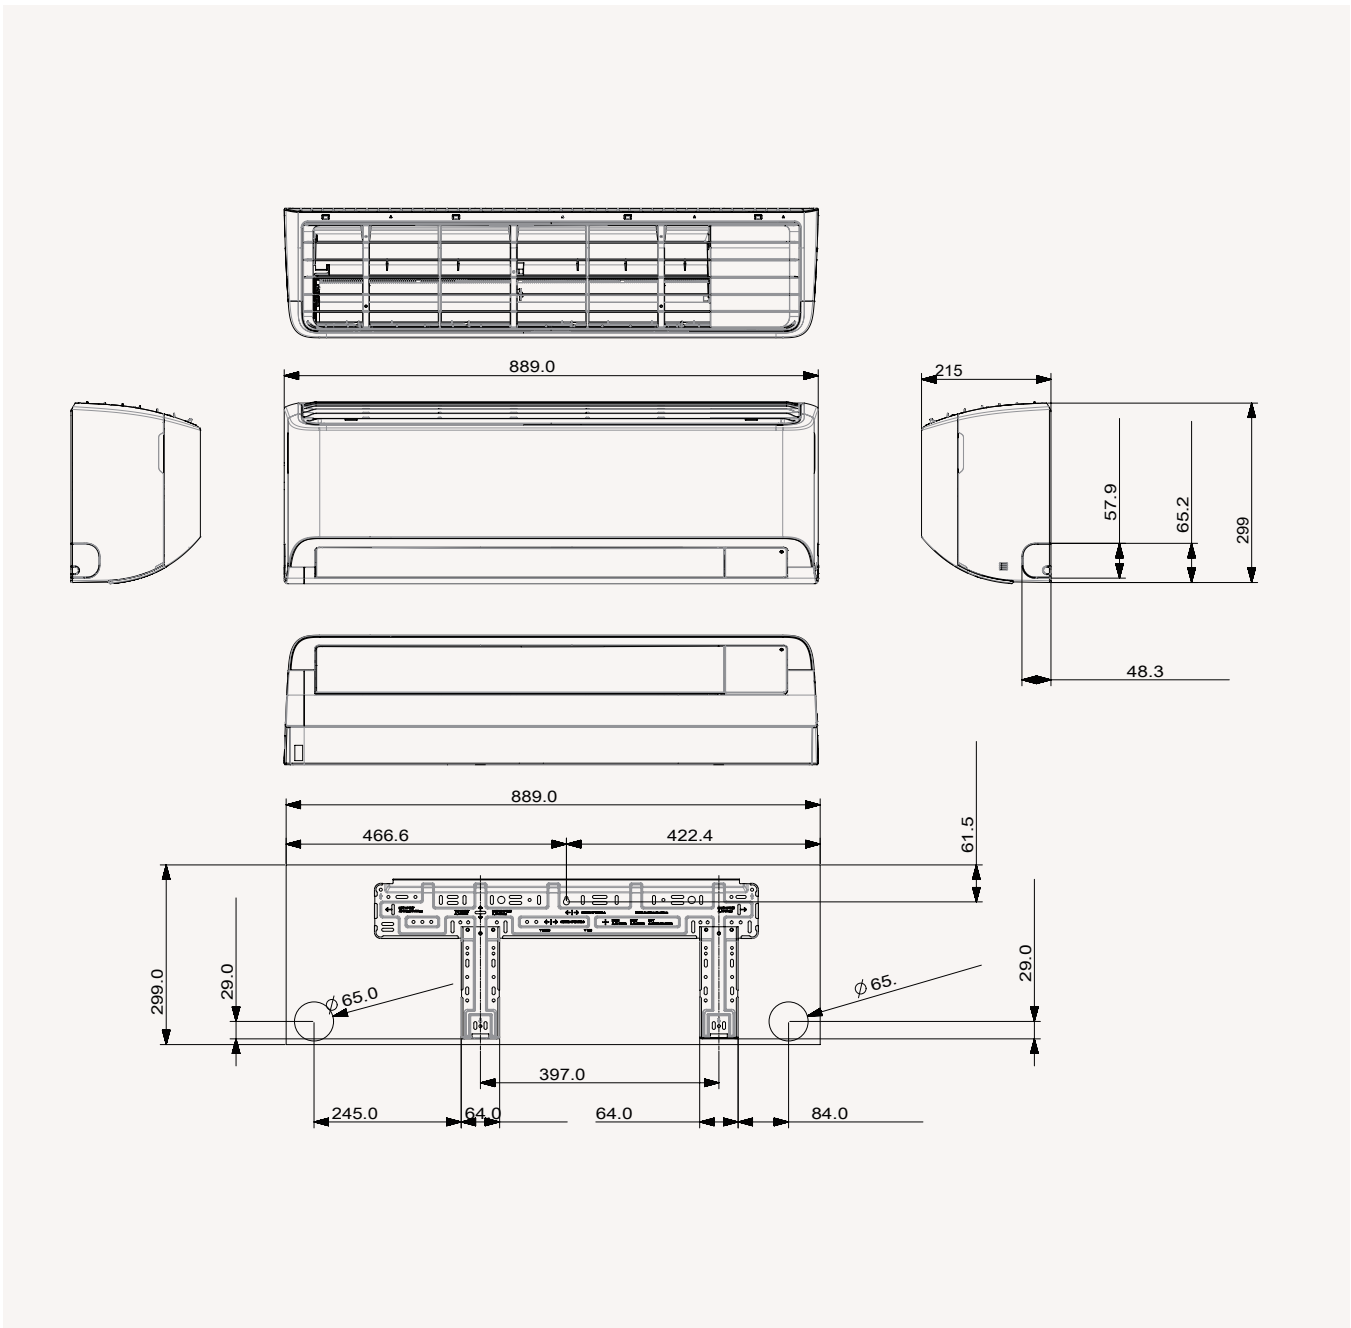

Dimensional Drawings

WindFree™ Deluxe


AE056/071TNXDEH/EU

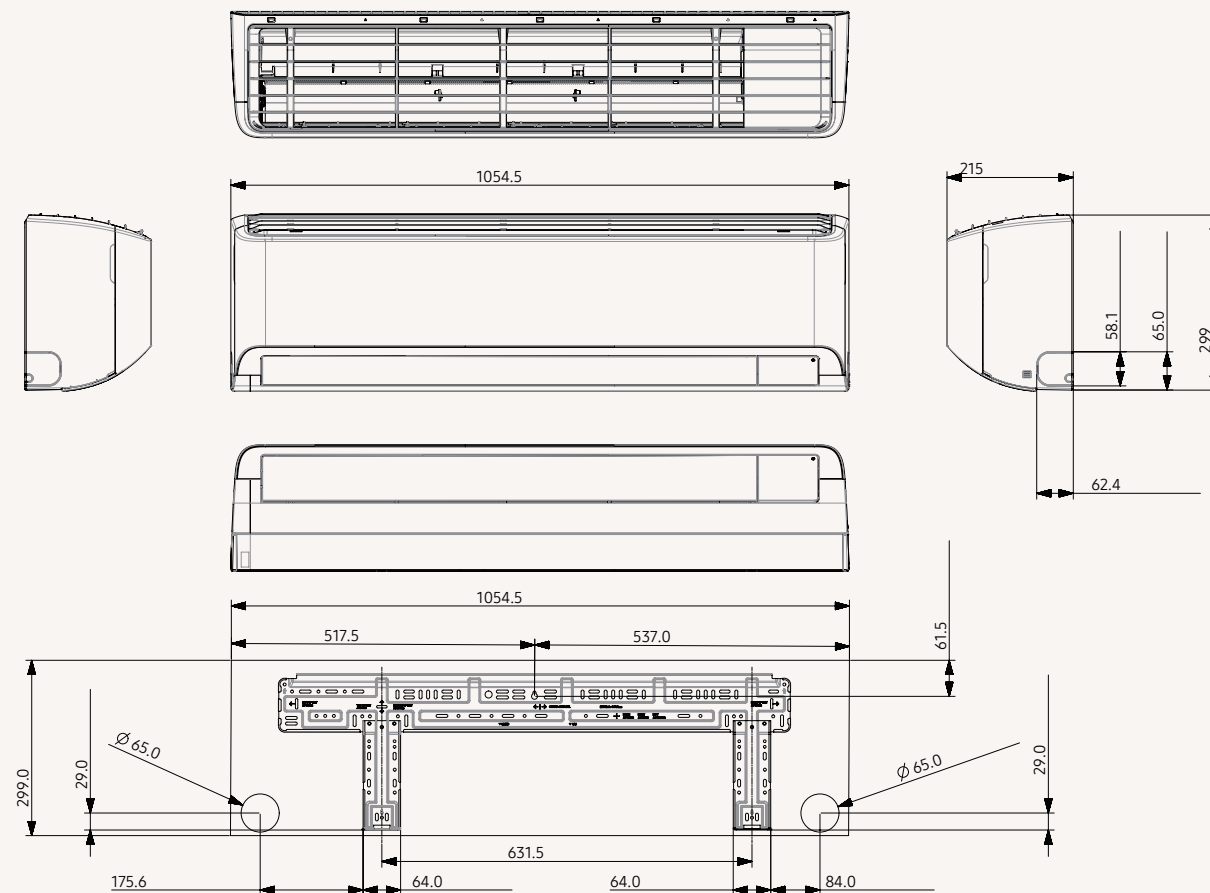

80

TDM Plus Slim Duct

AE022/028/036MNLDEH/EU

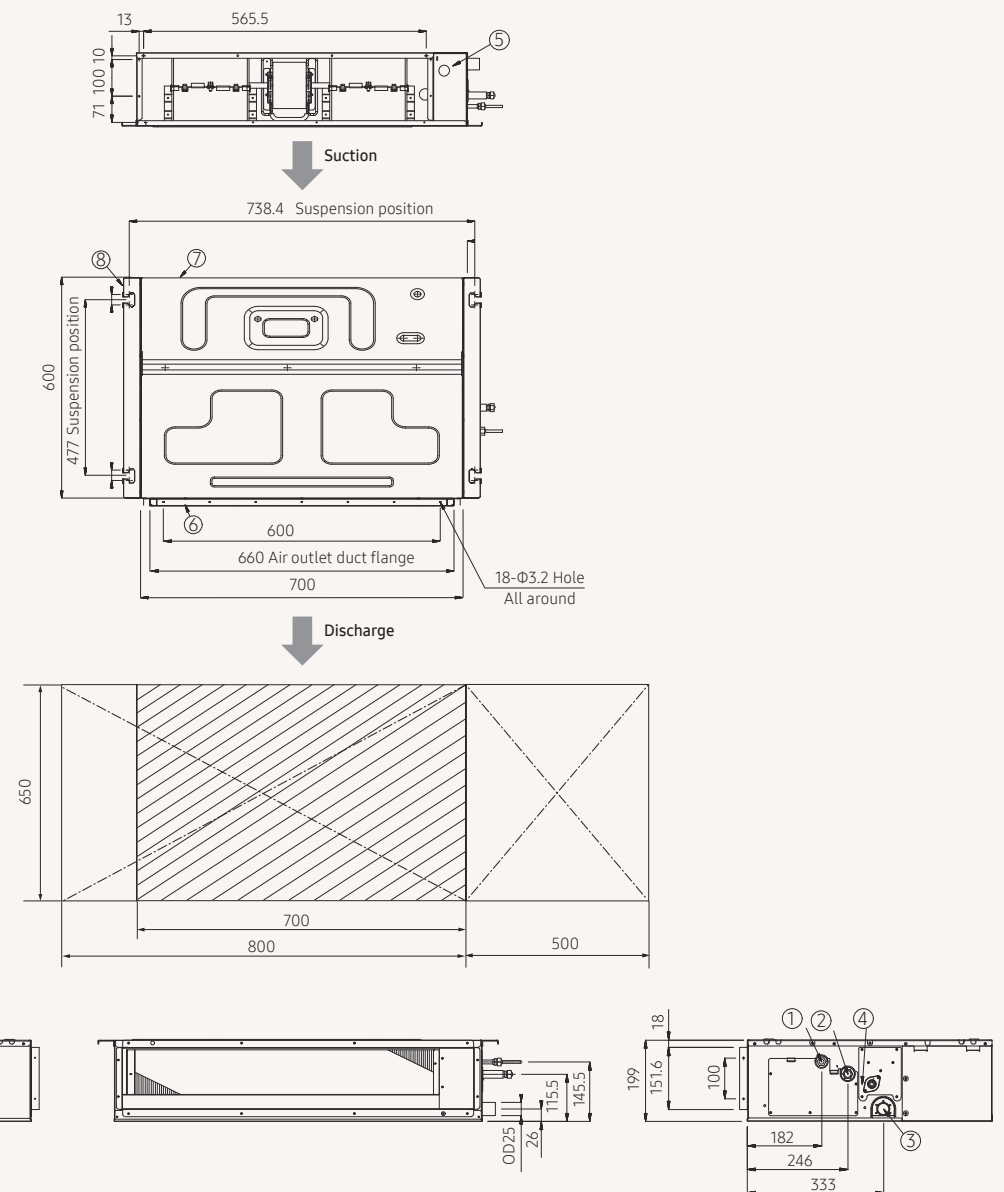


NO	Name	Description
1	Liquid pipe connection	Φ6.35(1/4")
2	Gas pipe connection	Φ12.70(1/2")
3	Drain pipe connection without drain pump	VP25(OD Φ32, ID Φ25)
4	Drain pipe connection with drain pump	VP25(OD Φ32, ID Φ25)
5	Power supply/Communication connection	-
6	Air discharge grille flange	-
7	Return air side	-
8	Hook	Φ9.52 or M10

31


Dimensional Drawings

TDM Plus MSP Duct

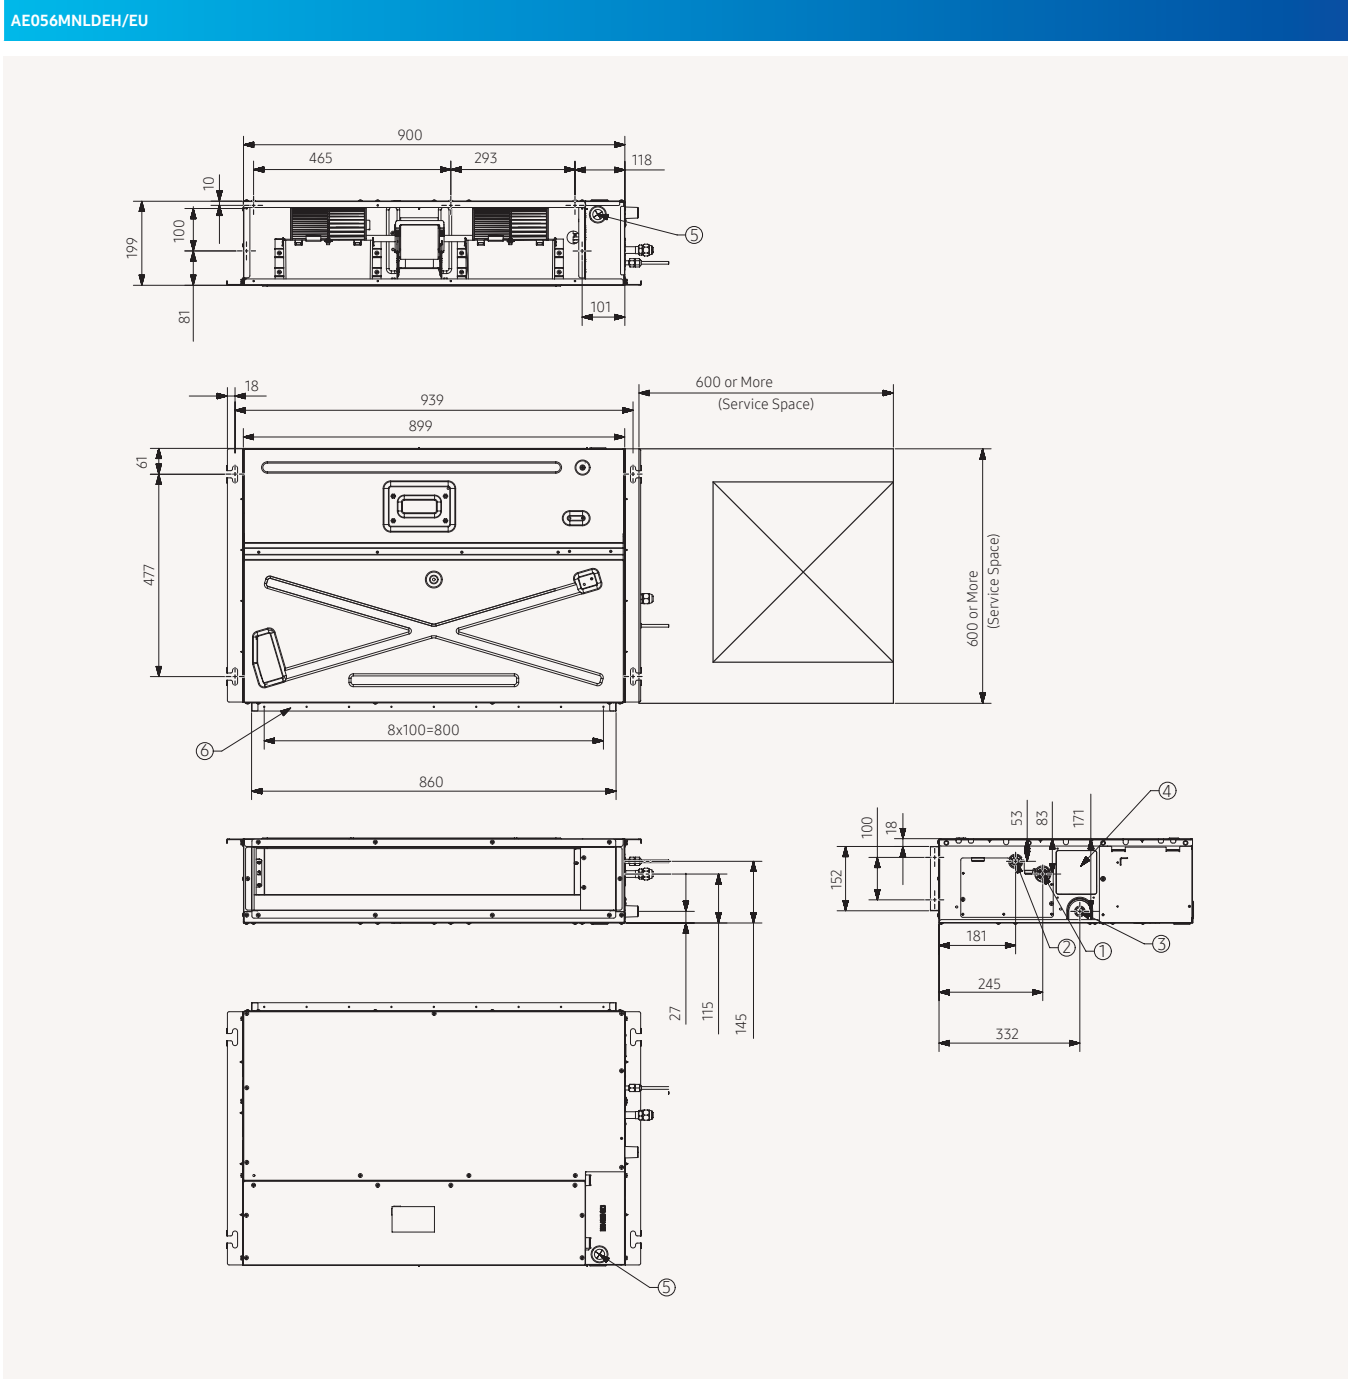

NO	Name	Description
1	Gas pipe connection	Φ12.7(1/2)
2	Liquid pipe connection	Φ6.35(1/4)
3	Drain pipe connection	VP-25(OD 32, ID 25)
4	Knockout hole for Drain pump	Option kit
5	Power supply & Communication wiring conduit	-
6	Air outlet duct flange	-

TDM Plus MSP Duct

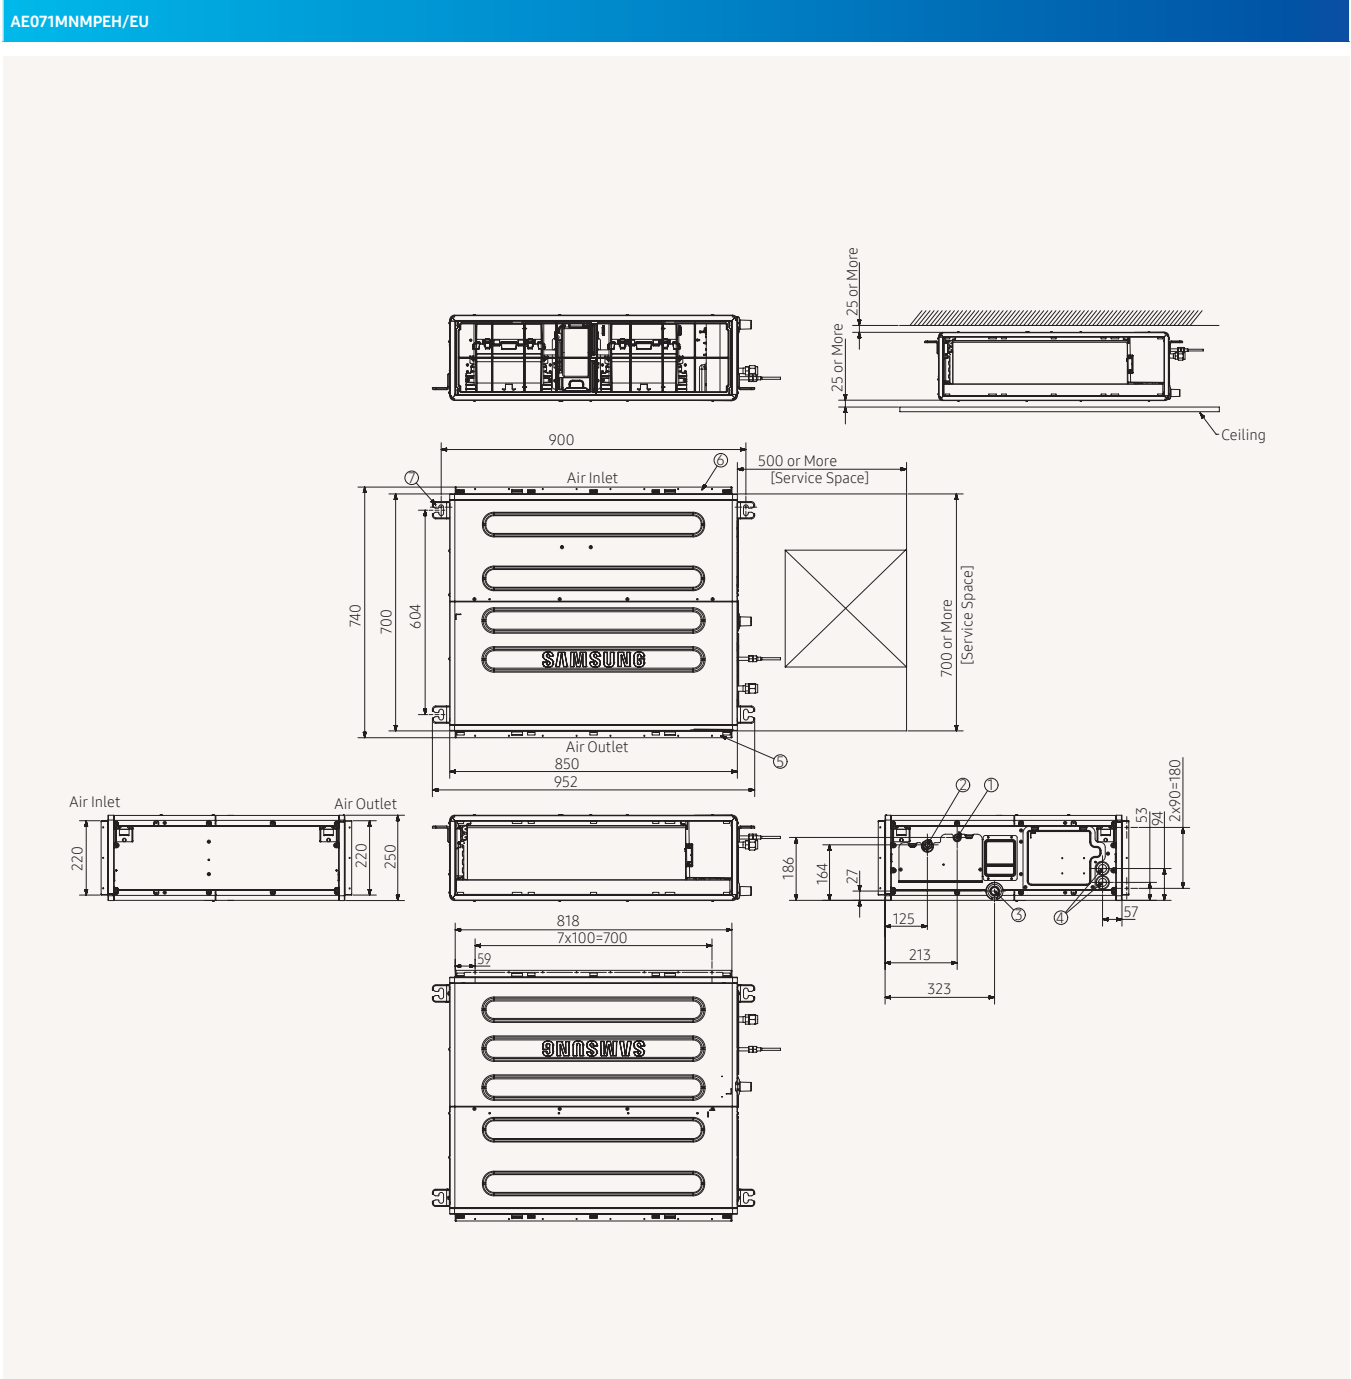


NO	Name	Description
1	Liquid pipe connection	Φ9.52(3/8)
2	Gas pipe connection	Φ15.88(5/8)
3	Drain pipe connection	VP-25(OD 32, ID 25)
4	Power supply & Communication wiring conduit	-
5	Air suction flange	-
6	Air discharge flange	-
7	Hook	Use M8-M10 bolt(4ea)

Dimensional Drawings

TDM Plus MSP Duct


AE090MNMPEH/EU

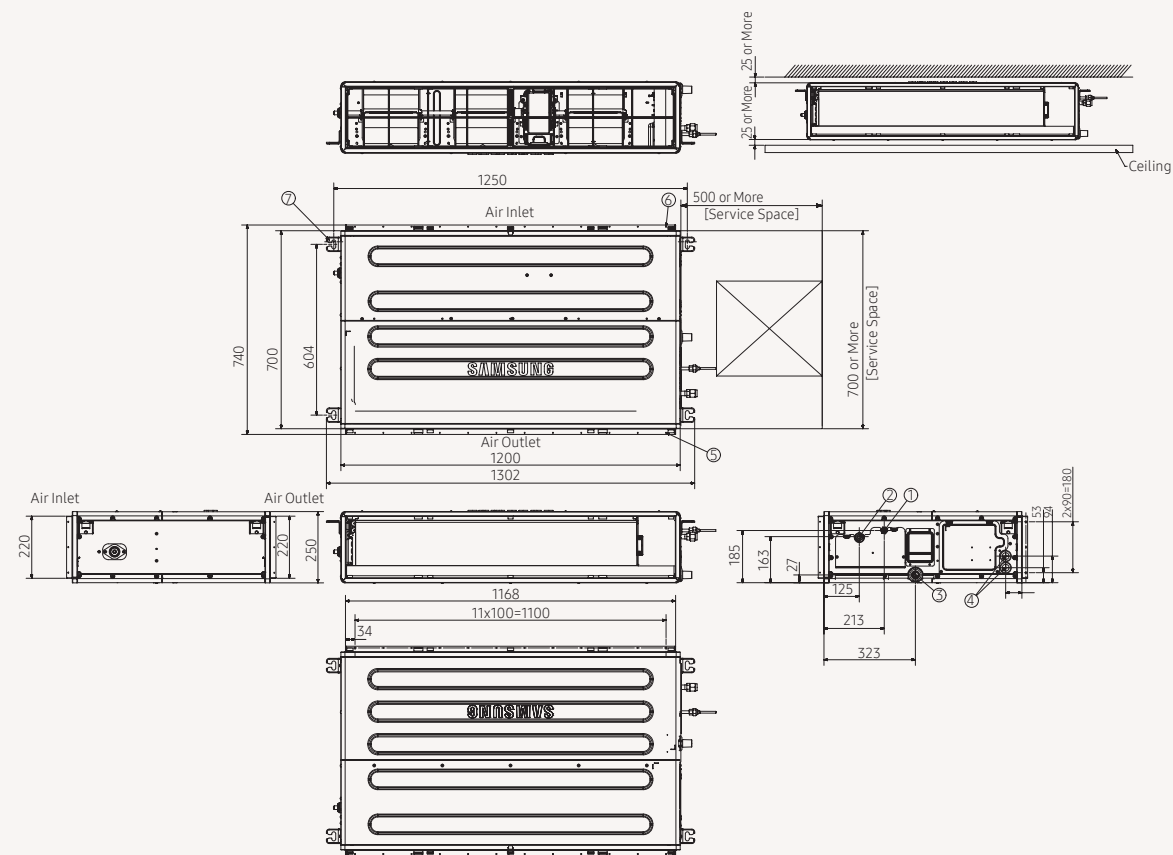

NO	Name	Description
1	Liquid pipe connection	Φ9.52(3/8)
2	Gas pipe connection	Φ15.88(5/8)
3	Drain pipe connection	VP-25(OD 32, ID 25)
4	Power supply & Communication wiring conduit	-
5	Air suction flange	-
6	Air discharge flange	-
7	Hook	Use M8-M10 bolt(4ea)

TDM Plus Console

AE022/028/036/056MNJDEH/EU

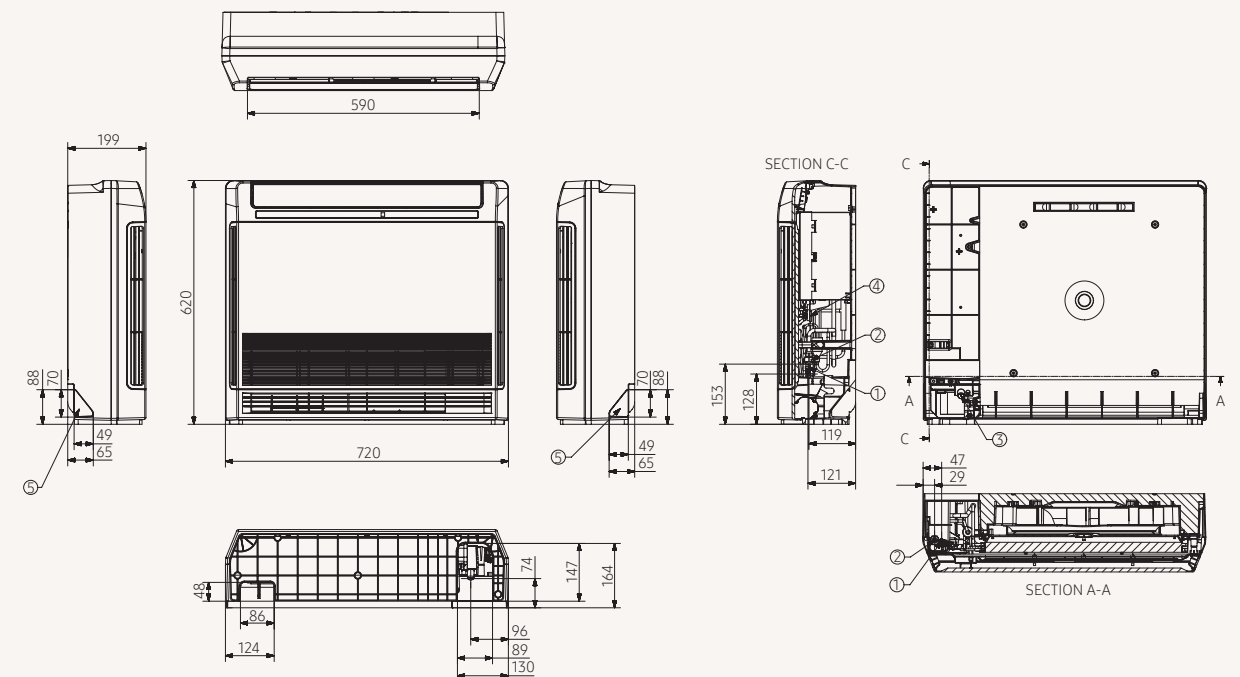


NO	Name	Description
1	Liquid pipe connection	Ø6.35(1/4)
2	Gas pipe connection	Ø12.7(1/2)
3	Drain pipe connection	ID 18mm[11/16 inch] Hose
4	Power supply & Communication wiring conduit	-
5	Knockout hole for drain hose	-

Dimensional Drawings

Wall-Mounted Hydro Unit

AE090/160MNYD*H/EU

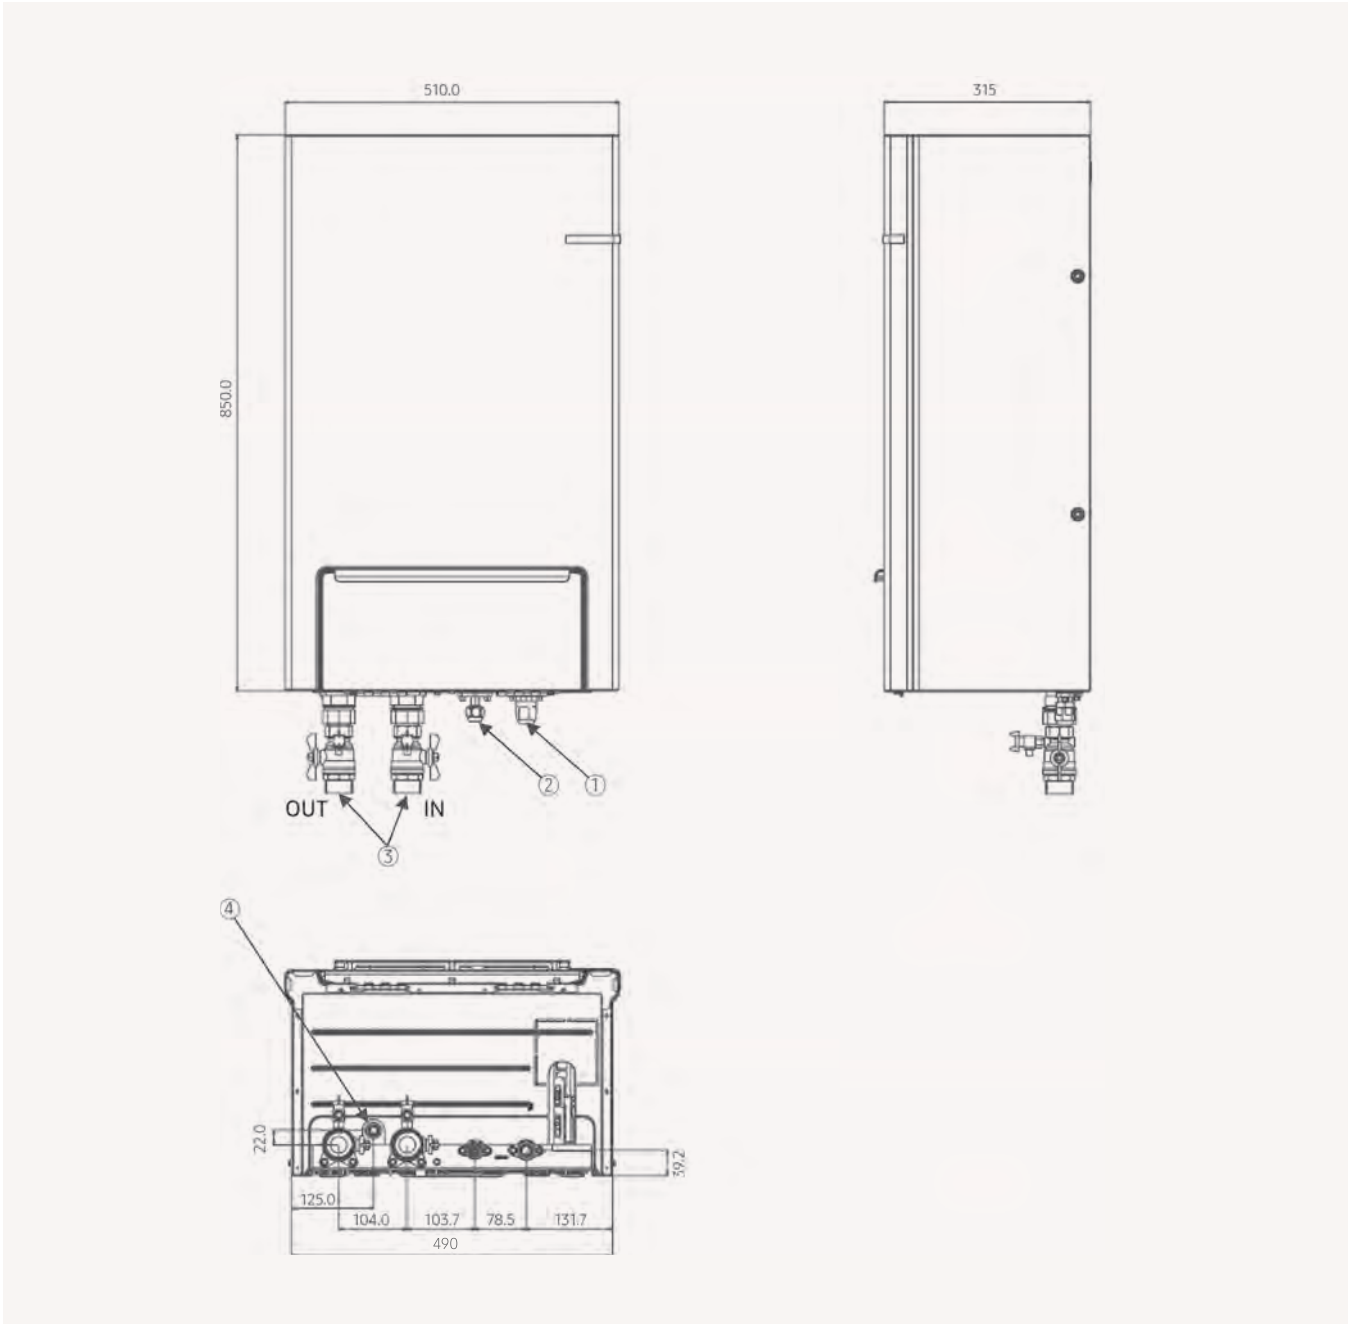

NO	Name	Description
1	Gas Ref. Pipe	φ 6.35 (1/4") (9kW), φ 9.52 (3/8) (16kW)
2	Liquid Ref. Pipe	φ 15.88 (5/8)
3	Water Pipe (Inlet/Outlet)	BSPP male 11/4
4	Drain Hose Connector	



Controls



Line-up

Category	Product	Model		Compatibility Table				
				EHS ClimateHub R32		EHS with Third Party Tank		
				EHS Mono R32	EHS Split R32	EHS Mono R32	EHS Split R32	EHS Split R410A
Individual Control System	Wireless Remote Controller	AR-EH03E						
		MR-EH00						
	Wired Remote Controller	MWR-WW10N		•	•	•	•*	
		MWR-WW00N						•*
		MWR-WE13N						
	Touch Controller	MWR-SH11N						
	Mono Control Kit	MIM-E03CN				•		
Centralised Control System	Touch Controller	MCM-A300N		•	•	•	•	•
	Wi-Fi Kit 2.0	MIM-H04EN		•	•	•	•	•
Integrated Control System	DMS 2.5	MIM-D01AN		•	•	•	•	•
Interface Module & Gateway	External Contact Interface Module	MIM-B14				•	•	•
	Pulse Interface Module (PIM)	MIM-B16N		•	•	•	•	•
	Modbus Interface module	MIM-B19N		•	•	•	•	•
Others	S-Converter	MIM-C02N		•	•	•	•	•
	External room sensor	MRW-TA		•	•	•	•	•
	Receiver Kit	MRK-A10N						

Compatibility Table					
TDM Plus ClimateHub R410A		TDM Plus R410A			
Wall-Mounted Hydro Unit	TDM Plus WindFree™ Deluxe	Slim Duct	MSP Duct	Console	
•*					
			optional	optional	•*
•					
•*					
		•	•	•	•
		•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•	•	•	•	•	•
•					

*No need to order separately, controller is already included.

Features

Controls | Individual Control

Wireless / Wired Remote Controllers		
Wireless Remote Controller Standard with WindFree™ AR-EH03E		• WindFree™ On/Off • Filter replacement alarm reset • Simple On/Off timer • Indoor unit option code setting • Temperature setting range • Auto/Cool/Dry : 18°C - 30°C • Heat : 16°C - 30°C • Direct/Indirect function On/Off • Motion Detect Sensor necessary • Net dimensions (W x H x D): 48 x 138 x 24mm
Wired Remote Controller Standard type for EHS MWR-WW10N		• Full color 4.3" LCD screen • Easy and Intuitive UI • 2-zone Control • LCD Backlight • Multiple Language support* • IR receiver is included • Daylight Savings Time • °C / °F Convertible • Error list display • Built-in room temperature sensor • SD slot • Net dimensions (W x H x D): 120 x 120 x 19mm * Available languages: English, German, Spanish, French, Italian and Polish.
Wired Remote Controller MWR-WE13N MWR-WW00N		• Air conditioner/ERV operation setting (Horizontal air flow, WindFree™) • LCD Backlight • Air conditioner/ERV error monitoring • Air conditioner individual blade control • Filter cleaning alert/reset alert time • Air conditioner/ERV interlocking control • Energy saving control • Automatic operation stop function • Weekly operation schedule setting • Button restriction function • Built-in room temperature sensor • Real time clock (Daylight Savings Time) • Control max. 16 indoor units (Air conditioner + ERV) in group with single wired remote controller • Net dimensions (W x H x D): 120 x 124 x 19.5mm
Wired Remote Controller Touch Simple type MWR-SH11N		• Touch screen wired remote controller • LCD Backlight • IR receiver is included • Away function • Quiet mode, Sleep mode • Reset filter cleaning alert indicator • Air conditioner Individual/group control • Operation On/Off timer function • WindFree™/Long horizontal wind • Button locking function • Eliminate Operation Mode function : Auto/Cool/Dry/Fan/Heat mode • Built-in room temperature sensor • °C / °F Convertible • Relative temperature setting function : -3 ~ +3°C setting • Control max. 16 indoor units in group with a single wired remote controller • Net dimensions (W x H x D): 94.2 x 122 x 19.5mm
Mono Control Kit MIM-E03CN		• EHS R32 Mono control Kit • Includes remote controller (MWR-WW10N) and flow sensor • Mounting box with the control printed board assembly • Leaving and return water sensors • Domestic Hot Water sensor • Net Dimensions (WxHxD) mm 290 x 110 x 370 mm

Controls | Centralised Control

Centralised Control Systems		
Touch Controller MCM-A300N		• 7 inch touch LCD controller • Controls max. 128 indoor units • Controls max. 12 zones • Schedule control, Indoor unit usage restriction, View indoor unit error history • Net dimensions (W x H x D): 205 x 163 x 38mm
Wi-Fi Kit 2.0 MIM-H04EN  		• Enhanced Convenience • Voice Control available through a smartphone with Bixby • Connected home with affordable units in every home using SmartThings • Welcome cooling and heating based on Geo-fencing • Individual indoor unit control • Personalized Climate Environment • Preferred automation • Multi-device experience interoperable with smart appliances • Energy Usage Monitoring • Current and daily, weekly or monthly energy usage* of the outdoor unit • Provides ease of installation • Easy set-up possible for up to 16 indoor units at once • Net dimensions (W x H x D): 185 x 130 x 29mm

Controls | Integrated Control

Integrated Control Systems		
DMS2.5 MIM-D01AN		• Built-in web server for PC-independent management and remote access control • Multiple upper-layer control access (S-NET 3, Web-client) • Weekly/Daily schedule control • Power distribution function • Current time management even during power failure (for 24 hours) • Emergency stop function with simple contact interface • Individual/Group control of up to 256 indoor units, AHU and ERV • User editable control logic • Accessible level management. • Dynamic security management • Operation & error history management • Data storage in non-volatile memory & SD memory • Net dimensions (W x H x D): 240 x 255 x 65mm

* Calculated by Samsung's own algorithm, it cannot be used as a legal basis.

Features

Controls | Interface devices

Module, Application Kit, Gateway		
External Contact Interface Module MIM-B14		The Samsung Guestroom Management System saves users the energy and money wasted on cooling an unoccupied room. The air conditioner is activated when the Key-Tag is in place and turns off when the Key-Tag is removed. An external contact interface module provides direct indoor unit control via an external contact signal, as well as window-synchronised indoor unit control. The emergency control function features simple contact input. Plus the module generates indoor unit operation/error state output through relay contacts. • Direct indoor unit control by external contact signal • Window-synchronised indoor unit control • Emergency control with simple contact input • Indoor unit operation/error state output through relay contacts • Net dimensions (W x H x D): 50 x 80 x 35mm
Modbus Interface Module MIM-B19N		A BMS or 3rd controller can control a Samsung SAC by using the Modbus protocol. • BMS unit protocol: Modbus RS485 (2 wires, max. 1,000m) • Unit connection protocol: Samsung Control Layer Protocol (R1/R2) • Max. No. of connection units: 1 outdoor unit (4 outdoor units including sub units in the case of modular installation) and 48 indoor units • Modbus interface module address range : up to 247 • Net dimensions (W x H): 50 x 80mm
Pulse Interface Module (PIM) MIM-B16N		The Watt-hour Meter Interface Module can be exclusively used for DMS 2.5 power distribution, displaying power consumption for each watt-hour meter. • Exclusive use for DMS 2.5 power distribution • Connection with up to 8 watt-hour meters • Pulse interface with watt-hour meters • Watt-hour meter - by 3rd party • Net dimensions (W x H x D): 240 x 255 x 65mm

Controls | Others

Module, Application Kit, Gateway		
S-Converter MIM-C02N		Communication converting module to connect a Samsung system air conditioner to a PC • Main reasons for use: - To connect with test run program [Test run program] - S-NET Pro: Conventional communication - S-NET Pro2: New communication • Net dimensions (W x H x D): 66 x 92 x 28mm
External Room Sensor MRW-TA		• Indoor unit is operated by MRW-TA instead of its own sensor. • Wire length: 12 m (39 ft)
Receiver Kit MRK-A10N		• Concealed wireless signal receiver • Filter replacement sign • Fan operation display • Operation Timer setting display • Operation On/Off button • Operation On display LED (blue) • Defrost operation display LED (red) • Net dimensions (W x H x D): 80 x 130 x 28mm



Accessories

Compatibility

Accessories		Name	Indoor unit	TDM Plus Slim Duct	TDM Plus MSP Duct	TDM Plus WindFree™ Deluxe	TDM Plus Console	Wall-Mounted Hydro Unit	EHS ClimateHub
		Name	Model code	2.2-5.6 kW	7.1-9.0 kW	2.2- 7.1 kW	2.2-5.6 kW	9.0/16.0 kW	200/260 L
EEV Kit (1/2/3 room)		1 Indoor	MEV-E24SA			•			
			MEV-E32SA			•			
		2 Indoor	MXD-E24K132A			•			
			MXD-E24K200A			•			
			MXD-E32K200A			•			
		3 Indoor	MXD-E24K232A			•			
			MXD-E24K300A			•			
			MXD-E32K224A			•			
			MXD-E32K300A			•			
Y-Joint		(≤15.0 kW and below)	MXJ-YA1509M	•	•	•	•	• (TDM Plus only)	• (TDM Plus only)
Drain Pump		Internal	MDP-E075SEE3D	•					
		External	MDP-G075SP		•				
		Internal	MDP-G075SQ		•				
Backup Heater		4 kW	MHC-400FE						•
		6 kW	MHC-600FE						•



Design and Support




Samsung Climate Solutions Partner Portal

As one of Samsung's registered Climate Solutions partners, you will have access to our Partner Portal and its many benefits. Whether you are looking for marketing materials or technical product documentation, requesting technical support or registering for training, the Samsung Climate Solutions Partner Portal offers you everything you need to consistently deliver the best results.



Access technical resources

The Technical Resources section provides you with all of the relevant information you need to understand the product's functionality and to prepare and design projects. A library full of technical information is at your fingertips, ranging from technical data books, BIM files and certificates to exploded views, drawings and different kinds of manuals.

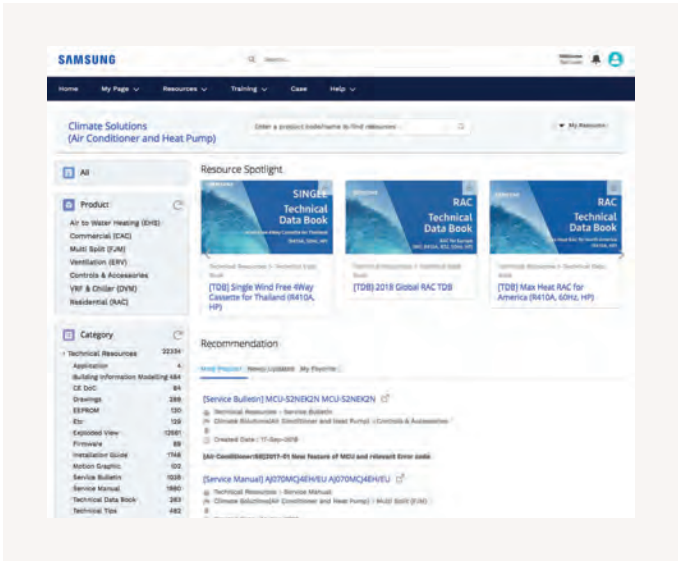

Obtain marketing resources

Potential buyers like to know that you are on the cutting edge of Samsung's latest innovations. To enable you to align with Samsung's marketing initiatives, the Partner Portal provides you with useful downloadable assets such as images and videos, designed to make your marketing activities easy and effective.

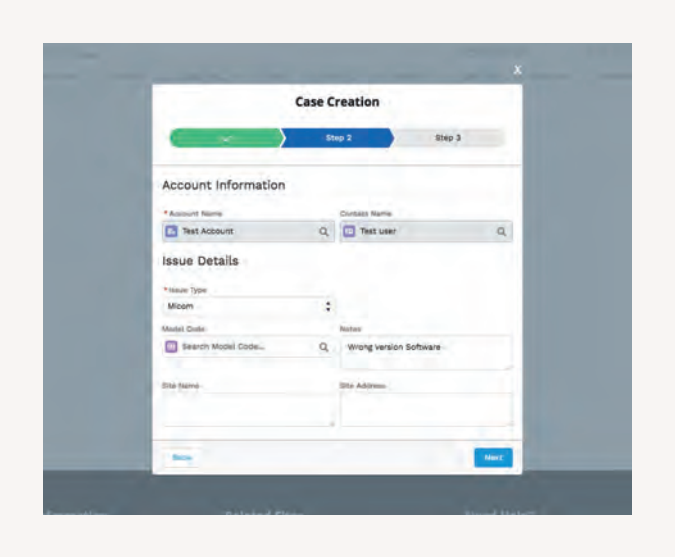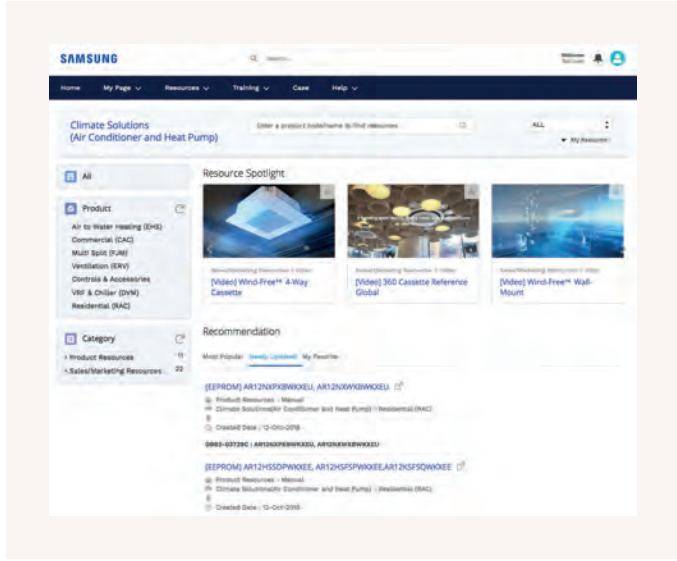


Request technical support

You can easily request technical support through the Samsung Partner Portal by reporting your case using our built-in ticketing system. You can rest assured that our well-trained technical experts will work to solve your issue as soon as possible.

Register for training

If you are dedicated to becoming a Samsung climate solutions expert, you can access Samsung's educational portal for training sessions provided by experienced trainers. The portal allows you to search for online courses and materials, test your climate solutions knowledge, and more. The Samsung Business Academy is here to help you succeed.¹

¹ The registration process for and availability of training courses may vary per country. Please contact your direct Samsung contact person for more information.

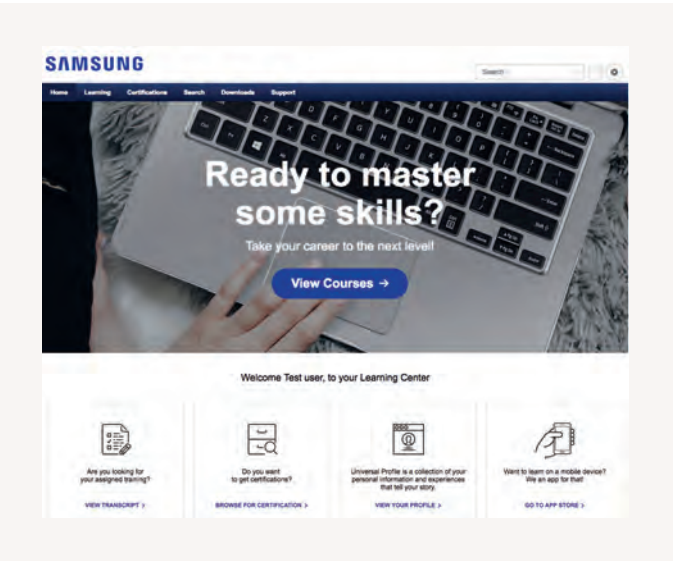

How to access

1 WWW

Register

To register for the Samsung Climate Solutions Partner Portal, open your web browser¹ and go to partnerhub.samsung.com/climate to complete the registration form.

2 ****

Access

Your information will be verified and your account will be activated. You will receive your personal login details.

3 [Gear Icon]

Manage account

Keep your account details up to date and invite your colleagues to join.

4 [Hand Icon]

Search and download

Access a full library of resources, request technical support, or sign up for a Climate Solutions Academy training session.

¹ Google Chrome is the recommended web browser for using the Samsung Climate Solutions Partner Portal.



DVM Pro 2.0

Samsung DVM Pro 2.0


NEW

Samsung introduces new updated version of DVM Pro version 2.0. Product selection is extended and now the tool is also available for EHS and HVM lineup.

Samsung DVM Pro 2.0 is an advanced design automation programme which helps you to select the most suitable equipment for easily and precisely designing your air conditioning system. It helps to ensure that the system's design falls within Samsung's engineering guidelines. With its reports, pipe and wire diagrams, additional refrigerant values and other information, Samsung DVM Pro 2.0 is a powerful tool for engineers, designers or installers.

Sales Mode

Sales Mode enables users to define their requirements and select air conditioning products quickly and easily.

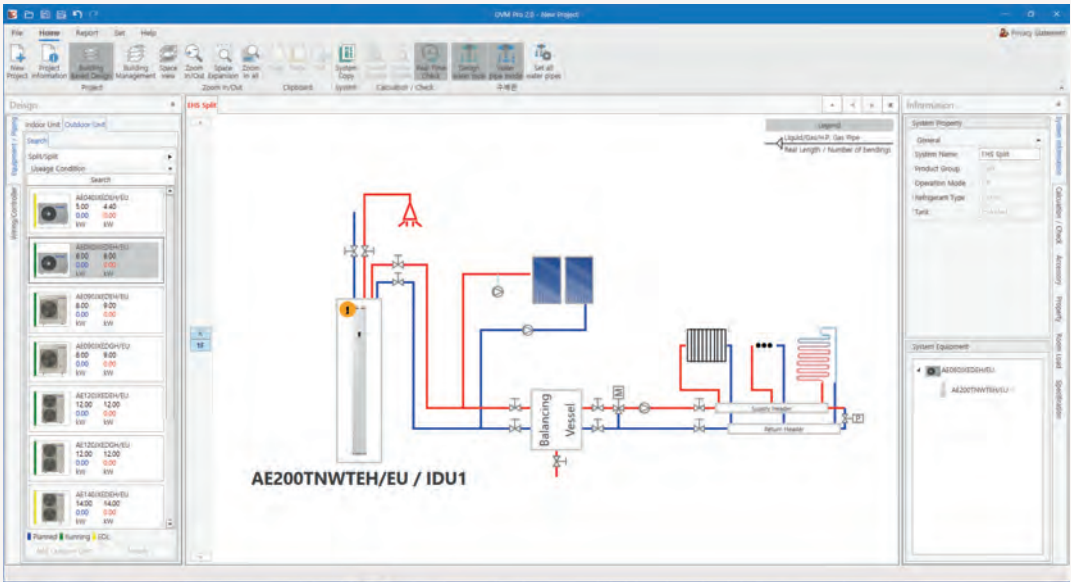

Product selection
List of equipment, including indoor units, outdoor units, controls and accessories

Piping schematics
Basic or manual selection with system check and capacity simulation

Reports
Specifications, diagrams in DWG & BMP format, quotations

Control systems
Automatic control unit selection


Updated Toolbar NEW
User-friendly tool bar helps to guide intuitively

Wiring schematics
Automatic diagrams including communication wiring for indoor/outdoor/control units and electric power meters

CAD Mode

CAD Mode is an in-depth and precise design tool that enables users to design their air conditioning systems using AutoCAD software¹.

¹ Sourced separately.

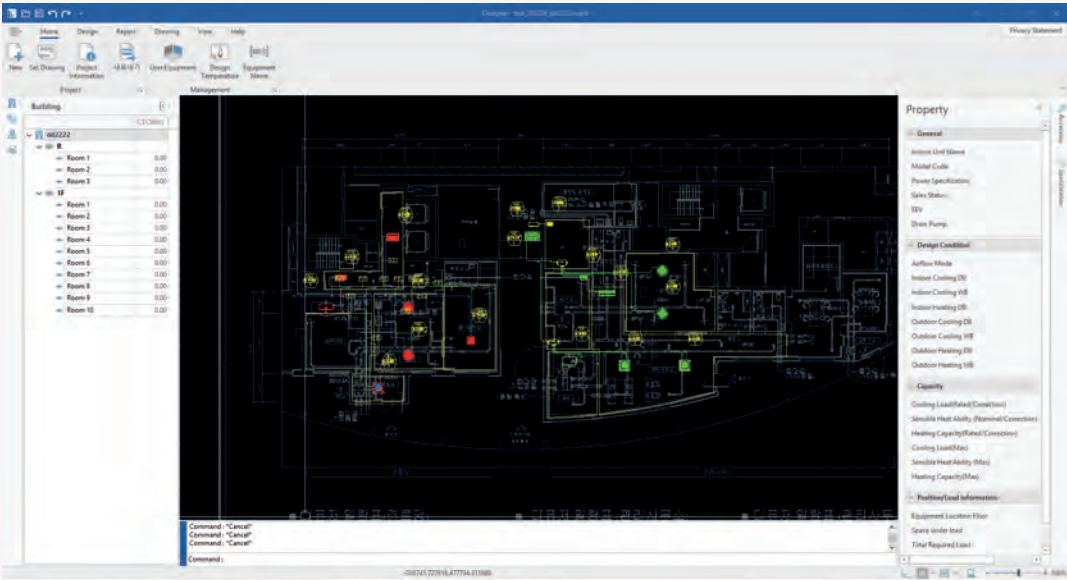

Pipe sizing & lengths
Refrigerant & drain pipe sizing

System check
Installation regulation & refrigerant charging

Automatic selection
Refnet joint, header & distributor kit

Performance simulation
Capacity correction tool against specific design conditions

Automatic report
Piping installation

Design without AutoCAD NEW
Compatible with AutoCAD and AutoCAD LT for DWG.

How to access



Go to dvmpo.mkt.samsung.com to access the Samsung DVM Pro 2.0 Portal¹. If you do not have access yet, complete the registration process and you will be sent the access details.



Click on DVM Pro 2.0 via the main menu and scroll to the end of the page to select the option DVM Pro 2.0 download.



Download the DVM Pro 2.0 installation file, view the user manuals, and start designing your project.

¹ Google Chrome is the recommended web browser for using the Samsung DVM Pro 2.0 Portal.



Samsung Climate Solutions Academy

Samsung Climate Solutions Academy

Samsung Climate Solutions Academy is committed to providing engineers with the technical skills required to install a Samsung product efficiently, and to help relay necessary information to users. All courses are designed to provide attendees with the opportunity to develop both theoretical and practical knowledge of Samsung's vast range of equipment and solutions.

Samsung training centres in Europe



Available training modules

Essential courses: Basic commercial training

- The product line-up, accessories and available controls
- The unique features of Samsung products
- Installation considerations

Advanced courses: Technical training

- How to correctly install and configure a system
- Commissioning: common issues during commissioning and how to resolve any challenges
- Troubleshooting and fault-finding (by use of E-codes)
- Control logic
- Case studies

Advanced courses: Design training

- Understanding customers' needs and offering possible solutions
- DVM Pro 2.0 - Samsung's advanced design tool
- Case studies

Note: the registration process for and availability of training courses may vary per country. Please contact your Samsung representative for more information.

How to register for training



Search

To check for available training courses, go to Samsung Business Academy (SBA) via the Samsung Climate Solutions Partner Portal¹: partnerhub.samsung.com/climate. Search the online event calendar and select the training course you would like to attend.



Register

After identifying the training course you would like to attend, follow the registration process. Once you have registered successfully you will receive a confirmation e-mail.



Get certified

Following confirmation of your registration, we will invite you to one of our training centres. You will be trained by one of our specialised Master Trainers or Product Specialists, and receive a Certificate of Completion.

¹ Google Chrome is the recommended web browser for using the Samsung Climate Solutions Partner Portal.


Hydraulic Schematics



ClimateHub Split

Application examples


Application 1: Space heating + water heating

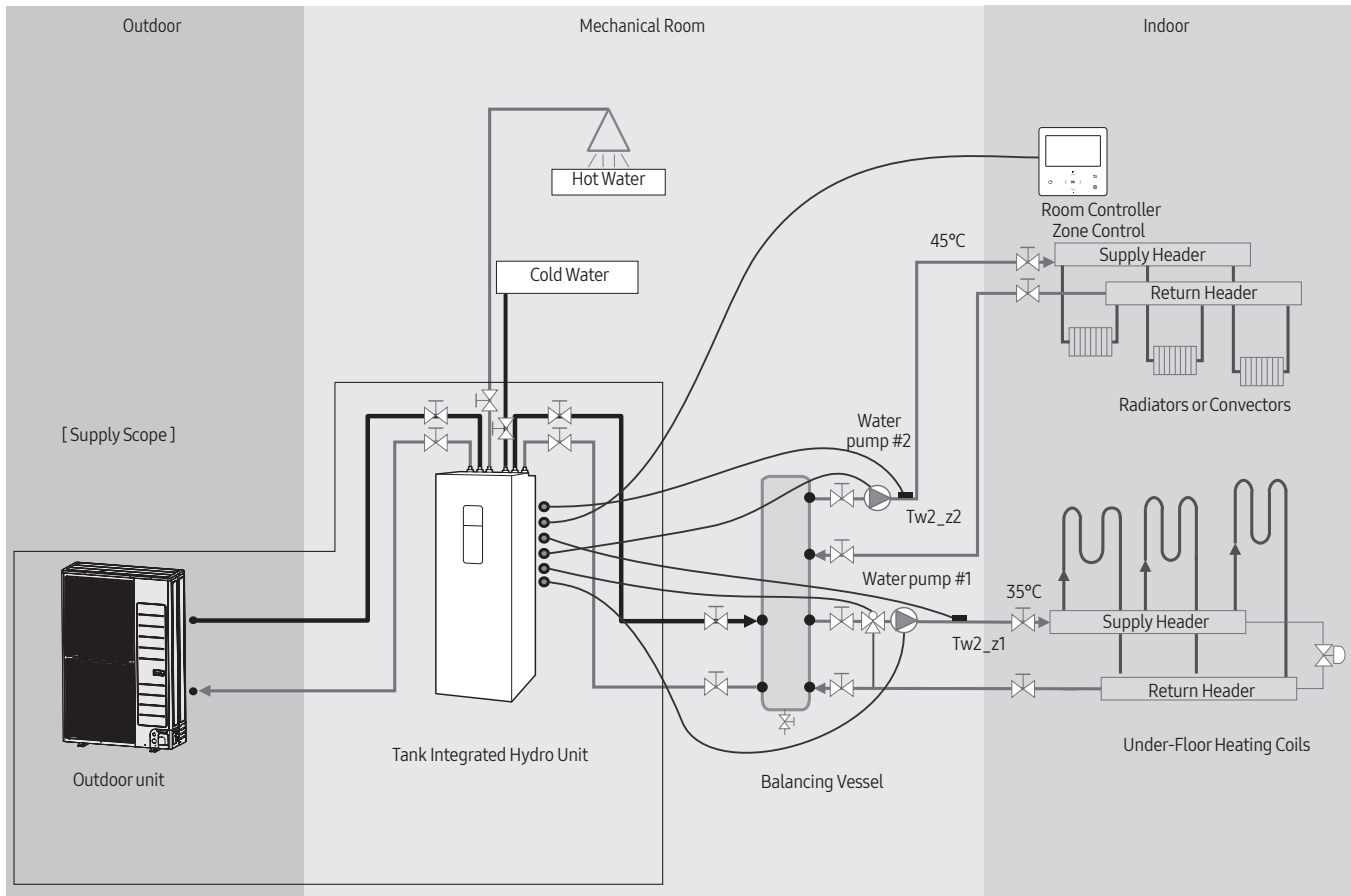

ClimateHub Split

Application examples


Application 2: Hybrid application (backup boiler and solar panel connected)

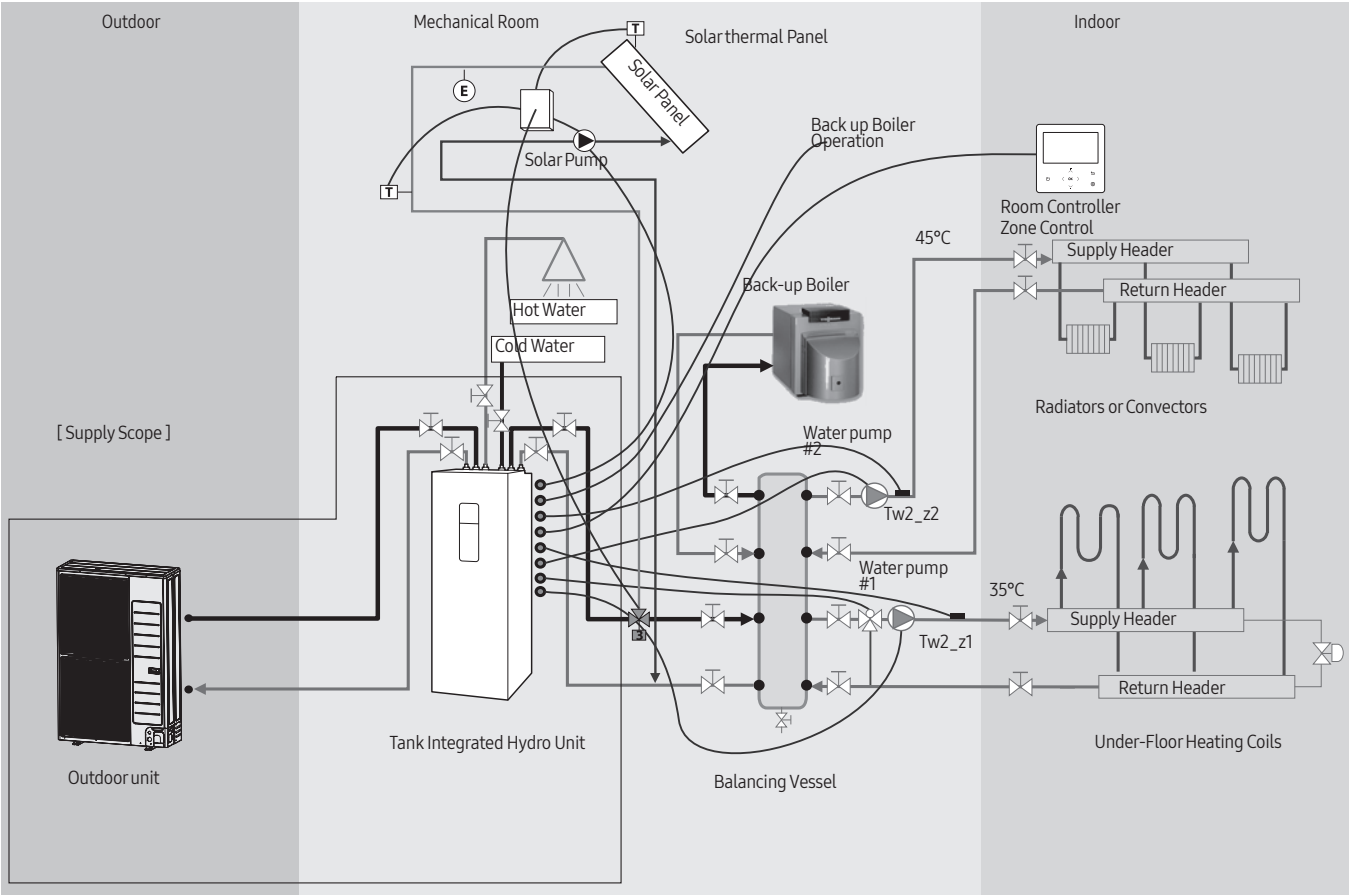

ClimateHub Mono

Application examples


Application 3: Space heating + water heating

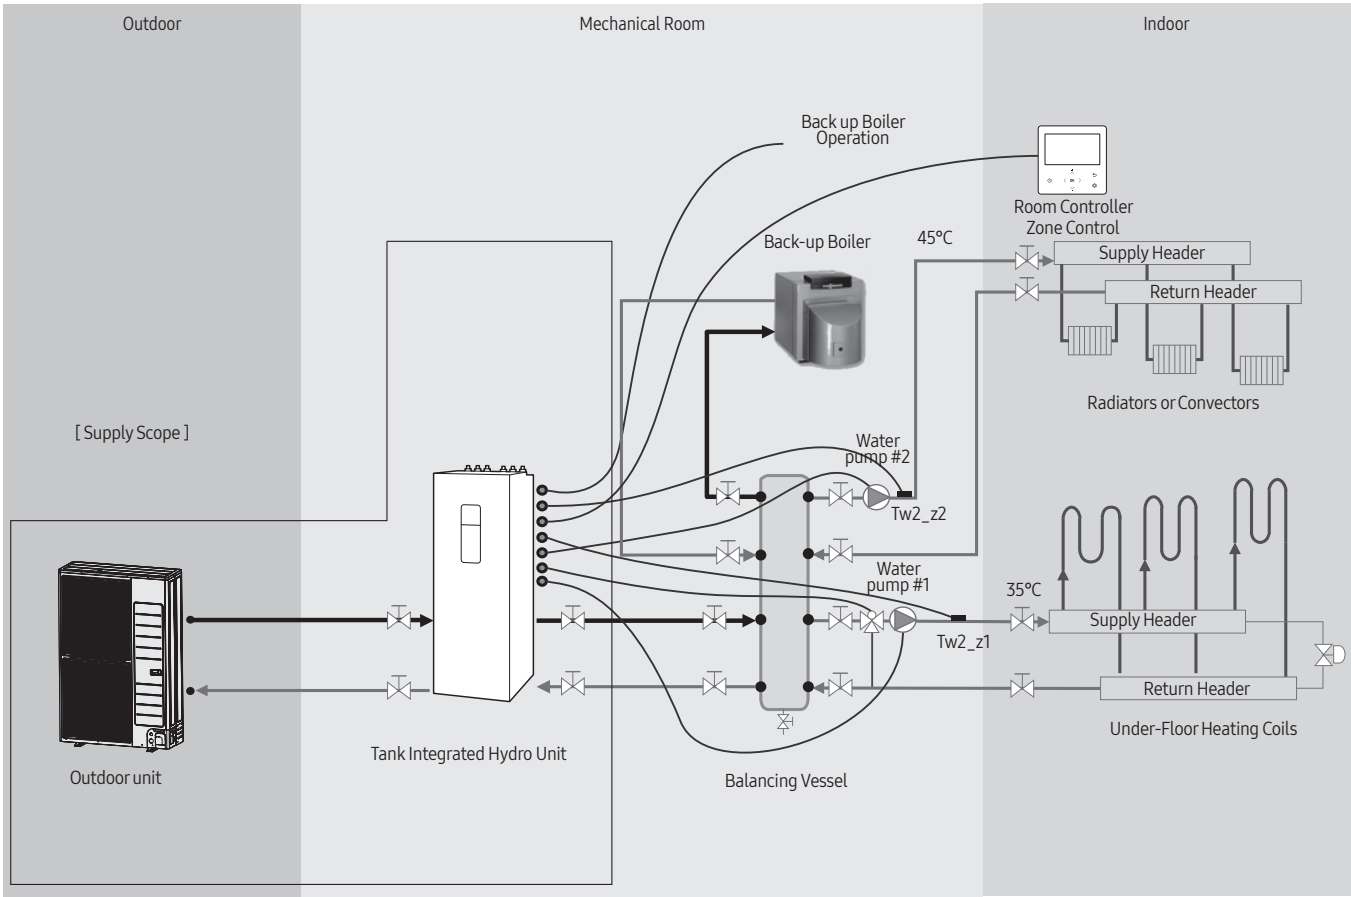

ClimateHub TDM Plus

Application examples

Application 4: Space heating + water heating/ A2A cooling

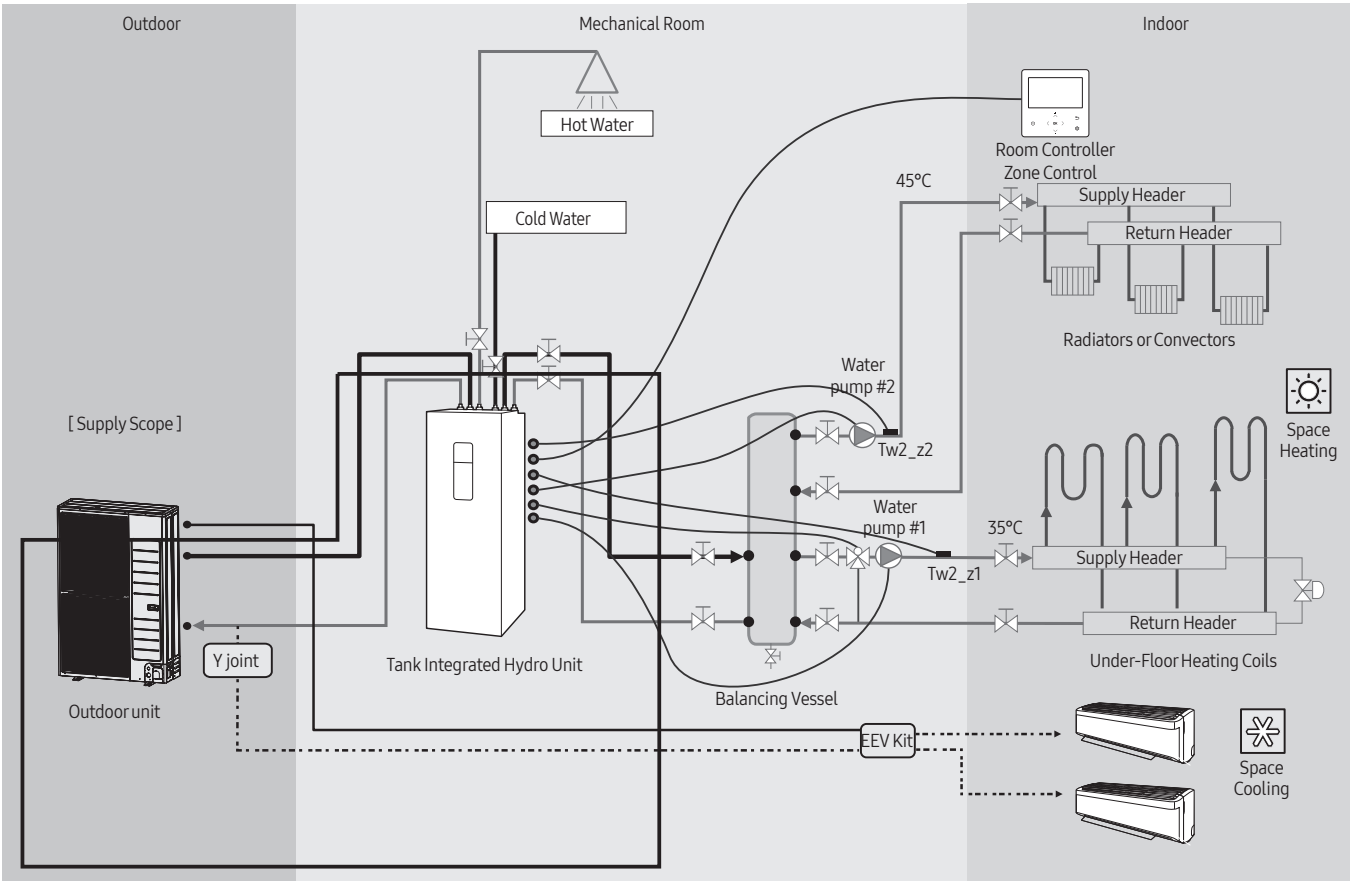

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are 20 columns and 20 rows of squares, creating a total of 400 square units. The grid covers the entire area of the page, leaving no margins or other markings.

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

[illegible]

Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are 20 columns and 20 rows of squares, creating a total of 400 square units. The grid covers the entire area of the page, leaving no margins or other markings.

Notes

This image shows a single page of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

Notes

[illegible]

Notes

[illegible]

Notes

This image shows a full page of blank graph paper. The grid consists of small, equal-sized squares formed by thin black lines. There are 20 columns and 20 rows of squares, creating a total of 400 square units. The grid covers the entire area of the page, leaving no margins or other markings.

Learn more about Samsung Climate Solutions at:
www.samsung.com/climate

Copyright © 2020 Samsung Electronics Air Conditioner Europe B.V. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co., Ltd. Specifications and designs are subject to change without notice and may include preliminary information. Non-metric weights and measurements are approximate. All data was deemed correct at the time of creation. Samsung is not liable for errors or omissions. Some images may be digitally altered. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognised and acknowledged.



Samsung Electronics Co., Ltd. participates in the Eurovent Certification Programme (ECP) for Air Conditioners (AC), Variable Refrigerant Flow (VRF) and Liquid Chilling Packages Heat Pump (LCP-HP). To check the ongoing validity of certification, please visit: www.eurovent-certification.com

Samsung Electronics Air Conditioner Europe B.V.
Evert van de Beekstraat 310, 1118 CX Schiphol
P.O. Box 75810, 1118 ZZ Schiphol
+31 (0)8 81 41 61 00
The Netherlands

SAMSUNG