



**DESIGNED FOR
SAFEKEEPING.**


Medical Grade Refrigerators and Freezers
Cold-storage solutions designed to keep medical products safe

Ensure safety and potency with medical grade refrigerators and freezers.

Your facility stores highly valuable medications, vaccines and other specimens that require cold storage to maintain effectiveness. But not just any refrigerator or freezer will do.


You need medical grade equipment to meet the demanding temperature requirements for safe medical product storage and that adheres to the Center for Disease Control and Prevention (CDC) guidelines.*

Medical and pharmacy-grade refrigerators and freezers contain features household equipment does not, including:



Our comprehensive offering of medical-grade refrigerators and freezers is sure to meet your specific needs. Choose from undercounter models to freestanding units all in a variety of sizes and styles.

To make it easy for you to select the refrigerator or freezer that best suits your needs, we have curated our wide selection into three simple categories:

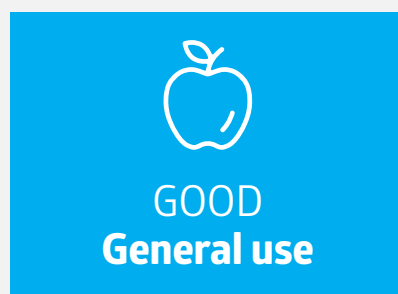




GOOD General use


These general purpose refrigerators, freezers and combination units provide a budget-friendly solution for safe sample storage. Our range of models is specifically designed for routine applications with sizes from small undercounter to larger freestanding models. Ideal for lower temperature regulated items such as nutritional goods and food products.

1.5 Cu. Ft. Standard Undercounter Freestanding Freezer

- » Mechanical thermostat
- » Average cycle temperature: -20°C
- » Keyed door lock
- » Magnetic door gasket for positive seal
- » Heavy duty door handle
- » Pyxis, Omnicell and AcuDose RX compatible




18½" W | 19½" D | 19½" H

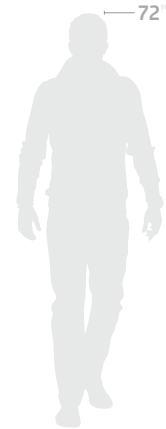


Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBCUCFS0220M	Manual	1 solid, right hinge	1 fixed	46 lb.	115	60	1/10	1.1

5 Cu. Ft. Standard Undercounter Freestanding Refrigerator

- » Mechanical thermostat
- » Temperature range : 0°C to 10°C
- » Keyed door lock
- » Magnetic door gasket for positive seal
- » Interior light
- » White cabinet and door
- » HFC-free refrigerant (R600a), foam insulation and packaging



20" W | 21¾" D | 32" H

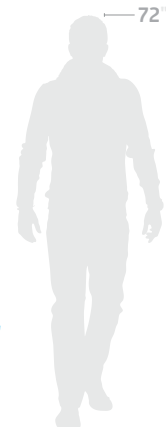

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBCUCFS0504W	Cycle	1 solid, right hinge	3-1 fixed/2 adjustable	69 lb.	115	60	1/7	.90


For product information and price quotes, contact LaboratoryEquipment@medline.com
For freight quotes, contact CapitalFreight@medline.com



GOOD
General use

3 Cu. Ft. Standard Dual Temp Refrigerator/Freezer

- » Mechanical thermostat
- » Refrigerator temperature range: 0°C to 10°C
- » Freezer temperature range: -8°C to -21°C
- » Pyxis, Omnicell and AcuDose RX compatible
- » Magnetic door gasket for positive seal
- » White cabinet and doors

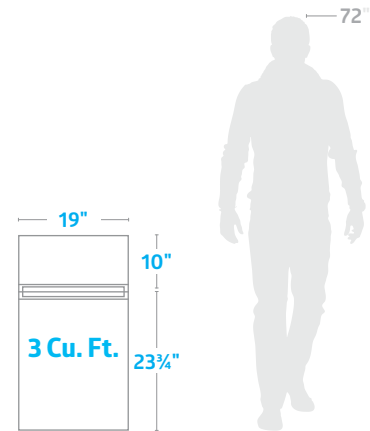


19" W | 19 1/2" D | 33 3/4" H

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBABTRFC3M	Manual	2 solid, right hinge	2—1 adjustable/1 fixed, 1 bin	66 lb.	115	60	1/6	1.3

17 Cu. Ft. Standard Dual Temp Refrigerator/Freezer

- » Refrigerator temperature range: 0°C to 10°C
- » Freezer chamber: -15°C to -10°C with two auto defrost cycles warming to 0°C per day
- » Mechanical thermostat
- » Magnetic door gasket for positive seal; heavy duty door handles
- » Two probe access ports (3/8"); one, refrigerator/one, freezer
- » White textured cabinet and door

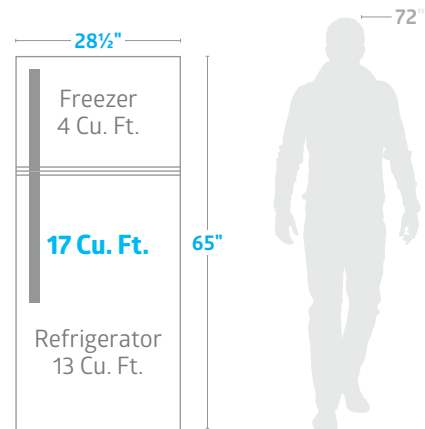

28 1/2" W | 32" D | 65" H

Item No.	Defrost	Door	Refrigerator Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBABTRFC17A	Auto	2 solid, right hinge	3—1 fixed/2 adjustable	190 lb.	115	60	1/4	6




**BETTER
Medical grade**

Designed for a variety of applications requiring close temperature control, our medical grade refrigerators and freezers are ideal for safely storing medications and specimens.

2.5 Cu. Ft. Pharma Glass Door Undercounter Freestanding Refrigerator


- » Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- » Pyxis, Omnicell and AcuDose RX compatible
- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Remote alarm contacts

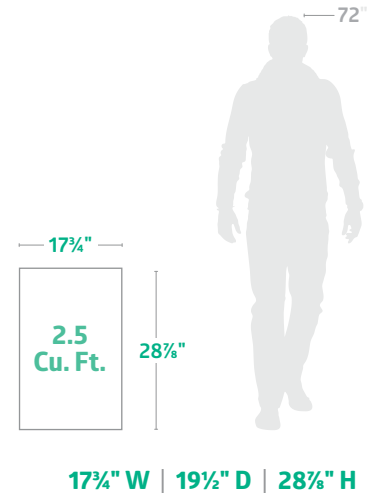

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBCUCFS0204G	Cycle	1 glass swing door, right hinge	4 adjustable shelves (2 large, 2 small) with guard rail on back	68 lb.	115	60	1/8	.90

4.6 Cu. Ft. Glass Built-In Undercounter Refrigerator

- » Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Remote alarm contacts
- » Pyxis, Omnicell and AcuDose RX compatible
- » Keyed door lock

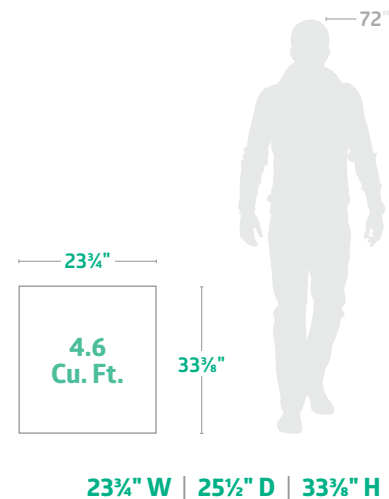

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBPHCB10404G	Cycle	1 glass swing door, right hinge	3 shelves (2 adjustable, 1 fixed)	97 lb.	115	60	1/8	1.74

For product information and price quotes, contact LaboratoryEquipment@medline.com
For freight quotes, contact CapitalFreight@medline.com




**BETTER
Medical grade**

10.5 Cu. Ft. Glass Vaccine Refrigerator

- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Remote alarm contacts
- » Adjustable operating temperature range: 36°F to 46°F (2°C -8°C)
- » Pyxis, Omnicell and AcuDose RX compatible



± 4.0

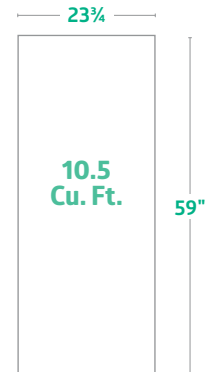

23 3/4" W | 26 1/2" D | 59" H


Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBHABTHC10PG	Cycle	1 glass swing door, right hinge	6 adjustable	160 lb.	115	60	1/3	2.3

24 Cu. Ft. Single Glass Door Refrigerator

- » Digital 4x20 character LCD display microprocessor temperature controller
- » Audible and visual Hi/Lo temperature alarm
- » Adjustable control range from +2°C to +10°C; factory preset at +4°C
- » Remote alarm contacts
- » Door opening counter with 24 hour automatic reset



± 4.0

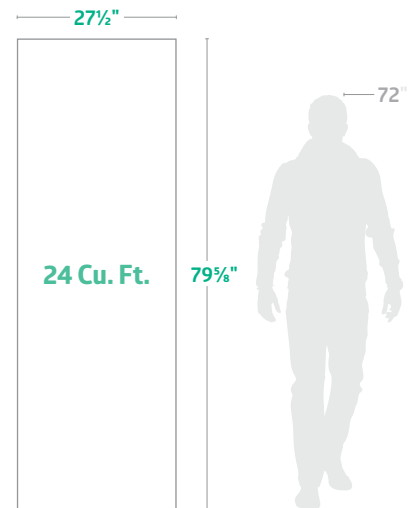


27 1/2" W | 35 1/2" D | 79 3/4" H

Item No.	Defrost	Door	Refrigerator Shelves	Weight	Volts	Hertz	H.P.	Amps
NOENSPR241WWG	Cycle	1 glass swing door, right hinge	3 adjustable	311 lb.	115	60	1/3	8.6

12 Cu. Ft. Glass Door Refrigerator/Freezer

- » Digital temperature display, refrigerator and freezer
- » Adjustable operating temperature range: Refrigerator: 1°C to 10°C; Freezer: -15°C to -25°C
- » Audible and visual high and low temperature alarms, refrigerator and freezer
- » 2 probes; 1 in air and 1 in sample bottle, in both Refrigerator and Freezer
- » Remote alarm contacts, refrigerator and freezer

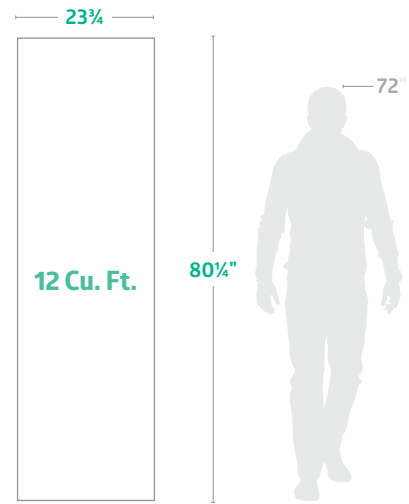


23 3/4" W | 26 1/2" D | 80 1/4" H

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBPHHCRFC12G	Manual defrost freezer/cycle defrost refrigerator	2 exterior swing doors (glass door refrigerator/solid door freezer), right hinged, not reversible	6 adjustable, refrig/ 2 adjustable, freezer	200 lb.	115	60	1/3 refrig/ 1/8 freezer	1

24 Cu. Ft. 1 Solid Door Lab and Pharmacy Freezer

- » Hi/Lo product temperature alarms, audible and visual
- » 2 levels of user password protection (set points and parameters)
- » Digital calibration air and product
- » Real time clock with date and time display
- » Adjustable alarm beep or constant on (key pad selectable)

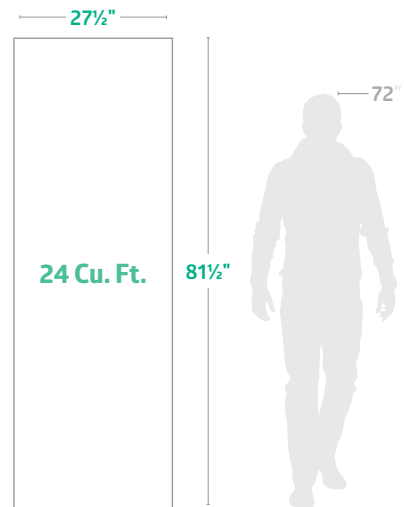

27 1/2" W | 34 3/8" D | 81 1/2" H

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
NOENSPF241WWW	Auto	1 solid door	8 adjustable	335 lb.	115	60	1/2	9.7

For product information and price quotes, contact LaboratoryEquipment@medline.com
 For freight quotes, contact CapitalFreight@medline.com



BEST Pharmaceutical


For supreme protection, our best refrigerators and freezers are designed for highly temperature-regulated items, including pharmaceuticals, vaccines, blood and plasma.

2.5 Cu. Ft. Solid Door Refrigerator

- » Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- » Pyxis, Omnicell and AcuDose RX compatible
- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Remote alarm contacts
- » 2 probes; 1 in air and 1 in sample bottle



± 4.0



17 3/4" W | 19 1/2" D | 28 3/8" H


Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBPHUCFS0204	Cycle	1 solid door	4 adjustable	68 lb.	115	60	1/8	.9

4.2 Cu. Ft. Built-In Undercounter Freezer

- » Adjustable operating temperature range: 5°F to -13°F (-15°C to -25°C)
- » Max air temp in empty freezer: +4.9°C; max air temp in loaded freezer: +0.6°C. Max sample temp in empty freezer: -9.1°C Max sample temp in loaded freezer: -11.2°C
- » Pyxis, Omnicell and AcuDose RX compatible
- » Keyed door lock



± 4.0




23 3/4" W | 24 1/2" D | 33 3/8" H

Item No.	Defrost	Door	Refrigerator Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBPHCB10420A	Auto	1 glass swing door, right hinge	3 adjustable	100 lb.	115	60	1/8	1.8

10.5 Cu. Ft. Glass Door Compact Refrigerator

- » Adjustable operating temperature range: 36°F to 46°F (2°C - 8°C)
- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Pyxis, Omnicell and AcuDose RX compatible
- » Vaccine storage power cord warning label
- » Keyed door lock

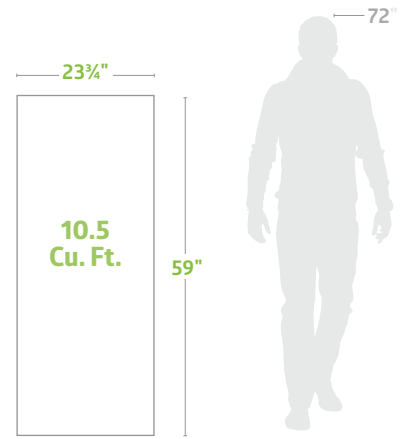


23 3/4" W | 26 1/2" D | 59" H

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBABTHC10PG	Cycle	1 glass	6 adjustable	160 lb.	115	60	1/3	2.3

16 Cu. Ft. Standard Vaccine Glass Door Refrigerator

- » Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- » Digital temperature display
- » Audible and visual high and low temperature alarms
- » Vaccine storage power cord warning label
- » Forced draft air circulation
- » Keyed door lock

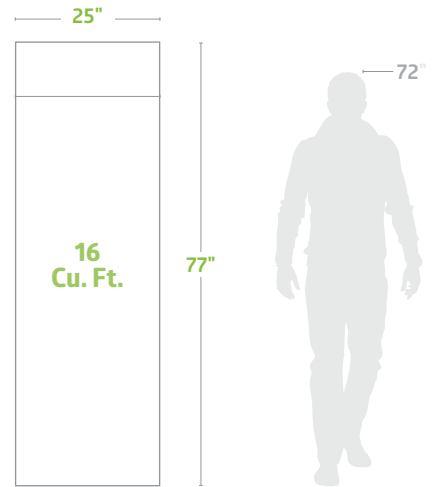

25" W | 29 3/4" D | 77" H

Item No.	Defrost	Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
HSBPHABTS16G	Cycle	1 glass	3 adjustable	235 lb.	115	60	3/8	6


For product information and price quotes, contact LaboratoryEquipment@medline.com
 For freight quotes, contact CapitalFreight@medline.com



**BEST
Pharmaceutical**

24 Cu. Ft. Glass Door Pass Thru Refrigerator

- » Adjustable temperature control range: +2°C to +10°C, factory preset at 4°C
- » Digital 4x20 character LCD display microprocessor temperature controller
- » Audible and visual Hi/Lo temperature alarm
- » Remote alarm contacts
- » Continuous product temperature display
- » 100 event alarm logging

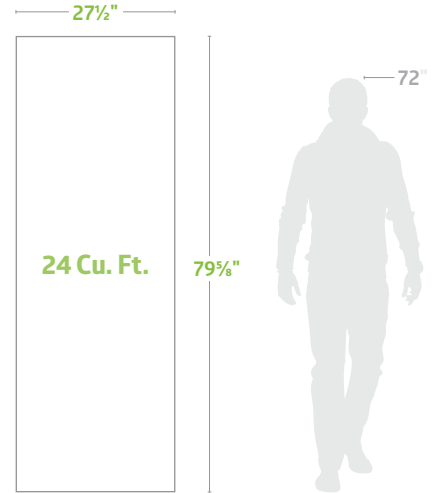


27½" W | 37¼" D | 79⅝" H

Item No.	Defrost	Door	Interior Door	Shelves	Weight	Volts	Hertz	H.P.	Amps
NOENSSP242WWF	Time Monitor	2 glass pass thru	1	3 adjustable	374 lb.	115	60	1	8.6

52 Cu. Ft. Glass Door Pass Thru Refrigerator

- » Adjustable temperature control range: +2°C to +10°C, factory preset at 4°C
- » Digital 4x20 character LCD display microprocessor temperature controller
- » Audible and visual Hi/Lo temperature alarm
- » Remote alarm contacts
- » Continuous product temperature display
- » Door ajar alarm, audible and visual

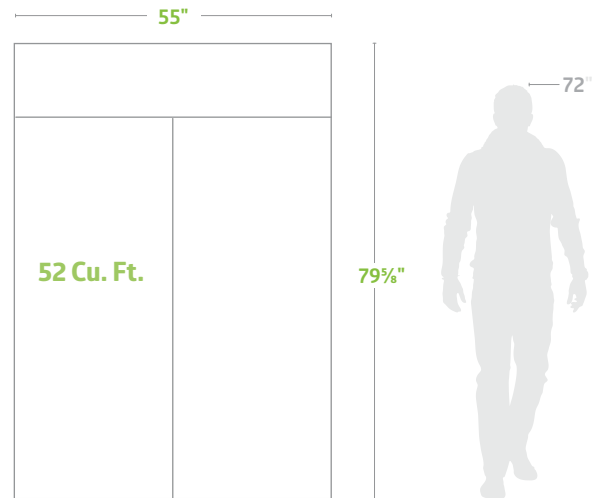

55" W | 37¼" D | 79⅝" H

Item No.	Defrost	Door	Interior Door	Refrigerator Shelves	Weight	Volts	Hertz	H.P.	Amps
NOENSSP524WWF	Time Monitor	2 glass pass thru	1	6 adjustable	636 lb.	115	60	1	10.7

Digital Thermometers

Digital Freezer and Refrigerator Thermometer

- » NIST traceable
- » Each thermometer is individually serialized
- » Triple display (current, min/max temperatures)
- » Audible alarm
- » Temperature probe housed in plastic bottle filled with a non-toxic, non-hazardous liquid medium
- » Bottles have dual magnets-thermometers have hook-and-loop fastener

Item No.	Defrost	Pkg.
MLAB821RFV2	Digital Freezer and Refrigerator	1 ea.



MLAB821RFV2

Vaccine Temperature Data Logger

- » NIST Traceable w/Certificate
- » High Accuracy $\pm 0.5^{\circ}\text{C}$ ($\pm 1.0^{\circ}\text{F}$); Temperatures in $^{\circ}\text{C}$ or $^{\circ}\text{F}$
- » Data File in Excel .CVS Format
- » Memory Card or by USB cable to PC
- » Logging Interval Selectable from 1 to 720 Minutes
- » Large LCD Display shows Internal / External

Item No.	Defrost	Pkg.
TPNACCRT8002	Vaccine Temp Data Logger	1 ea.



TPNACCRT8002

AccuTherm Infrared Dual Laser

- » High accuracy infrared thermometer with adjustable emissivity with dual laser sighting to define the diameter of the area being measured
- » Adjustable emissivity, min-max-averaging-differential temperature, data hold
- » NIST traceable certificate is provided for assured accuracy
- » Belt holster and 9v battery included
- » Temperature Range -50°C to 580°C (-58°F to 1076°F)
- » CE marked

Item No.	Defrost	Pkg.
TPNTCT8580	Infrared Thermometer	1 ea.



TPNTCT8580

For product information and price quotes, contact LaboratoryEquipment@medline.com
 For freight quotes, contact CapitalFreight@medline.com

Ice Makers and Water Dispensers



CDAHID312

Countertop Ice Maker and Water Dispenser

- » Produces up to 260 lb. of ice in 24 hours
- » 12 lb. bin storage space
- » Stainless steel exterior

Item No.	Defrost	Pkg.
CDAHID312	260 lb. CT Ice/Water Machine	1 ea.



CDA3030MA

Self-Contained Ice Maker

- » Produce up to 300 lb. of ice in 24 hours
- » Measures 30"L x 30"W x 33"H

Item No.	Defrost	Pkg.
CDA3030MA	300 lb. UC Scoopable Ice Maker	1 ea.



FOL50CI425WS

Countertop Ice Maker and Water Dispenser

- » Produces up to 425 lb. of ice a day
- » 50 lb. storage capacity

Item No.	Defrost	Pkg.
FOL50CI425WS	425 lb. Countertop Ice/Water Machine	1 ea.



SJISI7500

Ice Scoop

- » Durable polycarbonate Saf-T-Scoop ice scoop protects ice from contact with knuckles and thumbs while scooping
- » Domed design allows for faster and more accurate ice filling
- » Holder provides safe storage when not in use

Item No.	Defrost	Pkg.
SJISI7500	Ice Scoop, 12-16 oz.	1 ea.

For product information and price quotes, contact LaboratoryEquipment@medline.com
For freight quotes, contact CapitalFreight@medline.com



Medline Industries, Inc. Three Lakes Drive, Northfield, IL 60093

Medline United States
1-800-MEDLINE (633-5463)
medline.com | info@medline.com

Medline Canada
1-800-396-6996
medline.ca | canada@medline.com

Medline México
01-800-831-0898
medlinemexico.com | mexico@medline.com

FOLLOW US [f](#) [in](#) [t](#) [BLOG](#)