

SMMSe/SHRMe VRF Indoor Unit MMD-AP0240VHG2UL / Vertical Air Handler

TOSHIBA
Carrier

Submittal Data

Job Data _____ Location _____
 Buyer _____ Buyer PO # _____ Carrier # _____
 Unit Number _____ Model Number _____
 Performance Data Certified By _____ Date _____



STANDARD FEATURES

- Dual Drainage Spouts
- Three Fan Speeds - High, Medium and Low
- Unit Can Be Installed Standing Vertical or Laid Horizontally
- Electronically Commutated Fan Motor (ECM)
- Built In Pulse Modulating Valve For Installation Ease
- Removable Front Panel Provides Easy Access
- Filter MERV 3

INDOOR UNIT MODEL	MMD-AP0240VHG2UL	
PERFORMANCE		
Cooling Rated Capacity	Btu/h	24,000
Heating Rated Capacity	Btu/h	27,000
Airflow (H / M / L)	CFM	760 / 660 / 600
Sound Data (H / M / L) †	dBA	41.4 / 38.4 / 37.5
ESP (Factory Default)	wg	0.3
ELECTRICAL		
Power Supply	V/Ph/Hz	208-230/1/60
MCA*	A	2.8
MOCP*	A	15

Full Load Amps (FLA)	A	2.2
PHYSICAL DATA		
Pipe Connection Size - Liquid	inches	3/8 (brazed)
Pipe Connection Size - Suction	inches	5/8 (brazed)
Pipe Connection Size - Drain	inches	3/4 (FTP)
Refrigerant		R410A
DIMENSIONS (inches)	H (in)	46-7/8
	W (in)	17-3/4
	D (in)	22-1/4
NET WEIGHT	lbs	164

ACCESSORIES (Optional)

- ☐ Wired Remote Controller (7-Day Programmable) - RBC-AMS54E-UL
- ☐ Simple Wired Remote Control - RBC-AS41UL
- ☐ Stand Alone Receiver with Wireless Remote TCB-AX32UL
- ☐ Remote Sensor TCB-TC41LUL
- ☐ Wired Remote Controller - RBC-AMT32UL
- ☐ Filter Box / 2" MERV8 (TCB-FB2F241VDGUL)
- ☐ Plenum TCB-PL2S241VDGUL
- ☐ Electrical Heater (240V / 208V):

1.0kW/0.8kW	TCB-HT101VDGUL
3.0kW/2.3kW	TCB-HT301VDGUL
5.0kW/3.8kW	TCB-HT501VDGUL
6.0kW/4.5kW	TCB-HT601VDGUL


NOTES:

* Does not include electric heater

† Average / weighted sound values

Dimensional Drawing

Indoor Unit Vertical Air Handler MMD-AP0240VHG2UL

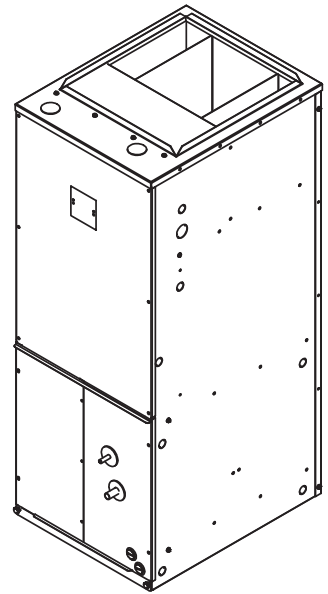

NOTE: Dimensions shown in inches.

