

WELCOME TO nexar

The Complete Package for Safety & Video Evidence



START HERE!



Wide angle
view



1-Click Report
for collisions



Unlimited
cloud storage



Download
videos from
any device




Detects &
records
events

In this manual, we'll show you how to install the HaloCam in your vehicle and connect it to the Nexar app for the safest driving experience possible.

Let's go!

DOWNLOADING THE NEXAR APP

If you haven't yet downloaded the Nexar app, do so first:*

1. Download the app by searching for 'Nexar' in the App Store (iPhone) or Google Play (Android) 
2. Open the app, register, and enable all necessary settings when prompted. Be sure to enable Location Services so Nexar can automatically start and stop when you start and stop driving




Do you share your car?

If so, make sure each driver downloads Nexar and connects to the camera.

*We recommend doing this while connected to a WiFi network

PACKAGE CONTAINS


1. HaloCam
2. Holder
3. USB charger
4. USB power cable
5. Installation tool
6. Micro SD card
7. Cable clips

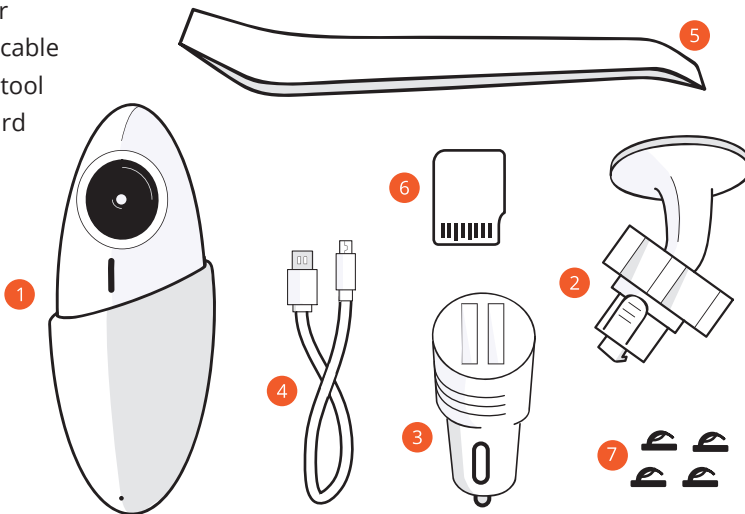

ASSEMBLING THE CAMERA

1. Insert micro SD card into the micro SD slot on the camera until you hear a click
2. Insert the holder into the holder slot on the camera and slide to lock in place
(The SD card may be pre-slotted for you)
3. Remove sticker from camera lens


Hold camera with lens
facing downwards

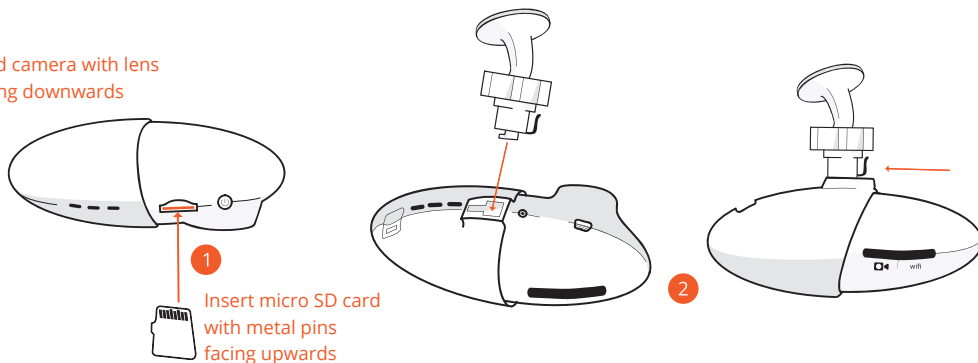


ATTENTION: Do NOT remove the micro SD from the camera while camera is ON. Doing so may cause permanent damage to the camera! Turn camera OFF before ejecting card.

ACTIVATING THE CAMERA IN YOUR VEHICLE

1. Connect the charging cable to the camera's POWER port

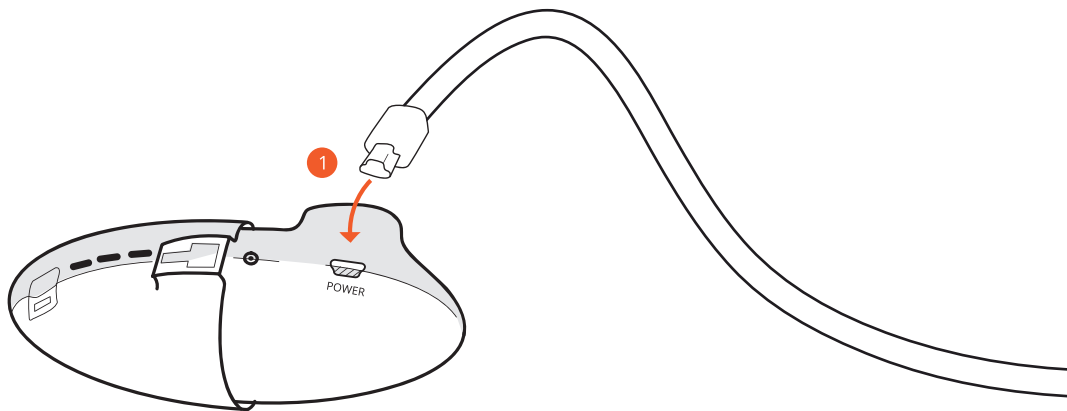

2. Plug the USB charger into your vehicle's power socket
3. Plug the other end of the charging cable into the USB charger
4. Start your vehicle. You should see a green light indicating that the camera is powered on, and a blue blinking light indicating that the camera is waiting to be paired

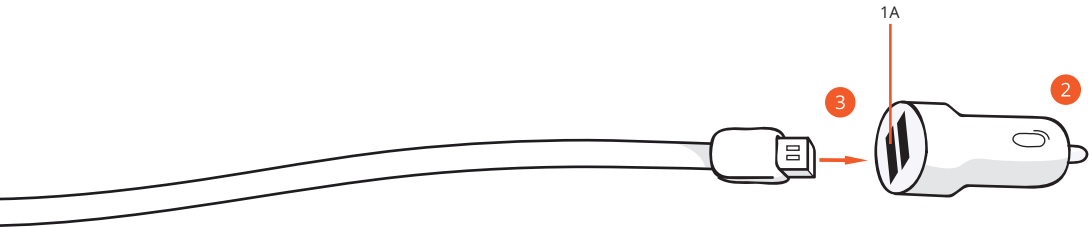


DO YOU HAVE AN IPHONE?




1. Open your iPhone's settings
2. Tap on WiFi
3. Connect to the WiFi network that begins with 'DIRECT-Nexar (5G)'
4. Enter password: 12345678
5. Don't worry, your cellular data is still available
6. The blue indicator light on the camera should now be steady

DO YOU HAVE AN ANDROID?


1. Open the Nexar app
2. Tap the menu button ☰ in the top left corner
3. Tap Settings
4. Tap External camera
5. After a few seconds, the camera and your phone will connect automatically
6. The blue indicator light on the camera should now be steady

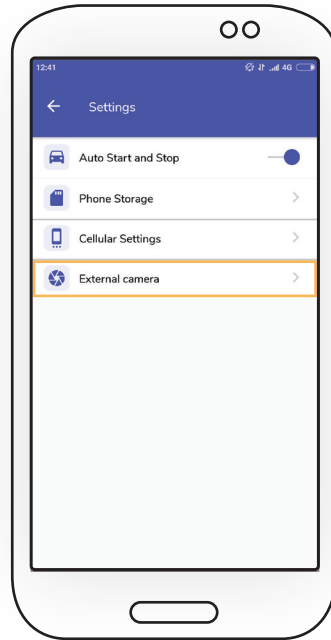

INSTALLING THE CAMERA IN YOUR VEHICLE

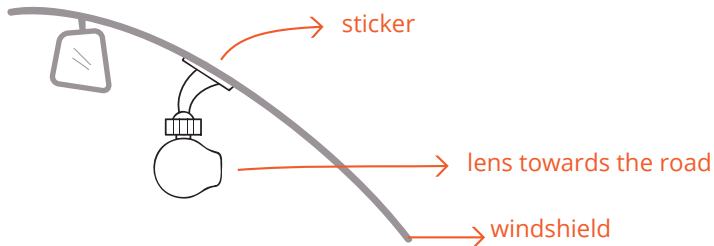

1. Open Nexar and tap the car icon (for Android) or the Drive button (for iPhone)
2. Wait a few moments for your camera's feed to show up in the Nexar app
3. Before sticking your camera to the windshield, make sure it has a clear view of the road. We recommend placing it behind and to the right of the rearview mirror
4. After choosing a location, clean any dust and dirt from that portion of the windshield
5. Remove the holder's sticker and fix the camera to your windshield



TIPS FOR DRIVING WITH NEXAR

Keeping your phone mounted is safer

We recommend that you keep your phone mounted while driving to better analyze objects ahead, detect collisions, and more.


You can let Nexar automatically detect when you start driving and begin recording on its own.

On iPhone - Go to your iPhone's settings, tap Nexar, set Location to 'Always'. Then go to the settings screen inside the app and turn on 'Auto start drive'.

On Android - Go to Nexar's settings menu in the app, and make sure 'Auto start rides' is on. Also, make sure your phone's GPS is on.


Make sure the camera and your phone are plugged in and charging at all times.

This will ensure that they capture all evidence, just in case.

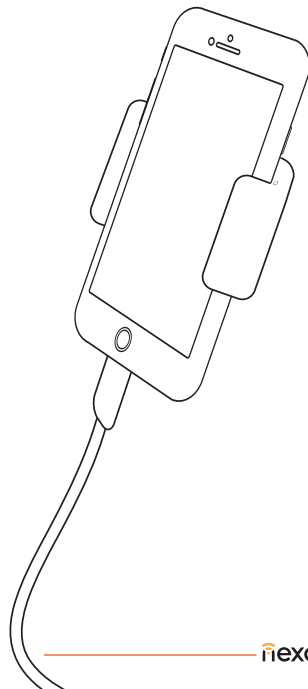


HOW TO HIDE THE CAMERA'S CABLE

Watch the video:
nrx.com/hidecables

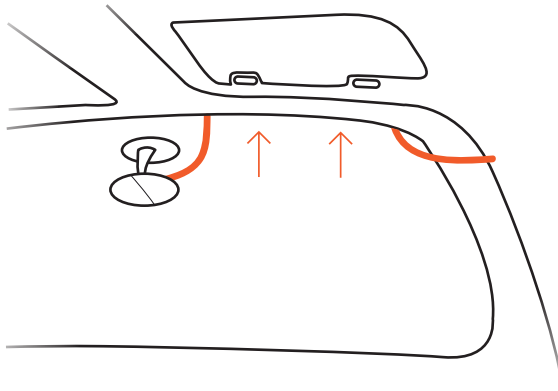


1. Sit in the passenger seat
2. With one hand, gently pull down the edge of the fabric at the top of the windshield
3. With your other hand, use two fingers or the installation tool to insert the cable behind the ceiling fabric
4. You can use the cable clips provided if you prefer

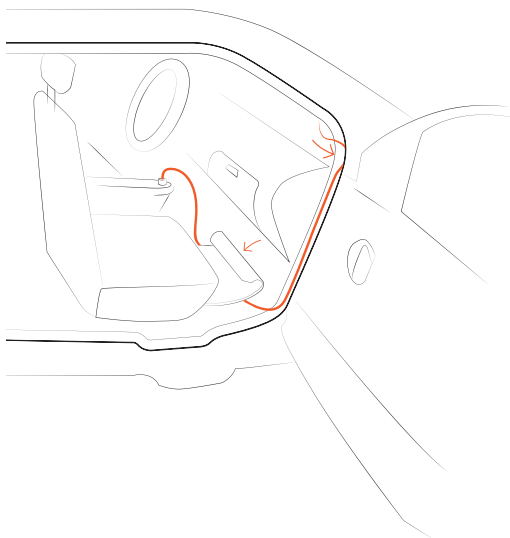

4. Open the passenger-side door
5. Insert the cable into the door's seal from top to bottom
6. Bring the cable behind the glove compartment
7. Insert the remaining cable under the passenger-side floor mat
8. Bring the cable as close to the power socket as possible, and connect the cable to the USB charger

STRUCTURE & BUTTONS

1. Rear camera port
2. Heat dissipation holes
3. Holder slot
4. Reset button
5. POWER port
6. Camera lens
7. Speaker
8. Power indicator light
9. WiFi indicator light
10. Microphone
11. Power button
12. Micro SD card slot
13. Heat dissipation holes

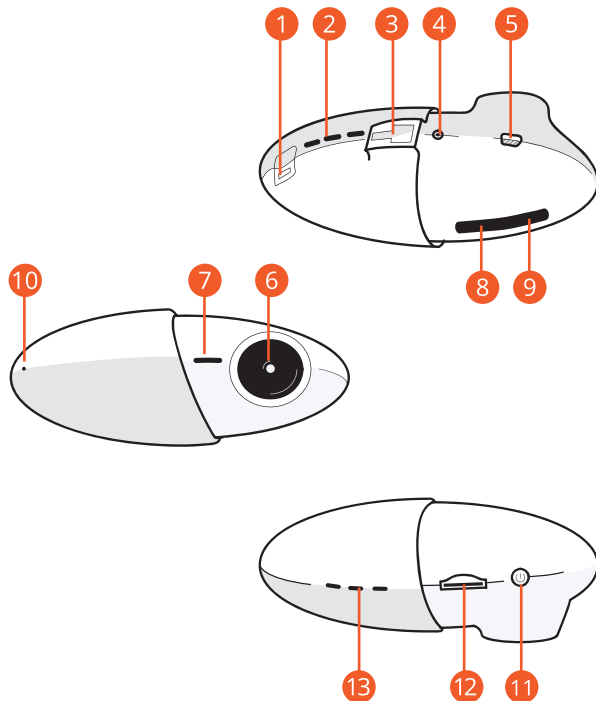

Additional Info:

Note: The camera will turn on and off automatically when you start and stop your vehicle.

Indicator Lights:

1. Green light on: camera powered on and active
2. Red light blinking: firmware upgrading
3. Blue light blinking: camera waiting for a connection
4. Blue light on: camera paired

Attention:

The camera is meant to function within the temperature range of -20° to 70° C (-4° to 158° F).

Improper changing of the battery may lead to explosion of the device.

Do not use irritating chemical solvents for cleaning. Clean with a damp paper towel or soft cloth.

Keep away from fire.

To protect the environment, do not throw the camera in the trash.

Do not try to open the camera and repair it yourself. If your camera isn't working for any reason, please contact us at support@getnexar.com or go to the app menu and then tap Contact Us (on iPhone) or Chat with us (on Android).

nexar is on a mission to end car crashes and make driving stress free. When you use our free app and a Nexar-ready dash cam, you join a safe driving network of vehicles. As more drivers in your area join this network, Nexar will start warning you of dangers on the road ahead. Buckle up, driving is about to change.

DRIVE SAFELY!

CONTACT US

Email: support@getnexar.com | Help center: getnexar.com/faq