
meridian 🔼

HID312 - Ice Machine/Dispenser

Ice and Water Dispenser



- Smarter Construction -Durable stainless steel evaporator and exterior panels.
 Greaseless bearings for reduced maintenance. Larger sink opening and
 dispensing area. Antimicrobial AquaArmor with AglON™ is molded into key
 components.
- Space-maximizing design The industry's smallest operational footprint relative to capacity. Featuring specially designed contoured sides for enhanced breathability and an external air filter.
- More convenient front access Removable front panels allow ease of access and service to all key internal components. Including a removable storage bin for better cleaning and maintenance access.
- Enhanced service features Intuitive LED diagnostic lights reduce service time.
 Unit specific QR code for quick access to service manuals and warranty history.
 Convenient USB drive that allows for fast software updates. New removable sink and grill provide maximum access for ease of cleaning.
- Energy and Water Efficiency Industry leading efficiencies deliver on going savings.
- Quieter operation Improved condenser fan function.

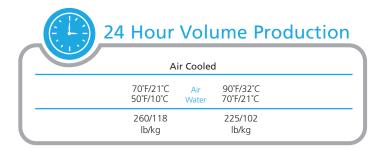



Specifications

				Max. Fuse Size		Energy Consumption		o (liters/45.4 kg)
Model Number	Condenser Unit	Storage Capacity	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Total Load Amps	kWh/100 lb 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C	Condenser)/70°F(21°C)
HID312A-1	Air	12	115/60/1	15	7.0	4.9	12/45.5	-
HID312AW-1	* Air	12	115/60/1	15	7.0	4.9	12/45.5	-

*Wall mount configuration.







- 3 years parts and labor.
- 5 years parts on the compressor and condenser.

Mator Heado


Warranty valid in North, South & Central America. Contact factory for warranty in other regions.




- 775 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •


Without Wall Mount: HID312A

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.





[61.9] 24.38



All models include 7.5' power cord with NEMA 5-15P plug


With Wall Mount: HID312AW

With Wall Mount. HIBS12AV

REMOVABLE AIR FILTER

ICE CHUTE





[40.6]
16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16.00

16

All Models

WATER CHUTE -

FRONT VIEW



Dimensions (W x D x H):

Unit:

HID312A-1: 16.25" x 24.38" x 35" HID312AW-1: 18.25" x 24.38" x 35"

Shipping Carton:

HID312A-1: 24.25" x 27.13" x 41.5" HID312AW-1: 24.25" x 27.13" x 41.5"

Shipping Weight: HID312A-1: 183 lb/ 83 kg HID312AW-1: 188 lb/ 85 kg

BTUs per hour: HID312A-1: 3,200 HID312AW-1: 3,200

Refrigerant: R-134A

Accessories

Model Number	Description	
KLP24A	4" Adjustable legs, box of 4, plastic with metallic foot.	
HST16-A	Machine stand for HID312, with locking reversible door and shelf.	
HST16B-A	Machine stand for HID312, basic version.	

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.

69

Operating Requirements

	Minimum	Maximum
Air Temperatures	50°F (10°C)	100°F (38°C)
Water Temperatures	40°F (4.4°C)	100°F (38°C)
Potable Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)
Electrical Voltage	-10%	+10%

Specifications and design are subject to change without notice.



meridian 🔼

HID525 - Ice Machine/Dispenser

Ice and Water Dispenser



The Meridian™ Difference

- Smarter Construction -Durable stainless steel evaporator and exterior panels. Greaseless bearings for reduced maintenance. Larger sink opening and dispensing area. Antimicrobial AquaArmor with AglON™ is molded into key components.
- Space-maximizing design The industry's smallest operational footprint relative to capacity. Featuring specially designed contoured sides for enhanced breathability and an external air filter.
- More convenient front access Removable front panels allow ease of access and service to all key internal components. Including a removable storage bin for better cleaning and maintenance access.
- Enhanced service features Intuitive LED diagnostic lights reduce service time.
 Unit specific QR code for quick access to service manuals and warranty history. Convenient USB drive that allows for fast software updates. New removable sink and grill provide maximum access for ease of cleaning.
- Energy and Water Efficiency Industry leading efficiencies deliver on going savings.
- Quieter operation Improved condenser fan function.



Specifications

				Max. Fuse Size		Energy Consumption	Gallons/100 lb (liters/45.4 kg)	
Model Number	Condenser Unit	Storage Capacity	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Total Load Amps	kWh/100 lb 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C	Condenser)/70°F(21°C)
HID525A-1	Air	25	115/60/1	15	9.0	5.5	12/45.5	-
HID525AW-1	* Air	25	115/60/1	15	9.0	5.5	12/45.5	-
HID525W-1	Water	25	115/60/1	15	9.0	4.1	12/45.5	120/454.3

*Wall mount configuration.







Mater Heade

- 3 years parts and labor.
- 5 years parts on the compressor and condenser.


Warranty valid in North, South & Central America. Contact factory for warranty in other regions.





- 775 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

Without Wall Mount: HID525A & HID525W

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.










With Wall Mount: HID525AW

All models include 7.5' power cord with NEMA 5-15P plug









All Models

Dimensions (W x D x H):

Unit:

HID525A-1: 21.25" x 24.38" x 35" HID525AW-1: 23.25" x 24.38" x 35" HID525W-1: 21.25" x 24.38" x 35"

Shipping Carton:

HID525A-1: 24.25 x 27.13 x 41.5 HID525AW-1: 24.25 x 27.13 x 41.5 HID525W-1: 24.25 x 27.13 x 41.5

Shipping Weight: HID525A-1: 208 lb / 95 kg

HID525AW-1: 213 lb / 97 kg HID525W-1: 208 lb / 95 kg

BTUs per hour: HID525A-1: 6,800 HID525AW-1: 6,800

Refrigerant: R-404A

Ad

Accessories

Model Number	Description
KLP24A HST21-A HST21B-A	4" Adjustable legs, box of 4, plastic with metallic foot. Machine stand for HID525 and HID540, with locking reversible door and shelf. Machine stand for HID525 and HID540, basic version.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

	Minimum	Maximum	
Air Temperatures	50°F (10°C)	100°F (38°C)	
Water Temperatures	40°F (4.4°C)	100°F (38°C)	
Potable Water Pressures	20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
Electrical Voltage	-10%	+10%	
			-

Specifications and design are subject to change without notice.



meridian 🔼


HID540 - Ice Machine/Dispenser

Ice and Water Dispenser



The Meridian™ Difference

- Smarter Construction Durable stainless steel evaporator and exterior panels. Greaseless bearings for reduced maintenance. Larger sink opening and dispensing area. Antimicrobial AquaArmor with AglON™ is molded into key components.
- Space-maximizing design The industry's smallest operational footprint relative to capacity. Featuring specially designed contoured sides for enhanced breathability and an external air filter.
- More convenient front access Removable front panels allow ease of access and service to all key internal components. Including a removable storage bin for better cleaning and maintenance access.
- Enhanced service features Intuitive LED diagnostic lights reduce service time.
 Unit specific QR code for quick access to service manuals and warranty history. Convenient USB drive that allows for fast software updates. New removable sink and grill provide maximum access for ease of cleaning.
- Energy and Water Efficiency Industry leading efficiencies deliver on going savings.
- Quieter operation Improved condenser fan function.

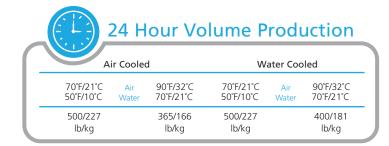

Specifications

				Max. Fuse Size		Energy Consumption		· Usage o (liters/45.4 kg)
Model Number	Condenser Unit	Storage Capacity	Basic Electrical Volts/Hz/Phase	or HACR Circuit Breaker (amps)	Total Load Amps	kWh/100 lb 90°F(32°C)/70°F(21°C)	Potable 90°F(32°C)	Condenser)/70°F(21°C)
HID540A-1	Air	40	115/60/1	15	9.0	5.5	12/45.5	-
HID540AW-1	* Air	40	115/60/1	15	9.0	5.5	12/45.5	-
HID540W-1	Water	40	115/60/1	15	9.0	4.1	12/45.5	120/454.3

^{*}Wall mount configuration.







- 3 years parts and labor.
- 5 years parts on the compressor and condenser.


Warranty valid in North, South & Central America. Contact factory for warranty in other regions.





- 775 Corporate Woods Parkway, Vernon Hills, IL 60061 •
- 1-800-SCOTSMAN Fax: 847-913-9844 www.scotsman-ice.com customer.relations@scotsman-ice.com •

Without Wall Mount: HID540A & HID540W

Installation Note: Allow 6" space at left, back and right side for ventilation and utility connections.










With Wall Mount: HID540AW

All models include 7.5' power cord with NEMA 5-15P plug









All Models

Dimensions (W x D x H):

Unit:

HID540A-1: 21.25" x 24.38" x 41" HID540AW-1: 23.25" x 24.38" x 41" HID540W-1: 21.25" x 24.38" x 41"

Shipping Carton:

HID540A-1: 24.25" x 27.13" x 41.5" 24.25" x 27.13" x 41.5" 24.25" x 27.13" x 41.5" HID540AW-1: HID540W-1:

Shipping Weight:

HID540A-1: 215lb / 98kg HID540AW-1: 220lb / 100kg

HID540W-1: 215lb / 98kg

BTUs per hour: HID540A-1: 6,800 HID540AW-1: 6,800

Refrigerant: R-404A

Accessories

	Model Number	Description
	KLP24A	4" Adjustable legs, box of 4, plastic with metallic foot.
	HST21-A	Machine stand for HID525 and HID540, with locking reversible door and shelf.
L	HST21B-A	Machine stand for HID525 and HID540, basic version.

Scotsman recommends all ice machines have water filtration. See Scotsman water filter specification sheet for details.



Operating Requirements

Minimum	Maximum	
50°F (10°C)	100°F (38°C)	
40°F (4.4°C)	100°F (38°C)	
20 PSIG (1.4 bar)	80 PSIG (5.5 bar)	
-10%	+10%	
	50°F (10°C) 40°F (4.4°C) 20 PSIG (1.4 bar)	50°F (10°C) 100°F (38°C) 40°F (4.4°C) 100°F (38°C) 20 PSIG (1.4 bar) 80 PSIG (5.5 bar)

Specifications and design are subject to change without notice.

