

## Top Signal Omni Cellular Cylinder Antenna 600-4000 MHz N-Female



**PRODUCT No: TS210471**  
Top Signal Omni Cellular Cylinder Antenna

### Features:

2 to 4.5 dBi Gain

Outdoor

Omni Directional

N-female

### Specifications:

Frequency Range	600-4000 MHz
Gain /VSWR	2 dBi (600-960 MHz) / $\leq 1.8$
Gain /VSWR	4 dBi (1710-2700 MHz) / $\leq 1.8$
Gain /VSWR	4.5 dBi (3300-4000 MHz) / $\leq 1.8$

Vertical Beam	Horizontal Beam
80°	360° (600-960 MHz)
52°	360° (1710-2700 MHz)
38°	360° (3300-4000 MHz)

Operating Temp -40°C to +65 °C

Input Impedance 50 ohm

Input Max Power 100 W

Lightning Protection DC Ground

Antenna Connector N-Female

Antenna Dimensions 9.8 in x 2.4 in diameter

Antenna Weight 2.2 lbs


Reflector Material Aluminum

Radome Material ABS (UV stabilized)

Mounting Pole 1.5 - 2.0 in poles

Color White

Mounting Type L-bracket/U-Bolt bracket (included)

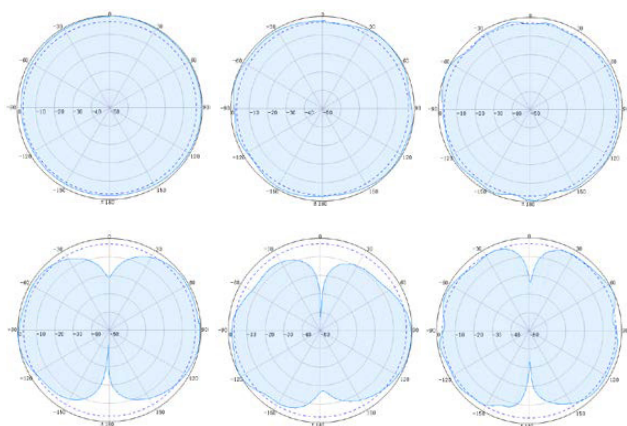

700-960MHz

1710-2700MHz

3300-3950MHz

### Description

The Top Signal TS210471 Omni Cylinder Antenna works with 600-4000 MHz 5G, 4G LTE, and 3G frequencies. This antenna mounts upright on poles 1.5" – 2.0 inches in diameter with L-bracket and U-bolt included. This antenna works with all cell phone providers and is made from UV-resistant PVC intended for outside use.