



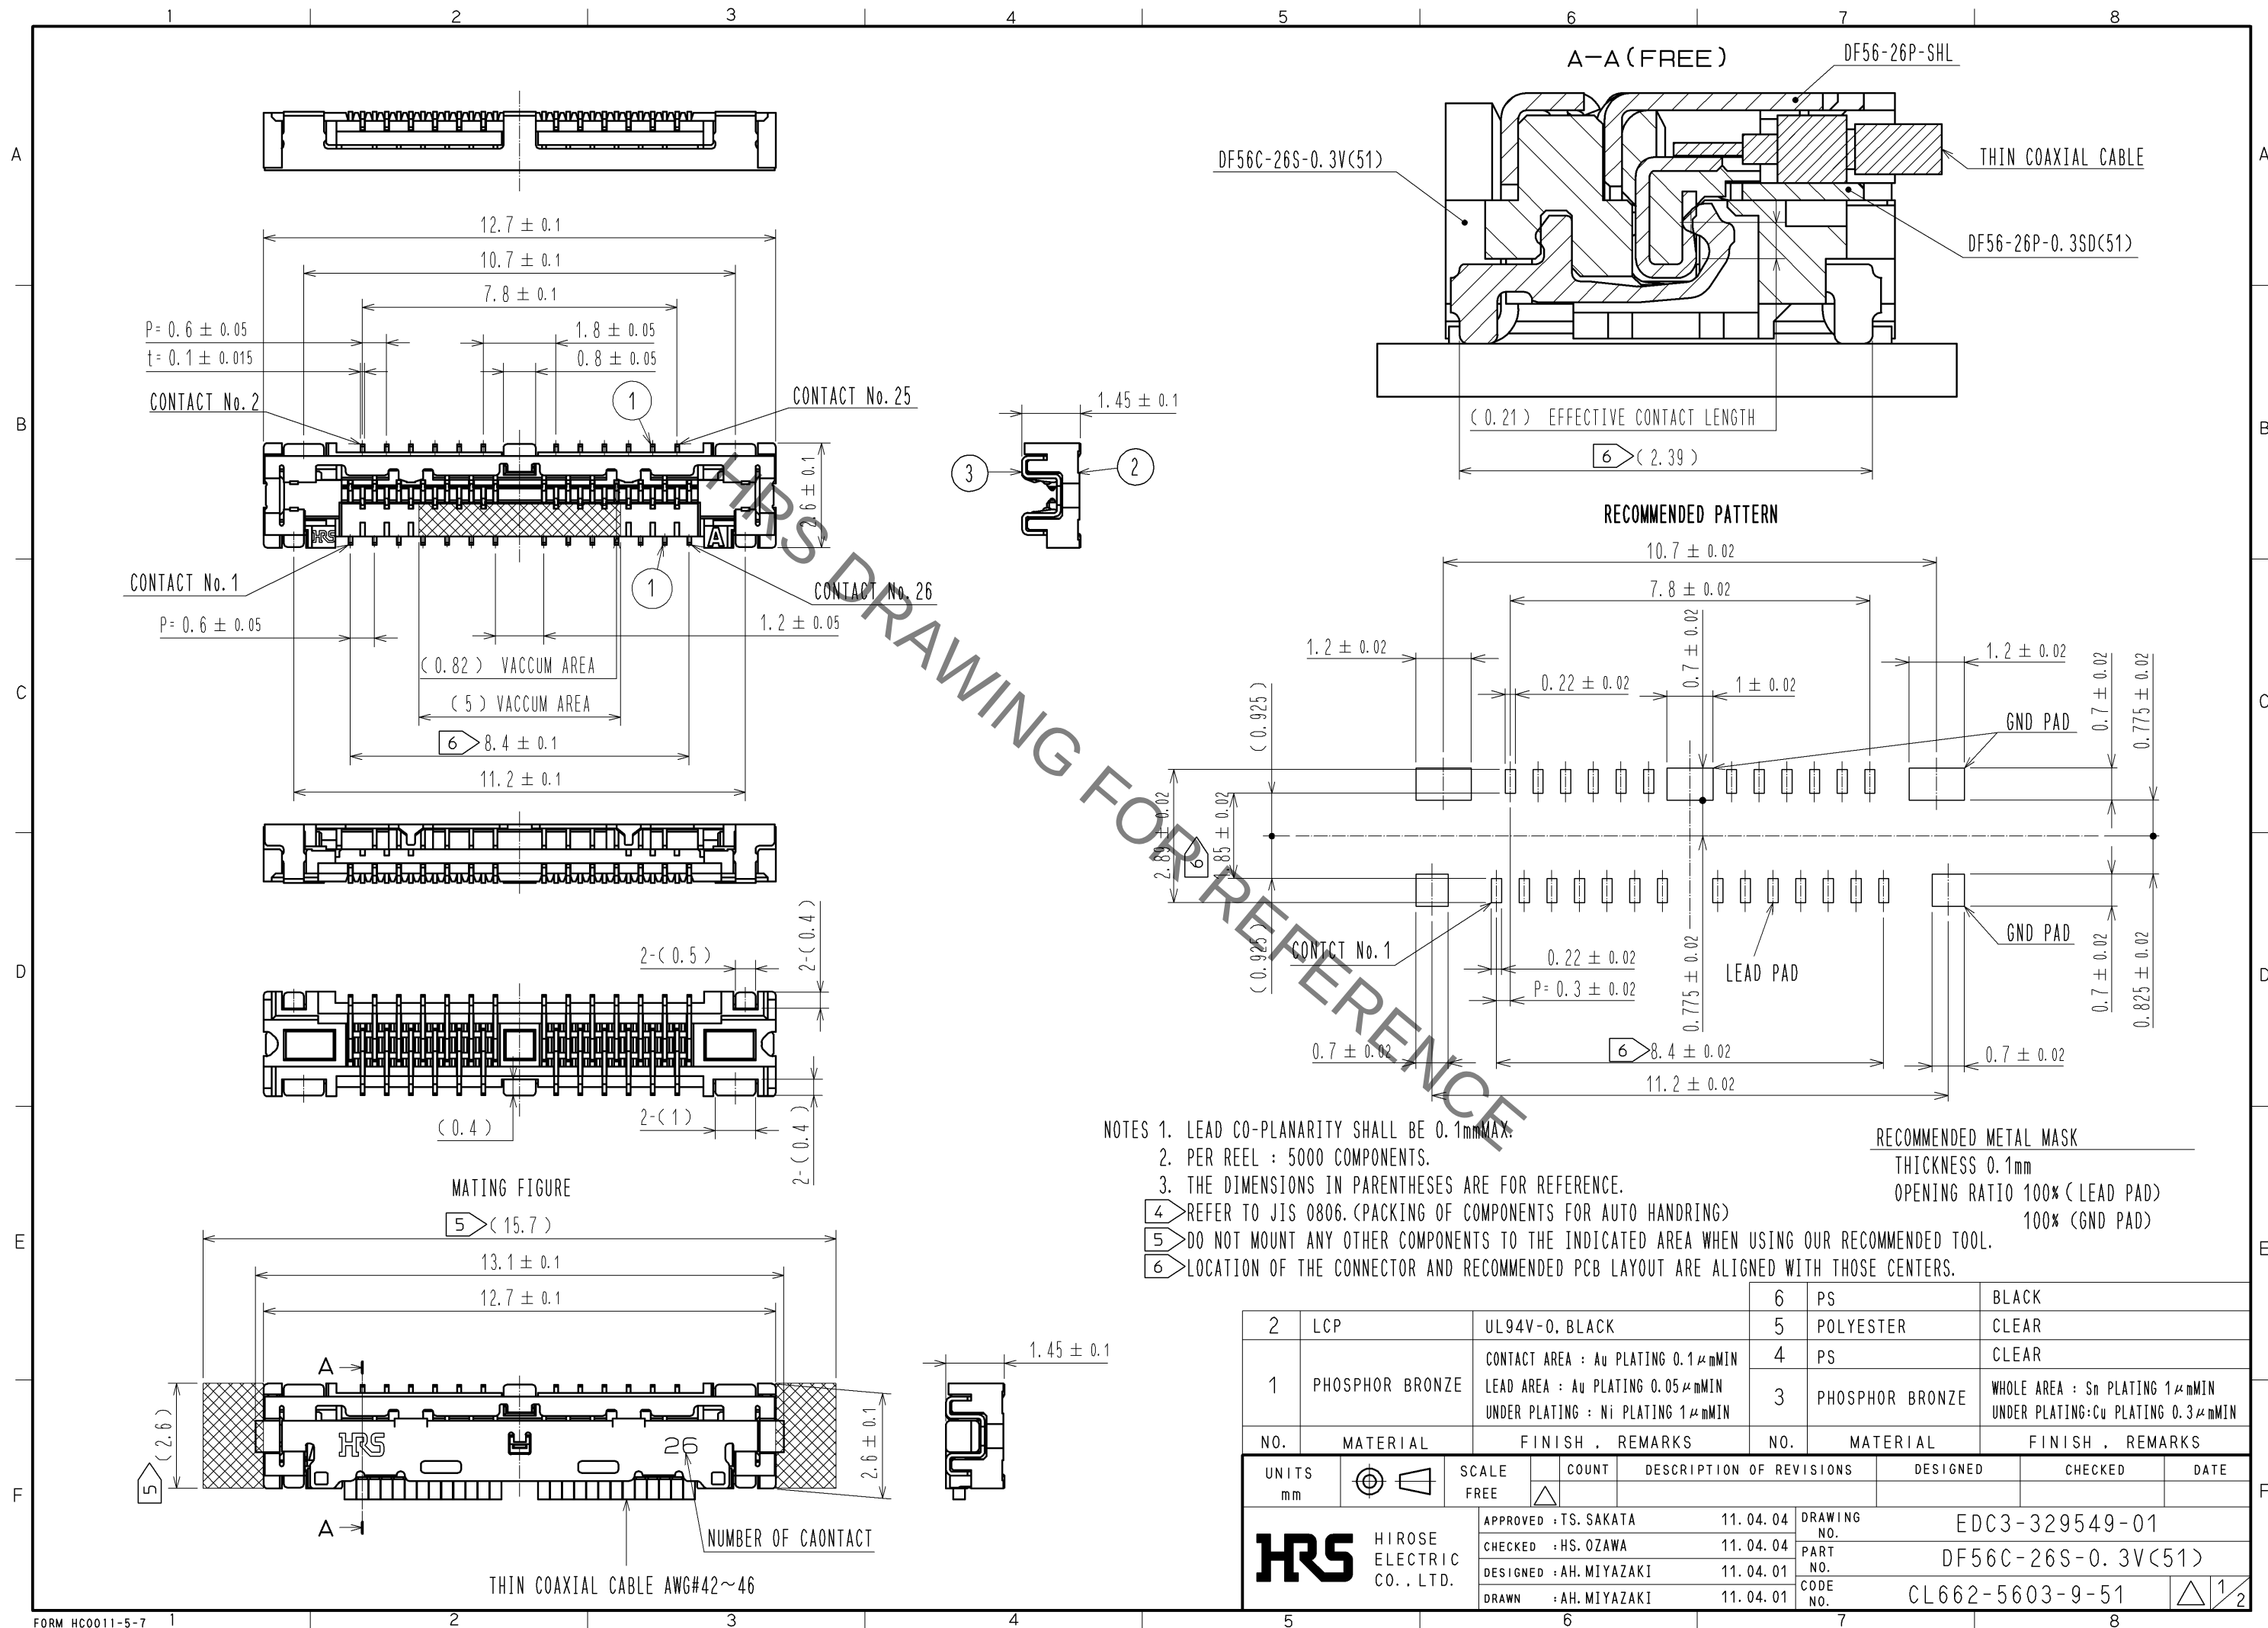

NOTES 1. LEAD CO-PLANARITY SHALL BE 0.1mmMAX.
2. PER REEL : 5000 COMPONENTS.
3. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
4 REFER TO JIS 0806. (PACKING OF COMPONENTS FOR AUTO HANDRING)
5 DO NOT MOUNT ANY OTHER COMPONENTS TO THE INDICATED AREA WHEN USING OUR RECOMMENDED TOOL.
6 LOCATION OF THE CONNECTOR AND RECOMMENDED PCB LAYOUT ARE ALIGNED WITH THOSE CENTERS.

RECOMMENDED METAL MASK
THICKNESS 0.1mm
OPENING RATIO 100% (LEAD PAD)
100% (GND PAD)

Sep.1.2021 Copyright 2021 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

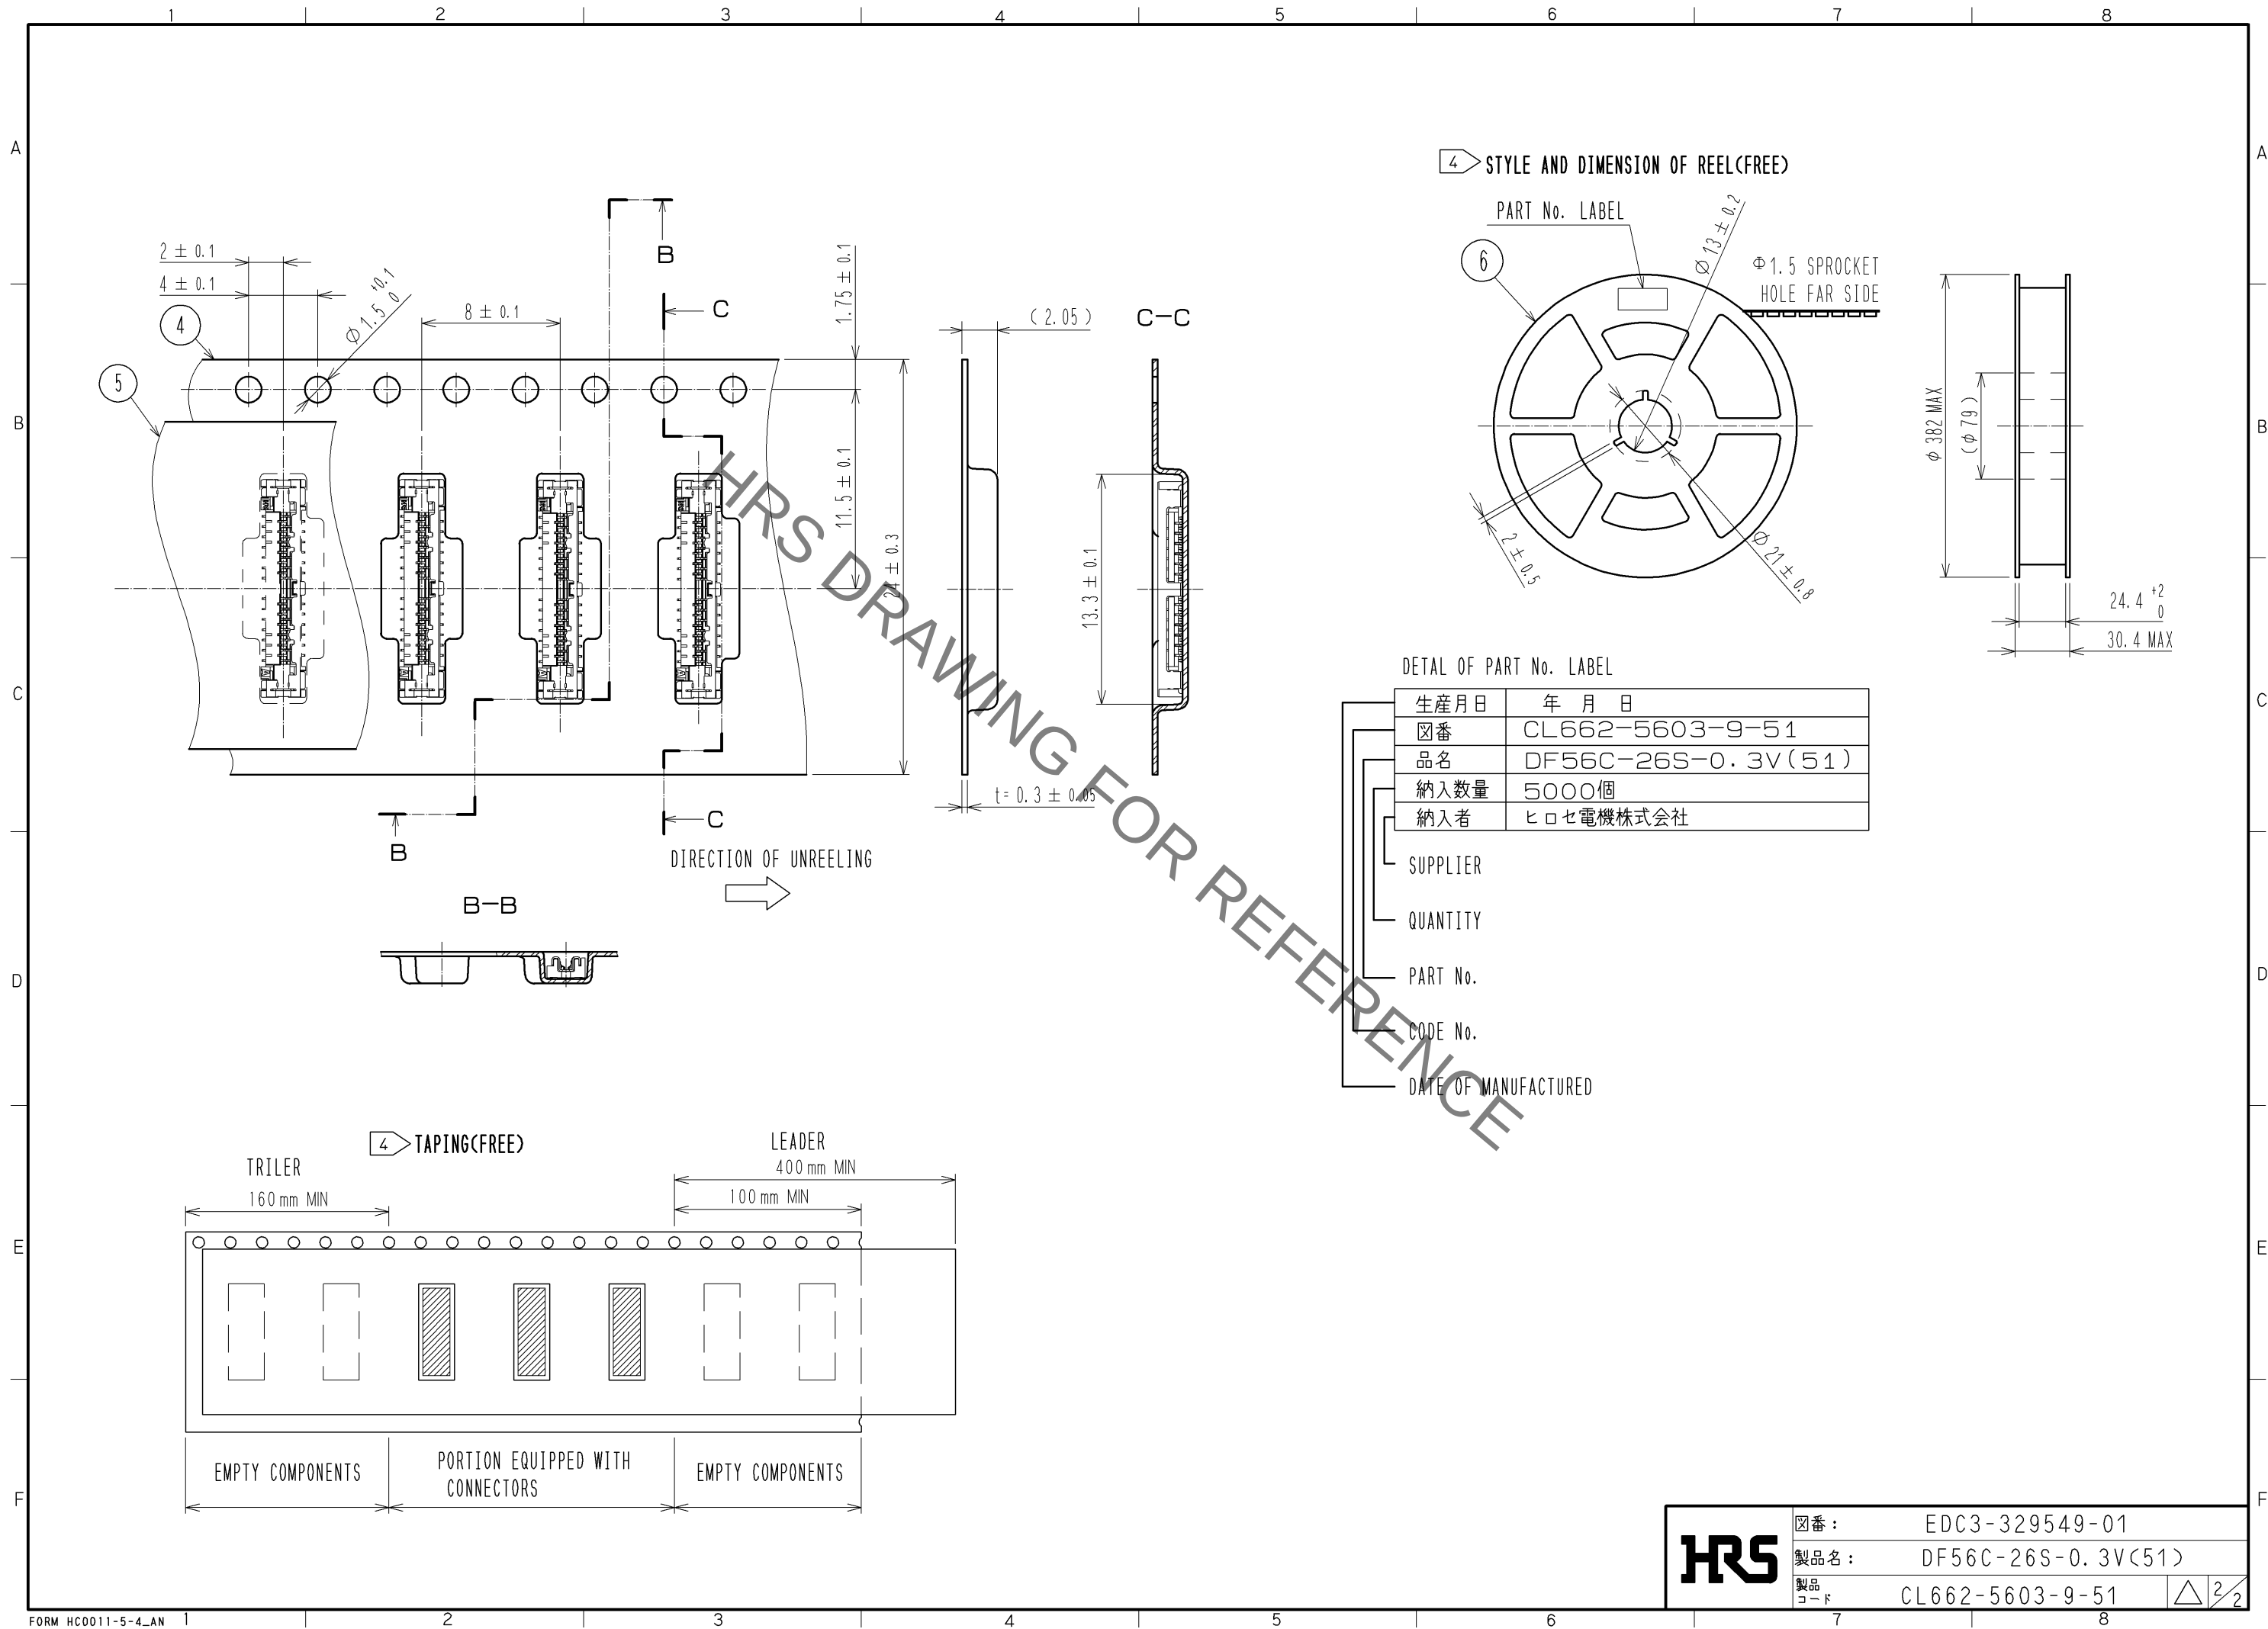

HR5

図番：	EDC3-329549-01
製品名：	DF56C-26S-0.3V(51)
製品コード	CL662-5603-9-51