

# LED Lighting Solutions Engineered for Demanding Environments



## Appleton™ LED Luminaires

Reliable LED lighting solutions that deliver superior illumination for safer, more productive environments.



## Whether upgrading a plant's legacy lighting system or designing a new facility, count on our LED lighting solutions.



At Emerson, we understand that harsh industrial or hazardous environments demand reliable equipment. That is why we are constantly striving to improve your operational performance by protecting you and your equipment, with the latest in today's LED lighting technology. Our Appleton™ LED luminaires are designed to deliver superior illumination with unparalleled protection and operate across your facility without incident.

For proper illumination in extreme conditions, you need a lighting manufacturer who engineers their LED luminaires to ensure optimal light dispersion; creating more usable light. From area to task, flood to emergency, our Appleton LED luminaires maximize usable light enabling you to work safely and comfortably.

We also recognize the importance of having LED solutions that are correctly certified for your geographic location and environment. Whether your geography requires ATEX, ATEX/IECEx, NEC or CEC certification, our regulatory involvement, technical expertise and range of LED luminaires solve the challenges of outfitting your facilities.

Our engineers continue to deliver unparalleled innovative advancements in LED lighting, making Emerson the right choice for harsh industrial or hazardous location luminaires.



Get the most from your LED investment, with lighting quality that makes a difference.

### Rugged Reliability

Through robust engineering and unprecedented innovation, our LED luminaires answer the need for safety and reliability. Learn more. ► [p 3](#)

### High Quality Illumination

Appleton LED luminaires are designed to make usable light the foundation for safer, more productive environments. Learn more. ► [p 5](#)

### Luminaire System Life and Total Cost of Ownership

LEDs provide an opportunity to reduce energy consumption and maintenance costs. This translates into real savings for facilities. Learn more. ► [p 7](#)

### Certification Standards

Delivering high quality illumination with superior protection is our top priority, that is why our LED luminaires are engineered to adhere and exceed industry standards. Learn more. ► [p 9](#)

### Methods of Protection and Environmental Ratings

We relentlessly test our fixtures to ensure they meet or exceed their rated capabilities even in the most extreme conditions. Learn more. ► [p 11](#)

### LED Applications and Industries

We offer harsh industrial and hazardous location LED luminaires to meet all your application requirements – without compromise. Learn more. ► [p 13](#)

### Appleton LED Luminaires

Consider it solved with our extensive offering of LED luminaires. Learn more. ► [p 15](#)

- A-51™ LED Factory Sealed ► [p 17](#)
- Code • Master™ LED Factory Sealed ► [p 19](#)
- Code • Master Jr. LED Factory Sealed ► [p 21](#)
- Contender™ LED ► [p 23](#)
- Rigmaster LED ► [p 25](#)
- Explosionproof Rigmaster LED ► [p 27](#)
- EHLED Handlamp ► [p 29](#)
- N2LED ► [p 30](#)
- Mercmaster™ LED Generation 3 ► [p 31](#)
- Mercmaster LED Low Profile ► [p 34](#)
- Areamaster™ Generation 2 LED ► [p 37](#)
- Baymaster™ LED ► [p 40](#)
- Viamaster™ LED ► [p 44](#)
- ATX™ FDLED ► [p 47](#)
- ATX FELED Series Nonmetallic LED ► [p 49](#)
- ATX FNLED Series Nonmetallic LED ► [p 51](#)
- ATX FDBAES LED ► [p 53](#)

### Lighting Services

Our experts can work with you to provide the optimal lighting solution for your facility. Learn more. ► [p 54](#)

# Rugged Reliability

Emerson products are exposed to the toughest environments on earth from the deserts of Saudi Arabia, to off shore platforms, and the North Slope of Alaska. Many of these environments are hazardous, and dependable lighting is essential to keeping workers safe. We understand that reliable lighting is key to improving operational efficiency and reducing expensive maintenance costs. Our commitment to reliability begins with a rigorous process, where we qualify that our designs perform in environments beyond our worst expectations relative to corrosive atmospheres, extreme temperatures, heavy vibration, and electrical disturbances.

## Corrosion Resistance

Emerson uses a proprietary finishing technique to protect and seal our Appleton LED products. This finish and its' advantages come standard on all our coated products, providing superior protection at no extra cost. Epoxy powder coat products last longer, thus reducing callbacks, lowering total installation and operation costs. All Appleton LED luminaires are suitable for use in wet locations and undergo rigorous testing procedures that comply with Marine Outside Type (Salt Water).




## Reliable Protection

Our Appleton LED luminaires are protected with gaskets that keep water and dust on the outside. Critical to reliability, gasket seals are tested to the stringent application requirements encountered in heavy industrial and hazardous applications. Gasket performance testing is conducted according to ASTM-D-395 through ISO accredited third party laboratories. We conduct a number of extended duration product life tests exceeding product operating specifications and verifying long term field reliability. Aging tests include thermal endurance spanning  $-50^{\circ}\text{C}$  to  $+120^{\circ}\text{C}$  ( $-58^{\circ}\text{F}$  to  $+248^{\circ}\text{F}$ ), humidity levels of 95% RH, and continuous Ultra Violet (UV) exposure. We select top grade gasket material composed of high performance closed cell silicone foam. The superior low compression set characteristics deliver years of reliable service in the toughest environments on the planet.

## Thermal Design

LED reliability begins with good thermal design. Appleton LED luminaires emphasize thermal performance first and foremost to provide long term field reliability. Extensive thermal simulation during the design process ensures driver electronics and LED semiconductor devices operate within their thermal limits even at the fixture's maximum rated ambient temperature. No failure prone fans or other active thermal management devices are employed. Our designs optimize housing thermal conduction, maximize radiating surface areas, and employ strategically placed thermal conduction breaks to balance heat flows within each LED fixture (Patent Pending). Appleton LED luminaires deliver rated illumination through their full ambient operating temperature range to make sure your facility is safely lit even when the going gets hot.

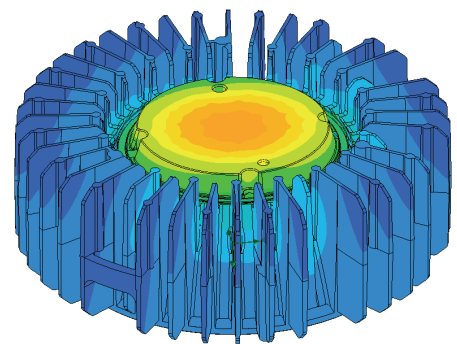

*Mercmaster LED Generation 3  
Thermal Simulation*

# Rugged Reliability

## Shock and Vibration

Our Appleton lighting fixtures are designed to be used in areas where high vibration is a constant occurrence. Exterior features, such as captive hardware and integral redundant die cast safety retention points, help protect workers from parts falling into work areas and production processes. Vibration tests involve sweeping through a range of frequencies and resonance points in the x, y and z axis with Gs well beyond expected application levels. To ensure interior components remain protected, impact tests are performed to IEC and NEC/CEC standards after material aging and temperature cycling to verify robust enclosure performance.


## Superior Surge Suppression



Lightning strikes and electrical devices such as motors and circuit contactors can induce transient surges that pose a threat to LED lighting installations. Appleton LED luminaires include a robust 6KV surge suppression circuit to protect against damage caused by surge energy, enhancing reliability, minimizing maintenance and downtime, and extending the life of the lighting installation. We also offer 10KV surge protection on floodlights and high bays for use in high surge risk areas.

## Top Tier Components

Emerson knows that world class reliability starts with quality components. Our rigorous supplier selection process accepts only the few that share our passion for long term reliability. Only top tier LEDs make their way into an Appleton luminaire. Our LED suppliers perform functional tests that exceed the requirements of LM80 to insure years of stable operation with best-in-class depreciation and color shift. Testing is extended past the 6,000 hour IES requirement to upwards of 15,000 hours to increase confidence in the TM21 prediction of long term performance. Appleton LED drivers use the highest quality electronic components and undergo rigorous qualification and production testing.

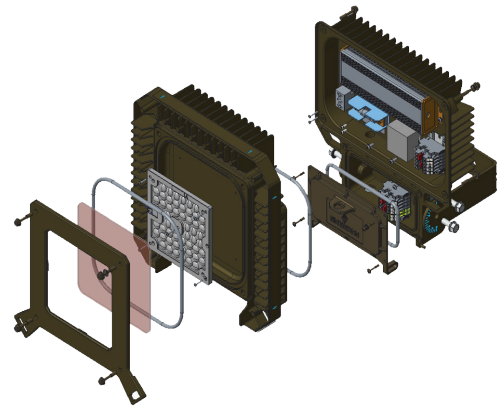

*Areamaster Generation 2 LED  
Assembly Exploded View*

## 100% Inspection Guarantee

Emerson's commitment to quality doesn't stop at product design. One hundred percent of Appleton luminaires undergo comprehensive electrical and dielectric testing prior to final inspection. Components and luminaires are bar code traceable to a specific manufacturing lot to allow us to identify and prevent potential product concerns. Our patented optical tester insures light output, color and distribution within specification, and a burn in process identifies infant mortality concerns before a product leaves the factory. Product packaging is tested and certified to International Safe Transit Association (ISTA) standards ensuring that your luminaire will arrive at your facility in the same condition it left ours every time.

# High Quality Illumination

The value in lighting is in enabling you to comfortably and safely work in harsh industrial or hazardous environments. The challenges of bad color, shadows, glare, and inconsistent illumination are complex. Appleton luminaires maximize usable light that is comfortable and appropriate for the application: providing a high quality LED experience.

## Our Secondary Optics Help Improve Fixture Spacing

Secondary optics are used to direct light from the source to where it is needed. Unlike HID lamps, LEDs are highly directional, requiring specialized optics to reduce glare and provide even light distribution in a beam shape optimized for specific applications. Well designed optics can help designers achieve ideal spacing and minimize the number of luminaires required. Our secondary optics set the industry standard for comfortable, evenly distributed lighting, with a selection of patterns.




Secondary Optics  
– Task Lighting




Secondary Optics  
– Flood Lighting

## The Right Beam Pattern for Your Application

The Illuminating Engineering Society of North America (IESNA), specifies different types of luminaire light distribution classifications for roadway lighting. Besides roadway lighting, they are also commonly used to describe the distribution of Appleton™ fixtures installed in industrial and hazardous applications for task, area, low bay and high bay lighting applications.

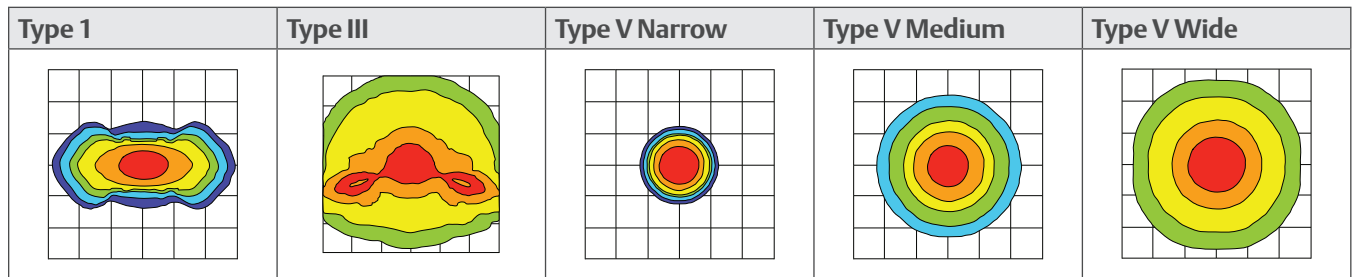

Flood lights are classified by the National Electrical Manufacturers' Association (NEMA). The NEMA Type specifies how wide or narrow the light is projected out of a flood light. This light distribution is also referred to as beam spread or beam pattern. Typically, the greater the distance between the flood light and the ground or the object being illuminated, the narrower the beam.

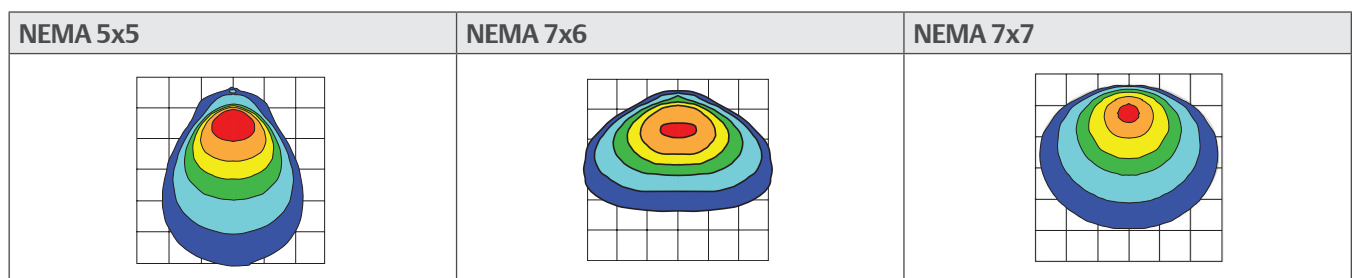

# High Quality Illumination

## Color Temperature Options

Correlated Color Temperature (CCT), refers to the color appearance or the look and feel of the light source. The cooler or crisper the appearance of a light source means the higher the CCT measured in Kelvin (K). Many Appleton LED luminaires offer more than one color temperature.

- Three color temperatures to suit customer preference
- Preferences shift from blue-rich, 5000K CCTs to warmer values
  - Bluish-White = ↑ K
  - Yellowish-White = ↓ K

5000K: Cool White      4000K: Neutral White      3000K: Warm White



### Guide to Using CCT

Color Temperature	Warm White	Neutral	Cool White
Kelvin	3000K	4000K	5000K
Mood and Effects	Soft, Warm, Pleasing	Neat, Clean, Efficient	Bright, Alert
Typical Applications	Interior, Fog, Dark Sky or Wildlife Friendly	Low Mounting Heights, Warehouse	Reading, Highlighting Details, Dust

## Selecting the Right Lumen Level

Because LED luminaires are more efficient than their HID predecessors, a watt for watt replacement would yield significantly higher than desired light levels. Generally, an LED equivalent luminaire produces the same light with 1/3 to 1/2 the energy consumption of HID. To the right is a guideline of the total LED luminaire output needed to effectively replace an HID luminaire. Since mounting height, luminaire beam pattern, and overall lighting conditions can all affect perceived illuminance levels, it is always best to request a lighting simulation and a luminaire sample. Contact an Appleton™ representative for more information.

HID Equivalent	LED Lumen Range
70 Watt	2000–3000
100 Watt	3000–4000
150 Watt	4000–5000
175 Watt	5500–7000
250 Watt	8000–10000
350 Watt	10000–12000
400 Watt	12000–14000
600 Watt	16000–18000
750 Watt	18000–20000
1000 Watt	24000–26000
1250 Watt	29000–31000
1500 Watt	37000–39000

### A Word About Perceived Brightness

The human eye has two types of photoreceptors: cones, which are active in brighter light levels, and rods, which take over in darker conditions. Commercial photometry measurements are based on photopic luminous efficiency, which only involves the cones. However, recent research shows that a white light source is perceptually and functionally brighter than its High Intensity Discharge (HID) equivalent, especially in a dimly lit application, due to the difference in the spectral power distribution of these light sources. Unfortunately, no universal standard exists today to convert traditional HID measurements to their LED counterparts.

# Luminaire System Life

Appleton LED products provide energy efficient and environmentally friendly, functionally equivalent, high quality white light with better visibility, no startup delay, no degradation in lighting quality due to on/off cycles, and no end-of-life cycling. Most people understand that these are benefits to switching to LED lighting. Quantifying these benefits and determining total cost of ownership, however, can be difficult due to the lack of an IES standard defining luminaire life.

## A Word About LED Life Specifications

While standards exist for reporting LED depreciation, no accepted standard exists for luminaire life. Manufacturers use a variety of terms to describe projected LED life. Here are a few of them and their accepted definitions:

### LM-80 Testing Standard

The IES LM-80 standard specifies a testing method for evaluating the useful life of an LED package or array. It requires at least 6,000 hours of actual LED operation, with lumen output measured and reported every 1,000 hours. These results can be used to interpolate the lifetime of an LED source within a system using the in-situ LED source case temperature.

### L70 Reported Lumen Maintenance

L70 is the time it takes for an LED's lumen output to depreciate to 70 percent of its original output. L70 is extrapolated per the calculator provided in IES TM-21, factoring in both application drive current and LED junction temperature. The standard limits reported lifespan to 6 times the number of LM-80 test hours, so that a 10,000 hour test can yield, at most, a 60,000 hour rating.


### L70 Calculated Lumen Maintenance

The TM-21 calculator allows manufacturers to calculate an estimated lumen maintenance beyond the 6 times rule. Although this can be useful for evaluating LED performance, lifetime values that exceed the 6 times multiplier are considered high risk.

## True Economic Life

TM-21 assesses lumen maintenance, but not the performance of a complete luminaire system under real world conditions. To determine expected economic life, we evaluate the entire system, including projected LED driver life, power line surge and noise immunity, light engine performance under thermal shock, long term gasket endurance against moisture ingress, and corrosion resistance.

One key factor is operating temperature, which can vary considerably with changing daily and seasonal temperatures. When operating within ambient temperature ratings, the average temperature of the environment over time provides a suitable approximation for predicting luminaire life.

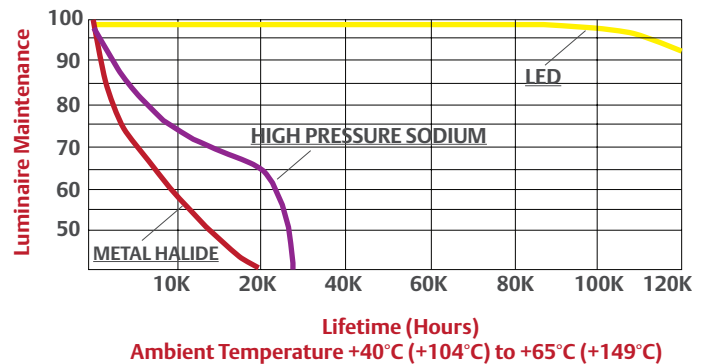

Ambient Temperature	Luminaire Life (Hours)	Number of Years at 24 Hours Usage	Number of Years at 12 Hours Usage
+25°C (+77°F)	200,000	23	46
+40°C (+104°F)	100,000	11	23
+55°C (+131°F)	90,000	10	21
+65°C (+149°F)	50,000	6	11

Note: Example for 400W Equivalent Areamaster Generation 2 LED



# Total Cost of Ownership

Although LED luminaires are inarguably more expensive than traditional lighting technologies, the savings in energy and maintenance costs provide a compelling case to upgrade your lighting. Even without taking into account improvements in safety and worker productivity, these easily quantified costs provide adequate justification.

## Dramatically Reduce Your Lighting Costs

Just because your operating budget is low, doesn't mean your expectations have to be. When evaluating lighting systems, consider both the total system power consumption and the expected luminaire life, in order to evaluate energy and maintenance costs and savings.

### Cost of Ownership Comparison

Luminaire	Power Consumption (Watts)	Lumen Output	Yearly Energy Costs	LED / Lamp Life	Annual Maintenance Costs	Yearly Total Costs	Yearly LED Savings	Yearly Savings
<b>Task Lighting Example</b>								
Mercmaster LED Low Profile	28	3,300	\$24.53	100,000 hrs	—	\$24.53	\$117.81	83%
Mercmaster III Low Profile 70W	94	5,329	\$82.34	24,000 hrs	\$60.00	\$142.34		
<b>Flood Lighting Example</b>								
Areamaster Generation 2 LED	110	14,200	\$96.36	100,000 hrs	—	\$96.36	\$341.23	78%
Areamaster 400 W HPS	465	30,900	\$407.34	24,000 hrs	\$30.25	\$437.59		

Energy Costs = Watt x 24 x 365/1000 (Kwh/yr) x \$.10/Kwh  
 Maintenance Costs = (87,600/24,000 x lamp cost + one ballast replacement)/5 years

### Appleton Lighting Retrofit Calculator

Calculate maintenance, energy and environmental savings achieved by upgrading to our Appleton LED luminaires with this interactive tool. Visit [masteringled.com](http://masteringled.com) to calculate project savings.

#### Maintenance Savings



Metal halide lamps last an average of 20,000 hours, or 2.28 years, in continuous use. By contrast, LED luminaires are typically rated for 60,000 hours and can exceed 200,000 hours depending on ambient temperature. Longer luminaire life means more time between lamp replacements; resulting in minimal maintenance downtime.

#### Energy Savings



LED luminaires provide far greater lighting efficacy compared to traditional lighting sources. Savings of over 70% can be achieved simply by retrofitting with LED.

#### Safety



LED luminaires provide instant on and cold-start capabilities without end-of-life degradation or premature failures due to frequent cycling; providing a safer work environment particularly in extreme temperatures. The solid state (no moving parts) nature of our luminaires are perfect for high vibration work environments such as oil rigs.

#### Field Replacement Components



By upgrading to an LED solution, maintenance personnel no longer need to change lamps and ballasts. However, we understand that occasionally things go wrong. Production disruptions due to light outages are minimized with our expansive range of replaceable globes and LED drivers.

# NEC/CEC Hazardous Location

Electrical installations in North America are governed by the National Electrical Code (NEC) and Canadian Electrical Code (CEC). The codes were developed for the purpose of life and property protection. Products intended for installation in hazardous locations must be listed or certified for the specific Class, Division or Zone, and Group highlighted below.

## NEC/CEC Area Classification

Classes	Divisions	Groups
<p><b>Class I: Gases</b> Areas in which flammable gases or vapors in the air, in sufficient quantities to ignite or explode.</p> <p><b>Class II: Dust</b> Areas in which combustible dust may be suspended in the air or accumulates on electrical equipment in quantities sufficient to ignite or explode.</p> <p><b>Class III: Fibers</b> Areas in which easily ignitable fibers or flyings are present. Typically fibers and flyings are not suspended in the air, but can collect around machinery or on lighting fixtures.</p>	<p><b>Division 1: Always Present</b> Areas in which ignitable concentrations of hazards exist under normal operation conditions and/or where hazard is caused by frequent maintenance or repair work or frequent equipment failure.</p> <p><b>Division 2:</b> Not Normally Present Areas in which ignitable concentrations of hazards are normally in closed containers or closed systems. Hazards may be present due to accidental rupture or breakdown of such containers or systems.</p>	<p><b>Class I: Gases</b> Group A - Acetylene Group B - Hydrogen Group C - Ethylene Group D - Propane</p> <p><b>Class II: Dusts</b> Group E - Electrically conductive dust Group F - Carbonaceous dust Group G - Agricultural and polymer dust</p>

Examples of NEC/CEC Class I, Division 1 and 2 Situations		
Class I, Division 1	Class I, Division 1 and 2	Non Classified
<b>Example 1</b>		
<p>Conditions:</p> <ul style="list-style-type: none"> <li>① Class I, Division 1 hazard exists during normal operation conditions                             <ul style="list-style-type: none"> <li>• Open air mixing tank</li> <li>• Products stored in work area</li> </ul> </li> <li>② Area classified based on properties of vapors present</li> <li>③ Electrical equipment must use approved Division 1 NEC protection techniques and wiring methods</li> </ul>		
<b>Example 2</b>		
<p>Conditions:</p> <ul style="list-style-type: none"> <li>① Division 2 area can exist where vapors are normally in closed system or containers</li> <li>② Division 1 and 2 areas separated by barrier or space (transition zone)                             <ul style="list-style-type: none"> <li>• Hazardous areas properly documented</li> <li>• Division 2 must use approved NEC wiring methods and products</li> </ul> </li> <li>③ Stored products outside Division 1 work area</li> <li>④ Non hazardous area</li> </ul>		
<b>Example 3</b>		
<p>Conditions:</p> <ul style="list-style-type: none"> <li>① Closed tank and piping confines Division 1</li> <li>② Yellow area qualifies as Division 2</li> <li>③ Stored products not present</li> <li>④ Purged/pressurized control room qualifies as "non hazardous" is sealed off from Division 2 area</li> <li>⑤ Electrical equipment in Division 2 must use approved Division 2 protection techniques and products</li> </ul>		

## Simultaneous Exposure

As specified in UL 844, The exterior surface temperature of a luminaire for use where Class I and Class II conditions may exist simultaneously shall not exceed:

- a. +165°C (+329°F) for Class I and Class II, Group G, Groups F and G, or Groups E, F, and G; or
- b. +200°C (+392°F) for Class I and Class II, Group E, Group F, or Groups E and F

# CEC/ATEX/IECEX Hazardous Location

Other global standards exist, including ATEX/IECEX. The objective of the ATEX/IECEX System is to facilitate international trade in equipment and services for use in explosive atmospheres, while maintaining the required level of safety.

## CEC/ATEX/IECEX Zone Classification

- IEC publication 60079-10 uses Zones to define the guidelines for classifying hazardous areas.
- CEC Section 18 uses Zones to define the guidelines for classifying hazardous areas.

### Gases

**Zone 0** - Areas where explosive gas atmosphere is continuously present or present for long periods of time.

**Zone 1** - Areas where explosive gas atmosphere is likely to occur in normal operation or can be expected to be present frequently.

**Zone 2** - Areas where explosive gas atmosphere is not likely to occur and if it does, it will only be present for a short period of time.

### Dusts


**Zone 20** - Areas in which a combustible dust, as a cloud, is present continuously or frequently during normal operations in sufficient quantities to produce an explosive mixture.

**Zone 21** - Areas in which a combustible dust, as a cloud, is likely to occur during normal operations in sufficient quantities to produce an explosive mixture.

**Zone 22** - Areas in which combustible dust, as a cloud, is not likely to occur, but may occur infrequently and persist for only short periods of time.

## Global Comparison of Hazardous Locations

Comparing ATEX/IECEX Zone and NEC/CEC Divisions			
Risk	Continuous Danger	Potential Danger	Accidental Danger
CEC/IEC	Zone 0 / Zone 20	Zone 1 / Zone 21	Zone 2 / Zone 22
NEC/CEC	Division 1		Division 2

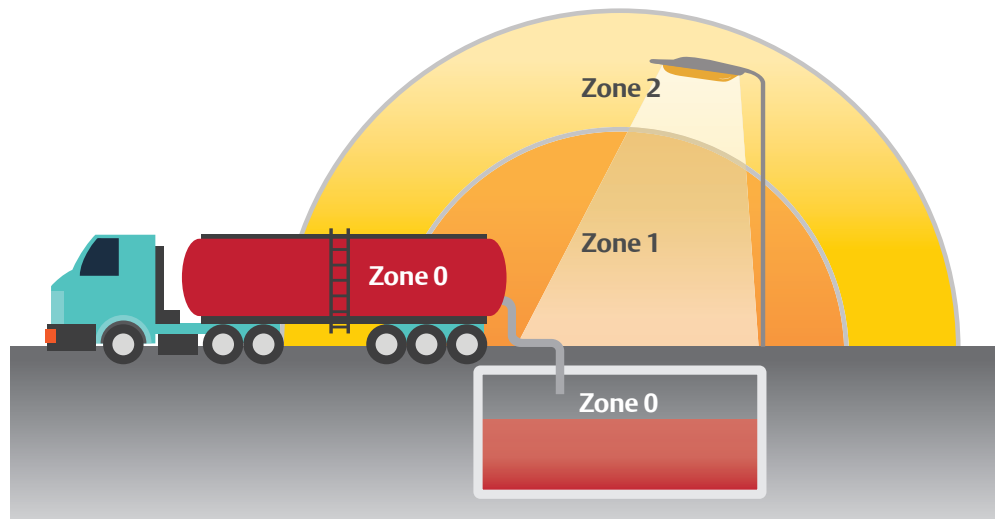

# Methods of Protection

Lighting plays a critical role in the safe, efficient, and productive operation of any industrial facility or production process. In addition to providing light, luminaires for these industries must address and overcome the inherent challenges of hazardous environments. Properly lighting hazardous locations requires knowing the facility environment, combustible composition, and fixture application.

## T - Codes

Every hazardous atmosphere has a temperature that, if exceeded, will cause the flammable or combustible to ignite. Accordingly, this temperature, called the “T” rating, is a critical safety benchmark. Hazardous location luminaires must run cooler than the ignition temperature of the surrounding atmosphere.

Per the “T” code chart, T1 rated luminaires run hot and can only be used in locations where the risk of explosion only exists at temperatures above +450° C (+842° F) to ignite. Conversely, T6 rated luminaires run the coolest and can be used in very volatile environments where temperatures can not exceed +85° C (+185° F).

The “T” code for a fixture is the temperature of the hottest spot on or in the luminaire depending on the luminaires’ Class or Zone rating. Whether the “T” rating is recorded on or in the luminaire depends on whether it is enclosed and gasketed, explosionproof or flameproof.

Maximum Operating Temperatures		Temperature Class (T-Code)
°C	°F	
450	842	— T1
300	572	— T2
280	536	— T2A
260	500	— T2B
230	446	— T2C
215	419	— T2D
200	392	— T3
180	356	— T3A
165	329	— T3B
160	320	— T3C
135	275	— T4
120	248	— T4A
100	212	— T5
85	185	— T6

## Explosionproof and Flameproof

- Class I, Division 1 Explosionproof or Zone 1 Flameproof
- Class II
- An ignition is never allowed into the environment from the luminaire interior
- Engineered flamepaths vent the pressure of an explosion
- Cooled gases are released from the flamepaths at temperatures that will not ignite the surrounding flammable atmospheres
- “T” ratings are measured on the exterior due to the explosionproof and flameproof luminaire’s ability to disarm any explosion caused within the interior of the luminaire



Code • Master LED

## Enclosed and Gasketed

- Class I, Division 2
- Class II
- Sealed to prevent the hazardous atmosphere from entering the fixture’s interior
- Prevent dust ingress in agricultural and mineral processing plants
- Contoured surfaces prevent accumulation of dust and reduce blanketing
- Internal components engineered to radiate less heat
- “T” ratings are measured on the inside because if a hazard is accidentally released into the atmosphere and reaches inside the luminaire, it will not ignite assuming the luminaire’s “T” rating is below that of the hazard



Mercmaster LED  
Low Profile

# Environmental Ratings

The IEC Ingress Protection classification system designates the degree of protection provided by an enclosure against impact and/or water or dust penetration (ingress). It has two numbers; first - protection against solid objects, second - protection against liquids. The NEMA Standard for Enclosures for Electrical Equipment test for environmental conditions such as corrosion, rust, and icing.

## Ingress Protection (IP) Codes

First Number: Solid Objects	Second Number: Liquids
0 – No protection	0 – No protection
1 – Objects greater than 50 mm (1.97 in)	1 – Vertically dripping
2 – Objects greater than 12.5 mm (0.49 in)	2 – Dripping up to 15°
3 – Objects greater than 2.5 mm (0.10 in)	3 – Limited spraying
4 – Objects greater than 1 mm (0.04 in)	4 – Splashing from all directions
5 – Dust protected	5 – Hosing jets from all directions
6 – Dust proof	6 – Strong hosing jets from all directions
	7 – Temporary immersion
	8 – Continuous immersion

## NEMA Enclosure Types

Type	Fixture Use	IP Code Rating
3R –	Indoor or outdoor use, rain, sleet, external formation of ice	–24
4 –	Indoor or outdoor use, rain, sleet, wind blown dust and rain, splashing water, hose directed water, external formation of ice	–66
4X –	Indoor or outdoor use, rain, sleet, wind blown dust and rain, splashing water, hose directed water, corrosion, external formation of ice	–66

## Suitable for Use in Wet Locations

Defined by the National Electrical Code (NEC) as “Installations underground or in concrete slabs or masonry in direct contact with the earth; in locations subject to saturation with water or other liquids, such as vehicle washing areas; and in unprotected locations exposed to weather.”

## Marine Outside Type (Salt Water)

Most Appleton LED lighting products meet the listing requirements of this sub group of UL 1598A, Supplemental Requirements for Luminaires for Installation on Marine Vessels. As a result, our lighting products are suitable for use on off shore platforms and on ships.

### Test requirements include:

- Hose test
  - 25.4 mm (1 in) nozzle, under a pressure of 103 kPa (15 lbs) per square inch from a distance 3.05 m (10 ft) for 5 minutes
- Corrosion test
  - Salt spray (fog) testing for 200 hours



# LED Lighting Applications

Luminaires are commonly categorized according to the type of lighting application, lumen level or mounting height. Choosing the right luminaire based on application is critical for providing safe and comfortable light.




## Task Lighting

Task lighting provides illumination to accomplish a specific task, such as reading a meter or gauge or safely lighting a walkway. Typical mounting heights are 3 meters (10 feet) or less.



## Low Bay or Area Lighting

Low bay or area lighting provides illumination of areas with mounting heights up to 6 meters (20 feet). Typical applications require less than 10,000 lumens, which is closest to a traditional 250 Watt High Intensity Discharge (HID) luminaire.

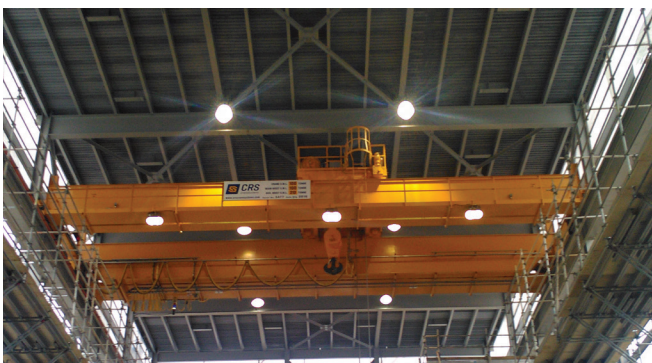

## High Bay Lighting

High bay is used to describe lighting applications with mounting heights over 6 meters (20 feet). The locations to be lit normally require greater than 10,000 lumens. Typical applications might include; warehouses, wastewater treatment facilities, production or processing plants, storages areas or foundries.



## Flood Lighting


Flood lighting uses a broad light spread to illuminate a wide area or a focused beam to project light over a great distance. Mounting heights are usually 6 meters (20 feet) or higher. Flood lighting provides safe and secure lighting. Common applications include tank farms, loading docks and perimeter fence line lighting.

# LED Lighting Industries

## Hazardous



## Harsh Industrial

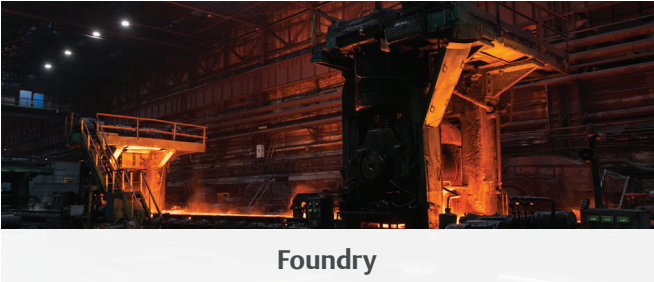

# Appleton LED Luminaires

Each application deserves a tailored lighting solution. Our broad range of reliable and energy efficient LED lighting products deliver superior light distribution and maximize usable light in harsh industrial or hazardous environments.

Lighting Application	LED Lighting Product Series	Certifications													Emergency Battery Backup	Ordinary Location		
		NEC/CEC										ATEX/ATEX/IECEX						
		Class I				Class II						Class III	IECEX					
		Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22	Zone 1		Zone 2	Zone 21			Zone 22	
Area/Task	Contender LED		•		•	•	•		•	•	•							•
	Code • Master LED Factory Sealed	•	•	•		•	•				•							
	Code • Master Jr. LED Factory Sealed	•		•		•					•							
	FDLED LED											•	•	•	•		•	
	FELED Series Nonmetallic LED											•	•	•	•		•	
	FNLED Series Nonmetallic LED												•		•			
	Mercmaster LED Generation 3		•	•	•	•	•		•	•	•	•	•	•	•		• <sup>①</sup>	•
	Mercmaster LED Low Profile		•		•	•	•	•	•	•	•	•		•	•	•	• <sup>①</sup>	•
	Rigmaster LED		•		•	•	•	•	•	•	•						•	•
	Explosionproof Rigmaster LED	•	•	•		•	•				•						•	
Viamaster LED		•		•		•			•	•		•	•	•		• <sup>①</sup>		
Flood	Areamaster Generation 2 LED		•	•	•	•	•	•	•	•	•	•	•	•				•
High Bay	Baymaster LED		•	•	•	•	•	•	•	•	•	•	•	•				•
Emergency	DEMULED LED											•	•	•	•		•	
	FDBAES LED											•	•	•	•		•	
	FNES LED												•	•	•		•	
	N2LED		•		•												•	

① Available in NEC/CEC only.



# Appleton LED Luminaires *(continued)*

Nominal Lumen Outputs													Color Temperature (CCT)			NEMA Light Distribution								
1500 - 2500	2500 - 3500	3500 - 4500	4500 - 5500	7000 - 8000	9000 - 10000	11000 - 12000	13000 - 14000	15000 - 17000	18000 - 20000	22000 - 26000	28000 - 30000	35000 - 38000	5000K	4000K	3000K	Type V	Type V Wide	Type III	Type I	7x6	7x7	5X5	3X3	
	•	•	•										•	•	•	•								
		•	•	•	•	•	•	•	•				•	•	•	•	•							
•	•	•	•										•		•	•								
													•											
	•	•	•	•									•	•		•								
	•	•	•	•									•	•		•								
	•	•	•	•	•	•	•	•	•	•			•	•	•	•	•	•						
	•	•	•										•	•	•	•								
		•	•	•									•	•	•						•			
		•	•	•									•	•	•						•			
•		•		•									•								•			
					•			•	•	•	•	•	•	•	•						•	•	•	•
					•			•	•	•	•	•	•	•	•	•	•		•					
													•											
													•											
													•											
													•											
													•											

# A-51 LED

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

The Appleton A-51 LED luminaire is designed to provide the benefits of LED lighting in low mounting height applications previously served by incandescent luminaires. Easy to install in new and retrofit applications, it fits in the same mounting hoods as traditional incandescent Appleton A-51 luminaires with no rewiring. Models are available for Group A and B areas (AAL) as well as strictly Group C and D areas (AL).

### Features

1. Easily retrofits into existing A-51 mounting hoods with no rewiring
2. Industry leading internal 6KV surge protection to prevent voltage spikes from possibly damaging the driver
3. Aluminum heat sink and thermally conductive polymer based potting compound maintains low LED driver temperature ensuring long life
4. Reported L70 life of 60,000 hours; CRI > 80
5. Wide operating temperature range from -25°C to +55°C (-13°F to +131°F)
6. Gray epoxy powder coat, electrostatically applied paint resists corrosion



### Illustrated Features



Heavy duty gray epoxy powder coated guards provide protection.



Color globes available (*ALL1 and ALL2 models only*) including: amber, red and green.



Single sided and three sided Exit signs available for the AL models only ①

### Mounting Hoods for A-51 LED



Ceiling Mount  
(AL Models and AAL Models)




Pendant Mount  
(AL Models and AAL Models)



15° Short Bracket  
(AL Models and AAL Models)



Long Bracket  
(AL Models Only)



25° Stanchion  
(AL Models Only)

### A-51 LED: UL Listed and CSA Certified for Class I, Division 1, Group A Locations

Acetylene is a dangerous gas because of its highly flammable nature. Even a little spark can ignite it so it is given an odor for easy detection, otherwise it is odorless in its pure form. Acetylene has a very wide range of flammability. The lower flammable limit (LFL) is typically listed as 2.5% and the upper flammable limit (UFL) is listed as 81%. Although acetylene will not undergo combustion at concentrations above the UFL, it can undergo an explosive decomposition reaction, even at concentrations of 100%.

# A-51 LED (continued)

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

### Product Selection Key

Certifications										Emergency Battery Backup	Ordinary Location				
NEC/CEC															
Class I				Class II					Class III			ATEX/ATEX/IECEX			
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
●	●			●	●				●						

### NEC/CEC Certifications

#### All Models

- Suitable for Use in Wet Locations
- cULus: E10444

#### Group A and B areas (AAL Models)

- Class I, Division 1, Groups A, B, C, D
- Class II, Division, Groups F, G
- Class III

#### Group C and D areas (AL Models)

- Class I, Division 1, Groups C, D
- Class II, Division 1, Groups E, F, G
- Class III

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60 Hz; 100-300 Vdc
<b>Retrofit Equivalents:</b>	100W – 300W Incandescent
<b>Lumens:</b>	1,600 to 3,200
<b>Efficacy:</b>	Up to 134 lm/w
<b>Color Temperatures:</b>	5000K, 3000K
<b>CRI:</b>	80+
<b>Ambient Temperature:</b>	-25°C to +55°C (-13°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Replaceable Components:</b>	Globe (AL Models) Globe Assembly (AAL Models)

### Product Ordering Guide: A-51™ LED Factory Sealed Luminaires - Groups C, D

AL	A	L1	1	C	BU	G
<b>Series:</b> AL - A-51 LED	<b>Mounting:</b> A - Pendant C - Ceiling S - 25° Stanchion ① LB - Long Bracket SB - 15° Short Bracket Blank - No Mounting Hood	<b>Lumen Output (nominal):</b> L1 - 1700 L2 - 3100	<b>Hub Size:</b> 1 - 1/2" NPT 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" - 1-1/2" Blank - No hub size needed if no mounting hood	<b>Color Temperature (CCT):</b> C - 5000K W - 3000K	<b>Voltage:</b> BU - 120-277 Vac, 50/60Hz; 100-300 Vdc	<b>Options:</b> G - Guard Blank - No Guard

① Not UL Listed.

### Product Ordering Guide: A-51™ LED Factory Sealed Luminaires - Groups A, B, C, D

AAL	A	L1	1	C	BU	G
<b>Series:</b> AAL - A-51 LED	<b>Mounting ①:</b> A - Pendant C - Ceiling SB - 15° Short Bracket Blank - No Mounting Hood	<b>Lumen Output (nominal):</b> L1 - 1700 L2 - 3100	<b>Hub Size:</b> 1 - 1/2" NPT 2 - 3/4" NPT Blank - No hub size needed if no mounting hood	<b>Color Temperature (CCT):</b> C - 5000K W - 3000K	<b>Voltage:</b> BU - 120-277 Vac, 50/60Hz; 100-300 Vdc	<b>Options:</b> G - Guard Blank - No Guard

① Only pendant is certified for Group A applications.

# Code•Master LED

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

The Code•Master LED explosionproof luminaire is certified for Class I, Division 1 locations and offers a full range of lumen outputs and mounting options. Easy to maintain, it offers field replaceable components and 60,000+ hours of operation with minimal maintenance. It is available in a full range of models equivalent to HID lamps from 70 to 750 Watts. The low profile design and optional diffused glass globe ensure adequate clearance and minimal glare in low ceiling applications, while the highest lumen output models provide ample lighting at mounting heights of 25 feet or higher.

### Features

1. Easily retrofits into existing Code • Master mounting hoods with norewiring
2. NEMA 4X cast copperfree aluminum body with baked epoxy powder coat finish
3. Superior thermal heat sink design. Cool operation from -40°C to +65°C (-40°F to +149°F)
4. Choice of clear glass lens or diffused lens to reduce glare in low ceiling applications
5. Optional lens guard to protect against breakage



### Illustrated Features



Double lead Acme threads for quick installation with only half as many turns and no sticking or galling.



Driver can be quickly and easily accessed for replacement with optional fuse to protect circuits against power spikes.



Clean, industrial design with no dirt traps for ease of maintenance.



Multiple mounting options, including: pendant, ceiling, wall bracket and 25° stanchion.

### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX					
Class I				Class II					Class III	Zone 1	Zone 2	Zone 21	Zone 22		
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22							
●	●	●		●	●					●					

# Code•Master LED *(continued)*

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

### NEC/CEC Certifications

- Class I, Division 1 and 2, Groups B, C, D
- Class I, Zone 1, Group IIB + H2
- Class II, Division 1, Group E, F, G
- Class II, Division 2, Group F, G
- Class III
- Simultaneous Exposure
- Type 3R, 4X
- IP66/67
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water)
- cCSAus: 164460, Certificate Number: 70030675
- Approved for use in paint spray booths

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60 Hz; 125-300 Vdc 347-480 Vac, 50/60 Hz
<b>Retrofit Equivalents:</b>	100W – 750W HID
<b>Lumens:</b>	2,100 to 19,300
<b>Efficacy:</b>	Up to 131 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+
<b>Ambient Temperature:</b>	-50°C to +65°C (-40°F to +149°F)
<b>LED Lumen Depreciation (L70):</b>	100,000+ hours
<b>Replaceable Components:</b>	Driver, Globe Assembly

### Product Ordering Guide

CMLED	A	17	5	N	G	5	BU	C
Series: CMLED - Code•Master LED	Mounting: A - Pendant C - Ceiling S - 25° Stanchion W - Wall Blank - No Mounting Hood	Lumen Output (Nominal): 10 - 3,700 15 - 5,400 17 - 7,900 25 - 10,000 35 - 11,600 40 - 13,600 75 - 16,700 90 - 19,300	Hub Size: 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT 5 - 1-1/2" NPT stanchion Blank - No hub size needed if no mounting hood	Color Temperature (CCT): Blank - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	Optical Assembly: G - Clear Glass Globe D - Diffused Glass Globe	Light Distribution Pattern: 5 - NEMA Type V Symmetrical W - NEMA Type V Wide	Voltage: BU - Universal Voltages 120-277 Vac, 50/60 Hz, or 125-300 Vdc BH - 347-480 Vac, 50/60 Hz	Options: C - Safety Cable F - Fusing ① G - Lens Guard Blank - No Options

① Use of a fuse voids Marine Outside Type (Salt Water) rating.

# Code•Master Jr. LED

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

The Code•Master Jr. LED Factory Sealed Luminaires delivers an innovative standard of performance for hazardous Class I, Division 1 environments. Suitable for both new-builds and retrofit installs, this series uses the same mounting hoods as legacy Code•Master™ incandescent and HID luminaires providing quick and easy upgrades to LED lighting. It is available in models equivalent to incandescent lamps from 100-300 Watts and HID lamps from 50 to 150 Watts. The small footprint and light weight design are ideal for tight fit applications. The prismatic glass globe offers minimal glare for low ceiling applications. The highest lumen output models provide ample lighting at mounting heights of 15 feet or lower.

### Features

1. Aluminum heat sink with grey epoxy powder coat, electrostatically applied paint that resists corrosion
2. Heat and impact resistant glass globe with smooth dust resistance exterior and prismatic finish to reduce glare
3. Diecast aluminum heatsink contributes to a reported L70 life of 60,000 hours
4. Internal 6KV surge protection to prevent voltage spikes from possibly damaging the driver
5. Thermally conductive potting compound maintains low LED driver temperature ensuring a long life



### Illustrated Features



Double lead Acme threads for quick installation with only half as many turns and no sticking or galling



Various accessories available to support multiple lighting design requirements



Lower lumen outputs in a small, lightweight housing for easy installation and maintenance.



Multiple mounting options, including: pendant, ceiling, wall bracket, and 25° stanchion.

### Product Selection Key

Certifications															Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX						
Class I				Class II					Class III	Zone 1	Zone 2	Zone 21	Zone 22			
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22			
●		●		●					●							

# Code•Master Jr. LED *(continued)*

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

### NEC/CEC Certifications

- Class I, Division 1, Groups B, C, D ①
- Class II, Division 1, Groups E, F, G
- Class III
- Zone 1, Ex db IIB + H2
- NEMA 3R, 4X
- Suitable for use in Wet Locations
- Marine Outside Type (Salt Water)
- Approved for use in Paint Spray Booths
- UL Listed: E10444

① For Group B applications, a Group B rated mounting hood must be used.

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60 Hz; 100 – 300 Vdc; 347-480 Vac, 50/60 Hz
<b>Retrofit Equivalents:</b>	50W – 150W HID
<b>Lumens:</b>	1,600 to 5,150
<b>Efficacy:</b>	Up to 123 lm/w
<b>Color Temperatures:</b>	5000K, 3000K
<b>CRI:</b>	80+
<b>Ambient Temperature:</b>	-40°C up to +55°C (-40°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours

### Product Ordering Guide

CJL	A	L1	1	C	BU	G
<b>Series:</b> CJL – Code•Master Jr. LED	<b>Mounting:</b> A - Pendant W – Wall Bracket C – Ceiling S – 25° Stanchion Blank - No Mounting Hood	<b>Lumen Output (nominal):</b> L1 – 1600 L2 - 3000 L3 - 5150	<b>Hub Size:</b> 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" or 1-1/2" NPT stanchion Blank - No hub size needed if no mounting hood	<b>Color Temperature (CCT):</b> C - 5000K W - 3000K	<b>Voltage:</b> BU - 120-277 Vac, 50/60Hz; or 100-300 Vdc ① BH - 347-480 Vac, 50/60H ②	<b>Options:</b> G - Guard Blank - No Guard

① Only for L1 and L2 models, 125–300 Vdc for L3 model.

② Only for L3 models.

# Contender LED

## Area/Task Lighting; Enclosed and Gasketed

Appleton Contender LED luminaires deliver exceptional efficiency, performance and advanced engineering. The compact, light weight, low profile design is suited for low mounting heights. With four different field replaceable globe options (clear and diffused polycarbonate, clear glass, or prismatic glass refractor) it can be customized to application requirements. With three light output levels, offering illumination up to 175W HID equivalent, the Contender LED Luminaire is designed to directly retrofit (no adapter) to Crouse-Hinds™ Champ® VMV Series mounting hoods. Additionally, this series is certified with many of the Mercmaster LED Low Profile globes and accessories including the visor, angled reflector, globe guards, and safety cable.

### Features

1. IP67 certified luminaire that includes an IP66 Driver with 6KV Surge Protection
2. Gray epoxy powder coat, electrostatically applied paint resists corrosion
3. LEDs have been tested for over 18,000 hours and have a rated L70 of 100,000+ hours with a calculated L70 of much longer
4. High temperature silicon gaskets resist compression set and maintain seal
5. IP68 Cord Gland Sealed wiring inlet to prevent water ingress into fixture from conduit



### Illustrated Features



Directly mounts to Crouse-Hinds Champ® mounting hoods (no adapter).



Globe assembly can be quickly removed to replace the globe for modification of light output of the fixture. Reduces storage requirements by minimizing SKUs and swapping/storing globes as necessary by application.



Safety cable is slipped around the housing through casted retention points.

### Interchangeable with Crouse-Hinds™ Champ® Mounting Hoods

Crouse-Hinds™ Luminaires that mount to Champ® Mounting Hoods	Pendant	Flexible Pendant	Ceiling	Wall	Quad	25 Degree Stanchion	Straight Stanchion
	APM2, APM3	HPM2	CM2, CM3	TWM2, TWM3	QM25	JM5	PM5
VMV Series - HID and LED	●	●	●	●	●	●	●
DMV Series - HID and Fluorescent	●	●	●	●	●	●	●
PVM Series - HID and LED	●	●	●	●	●	●	●
LMV Series - HID	●	●	●	●	●	●	●



# Contender LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX					
Class I				Class II					Class III	Zone 1	Zone 2	Zone 21	Zone 22		
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22							
	●		●	●	●		●	●	●						●

### NEC/CEC Certifications

#### Ordinary Location (IVMV Model)

- cCSAus Listed
- Type 3R, 4, 4X
- Class II, Division 1, Group E, F, G
- IP66/67
- Simultaneous Exposure
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) For USA ONLY
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460, Certificate Number: 7017002

#### Hazardous Location (VMV Model)

- Class I, Division 2, Group A, B, C, D
- Class I, Zone 2, AEx ec IIC
- Class II, Division 1, Group E, F, G
- Zone 2, AEx tb IIIC
- Class II, Division 2 Group F, G
- Class III
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) For USA ONLY
- Type 3R, 4 and 4X
- IP66/67
- Simultaneous Exposure
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460, Certificate Number: 70170001

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60 Hz; 125-300 Vdc 347-480 Vac, 50/60 Hz
<b>Retrofit Equivalents:</b>	70W – 175W HID
<b>Lumens:</b>	3,000 to 5,500
<b>Efficacy:</b>	Up to 125 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+
<b>Ambient Temperature:</b>	-40°C to +65°C (-40°F to +149°F)
<b>LED Lumen Depreciation (L70):</b>	100,000+ hours
<b>Replaceable Components:</b>	Driver, Globes

### Product Ordering Guide

VMV	3L	C	D5	BU	I
<b>Series:</b> VMV NEC/CEC Certified Contender™ LED Series IVMV Industrial Contender™ LED Series	<b>Lumen Output (nominal) ①:</b> 3L - 3K Lumens 4L - 4K Lumens 5L - 5K Lumens	<b>Color Temperature (CCT):</b> C - 5000K N - 4000K W - 3000K	<b>Globe Material:</b> P5 - NEMA Type V Clear Polycarbonate Globe D5 - NEMA Type V Diffused Polycarbonate Globe G5 - NEMA Type V Glass Globe ② J5 - NEMA Type V Glass Refractor ②	<b>Voltage:</b> BU - 120-277 Vac, 50/60Hz; or 125-300 Vdc BH - 347-480 Vac, 50/60Hz	<b>Options:</b> Blank - Wire Nuts (Standard) T - Terminal Blocks ③

① For specific lumen output information, see Lumen Output Chart in product catalog pages.

② Guards for the glass refractors and globes are ordered separately. See the Accessories for more information.

③ Terminal block wiring option is only available with BU voltage configuration.

④ Factory installed. Fusing available for cCSAus rating only.


# Rigmaster LED

## Area/Task Lighting; Enclosed and Gasketed

The Rigmaster LED is an NEC/CEC Class I, Division 2 or Class II, Division 1 rated luminaire designed for use in hazardous locations. It provides comfortable, uniform illumination in a lightweight, low profile design that comes in two lumen packages and is easy to install in any hazardous task lighting application. Also available in an Emergency Battery Backup version, this fixture provides users ample flexibility for wiring, CCT, Lens and voltage options. Tested for high vibration, dust and moisture prone environments, with adjustable yoke bracket options, captive hardware, and five casted safety retention points, this luminaire is durable enough to handle even the toughest applications drilling rigs entail.

### Features

1. Choice of clear or diffused lens for optimized glare control
2. Captive hardware for hassle free Access to wire box
3. Wide and uniform light distribution for maximum area coverage
4. Mounting brackets included with luminaire
5. Bracket position locking mechanism for consistent aiming
6. Five secondary retention points preventing accidental disengagement

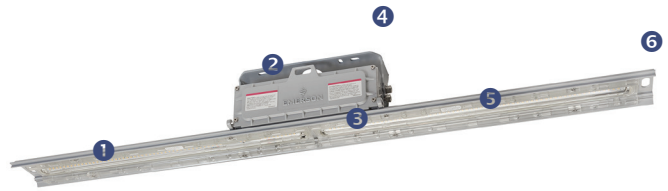


### Illustrated Features



Choose between wire nuts or terminal blocks and meet end user wiring preferences.



Three mounting bracket options offer various bolt patterns for retrofitting & help minimize overall fixture profile for low clearance areas.



Option for out of the box wiring eliminates the need to access wiring compartment and reduces installation time.



Battery Backup Option delivers 1350 lumens of standby emergency illumination for increased safety during power outages.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location
	NEC/CEC															
	Class I				Class II					Class III	ATEX/ATEX/IECEX					
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
RM		●		●	●	●	●	●	●	●					●	
IRM															●	●

# Rigmaster LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### Ordinary Location (IRM Model)

- cCSAus Listed
- Type 3R, 4, 4X, IP66
- Simultaneous Exposure
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) ⑤
- American Bureau of Shipping (ABS) Certified ⑤
- Industrial Rigmaster Standard:
  - cCSAus: 164460, Certificate Number: 70208309
- Industrial Rigmaster Emergency:
  - cCSAus: 164460, Certificate Number: 70218502

#### Hazardous Location (RM Model)

- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1, Groups E, F, G
- Class III
- Class I, Zone 2, Group IIC
- Simultaneous Exposure
- Class II, Zone 20 & 21, Group IIIC
- Type 3R, 4, 4X, IP66
- Marine Outside Type ⑤
- American Bureau of Shipping (ABS) ⑤
- Suitable for Use in Wet Locations

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60Hz; 125-300 Vdc; 347-480 Vac
<b>Retrofit Equivalents:</b>	2 x 32W up to 3 x 32W Fluorescent lamps
<b>Lumens:</b>	4,300 to 7,600
<b>Efficacy:</b>	Up to 146 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	80+, 80+, 80+
<b>Ambient Temperature Standard:</b>	-40°C to +65°C (-40°F to +149°F)
<b>Ambient Temperature Emergency:</b>	-20°C to +55°C (-4°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours @ +65 °C
<b>Replaceable Components:</b>	LED Driver, Lens

- Rigmaster Standard:
  - cCSAus: 164460, Certificate Number: 70212106
- Rigmaster Emergency:
  - cCSAus: 164460, Certificate Number: 70218504

### Product Ordering Guide

RM	A	4	2	C	P	L	BU	N	G	W	2
<b>Series:</b>	<b>Mounting</b> ③④:	<b>Lumen (nominal)</b> ①:	<b>Hub Size:</b>	<b>Color Temperature (CCT):</b>	<b>Lens Material:</b>	<b>Light Distribution Pattern:</b>	<b>Voltage:</b>	<b>Emergency:</b>	<b>Color:</b>	<b>Wiring Method:</b>	<b>Option</b> ③:
RM - Rigmaster Linear LED	N - If None (Use if Ordering Appleton Bracket Separately)	2 - 4,300 (2') 4 - 7,600 (4')	1 - (4) 1/2" NPT	C - Cool 5000K	D - Diffused Polycarbonate	L - Linear Pattern (non-optic) (standard)	BU - 120-277 Vac; 125-300 Vdc	N - If None (Standard) H - 90 minutes E - 180 minutes	G - Appleton Gray (Standard)	W - Wire Nuts (Standard)	Blank - If None 1 - (1) Safety Cable 2 - (2) Safety Cables
IRM - Industrial Rigmaster	A - Small Swivel Bracket B - Large Swivel Bracket L - Low Profile Bracket		2 - (4) 3/4" NPT	N - Neutral 4000K W - Warm 3000K	P - Clear Polycarbonate		BH - 347-480 Vac			T - Fixed Terminal Block ②	

① For lumen output information, see product catalog.

② Terminal block option available for BU voltage configuration only.

③ Brackets and safety cables can be ordered separately or included with fixture.

④ Mounting option A is not available with emergency version.

⑤ Applicable to standard (non emergency) fixtures only.

Note: Exclusions may apply. See catalog for full specifications.

# Explosionproof Rigmaster LED

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

The Explosionproof Rigmaster™ LED luminaire provides comfortable, uniform illumination with two lumen packages for any Class I, Division 1 hazardous task lighting application. With its low profile design, versatile mounting options and safety centric elements, it is easy to install and long lasting with minimal maintenance. Also available in an Emergency Battery Backup version with 90- or 180- minute modes, it provides up to 1350 lumens of egress lighting. Rugged, reliable and rigorously tested to withstand high vibration, this luminaire is durable enough to handle potentially explosive environments.

### Features

1. Choice of clear or frosted lens for optimized glare and brightness control
2. Screw-less access to wiring compartment for installation convenience
3. Mounting brackets included with luminaire for reduced complexity
4. Wide and uniform light distribution for maximum area coverage
5. Four secondary retention points preventing accidental disengagement




### Illustrated Features




Wire box cover is secured using captive hardware preventing accidental disengagement during use.



Bracket position locking mechanism for consistent aiming.



Two mounting bracket options offer various bolt patterns for retrofitting and help minimize overall fixture profile for low clearance areas.



Battery Backup Option deliver up to 1350 lumens of standby emergency illumination for increased safety during power outages.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location	
	NEC/CEC										ATEX/ATEX/IECEX						
	Class I				Class II				Class III	ATEX/ATEX/IECEX							
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21		Zone 22	Zone 1	Zone 2	Zone 21	Zone 22			
ERM	●	●	●		●	●					●					●	

# Explosionproof Rigmaster LED *(continued)*

## Area/Task Lighting; Explosionproof, Dust-Ignitionproof

### NEC/CEC Certifications

- Class I, Division 1, Groups C and D
- Class II, Division 1, Groups E, F, G
- Class III
- Class I Zone 1, Group IIB
- Type 3R, 4X, IP66
- Simultaneous Exposure
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) ④
- American Bureau of Shipping (ABS) ④
- Explosionproof Rigmaster Standard:
  - UL Certified, File Number: E10794
- Explosionproof Rigmaster Emergency:
  - UL Certified, File Number: E175025

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60Hz; 125-300 Vdc; 347-480 Vac
<b>Retrofit Equivalents:</b>	2 x 32W up to 3 x 32W Fluorescent lamps
<b>Lumens:</b>	4,300 to 7,600
<b>Efficacy:</b>	Up to 136 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	80+, 80+, 80+
<b>Ambient Temperature Standard:</b>	-40°C to +65°C (-40°F to +149°F)
<b>Ambient Temperature Emergency:</b>	-20°C to +55°C (-4°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours @ +65 °C
<b>Replaceable Components:</b>	LED Driver, Lens

### Product Ordering Guide

ERM	B	2	2	N	C	L	BU	N	G	W	2
<b>Series:</b> ERM - Explosionproof RigMaster Linear LED CID1	<b>Mounting</b> ③: N - If None (Use if Ordering Appleton Bracket Separately) B - Large Swivel Bracket L - Low Profile Bracket	<b>Lumen Level</b> ②: 2 - 4,300 Lumens (2') 4 - 7,6000 Lumens (4')	<b>Hub Size:</b> 1 - (4) 1/2" NPT 2 - (4) 3/4" NPT	<b>Color Temp. (CCT):</b> C - Cool 5000K N - Neutral 4000K W - Warm 3000K	<b>Lens Material:</b> C - Clear Glass F - Frosted Glass	<b>Light Distribution</b> Pattern: L - Linear Pattern (non-optic) (standard)	<b>Voltage</b> ①: BU - 120-277 Vac; 125-300 Vdc BH - 347-480 Vac	<b>Emergency:</b> N - If None (Standard) H - 90 minutes E - 180 minutes	<b>Color:</b> G - Appleton Gray (Standard)	<b>Wiring Method:</b> W - Wire Nuts (Standard) T - Terminal Blocks④	<b>Option</b> ③: Blank - If None 1 - (1) Safety Cable 2 - (2) Safety Cables

Note: Exclusions may apply. See product catalog pages for full specifications.

① Emergency battery back up version is only available with BU voltage configuration for 120-277Vac operation.

② For lumen output information, refer to catalog pages.

③ Brackets and safety cables can be ordered separately or included with fixture. Refer to catalog pages for more information.

④ Applicable to standard (non emergency) fixtures only.

# EHLED Handlamp

## Area/Task Lighting; Enclosed and Gasketed

The Appleton EHLED Explosionproof Handlamp can be used in the harshest atmospheres and is rated for use in Class I, Division 1, Groups C, D applications. This portable LED handlamp is rated for 120 Vac, 50/60 Hz and is UL Listed and CSA certified (cULus).

### Features

1. Phenolic handle, non-sparking guard and a swivel hook for easy temporary hanging
2. Heat and impact-resistant glass globe
3. 9 Watt LED bulb, rated for enclosed spaces, provides 800 lumens of light output (equivalent to a 60 Watt incandescent)
4. Available with or without a 50 foot 14-3 SOOW cord with a hazardous location rated plug or without the cord and plug



### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX					
Class I				Class II					Class III	Zone 1	Zone 2	Zone 21	Zone 22		
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22							
●	●														

### NEC/CEC Certifications

- UL Standard: UL 1598, UL 844, UL 153
- CSA Standard: CSA C22.2 No. 137, CSA C22.2 No 12
- cULus Listed: E59147

### Specifications

Features	Specifications
<b>Voltage:</b>	120 Vac, 50/60Hz
<b>Equivalency:</b>	60W – 100W Incandescent
<b>Lumens:</b>	800
<b>Efficacy:</b>	N/A
<b>Color Temperatures:</b>	5000K
<b>CRI:</b>	N/A
<b>Ambient Temperature:</b>	-20 °C to +40 °C (-4 °F to +104 °F)
<b>Replaceable Components:</b>	Heat-resistant Glass Globe and Guard Assembly and Tool Kit

# N2LED Emergency

## Emergency Lighting; Enclosed and Gasketed

The Appleton N2LED Series emergency system provides illumination for safe egress through doors, aisle-ways, stairs, walkways, exit paths, and outer perimeter walls during interruption of normal power. The non-metallic emergency egress lighting systems is available with up to two direct mounted lamps on the main or remote units. The system supports up to 4 light heads in any main/remote combination utilizing up to 6 Watts of output power. This allows for a main unit without any light heads to drive up to 4 remote units or any other combination of 4 lights. They provide 100% lumen output for 90 minutes of operation with four light heads or 180 minutes of operation with two light heads.



### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC															
Class I				Class II					Class III	ATEX/ATEX/IECEX					
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
	●		●											●	

### NEC/CEC Certifications

- UL Standards:
  - 1598A (Supplemental Requirements for Luminaires for Installation on Marine Vessels)
  - 924 (Emergency Lighting and Power Equipment)
  - 844 (Electric Luminaires Hazardous Locations)
- CSA Standards:
  - C22.2 No. 141-M1985 unit equipment for emergency lighting
  - C22.2 No. 137-M1981 non-incendive electrical equipment for use in Class I, Division 2 hazardous locations

### Specifications

Features	Specifications
<b>Voltage:</b>	120 277 Vac, 50/60 Hz
<b>Ambient Temperature:</b>	0°C to +55°C (+32°F to +131°F)
<b>Replaceable Components:</b>	Lamps, Battery Pack, Circuit Charger Board

- Life Safety Code NFPA101® – Section 5-9 (Emergency Lighting)
- Marine wet locations suitability, Type 4X
- cCSAus Certified: 2715744
- American Bureau of Shipping (ABS) Certified

### Product Ordering Guide: N2LED Master Units

<b>N2LED</b>	<b>2</b>	<b>I</b>	<b>1</b>
<b>Series:</b> N2LED - Emergency Lighting System	<b>No. of Direct Mounted Lamps:</b> 0 - None 2 - Two	<b>Entry Location:</b> T - Top Entry	<b>Entry Size:</b> 1 - 3/4" NPT

### Product Ordering Guide: N2LED Remote Units

<b>N2LEDR</b>	<b>2</b>	<b>R</b>	<b>1</b>
<b>Series:</b> N2LED - Remote Emergency Lighting System	<b>No. of Direct Mounted Lamps:</b> 1 - None 2 - Two	<b>Entry Location:</b> R - Right	<b>Entry Size:</b> 1 - 3/4" NPT

# Mercmaster LED Generation 3

## Area/Task Lighting; Enclosed and Gasketed

The Appleton Mercmaster LED Generation 3 is a full-feature lighting solution with in a rugged and corrosion-resistant housing. They are designed to meet the most demanding task and area lighting requirements. Featuring nine lumen outputs, seven mounting types, four light distribution patterns, four replaceable globe choices, five color temperatures, two input voltages, and various retrofit adapter options, this best-in-class LED achieves unprecedented application versatility and comfort.

The Mercmaster LED Generation 3 is rated for Class I, Division 2 and Class II hazardous locations and is certified for ATEX/ATEX/IECEX Zone 2 and 21 - 22. The Industrial Mercmaster LED Generation 3 is cULus Certified for ordinary (unclassified) locations.

### Features

1. Superior thermal heat sink design provides cool operation from  $-40^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ ), up to  $+75^{\circ}\text{C}$  on some High Ambient models – wide enough for any environment
2. IP66/67, NEMA 4X for marine and wet locations
3. Replaceable globes and LED drivers extend luminaire life even beyond 100,000 hours
4. Heavy guard provides extra protection
5. Secondary optics for Type I, Type III, Type V and Type V Wide light distribution
6. Ten year warranty with Type I, Type III, and Type V wide optics
7. Optional diffused polycarbonate globe for increased glare control or prismatic glass refractor
8. Up to 135 lumens per watt for maximum energy savings
9. 6KV standard surge protection and optional 10KV with 10 year warranty – protects your investment and keeps you up and running



MLGL3 - MLGL7/  
IMLGL3 - IMLGL7



MLGH9 - MLGH6/  
IMLGH9 - IMLGH6


### Illustrated Features



Captive, stainless steel latch assembly (bolt and nut) closes securely while providing resistance to corrosive atmospheres.



Swing-away design simplifies wiring and installation. Extra-high hinge secures housing to hood during wiring.



Safety cable is slipped around the housing through casted retention points.



Interchangeable globes and guards for application versatility (some certification restrictions).

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location	
	NEC/CEC																
	Class I				Class II					Class III	ATEX/ATEX/IECEX						
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22			
MLGL / MLGH		●		●	●	●		●	●	●		●	●	●	●	● <sup>⓪</sup>	
MGZ / MGZH			●					●	●			●	●	●	●		
IMLG																● <sup>⓪</sup>	●



# Mercmaster LED Generation 3 *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### Ordinary Location (All Models)

- Type 3R, 4, 4X
- IP66/IP67
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water)
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460, Certificate Number: 70129364

#### Hazardous Location (MLG and MLGH Models)

- Class I, Division 2, Groups A, B, C, D
- Class II, Division 1 and 2, Group E, F, G
- Class III
- Class I, Zone 2 AEx ec IIC
- Zone 21 AEx tb IIIC
- Class I, Zone 2 Ex ec IIC
- Zone 21 Ex tb IIIC
- cCSAus: 164460, Certificate Number: 70112879

### ATEX/ATEX/IECEX Certifications

#### Hazardous Location (MLG and MLGH Models)

- Zones: 2, 21, 22
  - Conforming to ATEX 2014/34/EU: Ⓢ II 3 GD
  - Type of Protection: Ex ec IIC T\* Gc  
Ex tb IIIC T\* °C Db; Ex tc IIIC T\* °C Dc
- Temperature Class: T6 to T3
- ATEX Certificate: Sira 17ATEX9365X
- ATEX/IECEX Certificate: ATEX/IECEX SIR 17.0085X
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK08
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 for all models

#### Hazardous Location (MGZ and MGZH Models)

- Zones: 1, 2, 21, 22
  - Conforming to ATEX 2014/34/EU: Ⓢ II 2 GD
  - Type of Protection: Ex eb mb op is IIC T\* Gb  
Ex op is tb IIIC T\* °C Db
  - Temperature Class: T6 to T4
- ATEX Certificate: ITS18ATEX303680X
- ATEX/IECEX Certificate: ATEX/IECEX ITS 18.0041X\_0
- Index of Protection according EN/IEC 60529: IP66/67
- Impact Resistance (shock): IK08
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 with diffused polycarbonate, RG1 with clear glass or polycarbonate

### International Dark-Sky Association

- IDA Dark Sky Approved when ordering [I]MLG[A/B/C/D/R/W]xxW[P/D/G]5Bxxx with MMVISOR accessory

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60Hz; 125-300 Vdc; 347-480 Vac
<b>Retrofit Equivalents:</b>	70 W - 1000W HID
<b>Lumens:</b>	3,000 to 26,000
<b>Efficacy:</b>	Up to 146 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+, 80+, 80+
<b>Ambient Temperature Standard:</b>	-40°C to +75°C (-40°F to +149°F)
<b>Ambient Temperature Emergency:</b>	-20°C to +55°C (-4°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	78,000+ hours @ +65 °C
<b>Replaceable Components:</b>	LED Driver, Lens

# Mercmaster LED Generation 3 (continued)

## Area/Task Lighting; Enclosed and Gasketed

### Product Ordering Guide: Mercmaster LED Generation 3 Series

MLG	A	L3	2	C	D	5	BU	F	1	H
<b>Series:</b> MLG - Mercmaster LED Generation 3 IMLG - Industrial Mercmaster LED Generation 3	<b>Mounting:</b> A - Pendant B - Watertight Pendant ▲ C - Ceiling ② D - Pendant Cone ⑥ R - 90° Stanchion ① S - 25° Stanchion ① T - Trunnion K - Killark™ Adapter Universal ▲ U - Mercmaster II Adapter, Ceiling or Pendant ▲ V - Mercmaster II Adapter, Stanchion or Wall ▲ W - Wall X - Crouse Hinds™ Adapter, Ceiling or Pendant ▲ ⑦ Y - Crouse Hinds™ Adapter, Stanchion or Wall ▲ Blank - No mounting hood	<b>Lumen (Nominal):</b> L3 - 3500 L3 - 3,500 L5 - 5,500 L7 - 7,500 L9 - 9,500 H9 - 9,500 ⑧ H1 - 11,500 H3 - 13,500 H6 - 17,500 X1 - 20,000 X5 - 24,000	<b>Hub Size:</b> 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT Stanchion 5 - 1-1/2" NPT Stanchion 6 - Metric M20 Blank - If using Adapter	<b>Color Temp. (CCT): ‡</b> C - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	<b>Globe Material:</b> P - Clear Polycarbonate Globe D - Diffused Polycarbonate Globe G - Clear Glass Globe ③ J - Glass Prismatic Refractor ③⑩	<b>Light Dist. Pattern:</b> 1 - Type I ② 3 - Type III ② 5 - Type V ② W - Type V Wide	<b>Voltage:</b> BU - 120-277 Vac, 50/60Hz; or 125- 300 Vdc ⑧ BH - 347-480 Vac, 50/60Hz ▲	<b>Options:</b> ⌘ F - Fusing Blank - No fusing	<b>Options:</b> 1 - Photocontrol 120V ⑤ 2 - Photocontrol 208V ⑤ 3 - Photocontrol 240V ⑤ 4 - Photocontrol 277V ⑤ 5 - Additional surge to 10 kV② A - High Ambient ④ Blank - No Options Chosen	<b>Emergency: *</b> H-90 Minutes E-180 Minutes

① 3/4" NPT, 1" NPT and Metric M20 hub entries are not offered in this mounting option.

② 10 year warranty standard when ordered with light distribution pattern Type I, III or V Wide or additional (10 kV) surge protection (not available with high ambient options).

③ Guards for the glass refractors and globes are ordered separately. See the Accessories for more information.

④ See details in T-Codes tables for specific model numbers.

⑤ Luminaires with photocontrol are not rated IP66/67, Class II, 3R, 4, 4X, or Marine Outside Type (Salt Water). Photocontrol available for 120-277 Vac only. Factory installed in the mounting hood. Photocontrols only certified for cCSAus.

⑥ Ceiling-mount and pendant cone mounting hoods and adapters are not designed to use the in hood photocontrol. Ceiling and pendant cone mounts must use an FS/FD box with photocontrol.

⑦ Only allowed for Type V and Type V wide light distribution.

⑧ For 125-170 Vdc, operating temperature range is -40°C to +55°C (-40 °F to +131 °F) (lower range applies to ATEX/IECEX/ATEX only).

⑨ H9 only available with High Ambient option (A).

⑩ J - Glass prismatic refractor is only available in light distribution pattern Type V. Refractor is not rated for ATEX/ATEX/IECEX.

\* IDA Dark Sky Approved when ordering [I]MLLED[A/B/C/D/R/W]xxW[P/D/G]5Bxxx with MMVISOR accessory.

⌘ Fusing only permitted for cCSAus rating. Factory installed. Use of fuse voids Marine Outside Type (Salt Water) rating. Fusing is mounted in the driver housing.

‡ Other CCT options available upon request. Contact your local sales representative for more information.

▲ Adapters, watertight pendant hood and BH Voltage only certified for cCSAus.

♦ Emergency battery backup options limited to L3 and L5 lumen output, P, D and G globes and BU voltage, and does not include fuse, surge, high ambient or photocontrol options.

### Product Ordering Guide: Mercmaster LED Generation 3 Zone 1 Series

MGZ	A	L3	2	C	D	5	BU
<b>Series:</b> MGZ - Mercmaster LED Generation 3 Zone 1 Series	<b>Mounting:</b> A - Pendant C - Ceiling R - 90° Stanchion ① S - 25° Stanchion ① T - Trunnion W - Wall Blank - Without Hood	<b>Lumen (Nominal):</b> L3 - 3,500 L5 - 5,500 L7 - 7,500 H9 - 9,500 H1 - 11,500 H3 - 13,500 H6 - 17,500	<b>Hub Size:</b> 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT stanchion 5 - 1-1/2" NPT stanchion 6 - Metric M20	<b>Color Temp. (CCT):</b> C - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	<b>Globe Material:</b> P - Clear Polycarbonate Globe D - Diffused Polycarbonate Globe G - Clear Glass Globe ③	<b>Light Dist. Pattern:</b> W - Type V Wide	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 125 - 300 Vdc BH - 347-480 Vac, 50/60 Hz

① 3/4" NPT, 1" NPT and Metric M20 hub entries are not offered in this mounting option

② For lumen output information, see Lumen Values Table in catalog pages.

③ Guards for the glass globes are ordered separately. See the Accessories section in the catalog pages for more information

# Mercmaster LED Low Profile

## Area/Task Lighting; Enclosed and Gasketed

Appleton Mercmaster LED Low Profile luminaires provide a broad, evenly distributed light pattern that can be tailored in the field. Choose the right lighting levels for any low-mount application while eliminating spotlight effects and dark spots. They offer a choice of globes and an optional 30° reflector to achieve the optimum light distribution for any application. This is the one harsh and hazardous location luminaire you can specify to meet all your low-mount application requirements, without compromise.

Mercmaster LED Low Profile Luminaires are certified for Class I, Division 2, Class II, and Class III hazardous locations, rated for use in marine and wet locations, and are globally certified for ATEX/ATEX/IECEx Zone 2, 21 and 22. The Industrial Mercmaster LED Low Profile is cCSAus Certified for ordinary (unclassified) locations.

### Features


1. Mounting Adapters for legacy Mercmaster HID fixture retrofits
2. Superior thermal heat sink design. Cool operation from -40°C to +65°C (-40°F to +149°F)
3. Four interchangeable globes
4. High temperature silicone gaskets prevent water ingress and corrosion
5. Replaceable LED drivers extend luminaire life, beyond 60,000 hours
6. Metalized reflector enhances the performance and efficacy of the LED array
7. Retrofits directly to Mercmaster III HID Mounting hoods
8. 6KV standard surge protection – protects your investment and keeps you up and running



### Illustrated Features



Captive, stainless steel latch assembly (bolt and nut) closes securely while providing resistance to corrosive atmospheres.



Easy to wire terminal housing. IP66/67 Driver with 6KV Surge Protection. Optional fuse for extra protection.



Safety cable is slipped around the housing through casted retention points.



Optional watertight pendant hood available for installation in water prone conduit systems.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location
	NEC/CEC															
	Class I				Class II					Class III	ATEX/ATEX/IECEx					
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
MLED		●		●	●	●	●	●	●	●		●	●	●	● <sup>Ⓟ</sup>	
IMLED															● <sup>Ⓟ</sup>	●

# Mercmaster LED Low Profile *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### Ordinary Location (All Models)

- Type 3R, 4 and 4X
- IP66/IP67
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) For USA ONLY
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460, Certificate Number: 70134063

#### Hazardous Location (MLED Models)

- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 2, AEx ec IIC
- Class II, Division 1, Group E, F, G
- Zone 20, Group IIIC
- Zone 21, AEx tb IIIC
- Class II, Division 2, Group F, G
- Class III
- Simultaneous Exposure

### ATEX/ATEX/IECEx Certifications

#### Hazardous Location (MLED Models)

- Certification Type: Mercmaster Low Profile
  - Gas: Zones 2
    - Conforming to ATEX 2014/34/EU: Ⓔ II 3 G
    - Type of Protection: Ex ec IIC T\* Gc
    - Temperature Class: T5 to T4
  - Dust: Zones 21 and 22
    - Conforming to ATEX 2014/34/EU: II 2 D
    - Type of Protection: Ex op is tb IIIC T\*\*°C Db
    - Ex tc IIIC T\*\*°C Dc
    - Surface Temperature: +66°C to +88°C (+151°F to +190°F)
- Ambient Temperature: -40°C up to +65°C (-40°F up to 149°F)
- ATEX Certificate: Sira 17ATEX9365X
- ATEX/IECEx Certificate: ATEX/IECEx SIR 17.0085X
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK08
- Photobiological Safety, IEC 62778 and IEC 62471

#### IDA Certification

- Dark Sky Approved

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 50/60 Hz; 125-300 Vdc 347-480 Vac, 50/60 Hz
<b>Retrofit Equivalents:</b>	70W – 175W HID
<b>Lumens:</b>	2,800 to 5,500
<b>Efficacy:</b>	Up to 125 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+/70+/70+
<b>Ambient Temperature:</b>	-40°C to +65°C (-40°F to +149°F) [-20°C to +55°C (-4°F to +131°F) <i>for Emergency version</i> ]
<b>LED Lumen Depreciation (L70):</b>	100,000+ hours
<b>Replaceable Components:</b>	Driver, Globe, Battery Pack, Battery Management Module

# Mercmaster LED Low Profile *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### Product Ordering Guide

MLLED	A	4	2	C	J5	BU	F	1
<b>Series</b> MLLED: NEC/CEC and ATEX/IECEX/ATEX Certified Mercmaster™ LED Low Profile Series  IMLED - Industrial Mercmaster LED Low Profile Series	<b>Mounting:</b> A - Pendant B - Watertight Pendant hood * C - Ceiling ① D - Pendant Cone Hood ① R - 90° Stanchion S - 25° Stanchion T - Trunnion * W - Wall K - Killark™ Adapter Universal * X - Crouse-Hinds™ Adapter, Centered * Y - Crouse-Hinds™ Adapter, Off-set * U - Mercmaster™ II Adapter, Ceiling or Pendant * V - Mercmaster™ II Adapter, Stanchion or Wall * Blank- Ballast housing only (no mounting hood)	<b>Lumen Output</b> ②: 2 - 3K Lumens 3 - 4K Lumens 4 - 5K Lumens	<b>Hub Size:</b> 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT 5 - 1-1/2" NPT 6 - M20 Metric hub Blank - No Hub Required - Adapters or No hood	<b>Color Temp (CCT):</b> C - Cool, 5000K CCT N - Neutral, 4000K CCT W - Warm, 3000K CCT	<b>Globe Type:</b> P5 - NEMA Type V Clear Polycarbonate Globe D5 - NEMA Type V Diffused Polycarbonate Globe G5 - NEMA Type V Glass Globe ③ J5 - NEMA Type V Glass Refractor * ③	<b>Voltage</b> ⑥ BU - 120-277 VAC, 50/60Hz or 125-300 VDC BH - 347-480 VAC, 50/60Hz*	<b>Option:</b> F - Fusing ④ Blank - No fusing	<b>Photocontrol</b> 1 - Photocontrol 120V ⑤ 2 - Photocontrol 208V ⑤ 3 - Photocontrol 240V ⑤ 4 - Photocontrol 277V ⑤ Blank - No photocontrol

\* Certified for cCSAus only.

① Ceiling and pendant cone hood mounted luminaires are not designed to use the PCD2 photocontrol. Ceiling mounts must use an FS/FD box with a photocontrol. Contact your local sales representative for more information.

② For specific lumen output information, see Lamp Comparison Chart in Mercmaster™ Low Profile LED catalog pages.

③ Guards for the glass refractors and globes are ordered separately. See Mercmaster™ Low Profile LED Catalog pages. J5 glass refractor is available for cCSAus rating only.

④ Factory installed. Fusing available for cCSAus rating only.

⑤ Luminaires with photocontrol are not rated IP66, Marine Outside Type (Salt Water), or Class II. Photocontrol available for 120-277 VAC only.

⑥ 120V-277 VAC versions only. For 347-480 VAC version, please see Mercmaster™ LED Low Profile catalog pages. Photocontrols available for cCSAus rating only.

\* IDA Dark Sky Approved when ordering [I]MLLED[A/B/C/D/R/W]xxW[P/D/G]5Bxxx with MMVISOR accessory.

### Product Ordering Guide: Mercmaster LED Low Profile Luminaires with Emergency Battery Backup

MLLED	A	3	2	C	P5	BU	H
<b>Series</b> MLLED - NEC/CEC Certified Mercmaster™ LED Low Profile Series	<b>Mounting:</b> A - Pendant C - Ceiling D - Pendant Cone Hood R - 90° Stanchion ② S - 25° Stanchion ② T - Trunnion W - Wall X - Crouse Hinds™ Adapter, Ceiling or Pendant ① Y - Crouse Hinds™ Adapter, Stanchion or Wall ① Blank - No Mounting Hood	<b>Lumen Output</b> ③: 2 - 3K Lumens 3 - 4K Lumens 4 - 5K Lumens	<b>Hub Size:</b> 2 - 3/4" NPT 3 - 1" NPT 4 - 1-1/4" NPT 5 - 1-1/2" NPT 6 - M20 Metric hub Blank - No Hub Required - Adapters or No hood	<b>Color Temp (CCT):</b> C - Cool, 5000K CCT N - Neutral, 4000K CCT W - Warm, 3000K CCT	<b>Globe Type</b> ④: P5 - NEMA Type V Clear Polycarbonate Globe D5 - NEMA Type V Diffused Polycarbonate Globe G5 - NEMA Type V Glass Globe ③	<b>Voltage:</b> BU - 120-277 VAC, 50/60Hz or 125-300 VDC	<b>Emergency:</b> H - 90 Minutes

① Certified for cCSAus only.

② 3/4" NPT, 1" NPT and Metric M20 hub entries not offered in this mounting option.

③ For specific lumen output information, see Lamp Comparison Chart.

④ Guards for the glass globes are ordered separately. See the Accessories for more information.

# Areamaster Generation 2 and Areamaster Generation 2 HL LED

## Flood Lighting; Enclosed and Gasketed

Appleton Areamaster Generation 2 LED luminaires deliver best-in-class LED performance. The redesigned Areamaster LED provides greater versatility, with low lumen models from 9,000 to 19,500 lumens and high lumen (HL) models from 24,000 to 38,000 lumens and a choice of beam patterns to meet your diverse floodlighting needs. Featuring new optic designs for superior uniformity and coverage, Areamaster Generation 2 LED luminaires provide HID-equivalent lighting that saves over 75% in energy costs and practically eliminates maintenance burdens.

Areamaster Generation 2 LED and HL luminaires are certified for NEC and CEC Class I, Division 2 and Class II hazardous locations, marine and wet locations as well as ATEX/ATEX/IECEX Zones 1, 2, 21 and 22. Industrial Areamaster Generation 2 LED and HL luminaires are cULus Certified for ordinary (unclassified) locations.

### Features


1. Compact size and low weight
2. Superior thermal heat sink design provides cool operation from  $-40^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ )
3. High temperature silicone gaskets prevent water ingress and corrosion
4. Replaceable LED drivers extend luminaire life even beyond 60,000 hours
5. Yoke bracket is designed to utilize standard Areamaster slipfitters and offers a full  $180^{\circ}$  of adjustment
6. Frosted glass available for glare control
7. 10 year warranty standard with surge and optics



### Illustrated Features



Heavy gauge stainless steel wire guard provides extra protection; polyester powder coated aluminum visor prevents unwanted overspill and uplight.



Gasketed front wiring compartment with screw terminal block, designed with easy-to-pull hinged handle and captive screws.



Optional safety cable design with multiple cast retention points.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location
	NEC/CEC															
	Class I				Class II					Class III	ATEX/ATEX/IECEX					
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
AMLG / AMLH		•	•	•	•	•	•	•	•	•			•			
AMLZ / AMHZ											•	•	•	•		
IAMLG / IAMLH															•	

# Areamaster Generation 2 and Areamaster Generation 2 HL LED *(continued)*

## Flood Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### Ordinary Location (All Models)

- Type 3R,4,4X
- IP66/67
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) for USA Only
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460 Certificate Number: 70073608

#### Hazardous Location (AMLG and AMLH Models)

- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 2, Group IIC
- Class II, Division 1 and 2, Groups E,F,G
- Class III
- Zone 20 and 21 Group IIIC, Zone 22 Group IIIB
- Simultaneous Exposure
- cCSAus: 164460 Certificate Number: 70073611

### ATEX/ATEX/IECEX Certifications

#### Hazardous Location (AMLG and AMLH Models)

- Zones: 2, 21, 22
  - Conforming to ATEX 2014/34/EU: Ⓢ II 3 GD
  - Type of Protection: Ex ec IIC Gc
  - Ex op is tb IIIC T\*\*°C Db
- Temperature Class: T5 to T3
- ATEX Certificate: SIRA 17ATEX3241
- ATEX/IECEX Certificate: ATEX/IECEX SIR 17.0079
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK10
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 with frosted glass, RG1 with clear glass

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 125-300 Vdc; 347-480 Vac; 50/60 Hz
<b>Retrofit Equivalents:</b>	175W-1500W HID
<b>Lumens:</b>	9,500 – 38,000
<b>Efficacy:</b>	Up to 140 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+, 80+
<b>Ambient Temperature:</b>	-40°C to +65°C (-40°F to +149°F)
<b>LED Lumen Depreciation (L70):</b>	100,000+ hours
<b>Replaceable Components:</b>	LED Driver, Lens Cover

#### Hazardous Location (AMLZ and AMHZ Models)

- Zones: 1, 2, 21, 22
  - Conforming to ATEX 2014/34/EU: Ⓢ II 2 GD
  - Type of Protection: Ex eb mb op is IIC T\* Gb
  - Ex op is tb IIIC T\*\*°C Db
- Temperature Class: T6 to T4
- ATEX Certificate: ITS18ATEX303521
- ATEX/IECEX Certificate: ATEX/IECEX ITS 18.0031
- Index of Protection according EN/IEC 60529: IP66/67
- Impact Resistance (shock): IK08
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 with frosted glass, RG1 with clear glass

# Areamaster Generation 2 and Areamaster Generation 2 HL LED *(continued)*

## Flood Lighting; Enclosed and Gasketed

### Product Ordering Guide: Areamaster Generation 2

AMLG	L7	C	G	Z	BU	S
<b>Series:</b> AMLG - Areamaster 2 LED	<b>Lumen (Nominal) ①:</b> L6 - 9K	<b>Color Temp. (CCT):</b> C - Cool 5000K N - Neutral, 4000K	<b>Lens Material:</b> D - Diffused Polycarbonate⑤	<b>Light Distribution Pattern:</b> 6 - 7x7 (non-optic)	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 125 - 300 Vdc	<b>Options:</b> F - Fusing ② M - Metric M20 S - 10 KV Surge Protection ④
IAMLG - Industrial Areamaster 2 LED	L7 - 15K L8 - 19K	W - Warm 3000K	F - Frosted Glass G - Clear Glass	7 - 7X6 BH - 347-480 Vac, 50/60 Hz ③		

① All lumen values are typical (tolerance +/- 10%)

② Use of fuse voids Marine rating. Fusing available for NEC/CEC only.

③ BH voltage available for NEC/CEC only.

④ 10kV Surge Protection available for NEC/CEC only.

⑤ Diffused polycarbonate available for NEC/CEC only

### Product Ordering Guide: Areamaster Generation 2 HL LED

AMLH	L1	C	G	Z	BU	S
<b>Series:</b> AMLH - Areamaster 2 HL LED	<b>Lumen (Nominal) ①:</b> L1 - 24K	<b>Color Temp. (CCT):</b> C - Cool, 5000K N - Neutral, 4000K	<b>Lens Material:</b> F - Frosted Glass G - Clear Glass	<b>Light Distribution Pattern:</b> 3 - 3x3 5 - 5x5	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 125 - 300 Vdc	<b>Options:</b> F - Fusing ② M - Metric M20 S - 10 KV Surge Protection ④
IAMLG - IAMLH - Industrial Areamaster 2 LED	L2 - 30K L3 - 38K	W - Warm 3000K		6 - 7x7 (non-optic) 7 - 7X6 BH - 347-480 Vac, 50/60 Hz ③		

① All lumen values are typical (tolerance +/- 10%)

② Use of fuse voids Marine rating. Fusing available for NEC/CEC only.

③ BH voltage available for NEC/CEC only.

④ 10kV Surge Protection available for NEC/CEC only.

### Product Ordering Guide: Areamaster Generation Zone 1

AMLZ	L7	C	G	6	BU	M
<b>Series:</b> AMLZ: Areamaster Generation 2 LED Zone 1	<b>Lumen (Nominal) ①:</b> L6 - 9K L7 - 15K L8 - 19K	<b>Color Temp. (CCT):</b> C - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	<b>Lens Material:</b> G - Clear Glass F - Frosted Glass ②	<b>Light Distribution Pattern:</b> 6 - 7x7 (non-optic) 7 - 7X6	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 125 - 300 Vdc	<b>Options:</b> M - Metric M20

① All lumen values are typical (tolerance +/- 10%).

② Frosted Glass is only available with NEMA 7x7 light pattern.



# Baymaster and Baymaster HL LED


## High Bay Lighting; Enclosed and Gasketed

Appleton Baymaster LED luminaires quick-mount pendant system and secondary optics combine innovation, reliability, and versatility to bring you a best in class, high bay luminaire. With exceptional efficiency and unbeatable performance, this luminaire offers quicker installation speeds and easier maintenance. The Baymaster LED offers 9K, 15K and 19K lumen levels and the Baymaster HL offers 4K, 30K and 38K lumen levels. Both models offer two color temperatures and three NEMA beam patterns.


Baymaster LED and HL LED luminaires are certified for NEC and CEC Class I, Division 2 and Class II hazardous locations, marine and wet locations as well as ATEX/ATEX/IECEX Zones 1, 2, 21 and 22. Industrial Baymaster LED and HL luminaires are cULus Certified for ordinary (unclassified) locations.

### Features

1. Superior thermal heat sink design provides cool operation from  $-40^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$  ( $-40^{\circ}\text{F}$  to  $+149^{\circ}\text{F}$ ) – wide enough for any environment
2. 6KV standard surge protection – protects your investment and keeps you up and running
3. Heavy gauge stainless steel wire guard provides extra protection
4. Compact size and low weight for single person installation
5. Replaceable cover and LED drivers extend luminaire life even beyond 84,000 hours
6. Optional frosted glass for increased glare control
7. 10 year warranty standard with surge and optics





BLL(P)/ IBLL(P)

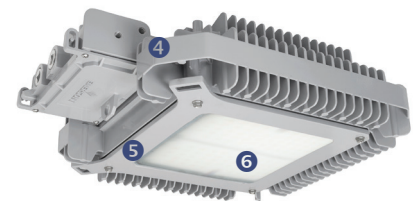

BHL(P)/ IBHL(P)

### Illustrated Features

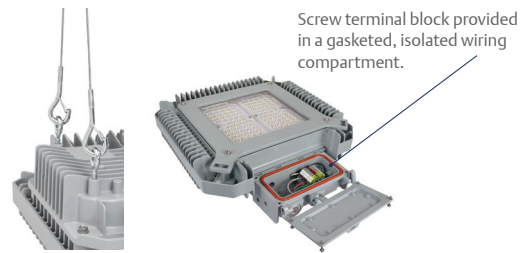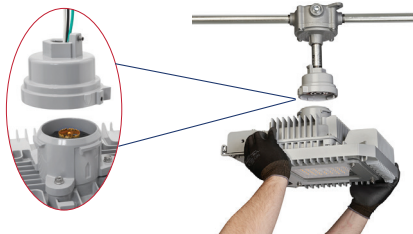

Screw terminal block provided in a gasketed, isolated wiring compartment.

With its quick-mount pendant system, installation and maintenance have never been easier. Simply pre-wire the mounting hood, line the arrows up, and lock the Baymaster into place.

As an alternative to our innovative quick mount, we offer an optional Y cable mounting kit. Simply attach 4 eyebolts and wire to the provided screw terminals in our field wiring compartment.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location	
	NEC/CEC										ATEX/ATEX/IECEX						
	Class I				Class II						Class III	ATEX/ATEX/IECEX					
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22	Zone 1		Zone 2	Zone 21	Zone 22			
BLL / BHL		•	•	•	•	•	•	•	•	•	•		•	•	•		
BLZ / BHZ													•	•	•	•	
IBLL / IBHL																	•

# Baymaster and Baymaster HL LED *(continued)*

## High Bay Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### Ordinary Location (All Models)

- Type 3R, 4, 4X
- IP66/67
- Suitable for Use in Wet Locations
- Marine Outside Type (Salt Water) for USA Only
- American Bureau of Shipping (ABS) Certified
- cCSAus: 164460, Certificate Number: 70073607

#### Hazardous Location (BHL and BLL Models)

- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 2, Group IIC
- Class II, Division 1 and 2, Group E, F, G
- Class III
- Zone 20 and 21, Group IIIC
- Zone 22, Group IIIB
- Simultaneous Exposure
- cCSAus: 164460, Certificate Number: 70073611

### ATEX/ATEX/IECEX Certifications

#### Hazardous Location (BHL and BLL Models)

- Zones: 2, 21, 22
  - Conforming to ATEX 2014/34/EU: II 3 GD
  - Type of Protection: Ex ec IIC Gc
  - Ex op is tb IIIC T\*\*°C Db
- Temperature Class: T5 to T3
- ATEX Certificate: SIRA 17ATEX3241
- ATEX/IECEX Certificate: ATEX/IECEX SIR 17.0079
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK10
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 with frosted glass, RG1 with clear glass

#### Hazardous Location (BLZ and BHZ Models)

- Zones: 1, 2, 21, 22
  - Conforming to ATEX 2014/34/EU: II 2 GD
  - Type of Protection: Ex eb mb op is IIC T\* Gb
  - Ex op is tb IIIC T\*\*°C Db
- Temperature Class: T6 to T4
- ATEX Certificate: ITS18ATEX303521
- ATEX/IECEX Certificate: ATEX/IECEX ITS 18.0031
- Index of Protection according EN/IEC 60529: IP66/67
- Impact Resistance (shock): IK08
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 with frosted glass, RG1 with clear glass

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac, 125-300 Vdc; 347-480 Vac; 50/60 Hz
<b>Retrofit Equivalents:</b>	175W-1500W HID
<b>Lumens:</b>	9,500 – 38,000
<b>Efficacy:</b>	Up to 140 lm/w
<b>Color Temperatures:</b>	5000K, 4000K, 3000K
<b>CRI:</b>	70+, 80+
<b>Ambient Temperature:</b>	-40°C to +65°C (-40°F to +149°F)
<b>LED Lumen Depreciation (L70):</b>	100,000+ hours
<b>Replaceable Components:</b>	LED Driver, Lens Cover
<b>Replaceable Components:</b>	LED Driver, Lens

# Baymaster and Baymaster HL LED *(continued)*

## High Bay Lighting; Enclosed and Gasketed

### Product Ordering Guide: Baymaster LED

BLL	P	L7	C	G	M	N	BU	S
<b>Series:</b> BLL - Baymaster LED	<b>Mounting:</b> P - Quick Mount	<b>Lumen (Nominal) ①:</b> L6 - 9K	<b>Color Temp. (CCT):</b> C - 5000K	<b>Lens Material:</b> D - Diffused Polycarbonate ⑥	<b>Light Dist. Pattern:</b> A - Aisle	<b>Dimming:</b> N - None	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz;	<b>Options:</b> F - Fusing ②
IBLL - Industrial Baymaster LED	Pendant	L7 - 15K	C - 5000K	⑥	M - Medium		125 - 300 Vdc	S - 10kV Surge Protection ④
	Blank - No Quick Mount ⑤	L8 - 19K	N - 4000K W - 3000K	F - Frosted Glass G - Clear Glass	W - Wide		BH - 347-480 Vac, 50/60 Hz ③	M - M20 Metric Cable Entry Adapters

① All lumen values are typical (tolerance +/- 10%)

② Use of fuse voids Marine rating. Fusing available for NEC/CEC only.

③ BH voltage available for NEC/CEC only.

④ 10kV Surge Protection available for NEC/CEC only.

⑤ Quick mount pendant includes pre wired, factory installed, quick mount pendant body and hood. Models without the quick pendant mount are wired through the 3/4" NPT entries and a provided screw terminal block in the wiring compartment. Quick pendant mount available for NEC/CEC only.

⑥ Diffused polycarbonate available for NEC/CEC only

### Product Ordering Guide: Baymaster HL LED

BHL	P	L2	C	G	M	N	BU	S
<b>Series:</b> BHL - Baymaster HL LED	<b>Mounting:</b> P - Quick Mount	<b>Lumen (Nominal) ①:</b> L1 - 24K	<b>Color Temp. (CCT):</b> C - 5000K	<b>Lens Material:</b> F - Frosted Glass G - Clear Glass	<b>Light Dist. Pattern:</b> M - Medium	<b>Dimming:</b> N - None	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz;	<b>Options:</b> F - Fusing ②
IBHL - Industrial Baymaster HL LED	Pendant	L2 - 30K	C - 5000K		N - Narrow		125 - 300 Vdc	S - 10kV Surge Protection ④
	Blank - No Quick Mount ⑤	L3 - 38K	N - 4000K W - 3000K		V - Very Narrow W - Wide		BH - 347-480 Vac, 50/60 Hz ③	M - M20 Metric Cable Entry Adapters

① All lumen values are typical (tolerance +/- 10%)

② Use of fuse voids Marine rating. Fusing available for NEC/CEC only.

③ BH voltage available for NEC/CEC only.

④ 10kV Surge Protection available for NEC/CEC only.

⑤ Quick mount pendant includes pre wired, factory installed, quick mount pendant body and hood. Models without the quick pendant mount are wired through the 3/4" NPT entries and a provided screw terminal block in the wiring compartment. Quick pendant mount available for NEC/CEC only.

# Baymaster and Baymaster HL LED *(continued)*

## High Bay Lighting; Enclosed and Gasketed

### Product Ordering Guide: Baymaster Zone 1

BLZ	P	L2	C	G	M	N	BU	M
<b>Series:</b> BLZ: Baymaster LED Zone 1	<b>Mounting:</b> P - Quick Mount Pendant Blank - No Quick Mount ☉	<b>Lumen (Nominal) ①:</b> L1 - 9K L2 - 14K L3 - 18.5K	<b>Color Temp. (CCT):</b> C - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	<b>Lens Material:</b> F - Frosted Glass G - Clear Glass	<b>Light Dist. Pattern:</b> M - Medium W - Wide	<b>Dimming:</b> N - None	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 170 - 300 Vdc	<b>Options:</b> M - Metric M20

① All lumen values are typical (tolerance +/- 10%)

② Quick mount pendant includes pre wired, factory installed, quick mount pendant body and hood. Models without the quick pendant mount are wired through the 3/4" NPT entries and a provided screw terminal block in the wiring compartment. Quick pendant mount available for NEC/CEC only.

### Product Ordering Guide: Baymaster HL Zone 1

BHZ	P	L2	C	G	M	N	BU	M
<b>Series:</b> BHZ: Baymaster HL LED Zone 1	<b>Mounting:</b> P - Quick Mount Pendant Blank - No Quick Mount ☉	<b>Lumen (Nominal) ①:</b> L6 - 23K L7 - 28.5K L8 - 36K	<b>Color Temp. (CCT):</b> C - Cool, 5000K N - Neutral, 4000K W - Warm, 3000K	<b>Lens Material:</b> F - Frosted Glass G - Clear Glass	<b>Light Dist. Pattern:</b> M - Medium W - Wide	<b>Dimming:</b> N - None	<b>Voltage:</b> BU - 120-277 Vac, 50/60 Hz; 170 - 300 Vdc	<b>Options:</b> M - Metric M20

① All lumen values are typical (tolerance +/- 10%)

② Quick mount pendant includes pre wired, factory installed, quick mount pendant body and hood. Models without the quick pendant mount are wired through the 3/4" NPT entries and a provided screw terminal block in the wiring compartment. Quick pendant mount available for NEC/CEC only.

# Viamaster LED

## Area/Task Lighting; Enclosed and Gasketed

The Appleton Viamaster LED features a contemporary, low profile design that is suitable for tight spaces. It is lightweight for easy handling and is designed to simplify installation and maintenance. A terminal block with ample wiring room provides quick and secure electrical connections. Its industry leading thermal management ensures safe, reliable operation over a wide temperature range. Field replaceable components can be accessed by swinging away the hinged cover, secured with captive screws. Viamaster LED is available in a full range of lumen outputs, with light distribution equivalent to fluorescent luminaires.

The Viamaster LED Luminaire is ideal for use in NEC and CEC Governed harsh and hazardous locations. The ATX Viamaster LED is ideal for use in ATEX and ATEX/IECEx Governed hazardous locations.

### Features


1. Easy to retrofit in same mounting footprint as Appleton's FE/FN Series fluorescent fixtures.
2. Field replaceable LED driver and lens
3. Industry-leading thermal management for safe, reliable operation over wide temperature range
4. Lightweight design, hinged cover with captive screws, and terminal block wiring for easy installation and maintenance




### Illustrated Features



Hinged design with captive screws for safe, easy access to replace components, including driver and polycarbonate lens.



Fits tight spaces and low ceiling. Same footprint as Appleton FV, FE and FN fluorescent luminaires.



LED Indicator LED Array

Emergency version available. Up to 1,250 lumens of illumination for 90 minutes. Functional diagnostic test self-initiates every 14 days.



Dual terminal blocks, and multiple entries standard for easy through wiring.

### Product Selection Key

	Certifications														Emergency Battery Backup	Ordinary Location	
	NEC/CEC										ATEX/ATEX/IECEx						
	Class I				Class II						Class III	ATEX/ATEX/IECEx					
	Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22	Zone 1		Zone 2	Zone 21	Zone 22			
LLED		●		●		●				●					● <sup>®</sup>		
LLEDA												●	●	●			

# Viamaster LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### NEC/CEC Certifications

#### (NEC/CEC models only)

- Class I, Division 2, Groups A, B, C, D
- Class I, Zone 2, Group IIC
- Class II, Division 2, Groups F, G
- Zone 22, Group IIIB
- Class III
- Type 3R, 4, 4X
- IP66/67
- Suitable for Use in Wet Locations
- Marine Outside Type- For USA Only ⚠
- cCSAus: 164460, Certificate Number: 70013699

⚠ Fusing option not available with Marine Outside Type (Salt Water) rating. Fusing option not permitted for cUL.

### ATEX/ATEX/IECEx Certifications

#### (ATX models only)

- Certification Type: LLEDA
  - Gas: Zone 2
    - Conforming to ATEX 94/9/EC: Ⓢ II 3 G
    - Protection Level: EPL Gc
    - Ex Protection: Ex nA IIC
    - T Rating: *See website for more information (T6 to T3)*
    - EC Declaration of Conformity: 50309
    - ATEX Certificate: LCIE 15 ATEX 1003X
    - ATEX/IECEx Certificate: ATEX/IECEx LCIE 15.0010X
  - Dust: Zones 21 and 22
    - Conforming to ATEX 94/9/EC: Ⓢ II 2 D and Ⓢ II 3 D
    - Protection Level: EPL Db and Dc
    - Ex Protection: Ex tb IIIC and Ex tc IIIC
    - T Rating: *See website for more information [+63°C to +84°C (+145°F to +183°F)]*

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277 Vac; 50/60 Hz 347-480 Vac; 50/60 Hz
<b>Retrofit Equivalents:</b>	1x18W up to 3x58 W Fluorescent
<b>Lumens:</b>	1,800 – 7,800
<b>Efficacy:</b>	Up to 100 lm/w
<b>Color Temperatures:</b>	5650K
<b>CRI:</b>	70+
<b>Ambient Temperature:</b>	-40°C to +65°C (-40°F to +149°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Replaceable Components:</b>	LED Driver, Lens Cover

- EC Declaration of Conformity: 50309
- ATEX Certificate, Zone 21: LCIE 15 ATEX 3006X
- ATEX Certificate, Zone 22: LCIE 15 ATEX 1003X
- ATEX/IECEx Certificate, Zone 21 and 22: ATEX/IECEx LCIE 15.0010X
- Ambient Temperature: -40°C up to +65°C (-40°F up to +149°F)
- Index of Protection: IP66, IK08
- Ex Standards: EN/IEC 60079-0; 60079-15; 60079-31
- Product Standards: EN/IEC 61347-1; 61347-2; 61598-1
- EMC Standards: EN/IEC 61000.4.2; 61000.4.3; 61000.4.4; 61000.4.5; 61000.4.6; 61000.4.8; 61000.4.11

# Viamaster LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### Product Ordering Guide: NEC/CEC Viamaster LED

LLED	A	1	2	LU	2	C	H
<b>Series:</b> LLED- NEC/CEC Certified Linear LED	<b>Housing:</b> A - Aluminum	<b>Entry Size:</b> 1 - (2) 3/4" NPT	<b>Lumen (Nominal):</b> 2 - 2400 5 - 4700 7 - 7800	<b>Voltage:</b> LU - Universal Voltages 120-277 Vac, 50/60 Hz BH - Universal Voltages 120-277 Vac, 50/60 Hz; 170-300 Vdc	<b>Hazardous Rating:</b> 2 - Division 2/ Zone 2	<b>Options:</b> C - Safety Cables D - Diffused Lens F - Fuse	<b>Emergency Options:</b> 90 minutes

### Product Ordering Guide: ATEX/ATEX/IECEX Viamater LED

LLEDA	A	2	2	LU	2	C	H
<b>Series:</b> LLEDA - ATEX/ ATEX/IECEX Certified Linear LED Series	<b>Housing:</b> A - Aluminum	<b>Size of Cable Entries:</b> 2 - M20 3 - M25	<b>Termination/Wiring:</b> L - Loop In/Out (3 entries, 1 at one end and 2 at the other) S - Standard (2 entries on the same side) T - Through Wired (2 entries, one at each end)	<b>Lumens (Length of Fixture):</b> 2 - 2K Lumens, [0.61 m (2 ft)] 5 - 5K Lumens, [0.61 m (2 ft)] 7 - 7K Lumens, [1.22 m (4 ft)]	<b>Voltage:</b> BU - Universal Voltages 120-277 Vac, 50/60 Hz	<b>Hazardous Rating:</b> Z2 - Zone 2 and 21-22	<b>Options:</b> C - Safety Cables

# ATX FDLED LED

## Area/Task Lighting; Flameproof

Appleton ATX FDLED Series LED luminaires provide standard and emergency lighting in hazardous areas designated as Zone 1, 2, 21 and 22. These units are entirely self-contained in a flameproof enclosure, with borosilicate glass for increased protection in high-corrosion environments. A thermal heating cable is included on the low temperature model for reliable performance in -60°C (-76°F) ambient environments

### Features

1. Easy access to LED array through gray painted aluminum threaded entry cap.
2. Supplied with O-ring for improved ingress protection.
3. Corrosion-resistant gray painted aluminum.
4. Supplied with energy efficient electronic driver on a removable gear tray.
5. Easy connection to wire and disconnect with plug-in terminal blocks



4725 lm  
(IIB)




2400 lm  
(IIB+H<sub>2</sub>)



400 lm  
(IIC)

### Illustrated Features



Impact resistant borosilicate glass sealed tube



High impact resistance: 4J on glass and 7J on metal parts



Aluminum end caps and cover feature gray, anti-corrosion finish

### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX					
Class I				Class II						Class III	Zone 1	Zone 2	Zone 21		
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22	Zone 1		Zone 2	Zone 21	Zone 22		
										●	●	●	●	●	



# ATX FDLED LED *(continued)*

## Area/Task Lighting; Flameproof

### ATEX/ATEX/IECEX Certifications

- Certification Type FDLED
  - Gas: Zone 1 and 2:
    - Conforming to ATEX 94/9/CE: Ⓢ II 2 G
    - Type of Protection: Ex d IIB (4725 lm version), Ex d IIB+H<sub>2</sub> (2400 lm version), Ex d IIC (400 lm version)
    - Temperature Class: T6
  - Dust: Zone 21 and 22:
    - Conforming to ATEX 94/9/CE: Ⓢ II 2 D
    - Type of Protection: Ex tb IIIC
    - Surface Temperature:
      - +75°C (+167°F) (400 lm version)
      - +80°C (+176°F) (2400 and 4725 lm version)
- Ambient Temperature: -55°C to +60°C (-67°F to +140°F)
- CE Declaration of Conformity: 50312-02
- ATEX Certificate: INERIS 15 ATEX 0042X
- ATEX/IECEX Certificate: ATEX/IECEX INE 15.0046X
- Index of Protection according EN/IEC 60529: IP66/68
- Impact Resistance (shock): IK09 (400 and 2400 lm version), IK08 (4725 lm version)
- Internal Volume: > 2 dm<sup>3</sup> (122 in<sup>3</sup>) - 2 liters

### Specifications

Features	Specifications
<b>Voltage:</b>	48/110/220V DC; 230V AC 50Hz 110-254V AC, 50/60 Hz
<b>Retrofit Equivalents:</b>	1x18W - 2x36W Fluorescent
<b>Lumens:</b>	400 - 4,725
<b>Efficacy:</b>	Up to 103 lm/w
<b>Color Temperatures:</b>	5000K
<b>CRI:</b>	70+
<b>Ambient Temperature:</b>	-55°C to +60°C (-67°F to +140°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Replaceable Components:</b>	LED Driver, Borosilicate Glass

### Product Ordering Guide

FDLED	04	AD	1	X
<b>Series:</b> FDLED Zone 1 and 2 - 21 and 22 ATEX/ATEX/IECEX Certified	<b>LED Power (lm):</b> 04 - 400 lm 25 - 2400 lm 50 - 4725 lm	<b>Voltage:</b> AD - 48/110/220V DC 230V - 50Hz AC ① BU - 110V to 254V, 50/60 Hz ②	<b>Cable Entry:</b> 1 - NPT 3/4" 2 - Metric M20 3 - Metric M25	<b>Options:</b> (Options must be listed alphabetically) D - Diffused Polycarbonate Lens ②

① Only 400 lm version

② Only 2400 and 4725 lm version

# ATX FELED Series Nonmetallic LED

## Area/Task Lighting; Enclosed and Gasketed

Appleton ATX FELED Series Nonmetallic LED luminaires are easy to install, easy to maintain non-metallic linear fixtures. The FELED is ideal for use in Zone 1 and Zone 21 locations and provides 2,000 to 8,000 lumens to fit a wide variety of applications. Also available in a 3 hour emergency version, the FELED includes a built-in monthly self-test. Test results are displayed through multi-colored LED. They are easy to retrofit in same mounting footprint as our Appleton FE series nonmetallic fluorescent luminaires; saving time, labor and money.

### Features

1. Fiberglass reinforced polyester body — lightweight, corrosion resistant and impact resistant (IK10, the highest rating)
2. Field replaceable LED driver and lens
3. Contemporary, low profile design suitable for use in tight spaces and high wind zones




### Illustrated Features



Central hex key opening with unique patented release system to prevent damage.



Latch assembly and elastomer gasket seals against water and dust ingress (IP66).



Hinged polycarbonate lens for easy maintenance.

### Product Selection Key

Certifications															Emergency Battery Backup	Ordinary Location
NEC/CEC										ATEX/ATEX/IECEX						
Class I				Class II					Class III	Zone 1	Zone 2	Zone 21	Zone 22			
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22			
											●	●	●	●	●	

# ATX FELED Series Nonmetallic LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### ATEX/ATEX/IECEX Certifications

- Certification Type: FELED30
  - Gas: Zones 1 and 2
    - Conforming to ATEX 2014/34/EU: II 2 G
    - Type of Protection: Ex eb mb op is IIC Gb
    - Temperature Class: T4
  - Dust: Zones 21 and 22
    - Conforming to ATEX 2014/34/EU: II 2 D
    - Type of Protection: Ex op is tb IIIC Db
    - Surface Temperature: +60 °C to +75 °C (+140 °F to +167 °F)
- Ambient Temperature: -30 °C up to +55 °C (-22 °F up to +131 °F)
- EU Declaration of Conformity: 50318
- ATEX Certificate: INERIS 18 ATEX 0042X
- IECEX Certificate: IECEX INE 18.0039X
- Certification Type: FELED (emergency)
  - Gas: Zones 1 and 2
    - Conforming to ATEX 2014/34/EU: II 2 G
    - Type of Protection: Ex db eb mb IIC Gb
    - Temperature Class: T6
  - Dust: Zones 21 and 22
    - Conforming to ATEX 2014/34/EU: II 2 D
    - Type of Protection: Ex tb IIIC Db
    - Surface Temperature: +63 °C to +73 °C (+145 °F to +163 °F)
- Ambient Temperature: -20 °C up to +50 °C (-4 °F up to 122 °F)
- EU Declaration of Conformity: 50317

- ATEX Certificate: LCIE 16 ATEX 3048X
- IECEX Certificate: IECEX LCIE 16.0038X
- Standard and Emergency:
  - Index of Protection according EN/IEC 60529: IP66
  - Impact Resistance (shock): IK10
  - Photobiological Safety, IEC 62778 and IEC 62471: RG0 at 0.25m mounting height

### Specifications

Features	Specifications
<b>Voltage:</b>	100-240 Vac, 50/60 Hz
<b>Retrofit Equivalents:</b>	1x18 W to 3x58 W Fluorescent
<b>Lumens:</b>	2,500 – 7,050
<b>Efficacy:</b>	Up to 122 lm/w
<b>Color Temperatures:</b>	5000K, 4000K
<b>CRI:</b>	70+, 80+
<b>Ambient Temperature:</b>	-30°C to +55°C (-22°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Replaceable Components:</b>	LED Driver, Diffuser, Lens

### Product Ordering Guide

FELED	LED Position <sup>①</sup>	3	C	BU	S	A	D
<b>Series:</b> FELED - Zone 1, 2, 21, 22 ATEX/IECEX Certified	Blank - Direct (with diffuser) I - Indirect (without diffuser)	<b>Lumen Output</b> <sup>②</sup> : 3 - 3K 4 - 4K 5 - 5K 7 - 7K	<b>Color Temp. (CCT):</b> C - 5000K (Cool) N - 4000K (Neutral)	<b>Voltage:</b> BU - 120-277Vac, 170-300Vdc, 50/60 Hz BD - 100 to 240 Vac, 50/60 Hz	<b>Mounting Version</b> <sup>③</sup> : S - Surface/ Suspension Mount Standard Wiring (single phase) L - Surface Suspension Mount Dual Loop In/Out Through Wiring (single phase)	<b>Cable Entry:</b> A - Armored M20 <sup>④</sup> N - Unarmored M25 <sup>⑤</sup>	<b>Emergency Options:</b> D - Diffused <sup>⑥</sup> E - 3H Emergency (combined) <sup>⑦</sup> F - Cutoff Switch <sup>⑧</sup>

① Indirect position only available for Standard product, non-Emergency.

② All values displayed reflect typical values.

③ Standard and Loop In/Out cable entries provide 3 entries; 1 at one end and 2 at the other end of housing.

④ Must order armored cable glands separately. M20 entries are with brass earth continuity plate for armored cable.

⑤ Cable glands provided in luminaires with unarmored hub entries.

⑥ Diffuser require for direct, not included with indirect.

⑦ Available for 3K and 5K lumen models only.

⑧ Cutoff Switch included with Emergency option.

# ATX FNLED Series Nonmetallic LED

## Area/Task Lighting; Enclosed and Gasketed

The ATX FNLED Series Nonmetallic LED Luminaires are easy to install, easy to maintain non-metallic linear fixtures. It is available in either a standard or an emergency battery back-up version. The FNLED is ideal for use in Zone 2 and Zone 22 locations and provides 3,000 to 7,000 lumens to fit a wide variety of applications. They can easily retrofit existing fluorescent fixtures as they maintain the same look and feel. The FNLED utilizes the same footprint and mounting accessories; saving time, labor and money.

### Features

1. Instant on, even in temperatures down to  $-30^{\circ}\text{C}$  ( $-22^{\circ}\text{F}$ )
2. Fiberglass reinforced polyester body – lightweight, corrosion resistant and impact resistant (IK10, the highest rating)
3. Easy to retrofit with same housing and mounting accessories as conventional fluorescent luminaires
4. Replaceable LED drivers extend luminaire life, even beyond 60,000 hours



### Illustrated Features



Wide range of lumen outputs from 3,300 to 7,000. Featuring a 2 foot, 4,300 lumen 2x36W equivalent.



Diffused lens for even illumination, glare reduction and photobiological requirements



Central hex key opening with unique patented release system to prevent damage



Hinged cover with captive screws and terminal block wiring enables easy installation and maintenance

### Product Selection Key

Certifications										Emergency Battery Backup	Ordinary Location				
NEC/CEC															
Class I				Class II					Class III			ATEX/ATEX/IECEX			
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
											●		●		

# ATX FNLED Series Nonmetallic LED *(continued)*

## Area/Task Lighting; Enclosed and Gasketed

### ATEX/ATEX/IECEX Certifications

- Certification Type: FNLED
  - Gas: Zone 2
    - Conforming to ATEX 2014/34/EU: II 3 G
    - Type of Protection: Ex ec IIC Gc
    - Temperature Class: T5 to T3
  - Dust: Zone 22
    - Conforming to ATEX 2014/34/EU: II 3 D
    - Type of Protection: Ex tc IIIC Dc
- Surface Temperature: +60 °C to +80 °C (+140 °F to +176 °F)
- Ambient Temperature: -30 °C up to +55 °C (-22 °F up to +131 °F)
- EU Declaration of Conformity: 50319
- ATEX Certificate: INERIS 19 ATEX 3005X
- ATEX/IECEX Certificate: ATEX/IECEX INE 19.0006X
- Index of Protection according EN/IEC 60529: IP66
- Impact Resistance (shock): IK10
- Photobiological Safety, IEC 62778 and IEC 62471: RG0 at 0.25m mounting height

### Specifications

Features	Specifications
<b>Voltage:</b>	120-277Vac; 125-300Vdc, 50/60 Hz
<b>Retrofit Equivalents:</b>	1x18 W to 3x58 W Fluorescent
<b>Lumens:</b>	3,300 to 7,000
<b>Efficacy:</b>	Up to 117 lm/w
<b>Color Temperatures:</b>	5000K, 4000K
<b>CRI:</b>	80+, 80+
<b>Ambient Temperature:</b>	-30°C to +55°C (-22°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Replaceable Components:</b>	LED Driver, Clear Lens

### Product Ordering Guide

FNLED	3	C	BU	S	A	D
<b>Series:</b> FNLED - Zone 2, 22 ATEX/ ATEX/IECEX Certified	<b>Lumen (Nominal)</b> ① 3 - 3K 4 - 4K 5 - 5K 7 - 7K	<b>Color Temp. (CCT):</b> C - 5000K (Cool) N - 4000K (Neutral)	<b>Voltage:</b> BU - 120-277 Vac, 125-300 Vdc, 50/60 Hz	<b>Mounting Version</b> ②: S - Surface/Suspension Mount Standard Wiring (single phase) L - Surface Suspension Mount Dual Loop In/ Out Through Wiring (single phase)	<b>Cable Entry:</b> A - Armored M20 ③ N - Unarmored M25 ④	<b>Emergency Options:</b> D - Diffused ⑤

① All values displayed reflect typical values.

② Standard and Loop In/Out cable entries provide 3 entries; 1 at one and 2 at the other end of the housing.

③ Must order armored cable glands separately. M20 entries are with brass earth continuity plate for armored cable.

④ Cable glands provided in luminaires with unarmored hub entries.

⑤ Diffuser required for RG0 photobiological rating.

# ATX FDBAES LED

## Emergency Lighting; Flameproof

Appleton ATX FDBAES Series LED luminaires provide emergency lighting in hazardous areas designated as Zone 1, 2, 21 and 22. These units are entirely self-contained in a flameproof enclosure, and include a built in automatic self-test system. Switched, unswitched, addressable switched and addressable unswitched versions are available.



### Product Selection Key

Certifications														Emergency Battery Backup	Ordinary Location
NEC/CEC															
Class I				Class II					Class III	ATEX/ATEX/IECEX					
Division 1	Division 2	Zone 1	Zone 2	Division 1	Division 2	Zone 20	Zone 21	Zone 22		Zone 1	Zone 2	Zone 21	Zone 22		
										•	•	•	•	•	

### ATEX/ATEX/IECEX Certifications

- Certification Type: FLd
  - Gas: Zone 1 - 2
    - Conforming to ATEX 94/9/CE: Ⓜ II 2 G
    - Type of Protection: Ex d IIC
    - Temperature class: T6
  - Dust: Zone 21 - 22
    - Conforming to ATEX 94/9/CE: Ⓜ II 2 D
    - Type of Protection: Ex tD A21
    - Surface Temperature: T80°C (T176°F)
- Ambient Temperature: -40°C to +55°C (-40°F to +131°F) ①
- ATEX Certificate: LCIE 97/ ATEX 6012
- ATEX/IECEX Certificate: ATEX/IECEX LCI 04.0018
- Index of Protection according EN/IEC 60529: IP66/68
- Impact Resistance (shock): IK08
- Internal Volume: > 2 dm<sup>3</sup> (122 in<sup>3</sup>) - 2 liters
- Conforming to NF AEAS
- American Bureau of Shipping (ABS) Certified

① Optimum operating temperature for battery is -5°C to +30°C (+23°F to +86°F).

### Specifications

Features	Specifications
<b>Voltage:</b>	230 Vac, 50/60 Hz
<b>Lumens:</b>	540/ 55
<b>Efficacy:</b>	110 lm/w
<b>Color Temperatures:</b>	5650K
<b>CRI:</b>	70 +
<b>Ambient Temperature:</b>	-40°C to +55°C (-40°F to +131°F)
<b>LED Lumen Depreciation (L70):</b>	60,000+ hours
<b>Emergency Duration:</b>	1 Hour
<b>Replaceable Components:</b>	Driver, Battery

### Product Ordering Guide


FDBAES	LED	SL	N	A
<b>Series:</b> FDBAES - FDBAES Series Zone 1 and 2 – 21 and 22 ATEX/ATEX/IECEX Certified	<b>Lamp Type:</b> LED	<b>Power:</b> SL - Space Lighting E - Escape Route Lighting	<b>Cable Entry:</b> N - 3/4" NPT M - Metric M20	<b>Options:</b> A - Addressable W - With Switch (main supply and remote)

# Lighting Services

## Lighting Layouts

Let Emerson's team of Lighting Applications Engineers design a professional solution to accommodate your diverse lighting needs. We design single rooms, whole floors, entire buildings and outdoor projects.

E-mail available lighting, site, building or floor plan drawings, along with installation specifics to: [appgrp.lighting\\_layout@emerson.com](mailto:appgrp.lighting_layout@emerson.com)

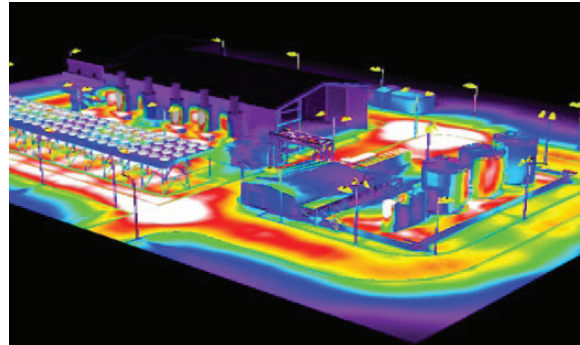

## DIALux™ and the Appleton Plug-In

DIALux is one of the world's leading software programs for planning, calculating and visualizing light. The complimentary Appleton Plug-In contains IES files for Appleton luminaires. Users have the ability to search for a specific solution according to area classification, light source, mounting type or available globe option.

Designers have the freedom to customize their lighting solutions by downloading the free software and the Appleton Plug-In at [www.masteringled.com](http://www.masteringled.com).



## Sample Our Solutions

Installing a sample is the best method to evaluate a luminaire's suitability for a particular application or location.

Try one out by contacting your local Appleton representative to request a sample today.



### LEARN MORE

The new standard for reliable LED lighting that saves energy and maintenance costs while delivering superior illumination is here. See it clearly. Contact your local Appleton representative or visit [www.masteringled.com](http://www.masteringled.com) today.

# Maximize usable light enabling you to comfortably and safely work in harsh or hazardous environments.



Appleton is the cornerstone brand of Emerson's Electrical Apparatus and Lighting business; trusted worldwide to make electrical installations safer, more productive and more reliable.

#### United States (Headquarters)

Appleton Grp LLC  
9377 W. Higgins Road  
Rosemont, IL 60018  
United States  
T +1 800 621 1506

#### Europe

ATX SAS  
Espace Industriel Nord  
35, rue André Durouchez,  
CS 98017  
80084 Amiens Cedex 2, France  
T +33 3 2254 1390

#### Canada

EGS Electrical Group Canada Ltd.  
99 Union Street  
Elmira ON, N3B 3L7  
Canada  
T +1 888 765 2226

#### Asia Pacific

EGS Private Ltd.  
Block 4008, Ang Mo Kio Ave 10,  
#04-16 TechPlace 1,  
Singapore 569625  
T +65 6556 1100

#### Latin America

EGS Comercializadora Mexico S  
de RL de CV  
Calle 10 N°145 Piso 3  
Col. San Pedro de los Pinos  
Del. Álvaro Obregon  
Ciudad de México. 01180  
T +52 55 5809 5049

#### Australia Sales Office

Bayswater, Victoria  
T +61 3 9721 0387

#### China Sales Office

Shanghai  
T +86 21 3338 7000

#### Middle East Sales Office

Dammam, Saudi Arabia  
T +966 13 510 3702

#### Chile Sales Office

Las Condes  
T +56 2928 4819

#### India Sales Office

Chennai  
T +91 44 3919 7300

#### Korea Sales Office

Seoul  
T +82 2 3483 1555

#### Jebel Ali- Dubai Office

Emerson, Building A  
Appleton Group  
Jebel Ali Free Zone- South  
T +971 4 811 81 00

 [Emerson.com](https://www.emerson.com)

 [LinkedIn.com/company/emerson](https://www.linkedin.com/company/emerson)

The Emerson logo is a trademark and service mark of Emerson Electric Co. Appleton is a registered trademark of Appleton Grp LLC. All other marks are the property of their respective owners. © 2021 Emerson Electric Co. All rights reserved.



**CONSIDER IT SOLVED™**