


Ceramic

# Frequency Mixer WIDE BAND

## MCA1-24+

Level 7 (LO Power+7 dBm) 300 to 2400 MHz



Generic photo used for illustration purposes only

CASE STYLE: DZ885

### Maximum Ratings

|                       |                |
|-----------------------|----------------|
| Operating Temperature | -55°C to 100°C |
| Storage Temperature   | -55°C to 100°C |
| RF Power              | 50 mW          |
| IF Current            | 40 mA          |

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

|        |               |
|--------|---------------|
| LO     | 10            |
| RF     | 5             |
| IF     | 3             |
| GROUND | 1,2,4,6,7,8,9 |

### Features

- wide bandwidth, 300 to 2400 MHz
- low conversion loss, 6.1 dB typ.
- excellent L-R isolation, 40 dB typ.
- LTCC double balanced mixer
- aqueous washable
- low cost
- low profile, 0.08"
- protected by US Patent 7,027,795

### Recommended Replacement:

**MAC-24+**

- Footprint Compatible
- MIL Level Reliability

[Click here for data sheet](#)

### Applications


- cellular
- PCN
- defense & weather radar
- UHF TV
- WCDMA
- defense communications

### +RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

|  |                      |
|--|----------------------|
| Available Tape and Reel at no extra cost |                      |
| Reel Size                                | Devices/Reel         |
| 7"                                       | 10, 20, 50, 100, 200 |
| 13"                                      | 500, 1000            |

### Outline Drawing

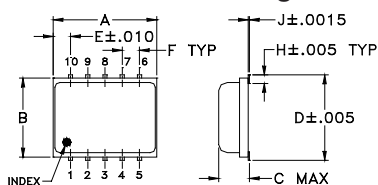

### PCB Land Pattern




Suggested Layout,  
Tolerance to be within ±.002

### Outline Dimensions (inch/mm)

| A    | B    | C    | D    | E    | F     | G    |
|------|------|------|------|------|-------|------|
| .30  | .250 | .085 | .266 | .050 | .050  | .012 |
| 7.62 | 6.35 | 2.16 | 6.76 | 1.27 | 1.27  | 0.30 |
| H    | J    | K    | L    | M    | wt    |      |
| .029 | .004 | .085 | .296 | .030 | grams |      |
| 0.74 | 0.10 | 2.16 | 7.52 | 0.76 | 0.25  |      |

### Demo Board MCL P/N: TB-144 Suggested PCB Layout (PL-045)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.  
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

### Electrical Specifications (T<sub>AMB</sub> = -55°C to 100°C)


| FREQUENCY (MHz) | CONVERSION LOSS (dB)                    |    |                         | LO-RF ISOLATION (dB) |      | LO-IF ISOLATION (dB) |      | IP3 at center band (dBm) |
|-----------------|---|----|-------------------------|----------------------|------|----------------------|------|--------------------------|
|                 | LO/RF<br>f <sub>L</sub> -f <sub>U</sub> | IF | $\bar{X}$ $\sigma$ Max. | Typ.                 | Min. | Typ.                 | Min. |                          |
| 300-2400        | DC-700                                  |    | 6.1    0.1    8.9       | 40                   | 25   | 25                   | 15   | 10                       |

1 dB COMPR. +1 dBm typ.

### Typical Performance Data

| Frequency (MHz) | Conversion Loss (dB) |       | Isolation L-R (dB) |       | Isolation L-I (dB) |       | VSWR RF Port (:1) |       | VSWR LO Port (:1) |       |
|-----------------|----------------------|-------|--------------------|-------|--------------------|-------|-------------------|-------|-------------------|-------|
|                 | LO                   | RF    | LO                 | RF    | LO                 | RF    | LO                | RF    | LO                | RF    |
|                 | +7dBm                | +7dBm | +7dBm              | +7dBm | +7dBm              | +7dBm | +7dBm             | +7dBm | +7dBm             | +7dBm |
| 301.00          | 331.00               | 5.65  | 49.09              | 22.79 | 1.98               | 6.94  |                   |       |                   |       |
| 401.00          | 431.00               | 4.79  | 42.44              | 24.50 | 1.37               | 2.42  |                   |       |                   |       |
| 501.00          | 531.00               | 6.25  | 44.11              | 26.82 | 3.58               | 1.36  |                   |       |                   |       |
| 701.00          | 731.00               | 6.44  | 43.51              | 26.63 | 3.58               | 2.12  |                   |       |                   |       |
| 901.00          | 931.00               | 6.94  | 42.58              | 28.29 | 4.77               | 3.78  |                   |       |                   |       |
| 1151.00         | 1181.00              | 7.00  | 43.47              | 29.90 | 4.79               | 4.32  |                   |       |                   |       |
| 1301.00         | 1331.00              | 7.04  | 41.88              | 30.02 | 3.94               | 4.91  |                   |       |                   |       |
| 1501.00         | 1531.00              | 5.51  | 39.43              | 27.85 | 1.91               | 3.22  |                   |       |                   |       |
| 1701.00         | 1731.00              | 4.99  | 36.78              | 25.41 | 1.29               | 1.64  |                   |       |                   |       |
| 2001.00         | 2031.00              | 5.90  | 33.55              | 23.65 | 2.15               | 2.56  |                   |       |                   |       |
| 2401.00         | 2431.00              | 7.09  | 36.83              | 29.81 | 3.39               | 4.83  |                   |       |                   |       |









### Electrical Schematic

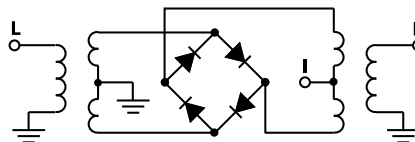

**Mini-Circuits**

[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. F  
M151107  
ED-9574/6  
MCA1-24+  
DJ/RS/CP/AM  
200512  
Page 1 of 2

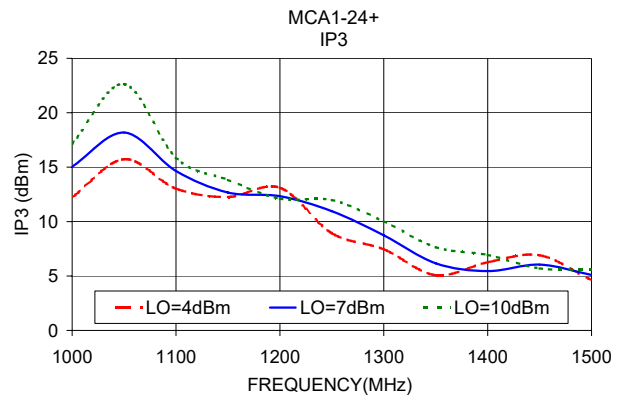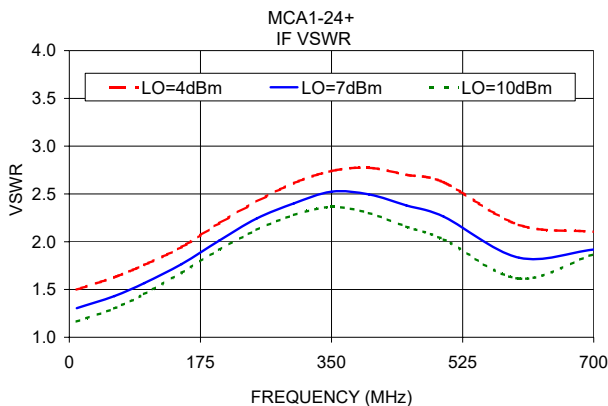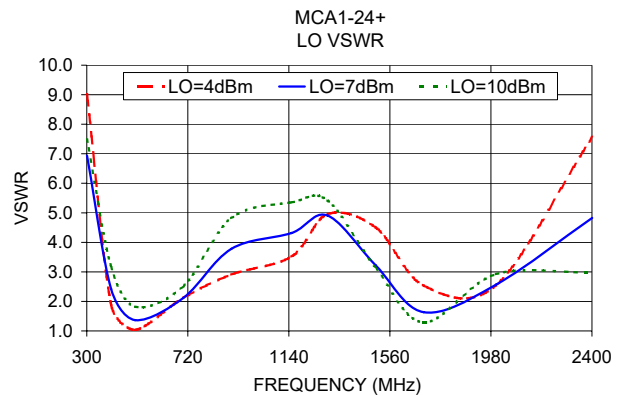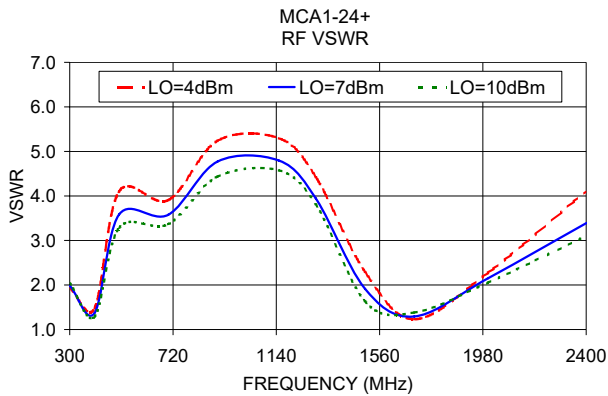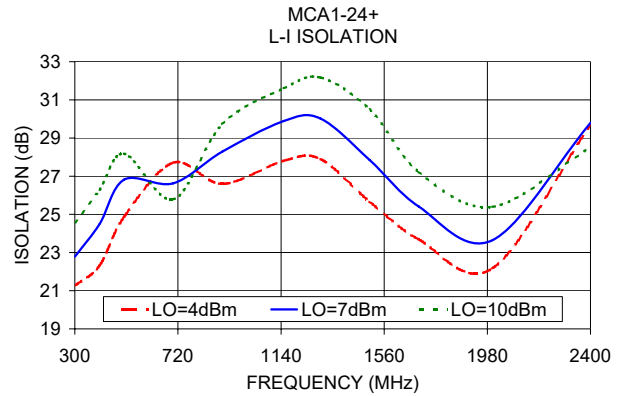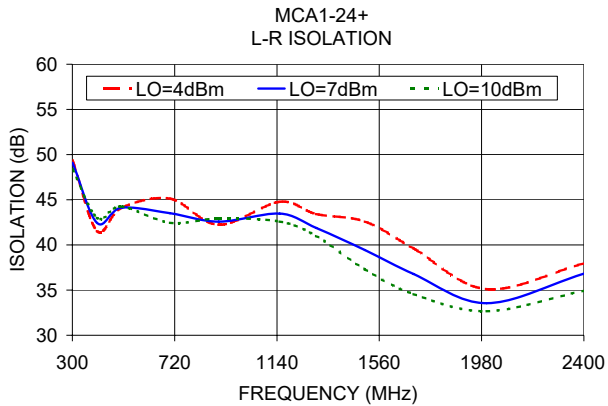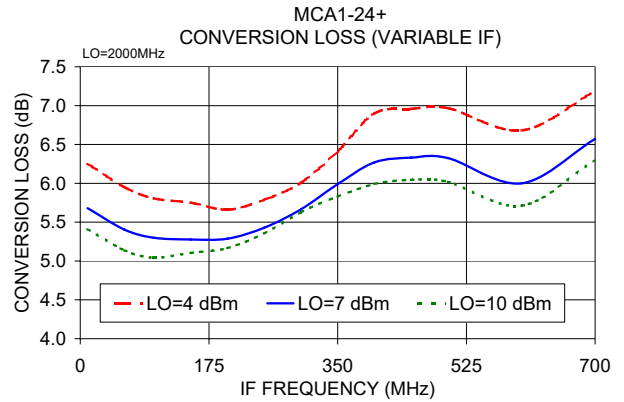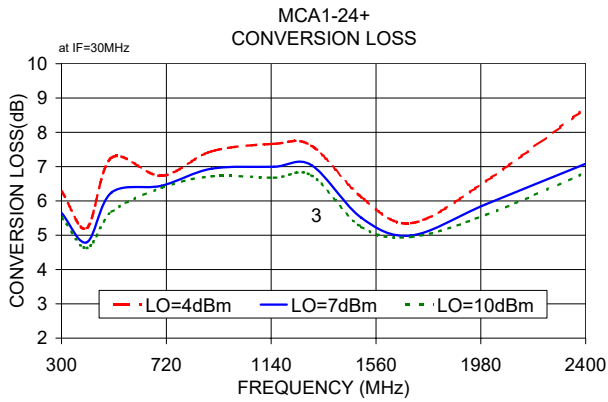

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

