



TANKLESS

PRODUCT GUIDE



SAVE ENERGY.

Energy-efficient, plentiful, and endless supply of hot water.

SAVE SPACE.

Compact size and wall-mounted to free up valuable floor space.

SAVE MONEY.


The smart choice that will save you a substantial amount of energy.

The American Water Heater brand delivers innovative hot water solutions and is sold exclusively by plumbing wholesalers and contractors. American's selection of residential and commercial tank-type, tankless & hybrid water heaters, boilers and storage tanks is unmatched for quality and diversity. Anywhere hot water is needed, American provides an energy-efficient solution with long lasting value for years after it's installed. American stands behind its products and customers with world-class service, combining cutting-edge technology with committed people who take pride in being the very best.

TANKLESS ADVANTAGE

HOW IT WORKS – The Process:

- A hot water tap is opened.
- The opened tap allows water to flow through the water heater. An internal water flow sensor detects this flow.
- Upon flow detection, the flow sensor sends the activation signal to the computer board.
- The computer automatically ignites the burner.
- As water flows through the heat exchanger, it absorbs heat from the burner.
- By the time the water exits the heater, it has reached the designated set temperature.
- When the hot water tap is closed, the water heater automatically turns off.

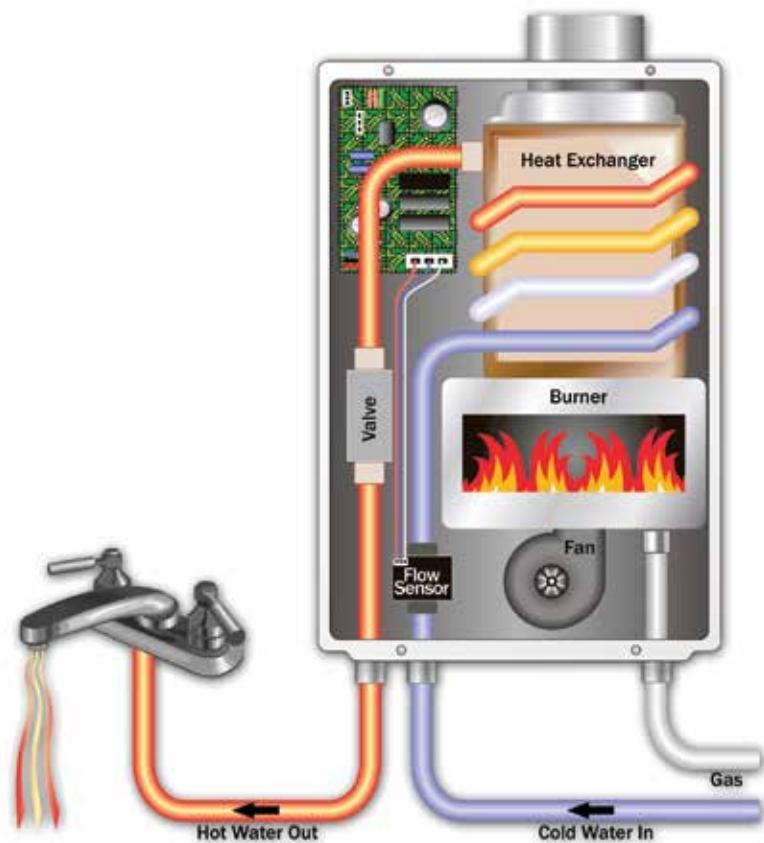

ENDLESS HOT WATER

Heating water only as it's being used means you will never run out of hot water again. After the few seconds it takes for the water to reach the designated set temperature, our water heaters will continually provide a steady flow of hot water for as long as your application needs it.

*Tankless water heaters provide endless hot water when sized appropriately for your home's needs.

ENERGY CONSERVATION

Provides you with continuous hot water in one of the most energy-efficient ways possible. Conventional tank-type water heaters will heat and store a set volume of water, regardless of whether someone is using that hot water or not. Because our tankless water heaters only activate when hot water is being used, no standby energy losses are incurred, providing efficient heating while conserving energy.

COMPACT SIZE

On top of all this, an American tankless water heater takes up much less space than your conventional tank-type water heater or boiler. The American wall-mount design offers flexible installations freeing up valuable storage space.

SAFETY

At American, we place the safety and reliability of our products above all else. By incorporating technologically advanced safety features into every model, we provide the assurance and peace of mind that can only come from an American quality product.

Air-Fuel Ratio (AFR) Sensor

American's unique AFR sensor monitors and maintains proper combustion at all times. Together with the onboard computer, this system will adjust the fan motor speed to ensure that air and fuel have a proper mixture ratio, minimizing emissions and maximizing efficiency.

Additional Safety Features

Freeze Protection:

Every heater in American's tankless lineup has an internal freeze protection system, which is rated to protect the heaters when installed in sub-freezing conditions. This system works to keep water temperatures within the heat exchanger from falling below a certain level, preventing freeze damage.

Hi-Limit Switch:


Ensures that water temperatures do not exceed safe levels. Before the water temperature can even reach these unsafe levels, the hi-limit switch activates by disengaging the gas valves, effectively shutting down the water heater.

PVC Venting:

Indoor condensing models have a thermistor and hi-limit switch that monitor the exhaust temperature. If the exhaust temperature nears an unsafe limit, these features regulate combustion and can shut the heater down to protect the integrity of the PVC vent material.

Overheat Cutoff Fuse:

Ensures that there are no breaches in the heat exchanger drum. In cases where enough physical damage might have been done to the water heater to lead to a breach in the heat exchanger drum, the overheat cutoff fuse reacts by shutting down the water heater if the surface of the heat exchanger retains too much heat.

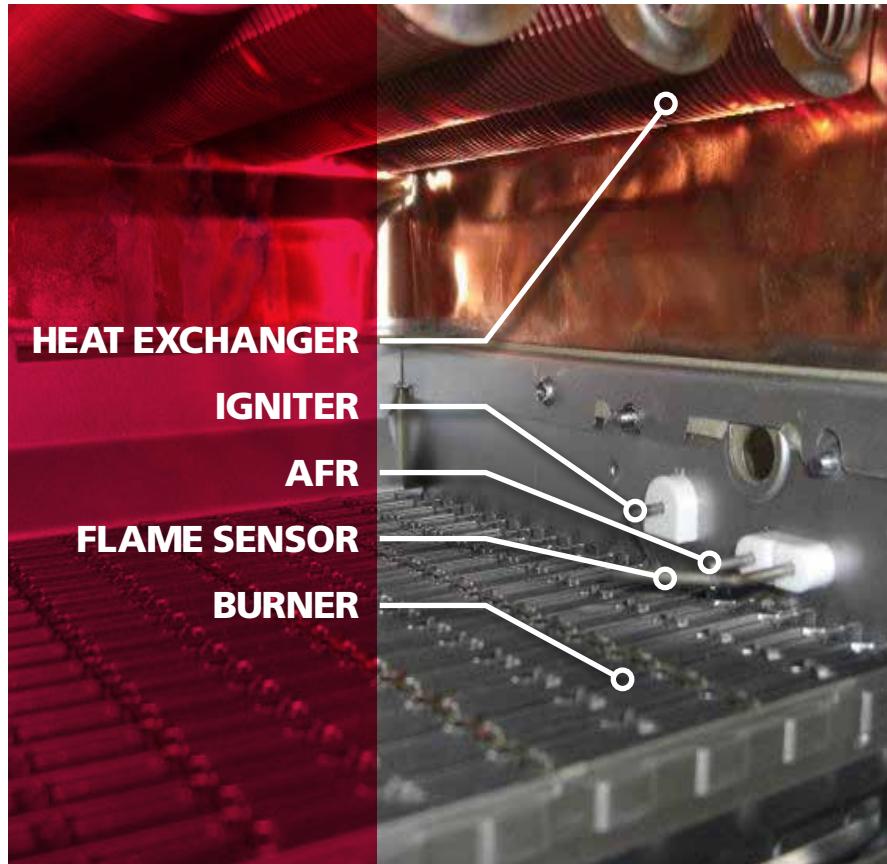


DURABILITY

HEAT EXCHANGER WITH COMMERCIAL-GRADE COPPER

Only American incorporates true commercial-grade heat exchangers in our tankless heaters (510, 510C, 510U, 540, 540P, CT-199 and 910 non-ASME models). All aspects of the heat exchanger are designed to add the durability and reliability that is vital to any successful commercial organization or business.


Commercial-Grade Copper Alloy

Our commercial-grade copper is a heat-resistant copper alloy, with additive elements that make it much stronger and harder than the standard C1220 copper used in most other heat exchangers. Our commercial-grade copper has 8 times the tensile strength of regular copper. Even at high temperatures, our commercial-grade copper maintains a fine grain and high strength. Commercial-grade copper provides resistance to the damaging effects of erosion that can cause heat exchangers to leak.

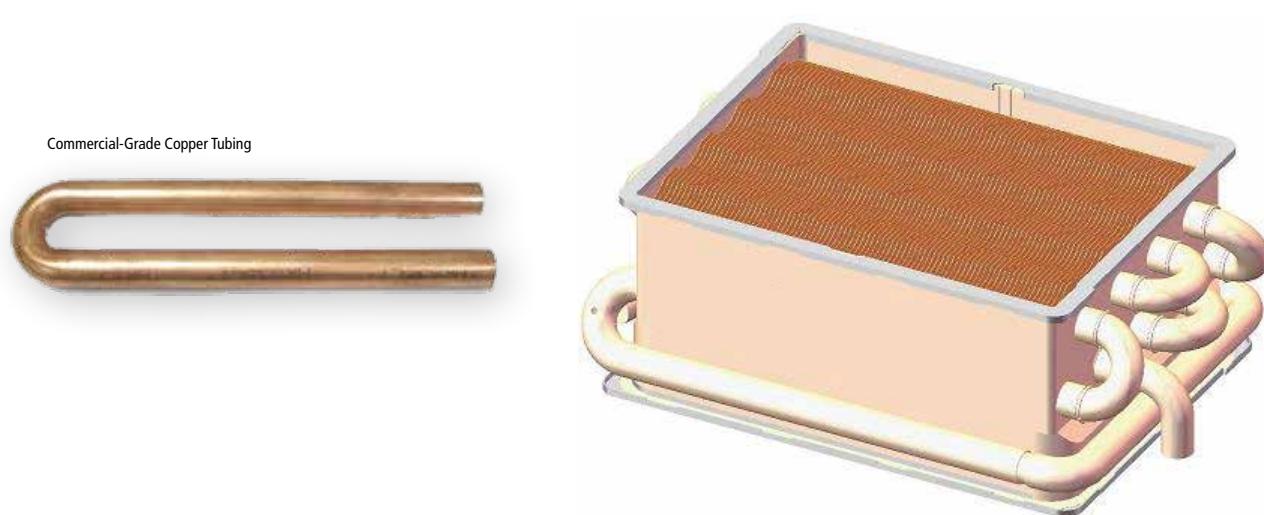

Drum Thickness


During every ignition cycle, thermal expansion causes all heat exchangers to undergo heat stress. After the thousands of ON/OFF cycles typically seen in a commercial application, this heat stress can prove damaging. This is why the heat exchangers in our commercial and light commercial products utilize drums that are 25% thicker, ensuring the longevity of our products. A thicker drum creates less strain on the heat exchanger.

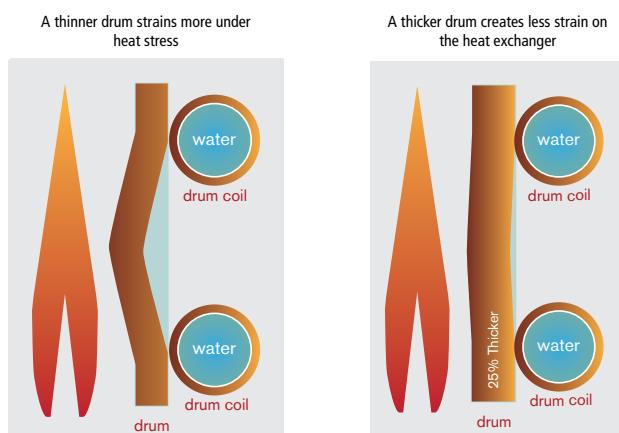

WATER VALVES

Making true commercial-grade water heaters involves more than just redesigning our heat exchangers—every internal component has to measure up to our commercial standards. Just like our advanced heat exchangers, the longevity and functionality of components such as our water valves and flow sensors are also of great importance.

Our commercial-grade water heaters (510 and 540), as well as our commercial water heaters (CT-199 and 910) feature a bypass and flow adjustment valve, which not only provide the optimal control and precision essential for commercial usage, but also offer the durability needed to handle tough, high-volume conditions.

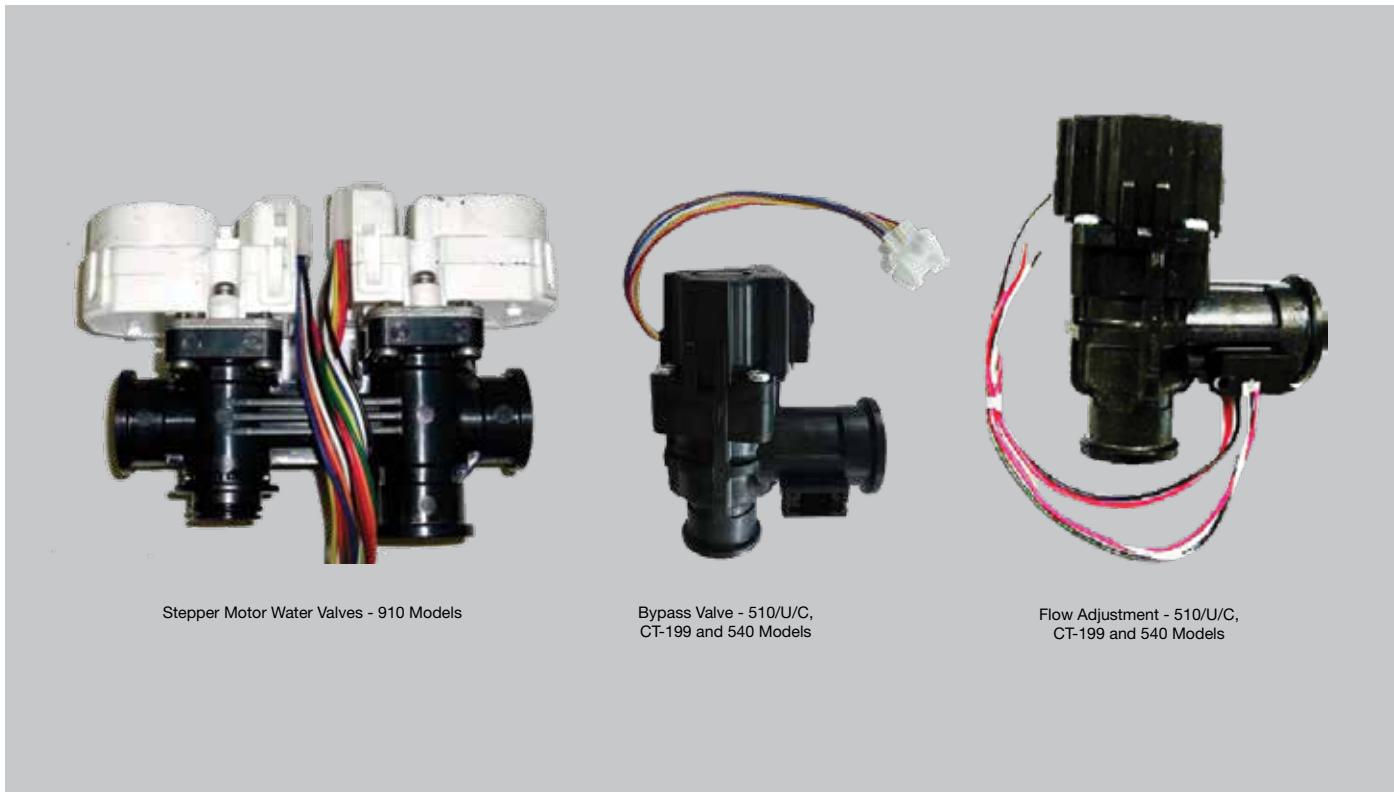

Stepper Motor Water Valves - 910 Models


Bypass Valve - 510/U/C,
CT-199 and 540 Models

Flow Adjustment - 510/U/C,
CT-199 and 540 Models

SECONDARY HEAT EXCHANGER 316L STAINLESS STEEL (CONDENSING MODELS ONLY)

The secondary condensing heat exchanger is made of high-quality 316L stainless steel. This is where the rest of the heat transfer occurs. Due to the lower temperature acidic condensation occurs, and stainless steel is required in order to avoid corrosion.

For condensing heat exchangers, it is more suitable to use 316L stainless steel because of the extreme environment (heat, acidic condensation, chloride) that the material is subjected to.

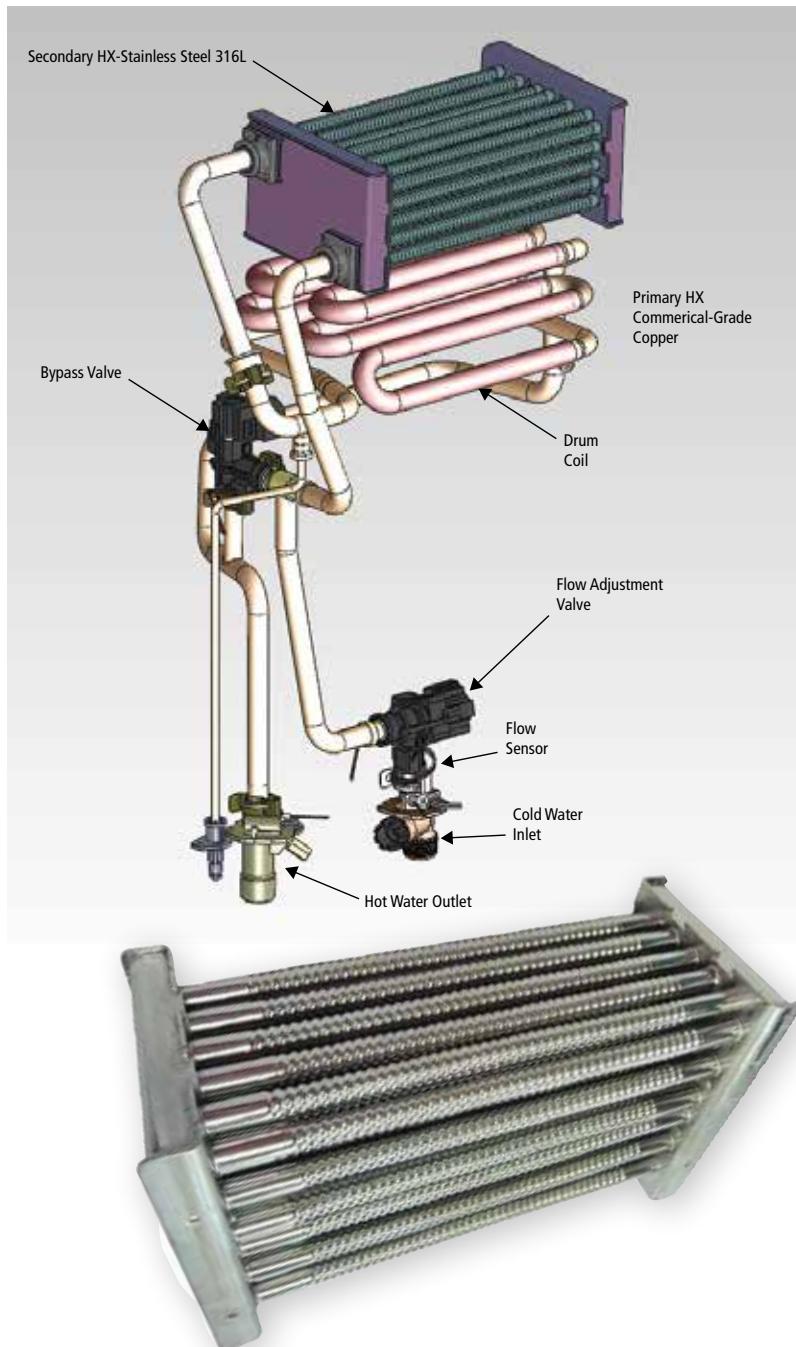

PRIMARY HEAT EXCHANGER: COPPER VS. STAINLESS STEEL

- Heat transfers 25 times more readily through copper than stainless steel. Consequently, for the same amount of heat transfer, stainless steel heat exchangers need to be larger than copper heat exchangers, leading to a larger pressure loss.
- At higher temperatures, it is the nature of stainless steel to become prone to a number of problems not usually experienced at room temperature. It is vulnerable to pitting corrosion and stress corrosion cracking (SCC).
- Stainless steel is NOT better for durability because it is harder. Hardness causes the material to become brittle. Stainless steel will crack after numerous cycles of thermal expansion/contraction, especially with chloride in the water. Copper heat exchangers are less brittle and better suited for expansion/contraction without cracking.
- In a *dual* heat exchanger design, corrosion is not a big concern in the non-condensing primary heat exchanger because no condensation forms on the exterior of the pipes. Stainless steel is unnecessary for this stage.

Note: 140, 240, and 340 condensing line units use C1220 copper and do not have a bypass valve
* Diagram represents 540

WATER FLOW


Condensation can build up over time in any heat exchanger, causing damage and premature leaks. American's commercial models (910 series) include condensation reduction features that safeguard against these types of damaging effects.

Better Water Pathway Design


By redesigning and redirecting the flow of water, the temperature of the heat exchanger drum and finned coils stay elevated above dew point, making it much more difficult for condensation to build.

Fin Pitch

By widening the pitch of the heat exchanger fins, not only do we improve durability by reducing occurrences of blockage, we also maintain higher temperatures on the upper finned coils. Keeping these coils at elevated temperatures reduces the likelihood of condensation buildup.

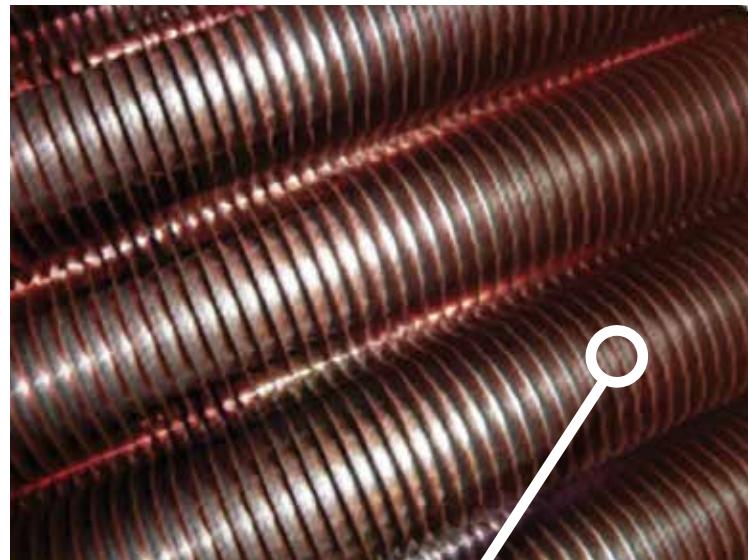

FIN

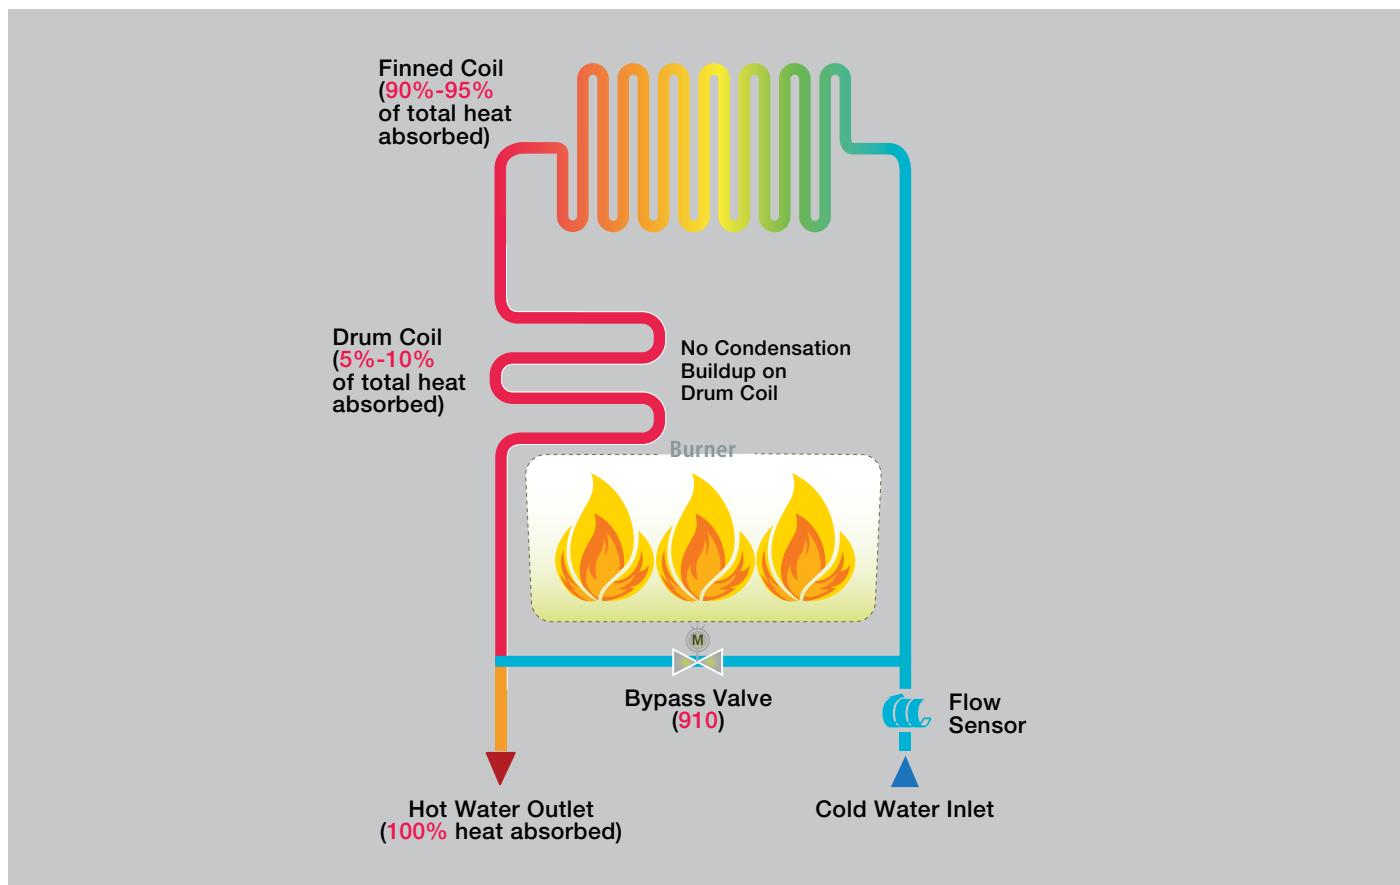

BASIC SIZING GUIDELINES

The flow rate capacity of tankless water heaters depends on the temperature difference between the desired output and incoming water temperature. The flow rate comparison chart and table shown here summarize the flow rate charts found in the specifications of each model.

American water heaters are sized according to the peak flow rate requirements, worst-case temperature-rise scenarios, and types of applications. Once these factors have been determined, refer to either the flow rate comparison here or the flow rate charts found in each model's specifications. Select the appropriate water heater as well as the amount of water heaters required.

Application designers/engineers can decide whether to size for full flow, expected flow, or utilize probability models such as the modified "Hunter Curve." For large scale applications such as hotels, apartment complexes and large restaurants, Hunter Curves are commonly used to estimate the peak flow rate demand when given the total amount of fixture units within an application. It is up to the application designer/engineer to determine the amount of fixture units within any given application.

MATCH THE UNIT TO YOUR NEEDS

| Warmer Climates 70°F Incoming Groundwater Temperature | | Cooler Climates 50°F Incoming Groundwater Temperature | | | |
|--|-------------|---|---|--|--|
| Capacity - Number of Shower Heads (Assuming the set point temperature is 120°F) | | | | | |
| Non-Condensing Units | | | | | |
| 110/U/C | 2.5 Showers |  |  | | |
| 310/U/C | 3.5 Showers |  |  | | |
| 510/U/C | 3.5 Showers |  |  | | |
| Condensing Units | | | | | |
| 140 | 2.5 Showers |  |  | | |
| 240 | 3.5 Showers |  |  | | |
| 340 | 4 Showers |  |  | | |
| 540P | 4.5 Showers |  |  | | |
| Commercial Units | | | | | |
| 910 | 7 Showers |  |  | | |
| CT-199 | 4.5 Showers |  |  | | |


FLOW RATE GUIDE

Temperature Rise vs. Gallons per Minute


| Temp Rise | 110/U/C | 310/U/C | 510/U/C | 140 | 240 | 340 | 540/P | CT-199 | 910 |
|-----------|---------|---------|---------|-----|-----|-----|-------|--------|------|
| 30° | 6.6 | 8.0 | 10.0 | 6.6 | 6.6 | 8.0 | 10.0 | 10.0 | 14.5 |
| 35° | 6.6 | 8.0 | 9.3 | 6.4 | 6.6 | 8.0 | 10.0 | 10.0 | 14.5 |
| 40° | 5.7 | 7.8 | 8.1 | 5.6 | 6.6 | 8.0 | 9.5 | 9.5 | 14.5 |
| 45° | 5.1 | 6.9 | 7.2 | 5.0 | 6.6 | 7.6 | 8.4 | 8.4 | 13.5 |
| 50° | 4.6 | 6.2 | 6.5 | 4.5 | 6.1 | 6.8 | 7.6 | 7.6 | 12.2 |
| 55° | 4.2 | 5.7 | 5.9 | 4.1 | 5.5 | 6.2 | 6.9 | 6.9 | 11.1 |
| 60° | 3.8 | 5.2 | 5.4 | 3.7 | 5.1 | 5.7 | 6.3 | 6.3 | 10.1 |
| 65° | 3.5 | 4.8 | 5.0 | 3.4 | 4.7 | 5.3 | 5.8 | 5.8 | 9.4 |
| 70° | 3.3 | 4.4 | 4.7 | 3.2 | 4.3 | 4.9 | 5.4 | 5.4 | 8.7 |
| 75° | 3.1 | 4.1 | 4.3 | 3.0 | 4.1 | 4.6 | 5.0 | 5.0 | 8.1 |
| 80° | 2.9 | 3.9 | 4.1 | 2.8 | 3.8 | 4.3 | 4.7 | 4.7 | 7.6 |
| 85° | 2.7 | 3.7 | 3.8 | 2.6 | 3.6 | 4.0 | 4.4 | 4.4 | 7.2 |
| 90° | 2.5 | 3.5 | 3.6 | 2.5 | 3.4 | 3.8 | 4.2 | 4.2 | 6.8 |
| 95° | 2.4 | 3.3 | 3.4 | 2.3 | 3.2 | 3.6 | 4.0 | 4.0 | 6.4 |
| 100° | 2.3 | 3.1 | 3.3 | 2.2 | 3.0 | 3.4 | 3.8 | 3.8 | 6.1 |

Flow rate is determined by temperature rise. To determine your temperature rise, subtract the incoming water temperature from the set output temperature. All units are factory set to 120°F or 122°F but can be changed.

EXAMPLE OF HUNTER CURVES FOR SIZING LARGE APPLICATIONS

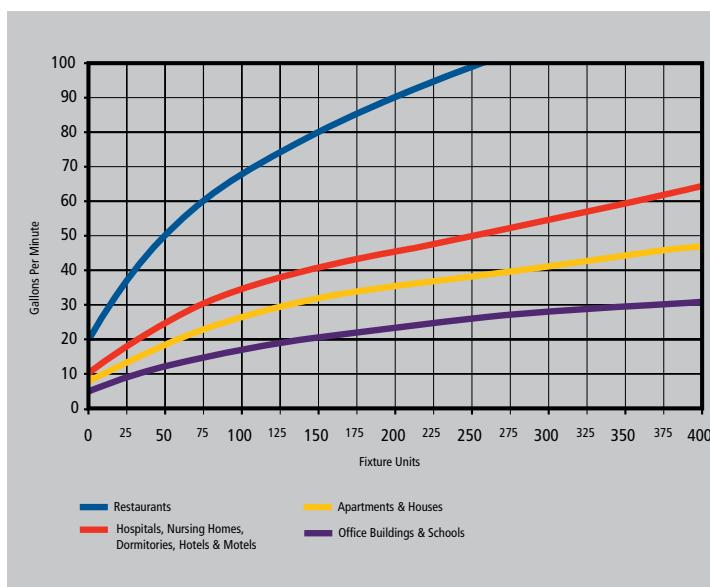

COMPARISON OF FLOW RATES VS. TEMPERATURE RISE

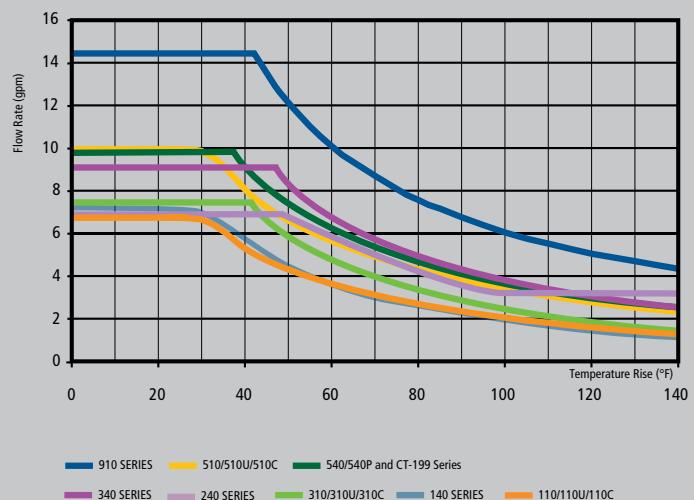

SIMPLE TANKLESS SIZING



TANKLESS MODELS GROUND WATER TEMPERATURE FACTOR

The temperature of incoming ground water (cold water inlet temperature) varies greatly throughout the U.S. and also fluctuates with the changing of the seasons. The temperature of water as it enters the water heater will determine the amount of "temperature rise" required to achieve the desired hot water outlet temperature (120°F is recommended).


The best way to measure incoming ground water temperature is to use a thermometer to measure cold water temperature during the coldest season of the year. To simplify the process, use this map to determine whether your installation location is in the Southern Zone, Central Zone or Northern Zone.

PEAK HOT WATER DEMAND

The next step is to determine how many gallons per minute of hot water will be required during the busiest usage period (peak demand). Consider all appliances and fixtures that use hot water, including lavatory faucets, kitchen faucets, washing machines, dishwashers, showers and bathtubs. Be sure to determine how many appliances and fixtures will be used at the same time (peak demand).




AVERAGE GROUND WATER TEMPERATURE

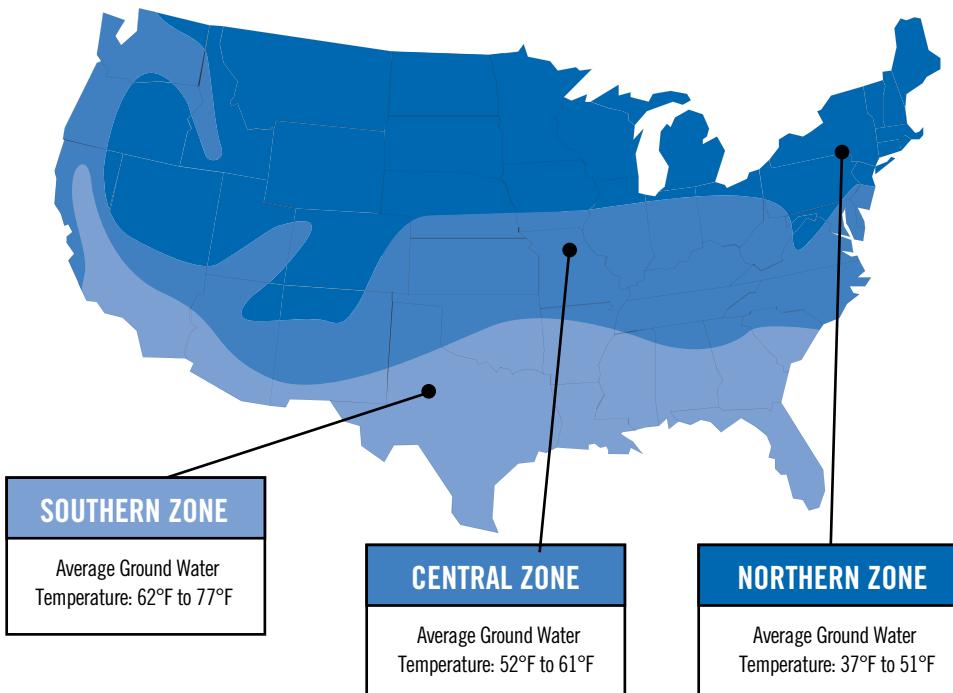

Remember, these are general recommendations. Your Water Heater Specialist can review your family's needs in even greater detail to make sure the model you choose will always provide enough hot water to meet the demand.

NON-CONDENSING

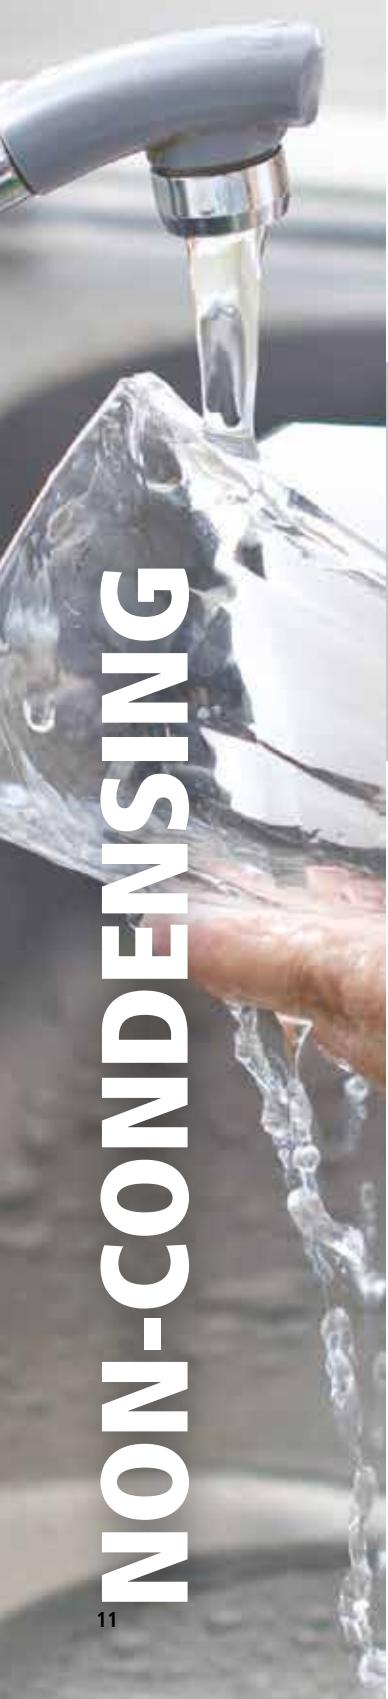

110 SERIES

The 110 Series is great for apartments, one bath homes in cold climates, condos and summer cabins. A remote control is included as a standard feature.



GT-110-NI

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-110-NI | Natural | 19,500 | 140,000 | 4.0 | 10.5 | 0.79 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-110-NI | 6.6 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 38 |

*For propane models, change "N" to "P"

**For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | | | | | |
|--------------------------------|--|-----------------------------------|------------------------|------------------------------------|--|--|--|--|--|
| 110 Temperature Settings | Dipswitches | 113°F 122°F (default) 131°F 140°F | | | | | | | |
| | With 100112183 remote (max. distance 150' from heater, non-polarized 20 gauge wiring.) | | | | | | | | |
| | 99°F to 167°F (16 options), 122°F Default Factory Setting | | | | | | | | |
| Electric | 120 V | 73 W / 0.61 A (Operation) | 6 W / 0.05 A (Standby) | 111 W / 0.93 A (Freeze-Protection) | | | | | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor installation only

Power Vent or Power Direct Vent Design

Low NOx Emissions

4" Category III Vent

Flow Rate up to 6.6 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition


Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 140,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

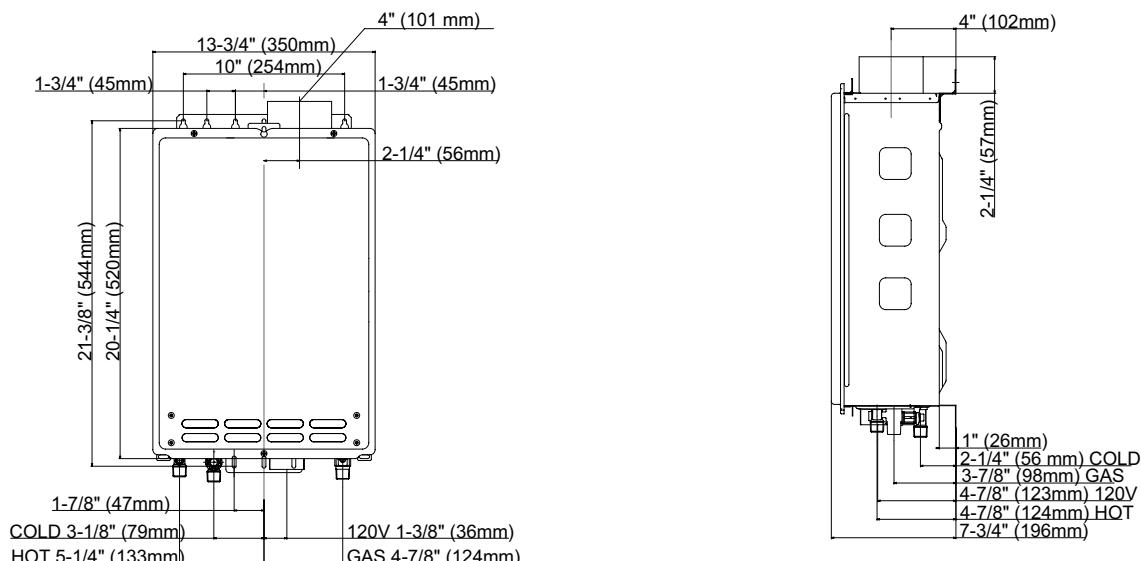

110: Flow Rate vs. Temperature Rise

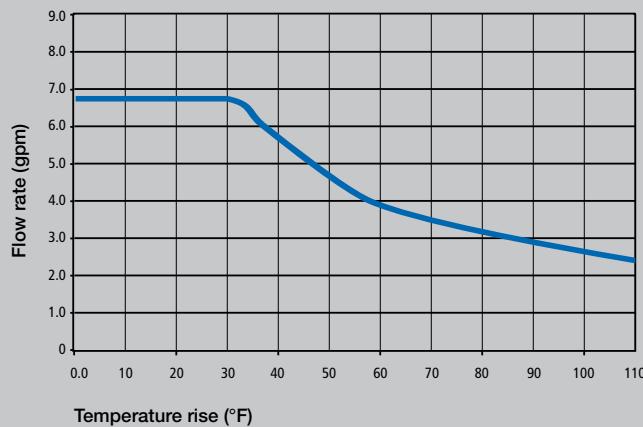

110: Pressure Loss

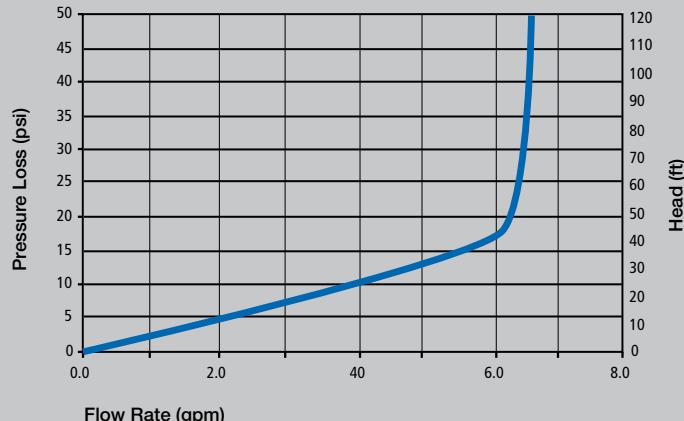

NON-CONDENSING



310 SERIES

The 310 features a max flow rate of 8.0 gpm, providing enough hot water for a home with up to three showers at the same time. A remote control is included as a standard feature.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-310-NI | Natural | 11,000 | 190,000 | 4.0 | 10.5 | 0.80 |
| GT-310-NE | Natural | 11,000 | 190,000 | 4.0 | 10.5 | 0.80 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-310-NI | 8 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 43 |
| GT-310-NE | 8 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 43 |

*For propane models, change "N" to "P"

**For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|--------------------------------|-------------|--|------------------------|------------------------------------|
| 310 Temperature Settings | Dipswitches | 113°F 122°F (default) 131°F 140°F | | |
| | | With 100112183 remote (max. distance 150' from heater, non-polarized 20 gauge wiring.) | | |
| | | 99°F to 167°F (16 options), 122°F Default Factory Setting | | |
| Electric | 120 V | 88 W / 0.73 A (Operation) | 6 W / 0.05 A (Standby) | 111 W / 0.93 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Low NOx Emissions

4" Category III Vent

Flow Rate up to 8.0 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition


Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 190,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

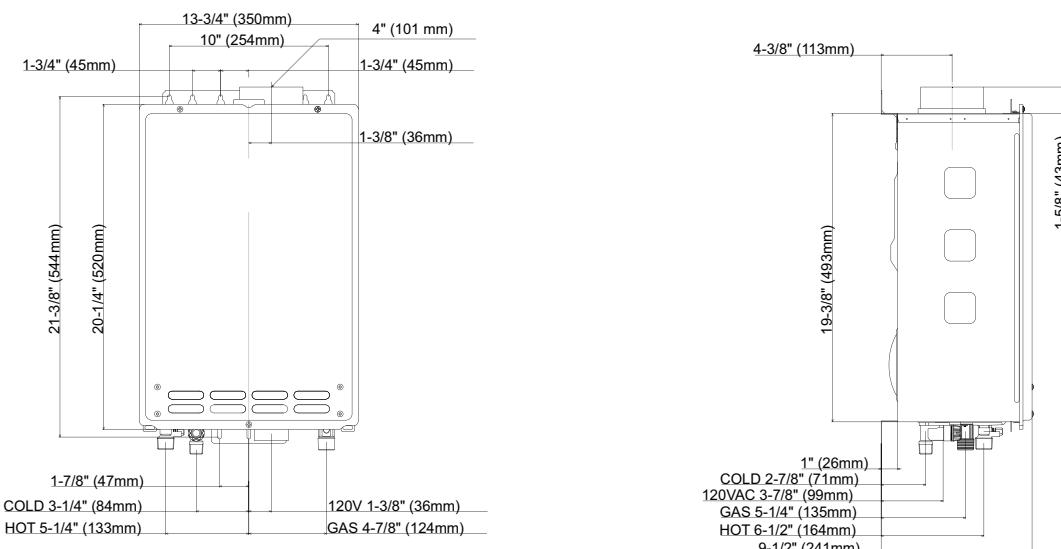


310: Flow Rate vs. Temperature Rise

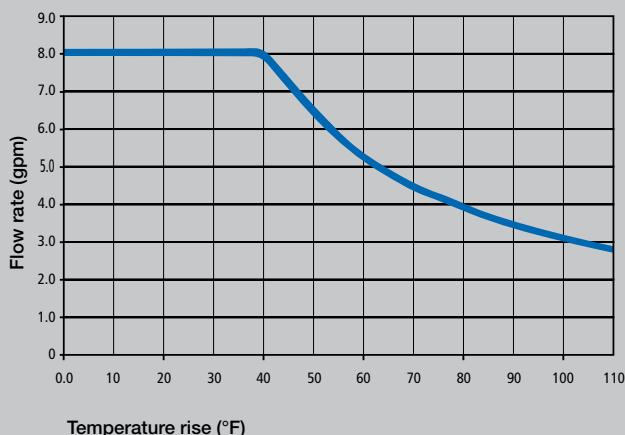

310: Pressure Loss

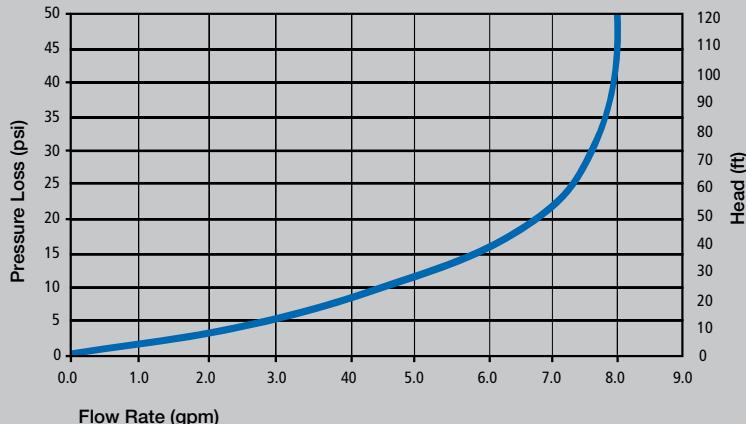

NON-CONDENSING

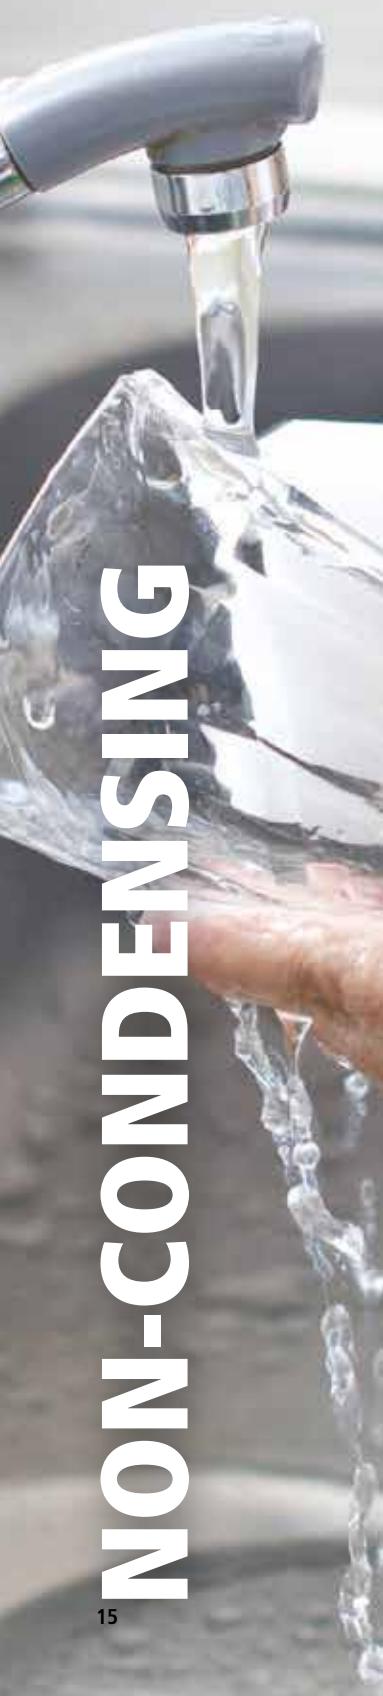

510 SERIES

The 510 series is well suited for residential/commercial applications such as small restaurants and beauty salons. Utilizing commercial grade copper alloy for the heat exchanger tubing, the 510 series is also suitable for heavier residential usages such as combination space heating and domestic recirculation systems. A remote control is included as a standard feature.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-510-NI | Natural | 11,000 | 199,000 | 4.0 | 10.5 | 0.80 |
| GT-510-NE | Natural | 11,000 | 199,000 | 4.0 | 10.5 | 0.80 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-510-NI | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 45 |
| GT-510-NE | 10 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 45 |

*For propane models, change "N" to "P"

**For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | | | | | |
|--------------------------------|--|-----------------------------------|--------------|------------------------------------|--|--|--|--|--|
| 510 Temperature Settings | Dipswitches | 104°F 113°F 122°F (default) 140°F | | | | | | | |
| | With 100112155 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | | | | | | |
| | 100°F to 176°F (15 options), 122°F Default Factory Setting | | | | | | | | |
| Electric | 120 V | 90 W / 0.75 A | 6 W / 0.05 A | 111 W / 0.93 A (Freeze-Protection) | | | | | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Low NOx Emissions

4" Category III Vent

Flow Rate up to 10.0 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi



- Pressure Only Relief Valve Requires (Min 199,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow

Easy-Link up to 4 heaters


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

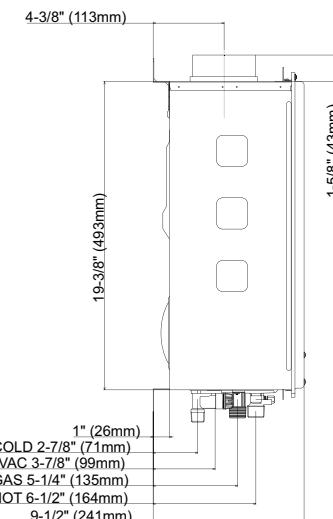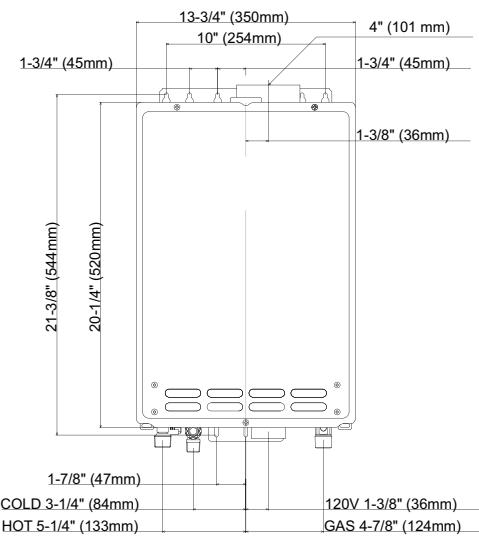

510: Flow Rate vs. Temperature Rise

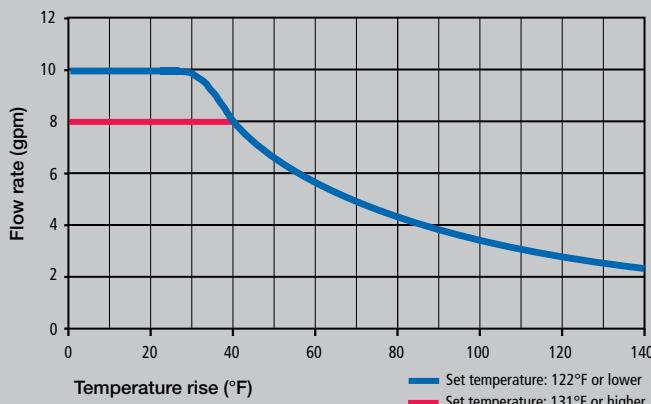

510: Pressure Loss

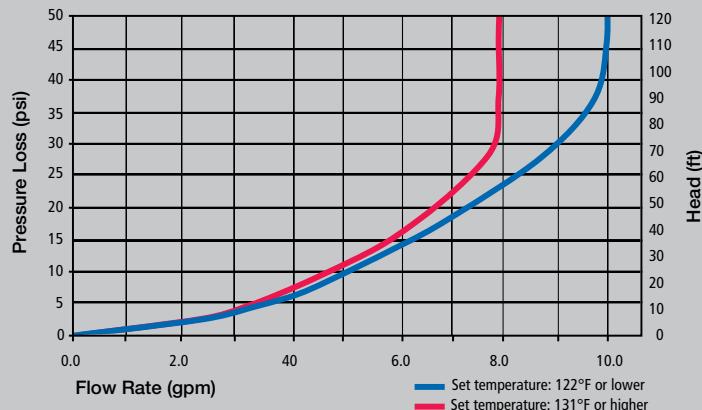

NON-CONDENSING



110C SERIES

The 110C Simplicity Series is fuel convertible out of the box and easily installs using contractor preferred concentric venting. Great for apartments, one bath homes in cold climates, condos and summer cabins.



GT-110C-NI

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-110C-NI | Natural | 15,000 | 140,000 | 4.0 | 10.5 | 0.81 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-110C-NI | 6.6 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 55 |

*Indoor models only. Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|---------------------------------|--|---------------------------|------------------------|-----------------------------------|
| 110C Temperature Settings | Dipswitches | 120 °F (default) 140°F | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100 °F to 140 °F (9 options), 120 °F Default Factory Setting | | | |
| Electric | 120 V | 53 W / 0.58 A (Operation) | 2 W / 0.06 A (Standby) | 99 W / 0.83 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Installations are simple and flexible with contractor-preferred concentric venting

Long venting runs up to 43 feet and operates in altitudes up to 10,100 feet

Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 6.6 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Meets Ultra-Low NOx requirements


Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 140,000 btu/h, 150 psi)
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

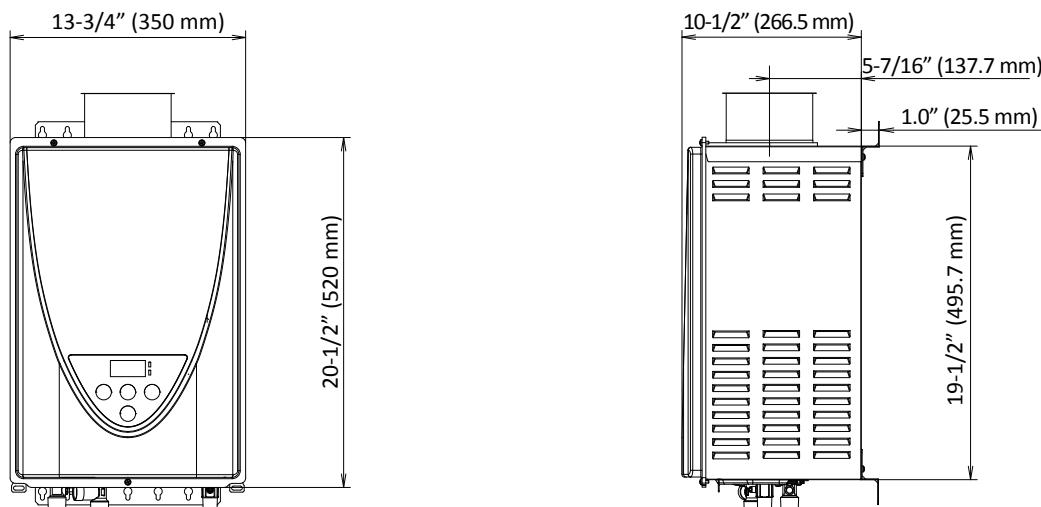

110C: Flow Rate vs. Temperature Rise

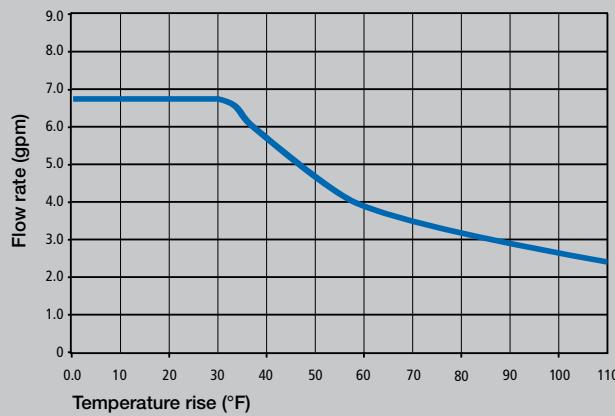

110C: Pressure Loss

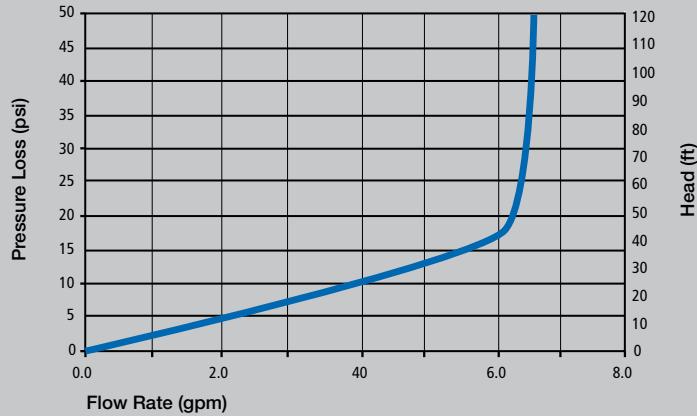

NON-CONDENSING

310C SERIES

The 310C Simplicity Series is fuel convertible out of the box and easily installs using contractor preferred concentric venting. It generates a max flow rate of 8.0 gpm, providing enough hot water to run three showers at the same time.



GT-310C-NI

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-310C-NI | Natural | 15,000 | 190,000 | 4.0 | 10.5 | 0.82 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-310C-NI | 8 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 55 |

*Indoor models only. Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | | | |
|---------------------------|--|---------------------------|------------------------|-----------------------------------|--|--|--|
| 310C Temperature Settings | Dipswitches | 120°F (default) 140°F | | | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | | | | |
| | 100 °F to 140 °F (9 options), 120°F Default Factory Setting | | | | | | |
| Electric | 120 V | 71 W / 0.81 A (Operation) | 2 W / 0.06 A (Standby) | 99 W / 0.83 A (Freeze-Protection) | | | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Installations are simple and flexible with contractor-preferred concentric venting

Long venting runs up to 43 feet and operates in altitudes up to 10,100 feet

Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 8.0 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition.

Meets Ultra-Low NOx requirements


Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 190,000 btu/h, 150 psi)
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

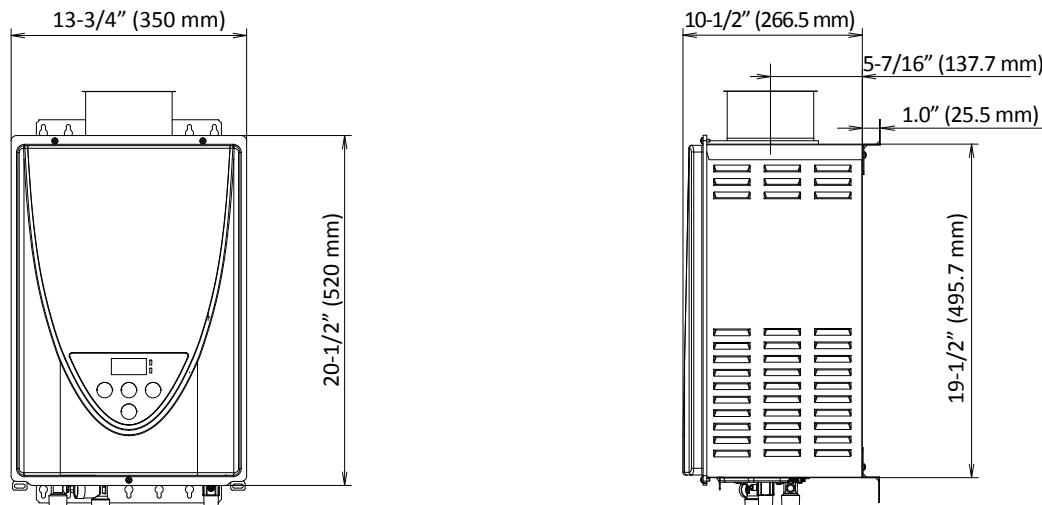

310C: Flow Rate vs. Temperature Rise

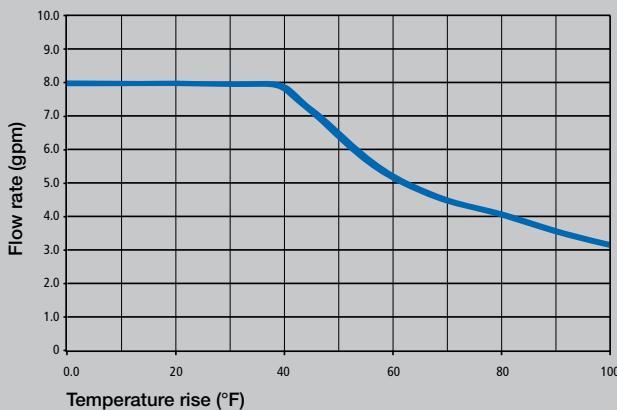

310C: Pressure Loss

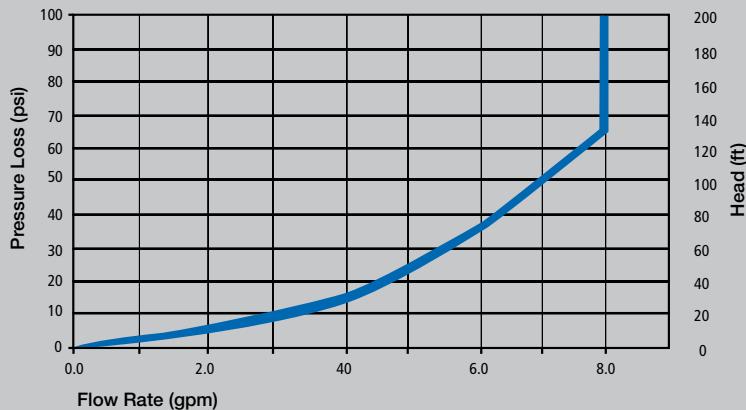

NON-CONDENSING

510C SERIES

The 510C Simplicity Series is fuel convertible out of the box and easily installs using contractor preferred concentric venting. It is well suited for residential/commercial applications such as small restaurants and beauty salons. Utilizing commercial grade copper alloy for the heat exchanger tubing, the 510C series is also suitable for heavier residential usages such as combination space heating and domestic recirculation systems.



GT-510C-NI

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-510C-NI | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.81 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-510C-NI | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 55 |

*Indoor models only. Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|---------------------------|-------------|--|------------------------|------------------------------------|
| 510C Temperature Settings | Dipswitches | 120°F (default) 140°F | | |
| | | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | |
| | | 100°F to 160°F (13 options), 120°F Default Factory Setting | | |
| Electric | 120 V | 72 W / 0.85 A (Operation) | 3 W / 0.07 A (Standby) | 100 W / 0.83 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Installations are simple and flexible with contractor-preferred concentric venting

Long venting runs up to 43 feet and operates in altitudes up to 10,100 feet



Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 10 GPM


- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition.

Meets Ultra-Low NOx requirements


Dimensions

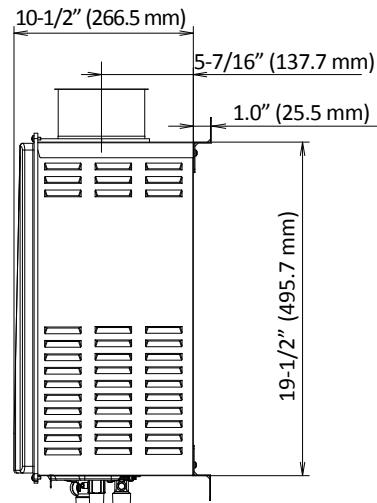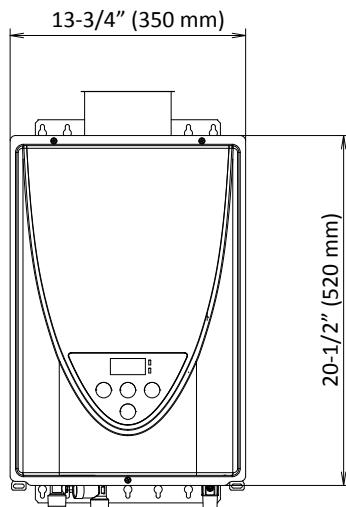

510C: Flow Rate vs. Temperature Rise

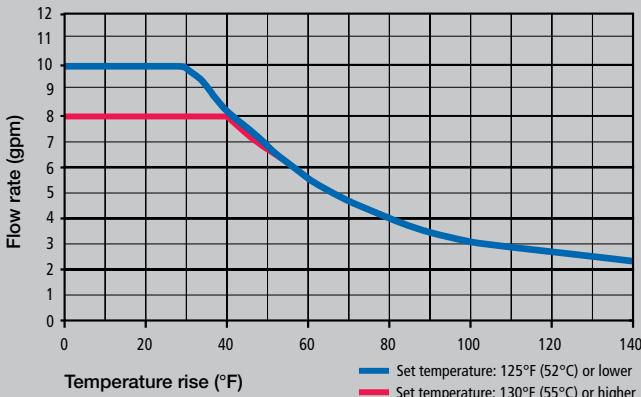

510C: Pressure Loss

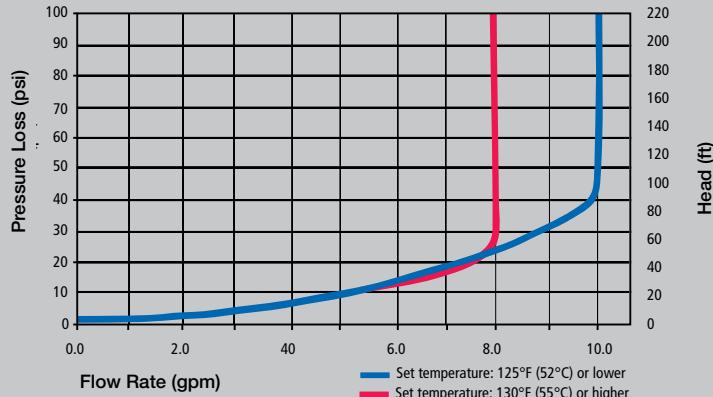

Set Temperature 125°F (52°C) or higher, maximum flow rate is limited to 8.0 gpm.

110U SERIES

The 110U Series is great for apartments, one bath homes in cold climates, condos and summer cabins. Indoor models include an integrated temperature controller. A remote control is included as a standard for outdoor models. Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar NOx Emission requirements of 14 ng/J or 20 PPM.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-110U-I | Natural | 15,000 | 140,000 | 4.0 | 10.5 | 0.81 |
| GT-110U-E | Natural | 15,000 | 140,000 | 4.0 | 10.5 | 0.81 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-110U-I | 6.6 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 39 |
| GT-110U-E | 6.6 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 39 |

*Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | | | |
|---------------------------------|--|---------------------------|------------------------|-----------------------------------|--|--|--|
| 110U Temperature Settings | Dipswitches | 120°F (default) 140°F | | | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | | | | |
| | 100°F to 140°F (9 options), 120°F Default Factory Setting | | | | | | |
| Electric | 120 V | 54 W / 0.64 A (Operation) | 2 W / 0.06 A (Standby) | 96 W / 0.82 A (Freeze-Protection) | | | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

4" Category III Vent

Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 6.6 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi


- Pressure Only Relief Valve Requires (Min 140,000 btu/h, 150 psi).

- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

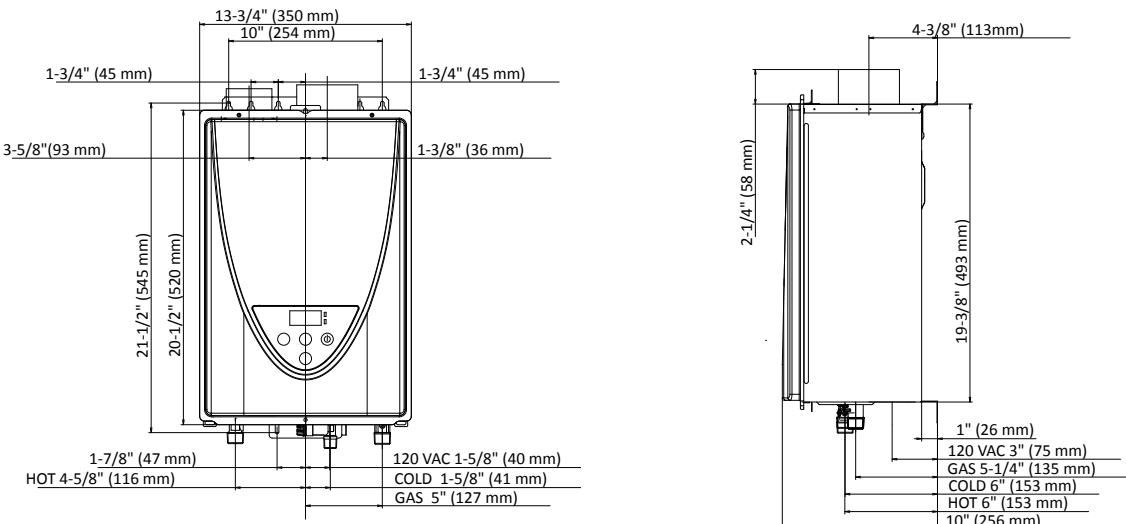

110U: Flow Rate vs. Temperature Rise

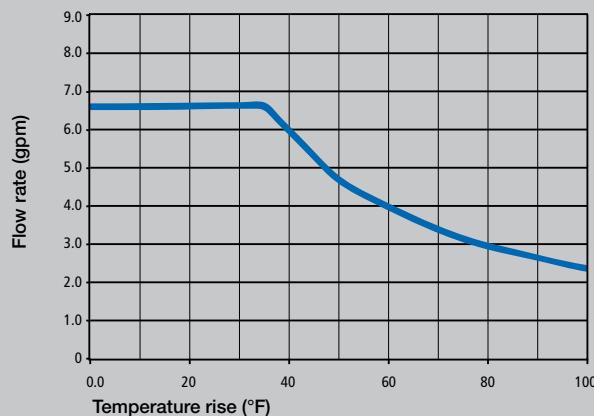

110U: Pressure Loss

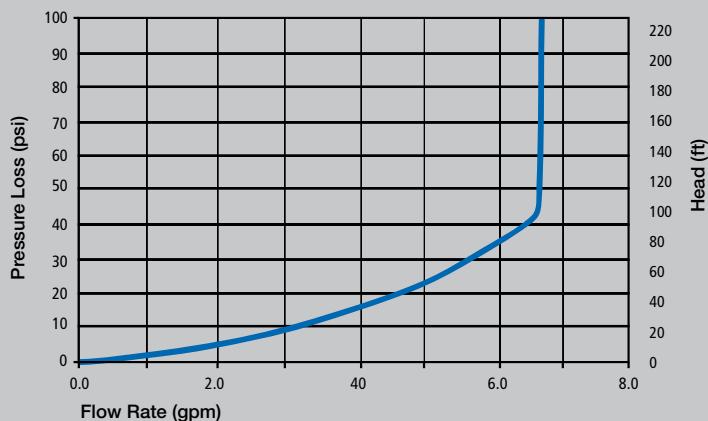

310U SERIES

The 310U features a max flow rate of 8.0 gpm providing enough hot water to run three showers at the same time. Indoor models include an integrated temperature controller. A remote control is included as a standard for outdoor models. Complies with SCAQMD Rule 1146.2 and other air quality management districts with similar NOx Emission requirements of 14 ng/J or 20 PPM.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-310U-I | Natural | 15,000 | 190,000 | 4.0 | 10.5 | 0.82 |
| GT-310U-E | Natural | 15,000 | 190,000 | 4.0 | 10.5 | 0.82 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-310U-I | 8 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 39 |
| GT-310U-E | 8 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 39 |

*Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | |
|---------------------------|--|---------------------------|------------------------|-----------------------------------|--|
| 310U Temperature Settings | Dipswitches | 120°F (default) 140°F | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | | |
| | 100°F to 140°F (9 options), 120°F Default Factory Setting | | | | |
| Electric | 120 V | 79 W / 0.99 A (Operation) | 2 W / 0.06 A (Standby) | 96 W / 0.82 A (Freeze-Protection) | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

4" Category III Vent

Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 8 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition



Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 190,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

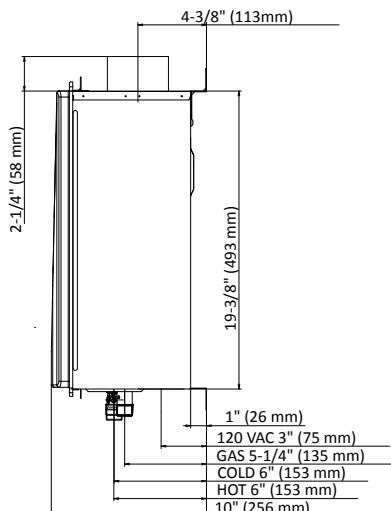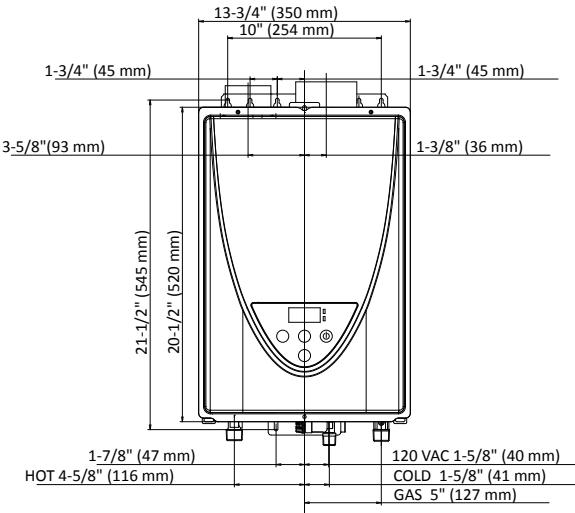

310U: Flow Rate vs. Temperature Rise

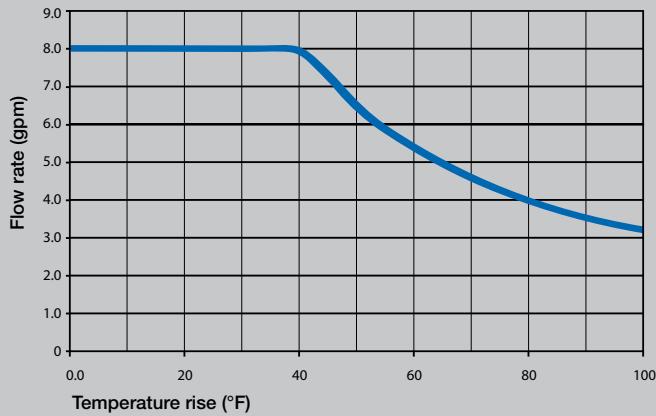

310U: Pressure Loss

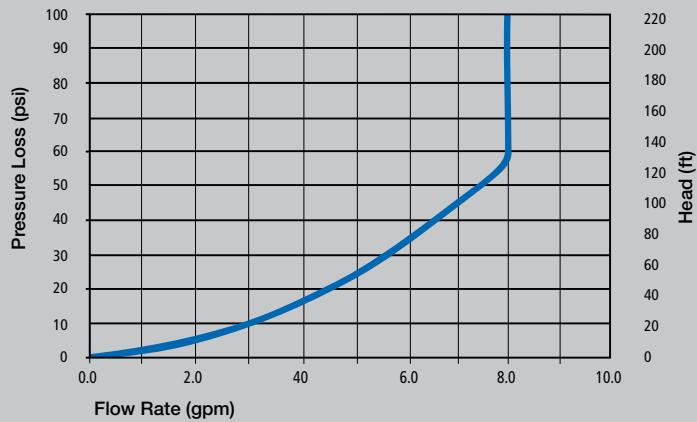

510U SERIES

The 510U series is well suited for residential/commercial applications such as small restaurants and beauty salons. Indoor models include an integrated temperature controller. A remote control is included as a standard feature for outdoor models. Utilizing commercial-grade copper alloy for the heat exchanger tubing, the 510U series is also suitable for heavier-residential usages such as combination space heating and domestic recirculation systems.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF | |
|---------------|-------------|-----------------------|-----------------|----------------------|--------------------|------|------------------------------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | | |
| GT-510U-I | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.82 | |
| GT-510U-E | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.81 | |
| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | Approx Shipping Weight (lbs) |
| | | | | Top | Bottom | Side | |
| GT-510U-I | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 40 |
| GT-510U-E | 10 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 40 |

*Units are field convertible from natural gas to propane with supplied conversion kit.

**For propane, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | |
|---------------------------|---|---------------------------|------------------------|-----------------------------------|--|
| 510U Temperature Settings | Dipswitches | 120°F (default) 140°F | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 120 gauge wiring.) | | | | |
| | 100°F to 160°F (13 options), 120°F Default Factory Setting | | | | |
| Electric | 120 V | 82 W / 1.02 A (Operation) | 3 W / 0.07 A (Standby) | 97 W / 0.82 A (Freeze-Protection) | |



Meets SCAQMD
Rule 1146.2
California and Texas



DESIGN
CERTIFIED



LOW-LEAD
IAPMO R&T

ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

4" Category III Vent



Gas convertible from natural gas to propane using the included conversion kit

Flow Rate up to 10 GPM


- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Easy-Link up to 4 heaters or connect up to 20 heaters with a Multi-Unit Controller


Dimensions

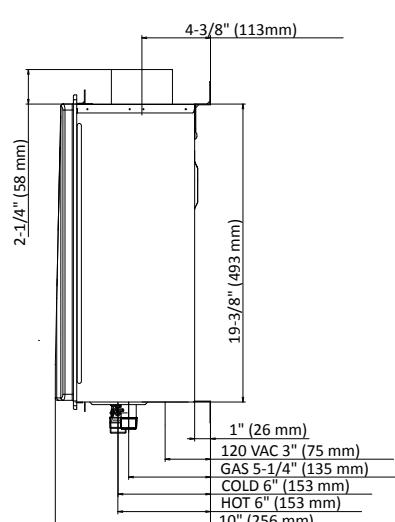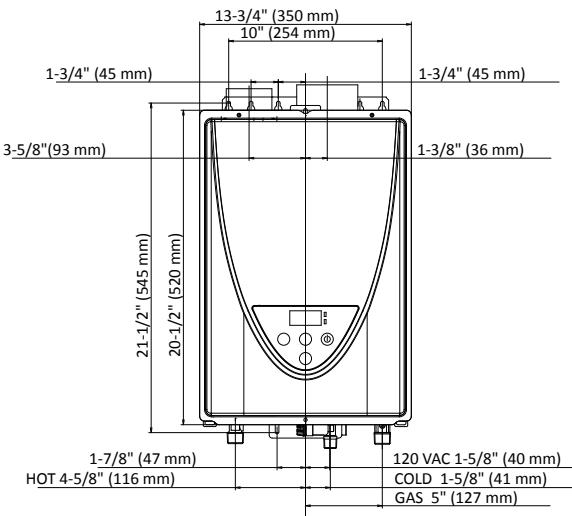

510U: Flow Rate vs. Temperature Rise

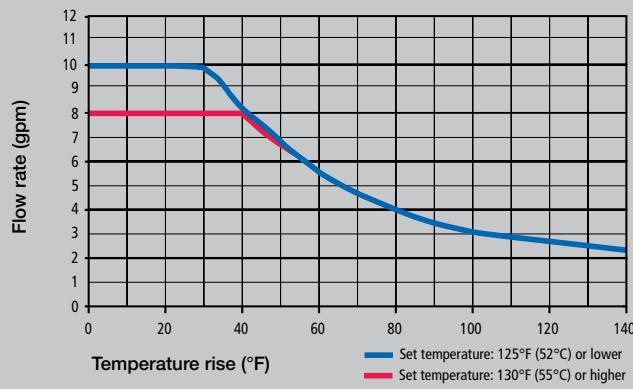

510U: Pressure Loss

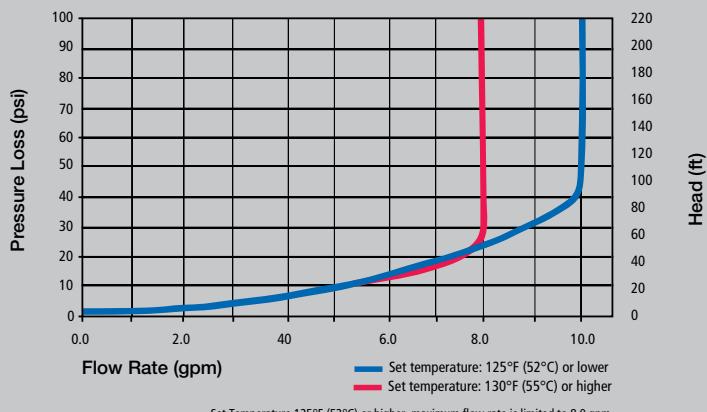

140 SERIES

The 140 Series is a high efficiency, ultra-low NOx condensing model with up to 0.91 Uniform Energy Factor, allowing for the use of 3" or 4" PVC venting or Category IV stainless steel. Indoor models have an integrated temperature controller and outdoor models include a remote control as a standard feature.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF | |
|---------------|-------------|-----------------------|-----------------|----------------------|--------------------|------|------------------------------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | | |
| GT-140-NIH | Natural | 15,000 | 120,000 | 4.0 | 10.5 | 0.90 | |
| GT-140-NEH | Natural | 15,000 | 120,000 | 4.0 | 10.5 | 0.91 | |
| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | Approx Shipping Weight (lbs) |
| | | | | Top | Bottom | Side | |
| GT-140-NIH | 6.6 | 3/4" NPT | 1/2" NPT | 12 | 12 | 3 | 54 |
| GT-140-NEH | 6.6 | 3/4" NPT | 1/2" NPT | 36 | 12 | 3 | 52 |

*For propane models, change "N" to "P"

**For propane models, minimum fire is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | | | |
|--------------------------|-------------|---|------------------------|---------------------------------|--|--|
| 140 Temperature Settings | Dipswitches | 120°F (default) 140°F | | | | |
| | | With 100209924 remote (max. distance 400' from heater, non-polarized 120 gauge wiring.) | | | | |
| | | 100°F to 140°F with 5°F intervals (9 options), 120°F Default Factory Setting | | | | |
| Electric | 120 V | 54 W / 0.7 A (Operation) | 3 W / 0.05 A (Standby) | 224 W / 2 A (Freeze-Protection) | | |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Flow Rate up to 6.6 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition


Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 120,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

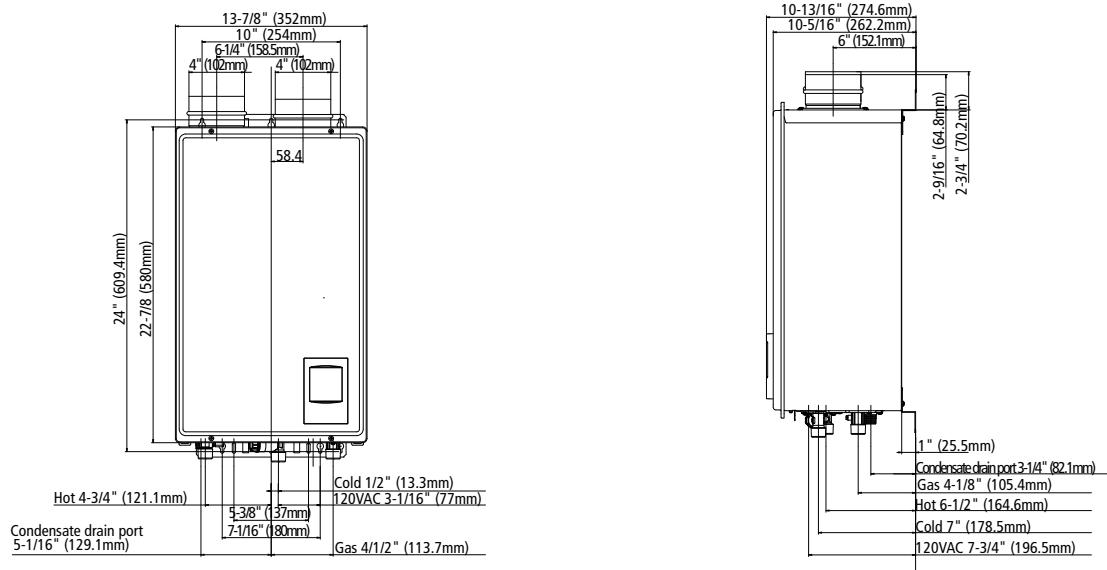

140: Flow Rate vs. Temperature Rise

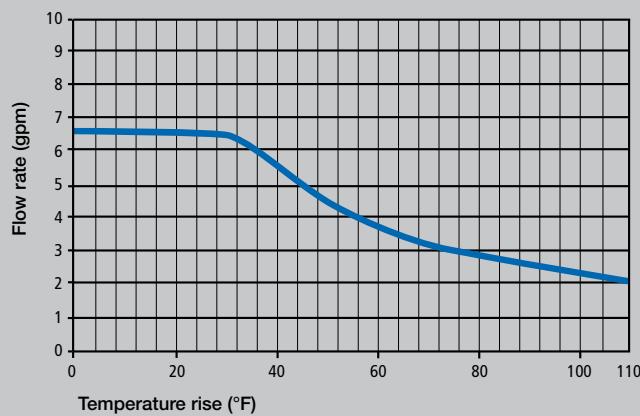

140: Pressure Loss

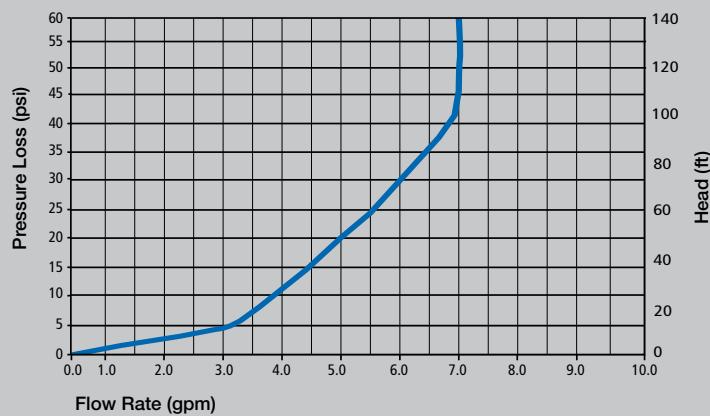

240 SERIES

The 240 series offers high efficiency Ultra-Low NOx condensing technology allowing for the use of 3" PVC venting and has 0" clearance to combustibles. Indoor models have an integrated temperature controller and outdoor models include a remote control as a standard feature.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-240-NIH | Natural | 15,000 | 160,000 | 4.0 | 10.5 | 0.94 |
| GT-240-NEH | Natural | 15,000 | 160,000 | 4.0 | 10.5 | 0.95 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-240-NIH | 6.6 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 71 |
| GT-240-NEH | 6.6 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 69 |

*For propane models, change "N" to "P"

**For propane models, minimum fire rate is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|--------------------------|--|---------------------------|------------------------|-----------------------------------|
| 240 Temperature Settings | Built In / without remote 120°F (default) 140°F | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 140°F with 5°F intervals (9 options), 120°F Default Factory Setting | | | |
| Electric | 120 V | 73 W / 0.61 A (Operation) | 3 W / 0.03 A (Standby) | 174 W / 1.5 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Flow Rate up to 6.6 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition



Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 160,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

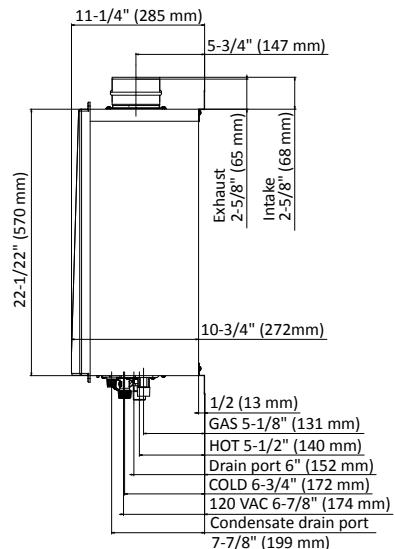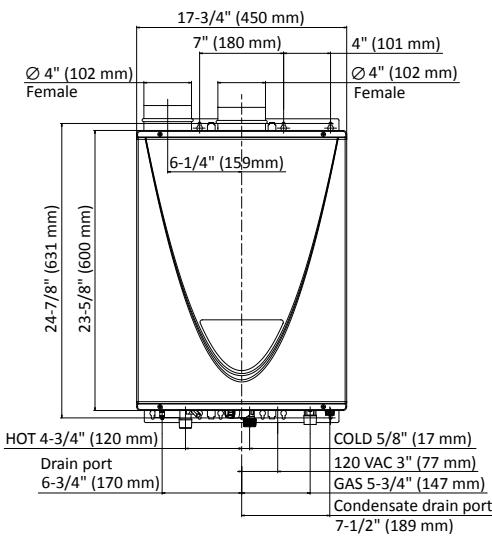

240: Flow Rate vs. Temperature Rise

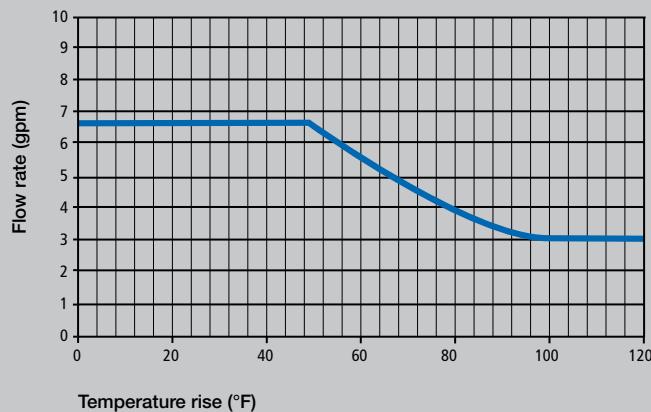

240: Pressure Loss

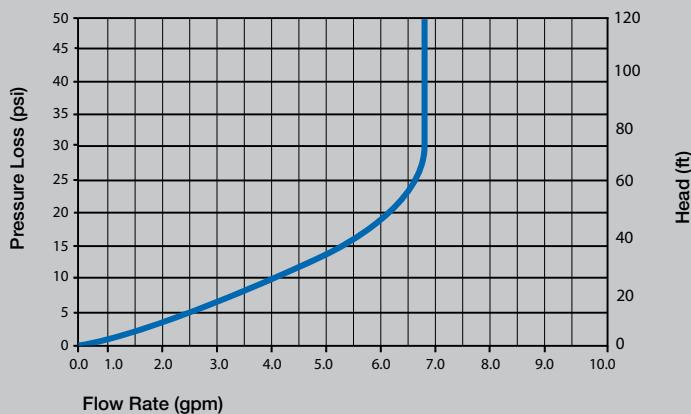

340 SERIES

The 340 series offers high efficiency Ultra-Low NOx condensing technology allowing for the use of 3" PVC venting and has 0" clearance to combustibles. Indoor models are certified up to 10,100 ft. altitude. Indoor models have an integrated temperature controller and outdoor models include a remote control as a standard feature.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-340-NIH | Natural | 15,000 | 180,000 | 4.0 | 10.5 | 0.95 |
| GT-340-NEH | Natural | 15,000 | 180,000 | 4.0 | 10.5 | 0.94 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| GT-340-NIH | 8 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 71 |
| GT-340-NEH | 8 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 69 |

*For propane models, change "N" to "P"

**For propane models, minimum fire rate is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|--------------------------|--|---------------------------|------------------------|-----------------------------------|
| 340 Temperature Settings | Built In / without remote 120°F (default) 140°F | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 140°F with 5°F intervals (9 options), 120°F Default Factory Setting | | | |
| Electric | 120 V | 78 W / 0.65 A (Operation) | 3 W / 0.03 A (Standby) | 174 W / 1.5 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Flow Rate up to 8 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition



Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 180,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

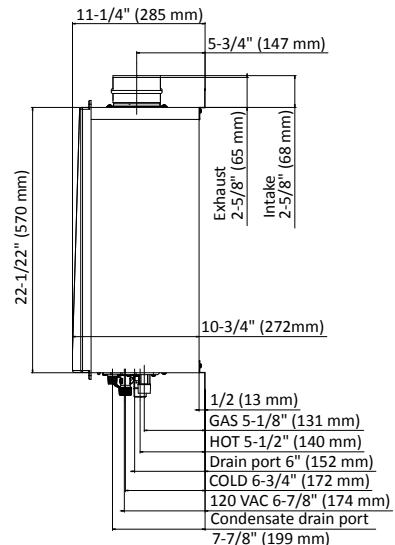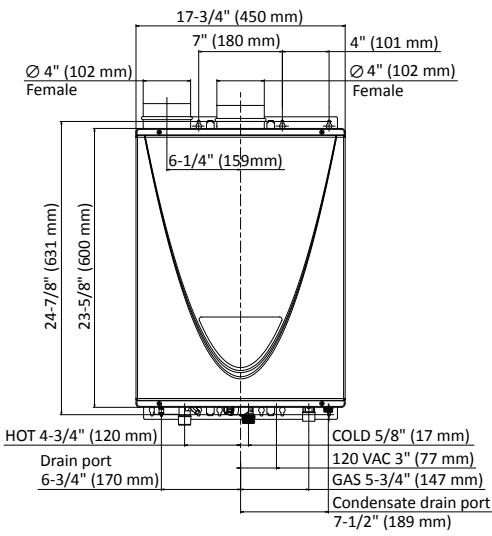

340: Flow Rate vs. Temperature Rise

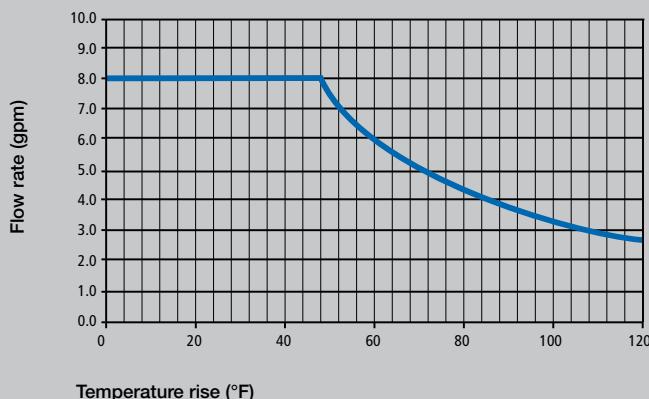

340: Pressure Loss

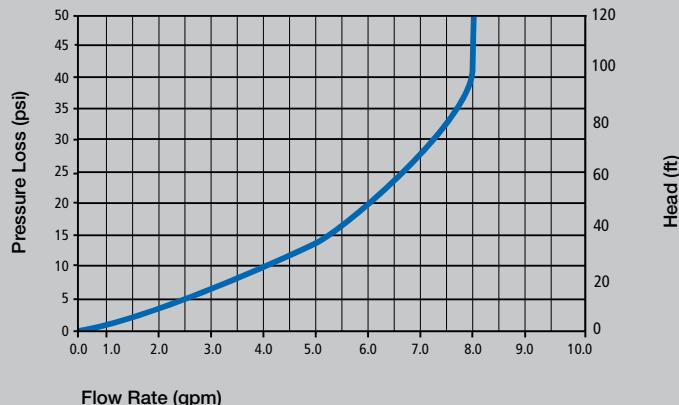

540 SERIES

Complies with Ultra-Low NOx regulations. Utilizing commercial-grade copper alloy for the heat exchanger tubing, the 540 is also suitable for heavier residential usages such as combination space heating and domestic recirculation systems. Indoor models have an integrated temperature controller and outdoor models include a remote control as a standard feature. Indoor models are certified up to 10,100 ft. altitude.



Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF |
|---------------|-------------|-----------------------|-----------------|----------------------|--------------------|------------------------------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-540-NIH | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.93 |
| GT-540-NEH | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.95 |
| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | Approx Shipping Weight (lbs) |
| | | | | Top | Bottom | |
| GT-540-NIH | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 4 |
| GT-540-NEH | 10 | 3/4" NPT | 3/4" NPT | 36 | 12 | 24 |

*For propane models, change "N" to "P"

**For propane models, minimum fire rate is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|--------------------------|--|---------------------------|------------------------|-----------------------------------|
| 540 Temperature Settings | Built In / without remote 120°F (default) 140°F | | | |
| | With 100209924 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 160 °F with 5°F intervals (13 options), 120°F Default Factory Setting | | | |
| Electric | 120 V | 89 W / 0.74 A (Operation) | 4 W / 0.04 A (Standby) | 175 W / 1.5 A (Freeze-Protection) |



Meets SCAQMD
Rule 1146.2
California and Texas
NSF



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Flow Rate up to 10 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi



- Pressure Only Relief Valve Requires (Min 199,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow

Easy-Link up to 4 heaters or connect up to 20 heaters with a Multi-Unit Controller


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

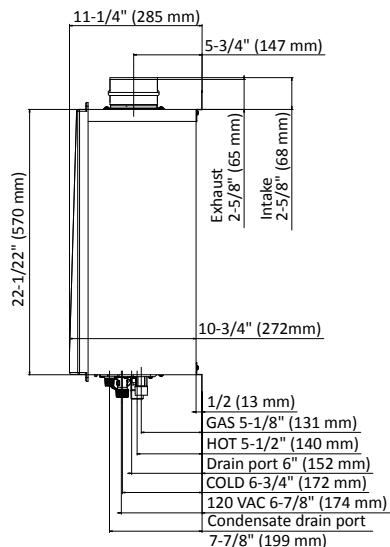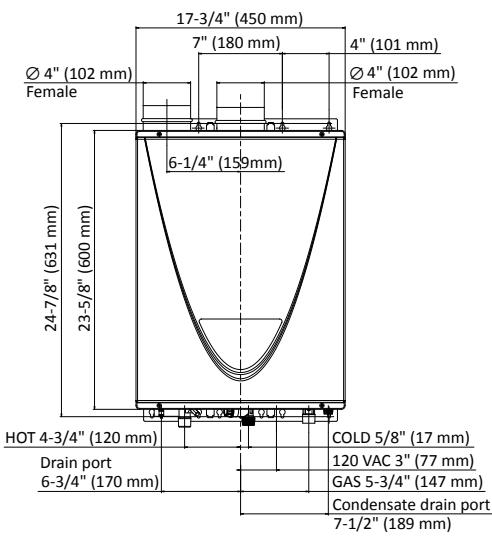

540: Flow Rate vs. Temperature Rise

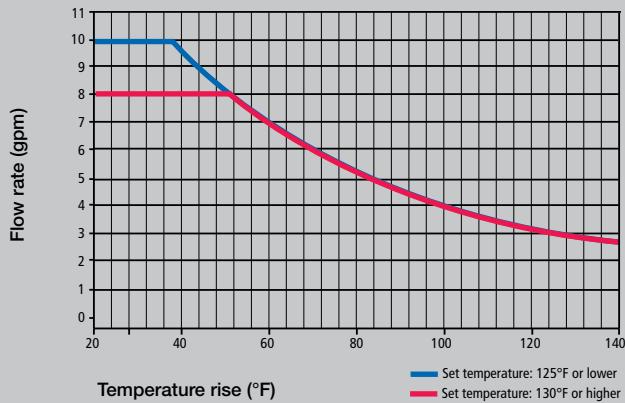

540: Pressure Loss

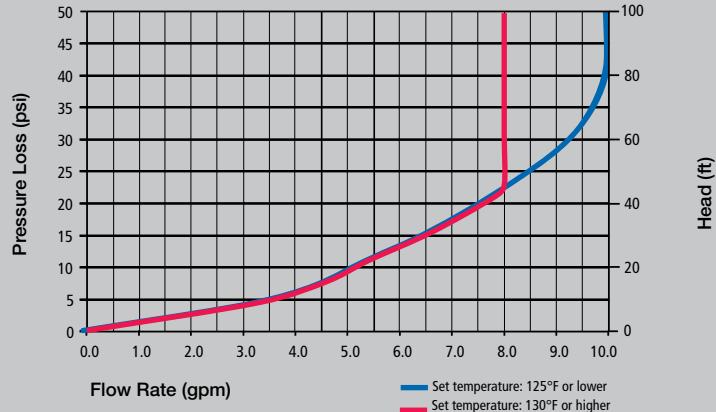

540P SERIES

The 540P Series integrates a recirculation pump to provide instant hot water in residential applications with dedicated recirculation lines. The pump is easily controlled with a simple user interface and multiple pump settings allow you to customize pump operation to meet your needs while maximizing heater efficiency. Indoor models have an integrated temperature and pump controller and outdoor models include a remote control as a standard feature.



GT-540P-NIH



GT-540P-NEH

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | UEF | | |
|---------------|-------------|-----------------------|-----------------|----------------------|--------------------|------|------------------------------|----|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | | | |
| GT-540P-NIH | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.93 | | |
| GT-540P-NEH | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 0.95 | | |
| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | Approx Shipping Weight (lbs) | |
| | | | | Top | Bottom | Side | | |
| GT-540P-NIH | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 71 |
| GT-540P-NEH | 10 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 70 |

*For propane models, change "N" to "P"

**For propane models, minimum fire is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|---------------------------|--|-----------------------------|-----------------------|-----------------------------------|
| 540P Temperature Settings | Built In / without remote 120°F (default) 140°F | | | |
| | With 100276687 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 140°F with 5°F intervals (9 options), 120°F Default Factory Setting | | | |
| Electric | 120 V | 1.09 W / 1.34 A (Operation) | 5 W / 0.1 A (Standby) | 192 W / 1.6 A (Freeze-Protection) |



Meets SCAQMD
Rule 1146.2
California and Texas



ENERGY STAR



DESIGN
CERTIFIED



IAPMO RGT

ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Integrated recirculation pump

Flow Rate up to 10 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi



- Pressure Only Relief Valve Requires (Min 199,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow

Easy-Link with up to 3 other 540 heaters


Warranty

- 15-year limited warranty on heat exchanger in residential applications.
- 5-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

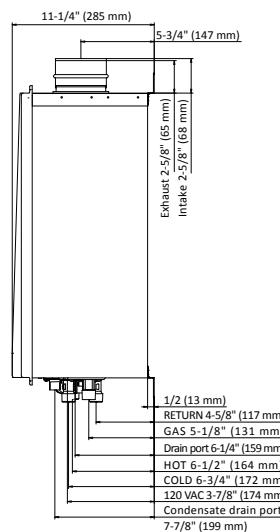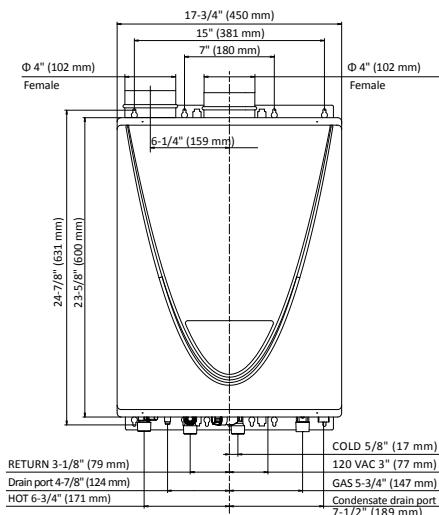

540P: Flow Rate vs. Temperature Rise

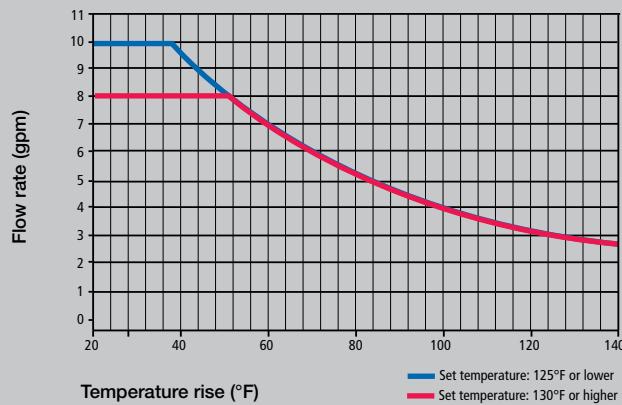

540P: Pressure Loss

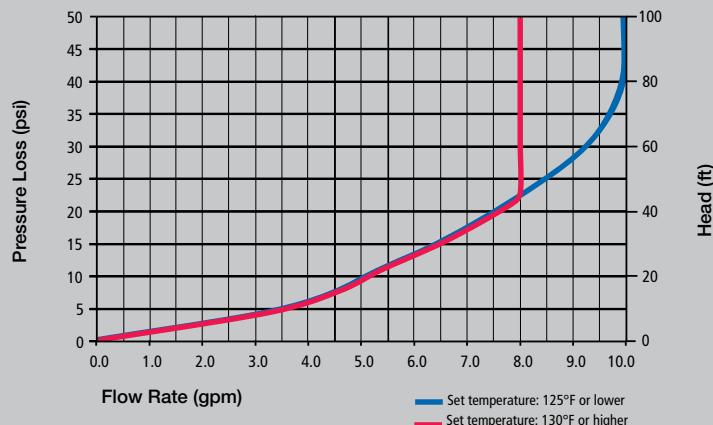



910 SERIES

The 910 Series, specifically designed for heavy-duty applications, is the largest American tankless heater yet and the most powerful (14.5 GPM max) in the tankless industry. The 910 Series is suitable for commercial applications (hotels, restaurants, government, convalescent homes, etc.) that require high demand and the most durable of heaters. Along with commercial-grade copper alloy, the 910 Series is the only commercial unit in the industry that offers a “dual-combustion system,” providing redundancy for added reliability.



GT-910-NIE

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | Thermal Efficiency |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|--------------------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | |
| GT-910-NIE | Natural | 15,000 | 380,000 | 4.0 | 10.5 | 80% |

| Model Number* | Connections | | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|--------|------------------|--------|------|-------|------------------------------|
| | Water | Gas | Top | Bottom | Side | Front | |
| GT-910-NIE | 1" NPT | 1" NPT | 12*** | 12 | 2 | 4*** | 113 |

*For ASME version, use model number AGT-910-(N/P)E

**For propane models, change "N" to "P"

**For propane models, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

***If installed outdoors, top clearance is 36" and front clearance is 24"

| | | | | |
|--------------------------------|--|----------------------------|-------------------------|------------------------------------|
| 910 Temperature Settings | Built In / without remote 110°F, 115°F, 120°F (default), 135°F, 145°F, 155°F, 165°F, 185°F | | | |
| | With 100112155 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 175°F with 5°F intervals (16 options), 120°F Default Factory Setting | | | |
| Electric | 120 VAC | 175 W / 1.48 A (Operation) | 16 W / 0.13 A (Standby) | 271 W / 2.26 A (Freeze-Protection) |



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Low NOx Emissions

Flow Rate up to 14.5 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi


- Pressure Only Relief Valve Requires (Min 380,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow

Easy-Link up to 4 heaters or connect up to 10 heaters with a Multi-Unit Controller


Warranty

- 6-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

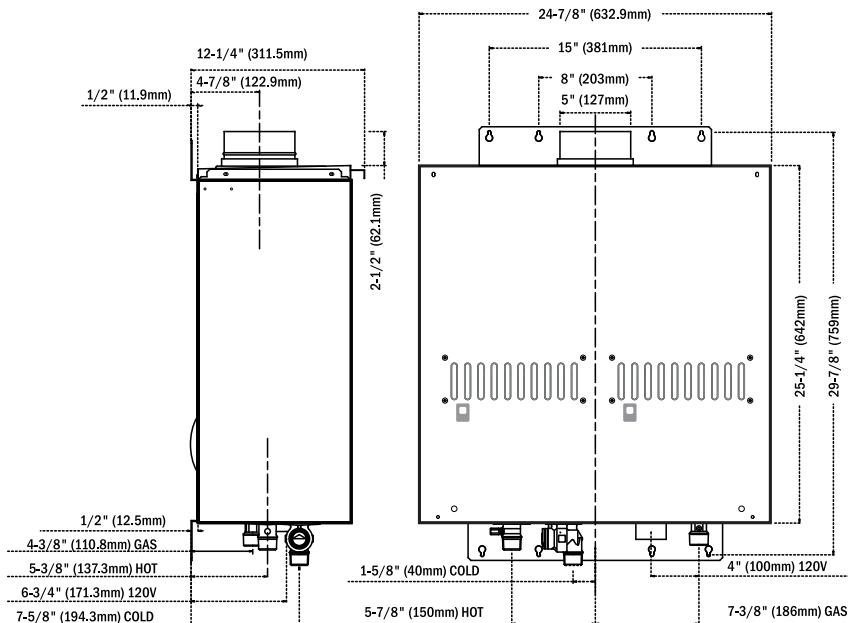

910: Flow Rate vs. Temperature Rise

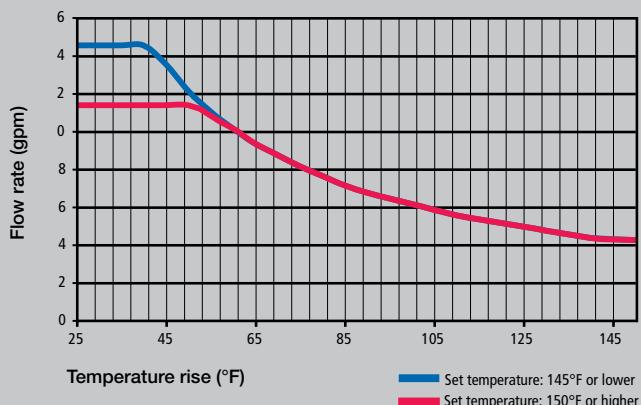

910: Pressure Loss

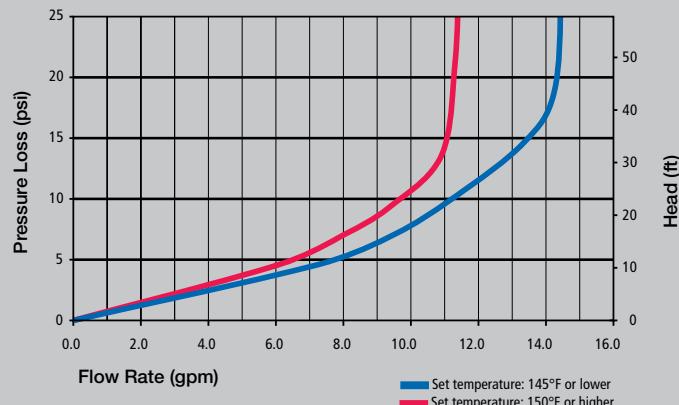



CT-199 SERIES

The CT-199 is well suited for commercial applications such as small restaurants and beauty salons. Complies with Ultra-Low NOx regulations. Utilizing commercial-grade copper alloy for the heat exchanger tubing, the CT-199 is also suitable for combination space heating and domestic recirculation systems. Indoor models have an integrated temperature controller and outdoor models include a remote control as a standard feature. Indoor models are certified up to 10,100 ft. altitude.



MCT-199I-N



MCT-199O-N



WARNING: Temperature above 125°F (52°C) can cause severe burns or death from scalding. Turn off the water supply to the heater and the unit before attempting to drain the tank.

Specifications

| Model Number* | Type | Gas Consumption Input | | Inlet Gas Pressure** | | Thermal Efficiency | UEF |
|---------------|---------|-----------------------|-----------------|----------------------|--------------------|--------------------|------|
| | | Minimum (BTU/H) | Maximum (BTU/H) | Minimum (in. W.C.) | Maximum (in. W.C.) | | |
| MCT-199I-N | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 96% | 0.93 |
| MCT-199O-N | Natural | 15,000 | 199,000 | 4.0 | 10.5 | 96% | 0.95 |

| Model Number* | Maximum GPM | Hot/Cold Connections | Gas Connection | Clearances (in.) | | | | Approx Shipping Weight (lbs) |
|---------------|-------------|----------------------|----------------|------------------|--------|------|-------|------------------------------|
| | | | | Top | Bottom | Side | Front | |
| MCT-199I-N | 10 | 3/4" NPT | 3/4" NPT | 12 | 12 | 3 | 4 | 71 |
| MCT-199O-N | 10 | 3/4" NPT | 3/4" NPT | 36 | 12 | 3 | 24 | 69 |

*For propane models, change "N" to "P"

**For propane models, minimum fire rate is 13,000 BTU/H, minimum inlet gas pressure is 8.0 in. W.C. and maximum inlet gas pressure is 14.0 in. W.C.

| | | | | |
|-----------------------------------|--|---------------------------|------------------------|-----------------------------------|
| CT-199 Temperature Settings | Built In / without remote 120°F (default) 140°F | | | |
| | With 100112572 remote (max. distance 400' from heater, non-polarized 20 gauge wiring.) | | | |
| | 100°F to 185°F with 5°F intervals (16 options), 120°F Default Factory Setting | | | |
| Electric | 120 V | 89 W / 0.74 A (Operation) | 4 W / 0.04 A (Standby) | 175 W / 1.5 A (Freeze-Protection) |



Meets SCAQMD
Rule 1146.2
California and Texas



ANSI Z21.10.3 • CSA 4.3

Specifications

Indoor and Outdoor Installation Options

Power Vent or Power Direct Vent Design

Ultra-Low NOx Emissions

Flow Rate up to 10 GPM

- Values based on factory testing. 0.4 GPM required for continuous fire after initial ignition

Water Pressure: 15-150 psi

- Pressure Only Relief Valve Requires (Min 199,000 btu/h, 150 psi).
- 40 psi or above recommended for max. flow



Easy-Link up to 4 heaters or connect up to 20 heaters with a Multi-Unit Controller

96% thermal efficiency


Warranty

- 6-year limited warranty on heat exchanger in commercial applications.
- 5-year warranty on all parts.
- Refer to AmericanWaterHeater.com for further warranty details


Dimensions

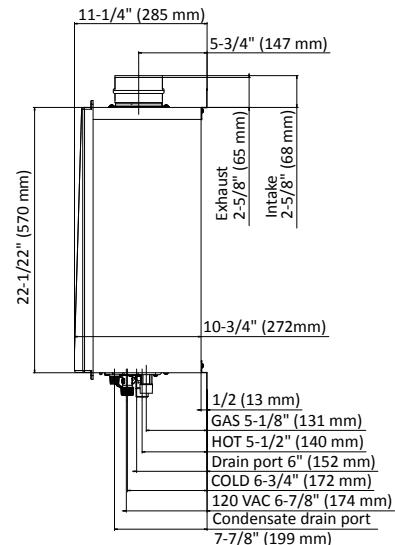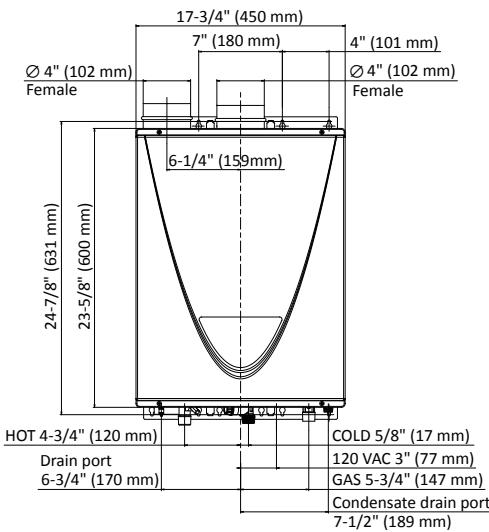

CT-199: Flow Rate vs. Temperature Rise

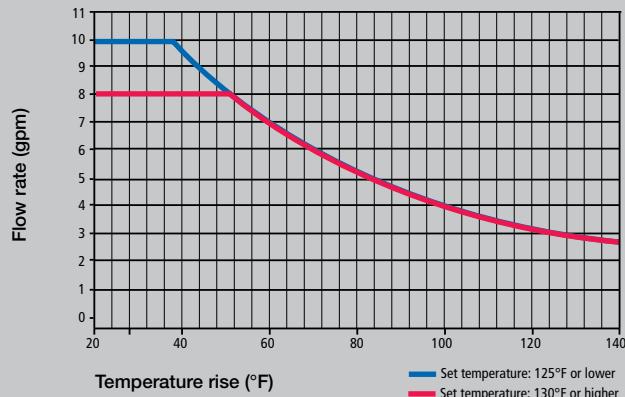

CT-199: Pressure Loss

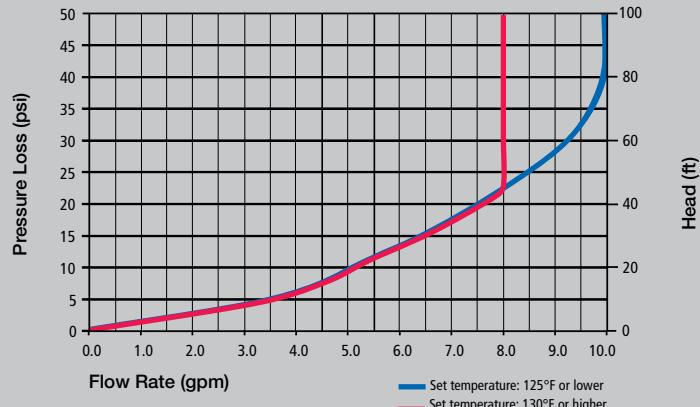

COMMERCIAL TANKLESS RACK SYSTEM

Commercial tankless rack systems allow the power of tankless technology to be customized with unprecedented flexibility. American offers wall mount, free standing and back-to-back configurations with easy options to integrate storage when needed. For jobs that require more than six units, custom solutions are available.

Installation is easier than ever as the rack systems are constructed from a light weight frame and just three connections for hot water, cold water and gas.

Commercial rack systems are expandable with up to 1,194,000 BTU on a single system. The rack system is designed so that individual units can be isolated for maintenance without shutting down the entire rack to provide non-stop operation.



MULTI-UNIT SYSTEMS

American tankless water heaters have the capability to link multiple heaters together to act as a system. The primary heater is rotated to ensure even operation of all heaters. The 510/U/C, 540, CT-199, and 910 models can Easy-Link up to four units using included communication cables.

For even larger applications the 510U (series 200), 510C, 540, CT-199, and 910 models also feature the Multi-Unit System, allowing a greater number of units to work together as an integrated system using a Multi-Unit System Controller. The Multi-Unit System can control up to twenty 510U (series 200), 510C, 540, and CT-199 or up to ten 910 heaters.



Unit Comparison

| | 510 Series | 510U/C Series | 540/CT-199 Series | 910 Series |
|-------------------------------------|---------------|----------------|-------------------|----------------|
| Easy-Link (No Controller Necessary) | Up to 4 units | Up to 4 units | Up to 4 units | Up to 4 units |
| Maximum input (BTU/h) | 796,000 | 796,000 | 796,000 | 1,520,000 |
| | | | | |
| Multi-UNIT* | N/A | Up to 20 units | Up to 20 units | Up to 10 units |
| Maximum input (BTU/h) | N/A | 3,980,000 | 3,980,000 | 3,800,000 |

*Requires Multi-Unit Controller: 100112691

COMMON VENTING

The American common venting system utilizes fewer unique components so you can design your venting based on project requirements.

- More design flexibility
- Fewer wall penetrations
- Able to use schedule 40 PVC on intake and exhaust
- Heaters don't de-rate when common vented
- Design doesn't override redundancy benefits




APPLICATION DIAGRAMS

American tankless water heaters can be used in a wide variety of applications. Whether used in recirculation systems, in conjunction with storage tanks or with heating applications, our commercial units are built to provide continuous hot water when sized appropriately for your home's needs.


*Local codes dictate proper compliance.

Legend

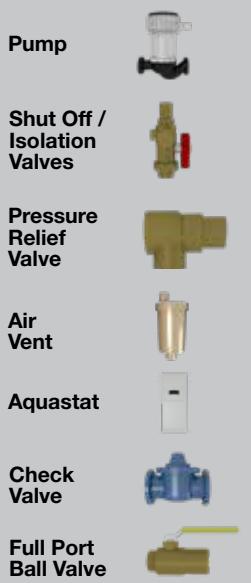

Basic Installation


(excluding 540P)

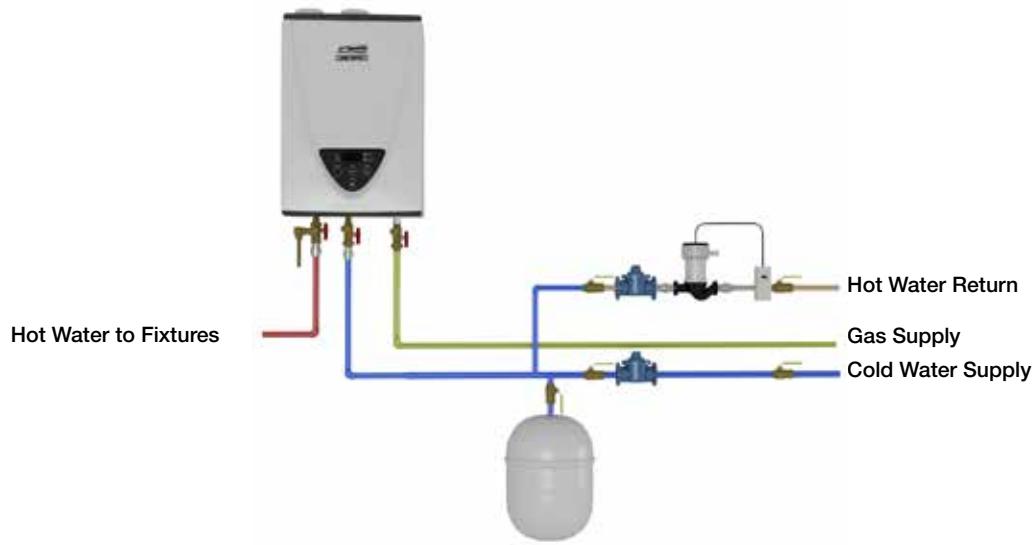

1. Recirculation pump shall be sized for 2-4 gpm per activated heater (4-8 gpm for 910)
2. Recirculation pump shall be controlled by an aquastat. The minimum suggested differential should be 10°F
3. For installations without recirculation, remove the check valves, pump, and aquastat.

540P Basic Installation

(540P only)

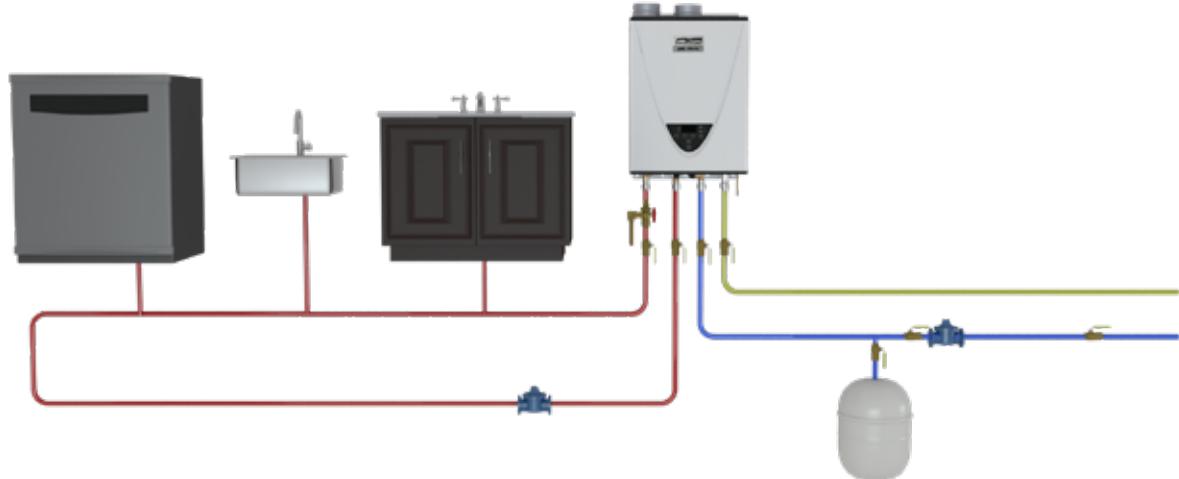

All application diagrams shown are concept drawings only. These diagrams are only to be used as basic guides. It is up to the application designer to properly design the plumbing layout and correctly size all components within an application (pumps, piping, storage tanks, water heaters, etc.). All national and local codes must be followed and will dictate proper compliance.


MULTIPLE UNITS

Multiple Units with Easy-Link



1. Recirculation pump shall be sized for 2-4 gpm per activated heater (4-8 gpm for 910)
2. Recirculation pump shall be controlled by an aquastat. The minimum suggested differential should be 10°F
3. The automatic air should be installed at the highest location of the system in accordance with the manufacturer's instructions.

Multiple Unit with the Multi-Unit Controller

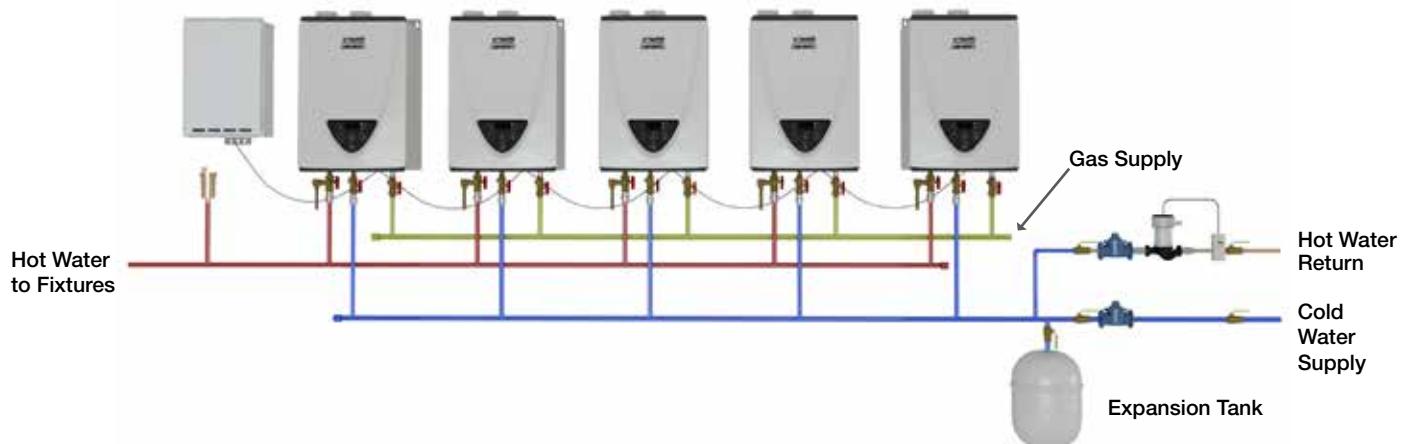


1. Recirculation pump shall be sized for 2-4 gpm per activated heater (4-8 gpm for 910)
2. Recirculation pump shall be controlled by an aquastat. The minimum suggested differential should be 10°F
3. The automatic air should be installed at the highest location of the system in accordance with the manufacturer's instructions.

All application diagrams shown are concept drawings only. These diagrams are only to be used as basic guides. It is up to the application designer to properly design the plumbing layout and correctly size all components within an application (pumps, piping, storage tanks, water heaters, etc.). All national and local codes must be followed and will dictate proper compliance.

MULTI-UNITS

Multiple Unit with Storage

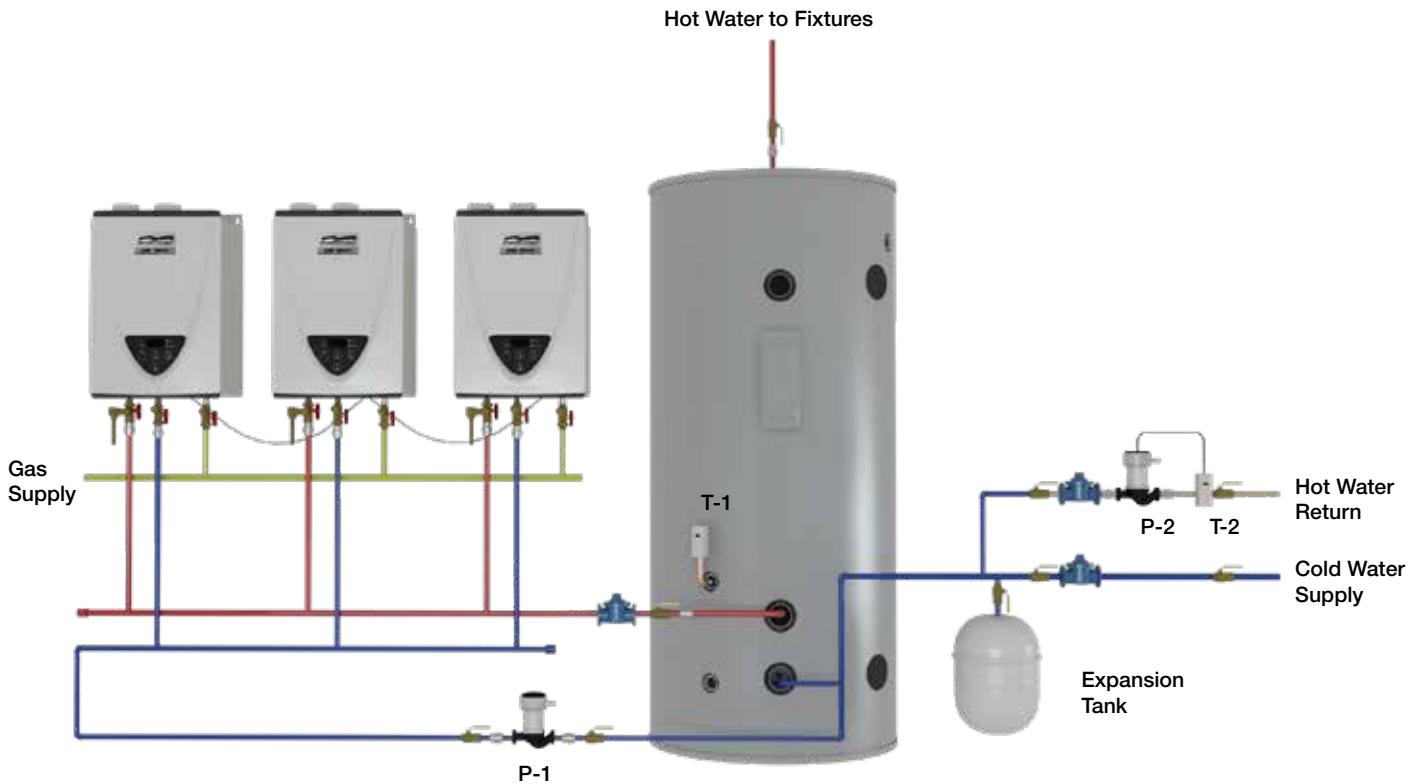


1. Tank circulation pump, P-1, should be controlled by tank aquastat, T-1.
2. Tank aquastat, T-1, should be set 20°F below water heater set temperature.
3. Pump P-1 should be sized to provide flow necessary to heat the storage tank.

Refer to the water heater's spec sheet for pressure drop curves.

All application diagrams shown are concept drawings only. These diagrams are only to be used as basic guides. It is up to the application designer to properly design the plumbing layout and correctly size all components within an application (pumps, piping, storage tanks, water heaters, etc.). All national and local codes must be followed and will dictate proper compliance.

SOLAR TANKLESS BACK UP

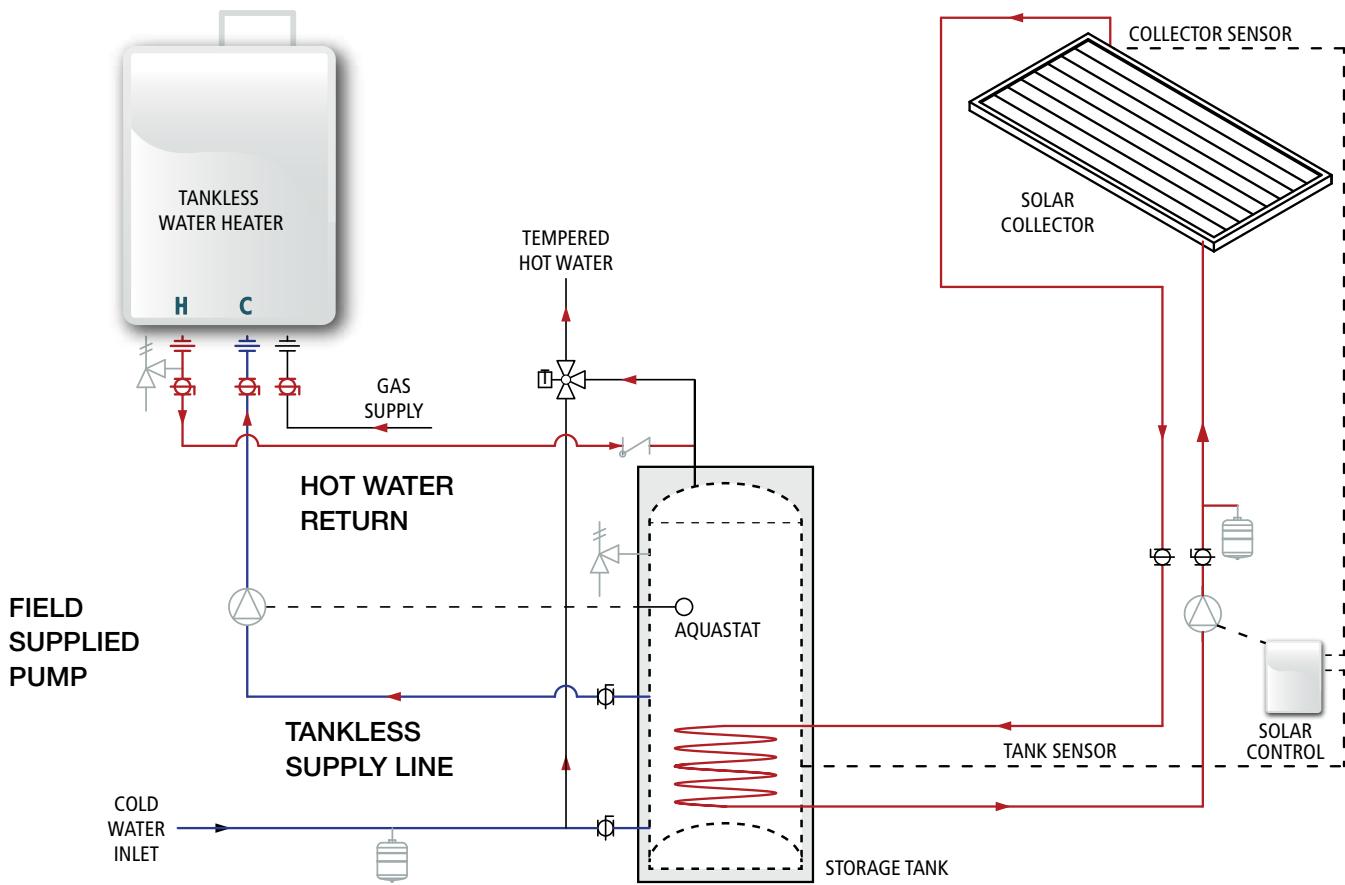

NOTES:


1. Ensure field supplied tank aquastat is in top 1/3 section of the tank.
2. Set tank aquastat 10°F lower than tankless unit set point.
3. Ensure the hot water return from the tankless unit is connected to the hot water outlet from the solar tank as shown in the drawing.
4. The supply line to the tankless unit may be made at the element fitting (after element is removed) with a 1"-11-1/2 NPSH fitting and gasket.
5. Field supplied pump must provide > 3 GPM flow through tankless backup loop - contact pump manufacturer for sizing assistance.

All application diagrams shown are concept drawings only. These diagrams are only to be used as basic guides. It is up to the application designer to properly design the plumbing layout and correctly size all components within an application (pumps, piping, storage tanks, water heaters, etc.). All national and local codes must be followed and will dictate proper compliance.


VENTING DIAGRAMS (EXAMPLES)

4" Sidewall Termination

(Please check the wall thickness
for proper installation)

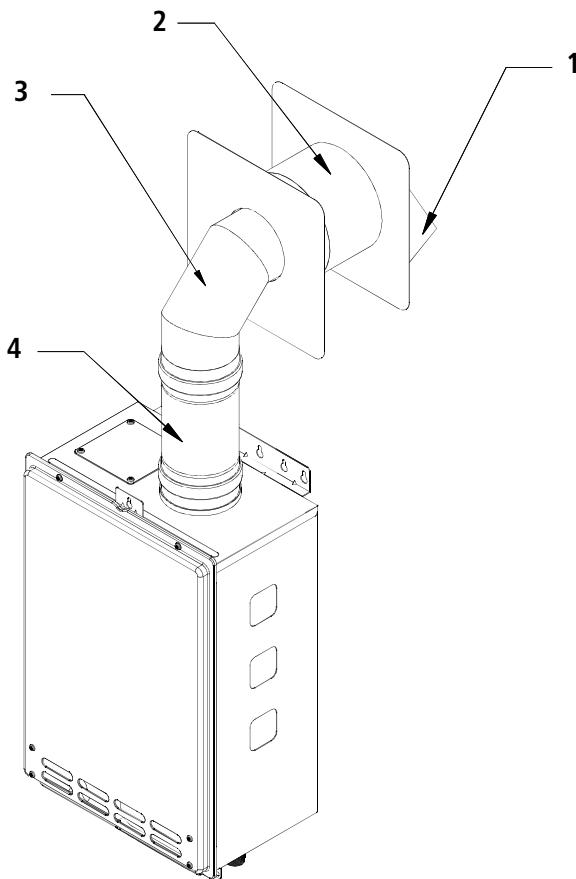

| Models 110/U, 310/U, 510/U | | | | Qty. |
|--------------------------------------|---|-----------|-----------------------------|------|
| 4" Combustible Sidewall Termination | | | | |
| Kit Part Number: 100112726 | 1 | 100112419 | 4" Sidewall Hood Terminator | 1 |
| | 2 | 100112732 | 4" Wall Thimble (4.0"-7.0") | 1 |
| | 3 | 100112400 | 4" 90 degree Elbow | 1 |
| | 4 | 100112399 | 4" Female-Female Adaptor | 1 |
| | | | | |

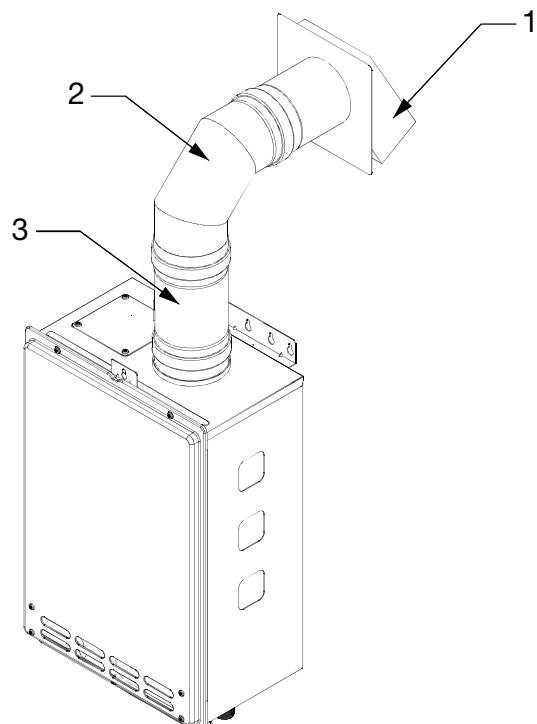


| Models 110/U, 310/U, 510/U | | | | Qty. |
|---|---|-----------|-----------------------------|------|
| 4" Non-Combustible Sidewall Termination | | | | |
| Kit Part Number: 100112767 | 1 | 100112419 | 4" Sidewall Hood Terminator | 1 |
| | 2 | 100112400 | 4" 90 degree Elbow | 1 |
| | 3 | 100112399 | 4" Female-Female Adaptor | 1 |


4" Sidewall Termination

(With Condensate Trap)

(Please check the wall thickness
for proper installation)

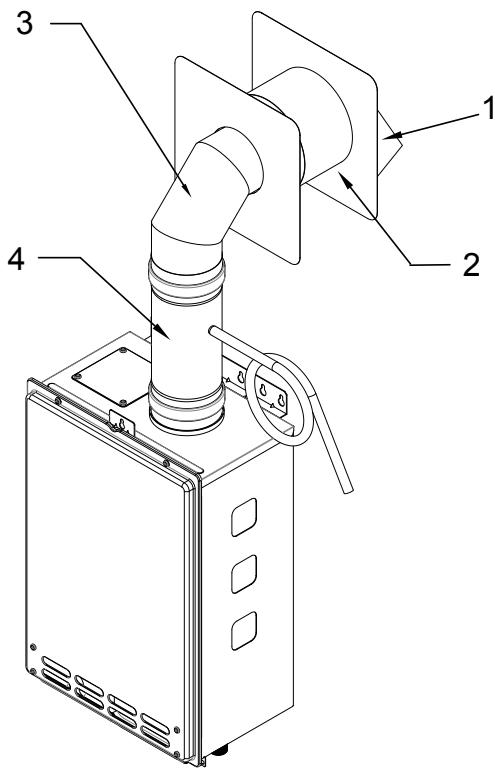


| Models 110/U, 310/U, 510/U | | | Qty. |
|--|---|-----------|--------------------------------|
| 4" Combustible Sidewall Termination (With Condensate Trap) | | | |
| Kit Part Number: 100112775 | 1 | 100112419 | 4" Sidewall Hood Terminator |
| | 2 | 100112732 | 4" Wall Thimble (4.0"-7.0") |
| | 3 | 100112400 | 4" 90 Degree Elbow |
| | 4 | 100112549 | 4" Universal Appliance Adaptor |
| | | | 1 |

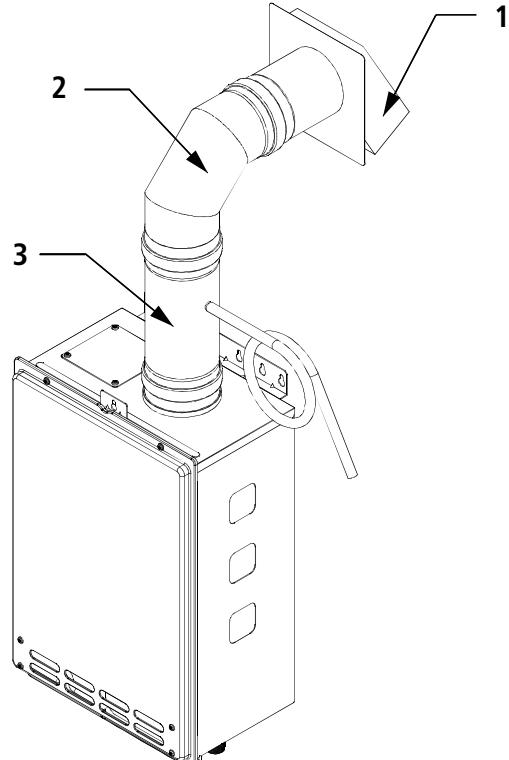

| Models 110/U, 310/U, 510/U | | | Qty. |
|--|---|-----------|--------------------------------|
| 4" Non-Combustible Sidewall Termination (With Condensate Trap) | | | |
| Kit Part Number: 100112776 | 1 | 100112419 | 4" Sidewall Hood Terminator |
| | 2 | 100112400 | 4" 90 degree Elbow |
| | 3 | 100112549 | 4" Universal Appliance Adaptor |


DIRECT VENT, CONCENTRIC SIDEWALL TERMINATION

110, 310, 510 Models

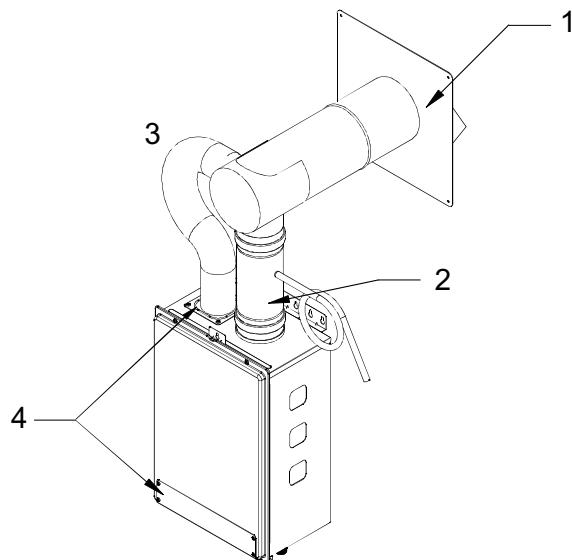


| Models 110, 310, 510 | | | | Qty. |
|---|---|-----------|-------------------------------|------|
| 5-10" Sidewall Thickness Direct Vent, Concentric Termination | | | | |
| Kit Part Number: 100112421 | 1 | 100112550 | Concentric Intake/Exhaust Kit | 1 |
| | 2 | 100112549 | Universal Appliance Adaptor | 1 |
| | 3 | NA | 3" Aluminum Flex | 1 |
| | 4 | 100112184 | Direct Vent Conversion Kit | 1 |
| 12-18" Sidewall Thickness Direct Vent, Concentric Termination | | | | Qty. |
| Kit Part Number: 100112420 | 1 | 100112551 | Concentric Intake/Exhaust Kit | 1 |
| | 2 | 100112549 | Universal Appliance Adaptor | 1 |
| | 3 | NA | 3" Aluminum Flex | 1 |
| | 4 | 100112184 | Direct Vent Conversion Kit | 1 |

910 Model


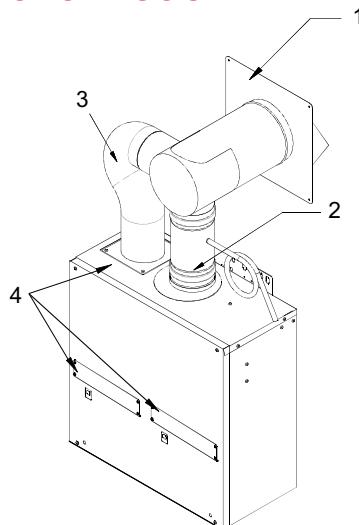


| Model 910 | | | | Qty. |
|---|---|-----------|-------------------------------|------|
| 5-10" Sidewall Thickness Direct Vent, Concentric Termination | | | | |
| Kit Part Number: 100112606 | 1 | 100112604 | Concentric Intake/Exhaust Kit | 1 |
| | 2 | 100112597 | Universal Appliance Adapter | 1 |
| | 3 | NA | 5" Aluminum Flex | 1 |
| | 4 | 100112186 | Direct Vent Conversion Kit | 1 |
| 12-18" Sidewall Thickness Direct Vent, Concentric Termination | | | | Qty. |
| Kit Part Number: 100112601 | 1 | 100112605 | Concentric Intake/Exhaust Kit | 1 |
| | 2 | 100112597 | Universal Appliance Adaptor | 1 |
| | 3 | NA | 5" Aluminum Flex | 1 |
| | 4 | 100112186 | Direct Vent Conversion Kit | 1 |

4" Rooftop Termination




| Models 110/U, 310/U, 510/U | | | | Qty. |
|----------------------------|---|----------------------------|--------------------------------|------|
| 4" Flat Roof Termination | | | | |
| Kit Part Number: | 1 | 100112548 | 4" Extreme Weather Rain Cap | 1 |
| | 2 | 100112410 | 4" Storm Collar | 1 |
| | 3 | 100112412 | 4" Flat Roof Flashing | 1 |
| | 4 | 100112408 | 4" Vertical Firestop | 1 |
| | 5 | 100112400 | 4" 90 degree Elbow | 2 |
| | 6 | 100112549 | 4" Universal Appliance Adaptor | 1 |
| | 7 | Refer to Accessories Chart | Straight Pipe | TBD |

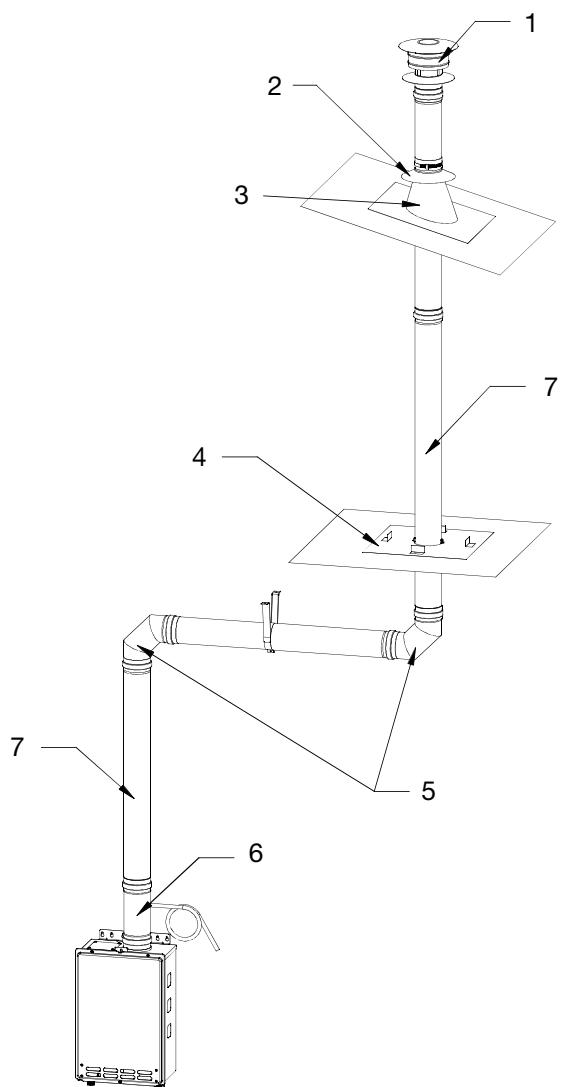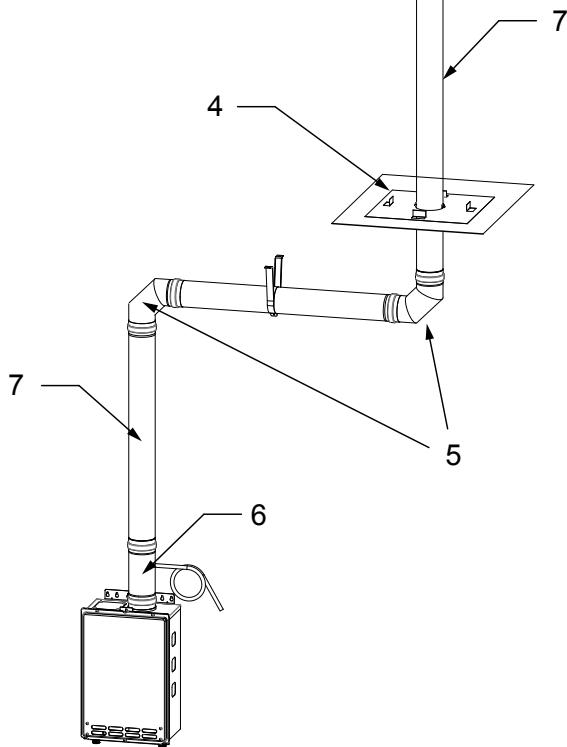


| Models 110/U, 310/U, 510/U | | | | Qty. |
|----------------------------|---|----------------------------|--------------------------------|------|
| 4" Angled Roof Termination | | | | |
| Kit Part Number: | 1 | 100112548 | 4" Extreme Weather Rain Cap | 1 |
| | 2 | 100112410 | 4" Storm Collar | 1 |
| | 3 | 100112411 | 4" Angled Roof Flashing | 1 |
| | 4 | 100112408 | 4" Vertical Firestop | 1 |
| | 5 | 100112400 | 4" 90 degree Elbow | 2 |
| | 6 | 100112549 | 4" Universal Appliance Adaptor | 1 |
| | 7 | Refer to Accessories Chart | Straight Pipe | TBD |

5" Sidewall Termination

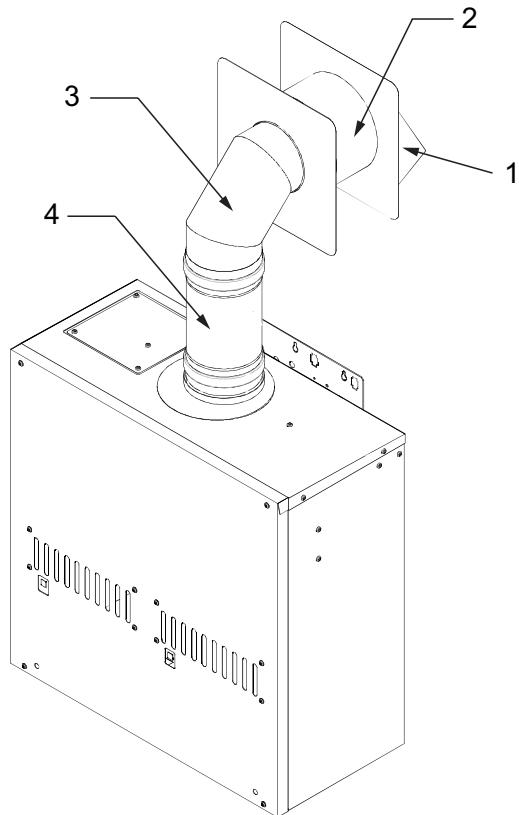


| Model 910 | | | | Qty. |
|-------------------------------------|---|-----------|-----------------------------|------|
| 5" Combustible Sidewall Termination | | | | |
| Kit Part Number: 100112729 | 1 | 100112594 | 5" Sidewall Hood Terminator | 1 |
| | 2 | 100112734 | 5" Wall Thimble (4.0"-7.0") | 1 |
| | 3 | 100112587 | 5" 90 degree Elbow | 1 |
| | 4 | 100112599 | 5" Female-Female Adaptor | 1 |

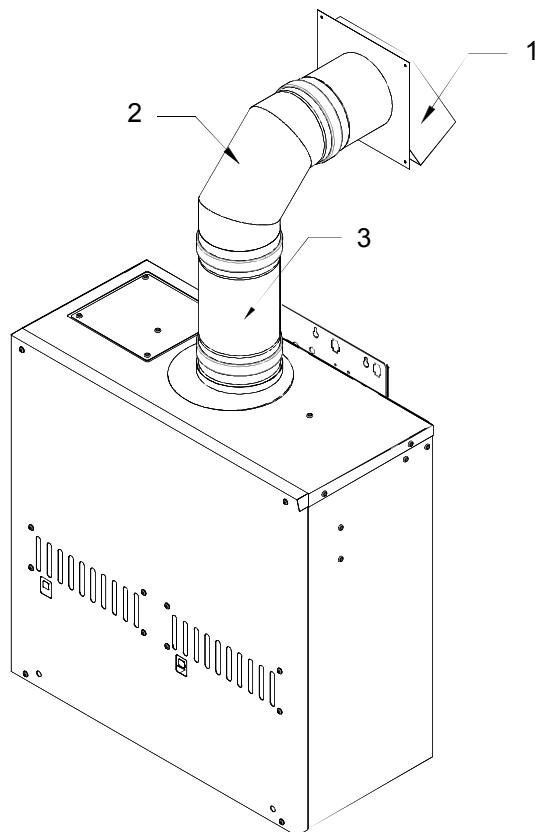


| Model 910 | | | | Qty. |
|---|---|-----------|-----------------------------|------|
| 5" Non-Combustible Sidewall Termination | | | | |
| Kit Part Number: 100112768 | 1 | 100112594 | 5" Sidewall Hood Terminator | 1 |
| | 2 | 100112587 | 5" 90 degree Elbow | 1 |
| | 3 | 100112599 | 5" Female-Female Adaptor | 1 |

5" Sidewall Termination

(With Condensate Traps)

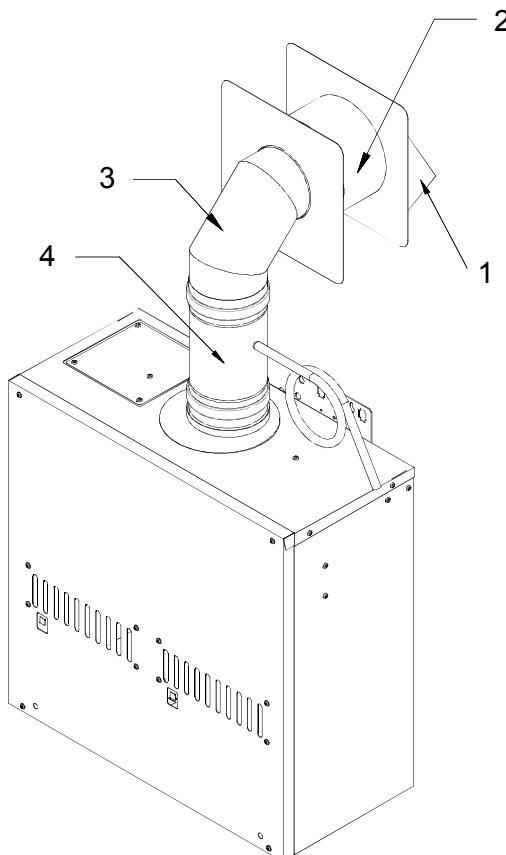


| Model 910 | | | | Qty. |
|--|---|-----------|--------------------------------|------|
| 5" Combustible Sidewall Termination (With Condensate Trap) | | | | |
| Kit Part Number: | 1 | 100112594 | 5" Sidewall Hood Terminator | 1 |
| 100112777 | 2 | 100112734 | 5" Wall Thimble (4.0"-7.0") | 1 |
| | 3 | 100112587 | 5" 90 degree Elbow | 1 |
| | 4 | 100112597 | 5" Universal Appliance Adaptor | 1 |

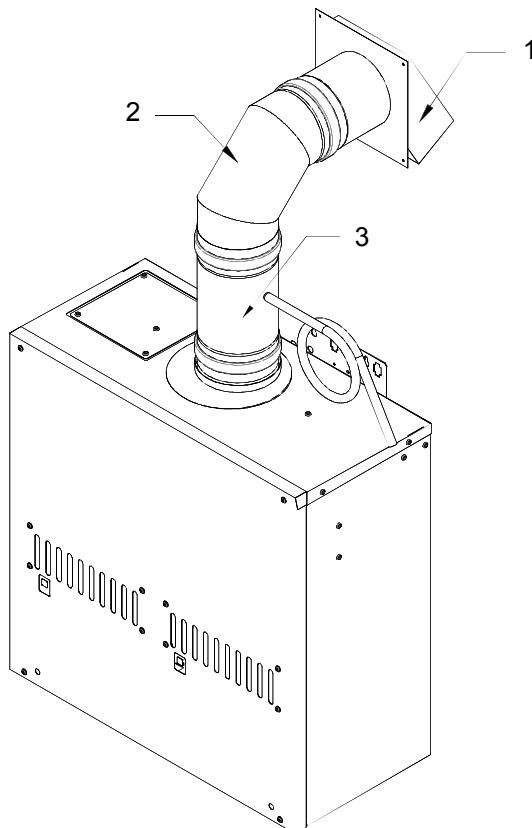


| Model 910 | | | | Qty. |
|--|---|-----------|--------------------------------|------|
| 5" Non-Combustible Sidewall Termination (With Condensate Trap) | | | | |
| Kit Part Number: | 1 | 100112594 | 5" Sidewall Hood Terminator | 1 |
| 100112778 | 2 | 100112587 | 5" 90 degree Elbow | 1 |
| | 3 | 100112597 | 5" Universal Appliance Adaptor | 1 |

5" Rooftop Termination

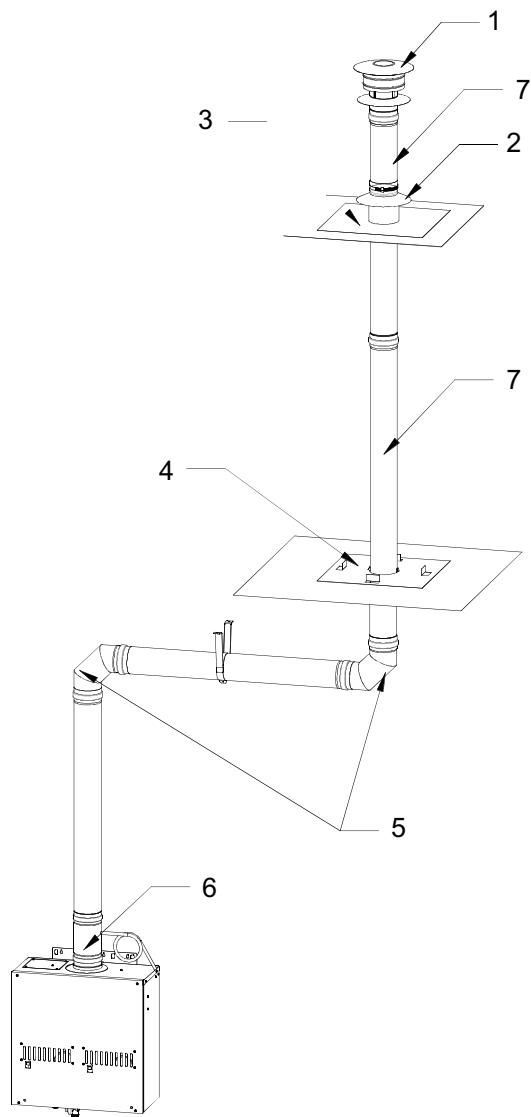


| Model 910 | | | | Qty. |
|---------------------------|---|----------------------------|--------------------------------|------|
| 5" Flat Roof Termination | | | | |
| KitPart Number: 100112730 | 1 | 100112596 | 5" Extreme Weather Rain Cap | 1 |
| | 2 | 100112590 | 5" Storm Collar | 1 |
| | 3 | 100112592 | 5" Flat Roof Flashing | 1 |
| | 4 | 100112591 | 5" Vertical Firestop | 1 |
| | 5 | 100112587 | 5" 90 degree Elbow | 2 |
| | 6 | 100112597 | 5" Universal Appliance Adaptor | 1 |
| | 7 | Refer to Accessories Chart | | TBD |

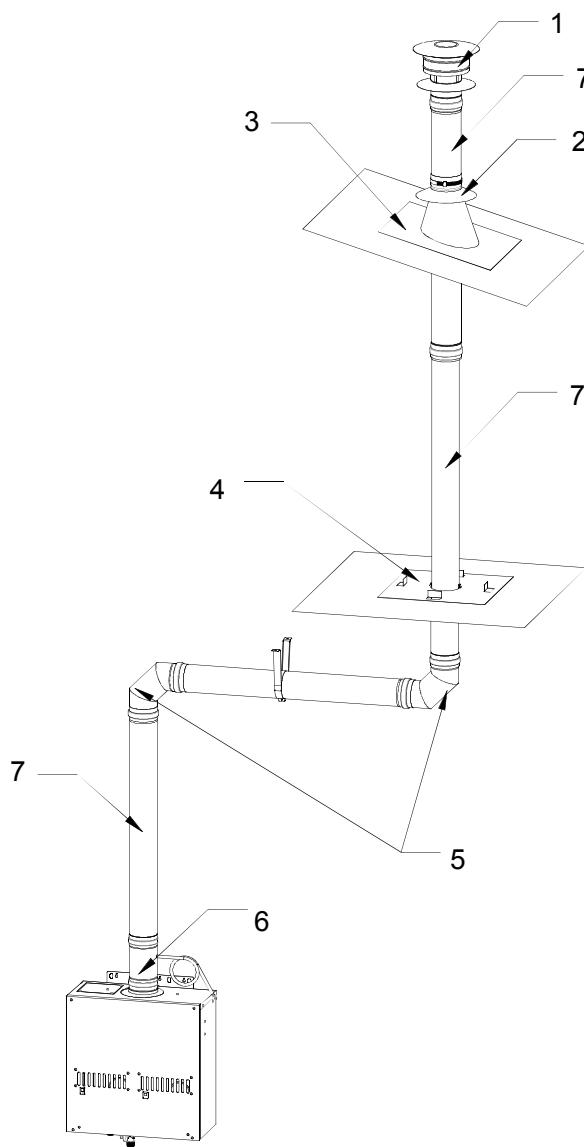

| Model 910 | | | | Qty. |
|----------------------------|---|----------------------------|--------------------------------|------|
| 5" Angled Roof Termination | | | | |
| KitPart Number: 100112731 | 1 | 100112596 | 5" Extreme Weather Rain Cap | 1 |
| | 2 | 100112590 | 5" Storm Collar | 1 |
| | 3 | 100112593 | 5" Angled Roof Flashing | 1 |
| | 4 | 100112591 | 5" Vertical Firestop | 1 |
| | 5 | 100112587 | 5" 90 degree Elbow | 2 |
| | 6 | 100112597 | 5" Universal Appliance Adaptor | 1 |
| | 7 | Refer to Accessories Chart | | TBD |

CONCENTRIC VENT SERIES

Horizontal Installation

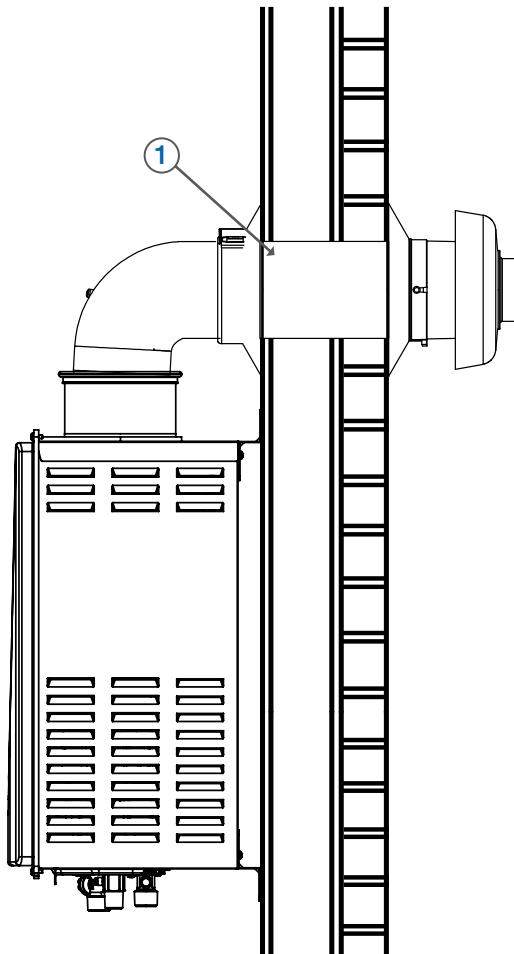


Horizontal Installation

Models 110C, 310C, 510C

| | | |
|---|-------------------------|-------------------|
| 1 | Standard Sidewall Kits* | 100266115 (11.5") |
| | | 100266117 (21") |
| 2 | Straight Pipe | 100266133 (10") |
| | | 100266134 (19.5") |
| 3 | Elbow | 100266135 (39") |
| | | 100266119 (45") |
| 4 | Condensate Trap | 100266132 (87") |
| | | 100266139 |
| 5 | Condensate Collector | 100266140 |


*This kit includes one 87° elbow

Horizontal Installation

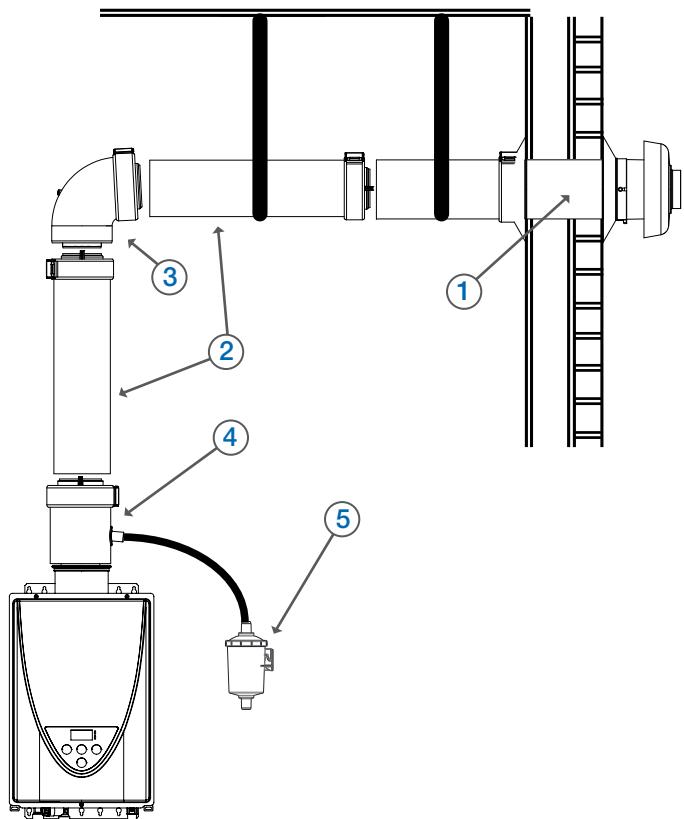

CONCENTRIC VENT SERIES

Vertical Installation

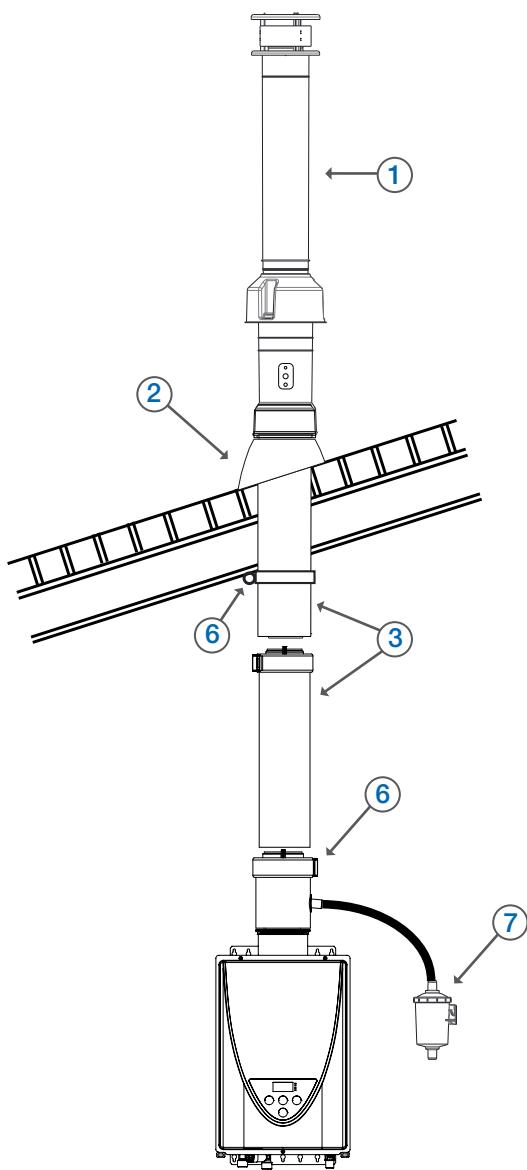


Vertical Installation

Models 110C, 310C, 510C

| | | |
|---|----------------------------|------------------------------------|
| 1 | Roof Termination (38") | 100266118 |
| 2 | Tile/Shingle Roof Flashing | 100266136 (1/12 to 6/12 pitch) |
| | | 100266137 (8/12 to 16/12 pitch) |
| | | 100266138 (6/12 to 12/12 pitch) |
| | | 100266187 (Flat Roof) |
| | | 100266133 (10") |
| 3 | Straight Pipe | 100266134 (19.5") |
| | | 100266135 (39") |
| | | 100266141 |
| 4 | Elbow | 100266119 (45°) 100266132 (87°) |
| 5 | Condensate Trap | 100266139 |
| 6 | Condensate Collector | 100266140 |

Vertical Installation

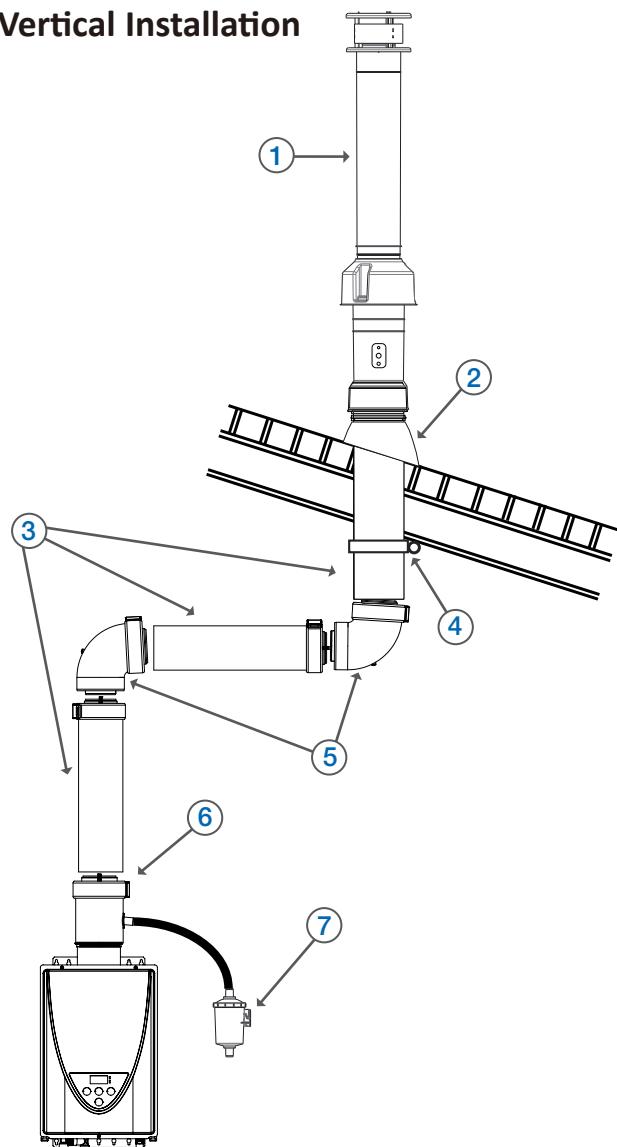

VENTING COMPONENTS

Simple Leak-Proof Gasketed Connections – No Sealant Required. High Quality – Category III / IV Stainless Steel. Versatile – Vertical and Horizontal Terminations. Convenient – Vent Kits Available. UL Listed. All Connections have Heat-Resistant Rubber Gaskets.

| Nova Vent Part # | DESCRIPTION | |
|-----------------------------|--|---|
| Straight Vent Pipe | | |
| 100112407 | 4" Straight pipe - 6" Length |  |
| 100112406 | 4" Straight pipe - 12" Length | |
| 100112404 | 4" Straight pipe - 24" Length | |
| 100112403 | 4" Straight pipe - 36" Length | |
| 100112402 | 4" Straight pipe - 48" Length | |
| 100112580 | 5" Straight pipe - 6" Length | |
| 100112581 | 5" Straight pipe - 12" Length | |
| 100112582 | 5" Straight pipe - 24" length | |
| 100112583 | 5" Straight pipe - 36" Length | |
| 100112584 | 5" Straight pipe - 48" Length | |
| Adjustable Vent Pipe | | |
| 100112405 | 4" Adjustable Pipe (7"- 9.9") |  |
| 100112585 | 5" Adjustable Pipe (7"- 9.9") | |
| Elbow | | |
| 100112401 | 4" 45 Degree Elbow |  |
| 100112586 | 5" 45 Degree Elbow | |
| 100112400 | 4" 90 Degree Elbow |  |
| 100112587 | 5" 90 Degree Elbow | |
| Adaptor | | |
| 100112399 | 4" Female-Female Adaptor |  |
| 100112599 | 5" Female-Female Adaptor | |
| 100112549 | 4" Universal Appliance Adaptor 3-in-1 (F-F adaptor, condensate drain, & back-flow preventer) |  |
| 100112597 | 5" Universal Appliance Adaptor 3-in-1 (F-F adaptor, condensate drain, & back-flow preventer) | |

| Nova Vent Part # | DESCRIPTION | |
|--|---|---|
| Backflow Preventer | | |
| 100112416 | 4" Backflow Preventer & F-F Adaptor |  |
| 100112598 | 5" Back-flow Preventer & F-F Adaptor | |
| Condensation Drain | | |
| 100112414 | 4" Horizontal Drain Tee |  |
| 100112588 | 5" Horizontal Drain Tee | |
| 100112413 | 4" Vertical Drain Tee |  |
| 100112589 | 5" Vertical Drain Tee | |
| Support | | |
| 100112409 | 4" Support Strap (1") |  |
| 100112600 | 5" Support Strap (1") | |
| Wall Thimble | | |
| 100112732 | 4" Wall Thimble (4"-7") |  |
| 100112733 | 4" Wall Thimble (5"-10") | |
| 100112734 | 5" Wall thimble (4"-7") | |
| 100112735 | 5" Wall thimble (5"-10") | |
| 4" Sidewall Termination & Thimble Kit | | |
| 100112424 | Sidewall Vent Terminator (Hood) and Wall Thimble (4"-7") |  |
| 100112425 | Sidewall Vent Terminator (Hood) and Wall Thimble (5"-10") | |

Note: 110/U, 140, 310/U, 510/U, 240, 340, 540 series are compatible with 4" components. 910 series is compatible with 5" components.

| Nova Vent Part # | DESCRIPTION | |
|-----------------------------------|--|---|
| Termination | | |
| 100112547 | 4" Termination Tee |  |
| 100112595 | 5" Termination Tee | |
| 100112419 | 4"Exhaust Sidewall Vent Terminator (Hood) |  |
| 100112594 | 5"Exhaust Sidewall Vent Terminator (Hood) | |
| 100112415 | 4" Rain Cap |  |
| 100112548 | 4" Extreme Weather Rain Cap | |
| 100112596 | 5" Extreme Weather Rain Cap | |
| 100112163 | 3" Concentric PVC Termination |  |
| Firestop | | |
| 100112408 | 4" Firestop |  |
| 100112591 | 5" Firestop | |
| Roof Flashing | | |
| 100112412 | 4" Flat Roof Flashing |  |
| 100112592 | 5" Flat Roof Flashing | |
| 100112411 | 4" Angled Roof Flashing |  |
| 100112593 | 5" Angled Roof Flashing | |
| Storm Collar | | |
| 100112410 | 4" Storm Collar |  |
| 100112590 | 5" Storm Collar | |
| Direct Vent Conversion Kit | | |
| 100112184 | Direct Vent Conversion Kit for Indoor models 110 / 310 / 510 |  |
| 100112186 | Direct Vent Conversion Kit for Model 910 | |

| Nova Vent Part # | DESCRIPTION | |
|---------------------------------|-------------|--|
| Intake Hood (Galvanized) | | |
| 100112545 | 3" | |
| 100112546 | 4" | |
| 100112547 | 5" | |

| | | |
|---|---|--|
| Direct Vent, Concentric Sidewall Termination Kit Includes : DV Conversion Kit, Concentric Termination, Universal Adaptor 3-in-1, Aluminum Flex and Gear Clamp | | |
| 100112421 | 5.0" to 10.0" 3" Intake, 4" Exhaust |  |
| 100112420 | 12.0" to 18.0" 3" Intake, 4" Exhaust | |
| 100112602 | 5.0" to 10.0" 4" Intake, 4" Exhaust | |
| 100112603 | 12.0" to 18.0" 4" Intake, 4" Exhaust | |
| 100112606 | 5.0" to 10.0" 5" Intake, 5" Exhaust | |
| 100112601 | 12.0" to 18.0" 5" Intake, 5" Exhaust | |

Note: 110/U, 140, 310/U, 510/U, 240, 340, 540 series are compatible with 4" components. 910 series is compatible with 5" components.

ACCESSORIES

| ACCESSORIES | | | GT-110C-NI | GT-110U-1 | GT-110U-E | GT-310C-NI | GT-310U-1 | GT-310U-E | GT-510C-NI | GT-510U-1 | GT-510U-E | GT-140-NIH | GT-140-NEH | GT-240-NIH | GT-240-NEH | GT-340-NIH | GT-340-NEH | GT-540-NIH/P | GT-540-NEH/P | MCT-199/O |
|-------------------------|---|---|------------|-----------|-----------|------------|-----------|-----------|------------|-----------|-----------|------------|------------|------------|------------|------------|------------|--------------|--------------|-----------|
| 100112194 | Outdoor Vent Cap |  | | | | | | | | | | | | | | | | | x | |
| 100266729, 100266730 | Recess Box Standard Flange |  | | x | | x | | | x | x | | | | | | | | | | |
| 100112188 | Pipe Cover |  | x | x | | | | | | | | | | | | | | | | |
| 100112187 | | | x* | x* | x | x | x | x | | | | | | | | | | | | |
| 100112190 | | | | | | | | | | | | | | | | | | x | | |
| 100112718 | | | | | | | | | | | | x | x | x | x | x | x | x | x | x |
| 100187904 | | | | | | | | | x | x | | | | | | | | | | |
| 100112691 | Multiple Unit Controller |  | | | | x | x* | x* | | | | | | | | | x | x | x | x |
| 100112183 | Remote Temperature Controller |  | x | x | x | x | x | | | | | | | | | | | | | |
| 100112155 | | | | | | | | x | x | | | | | | | | | x | | |
| 100209924 | | | x | x* | x* | x | x* | x* | x | x* | x* | x | x | x | x | x | x** | x** | | |
| 100276687 | | | | | | | | | | | | | | | | | x*** | x*** | | |
| 100112572 | | | | | | | | | | | | | | | | | | | x | |
| 100112156 | Isolation Valves (Lead Free) |  | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| 100112255 | | | | | | | | | | | | | | | | | | | x | |
| 100112159 | Neutralizer |  | | | | | | | | | x | x | x | x | x | x | x | x | x | x |
| 100113129 | PVC Adapter for Common Venting |  | | | | | | | | | x | | x | | x | | | | x | |
| 100113130 | Non-Return Valve for Common Venting |  | | | | | | | | | x | | x | | x | | | | x | |
| 100291509 | Product Preservers® Anti-Scale System |  | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |
| 100291510 | Product Preservers Replacement Cartridge | | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x | x |

*Compatible with Ultra-Low NOx models only

**Compatible with 540 models only

***Compatible with 540P models only

Hard Water and Tankless Heaters


Hard water can adversely affect plumbing systems, from water piping to water fixtures and even down to the water heating system. For piping and fixtures, hard water can create more pressure loss and reduce water flow. For water heaters, it can even reduce energy efficiency and damage the heater. This is especially true for tankless water heaters and it is important to understand what hard water is, what hard water does, and how to protect your tankless water heater from possible damage caused by hard water.

What is hard water and hard water scale?

Very simply, hard water is defined as water that has a high mineral content, specifically in magnesium and calcium (Ca^{2+} and Mg^{2+} ions). Hard water is not considered a health risk and these minerals generally remain dissolved in the water. However, the problems arise when the minerals precipitate out of the water and leave behind a solid mineral buildup. This buildup is called hard water scale, and it is this scale that reduces water flow through pipes and fixtures, reduces the energy efficiency of water heating equipment and, at worst, causes irreversible damage to the heat exchangers within tankless water heaters. It is important to note that the likelihood of scale formation is only based on the hardness levels of the water and the temperature of the water, not on the material the scale is adhering to. For example, hard water scale would form equally on a copper surface as it would on a stainless steel surface, given the same hardness level and temperature of water.

What does hard water scale do to my water heater?

When hard water scale forms a layer coating on the inside wall of a tankless heat exchanger fin pipe, it acts as a thermal insulator. This insulation effectively prevents a significant amount of heat from the burners to properly transfer into the water within the piping. Because the heat is not transferring into the water, the heat exchanger material is forced to retain this excess heat, eventually overheating and becoming damaged. Once the material has degraded enough, the heat exchanger piping eventually gives way and water leakage occurs.

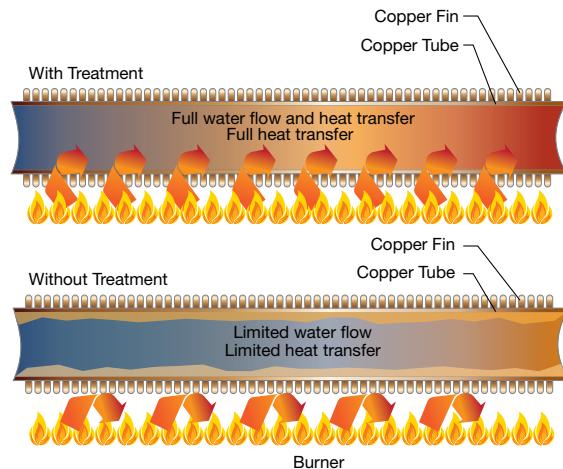

Picture shows a clean HX with treatment.



Scale buildup from untreated water.




How is the hardness of water measured?

Water hardness is measured in either parts per million (ppm) or grains per gallon (gpg). Anything that measures above 3 gpg is generally considered hard (United American's Geological Survey) and it is advised at this point to look into water treatment. The U.S. Department of Interior and the Water Quality Association have classified water hardness under several levels:

| Classification | mg/L or ppm (parts per million) | gpg (grains per gallon) |
|-----------------|------------------------------------|-------------------------|
| Soft | 0 - 17 | 0 - 1 |
| Slightly Hard | 17 - 60 | 1 - 3.5 |
| Moderately Hard | 61 - 120 | 3.5 - 7.0 |
| Hard | 121 - 180 | 7.0 - 10.5 |
| Very Hard | 180 and above | 10.5 and above |

Where is hard water found?

Hard water is everywhere. In fact, more than 85% of American homes have hard water.

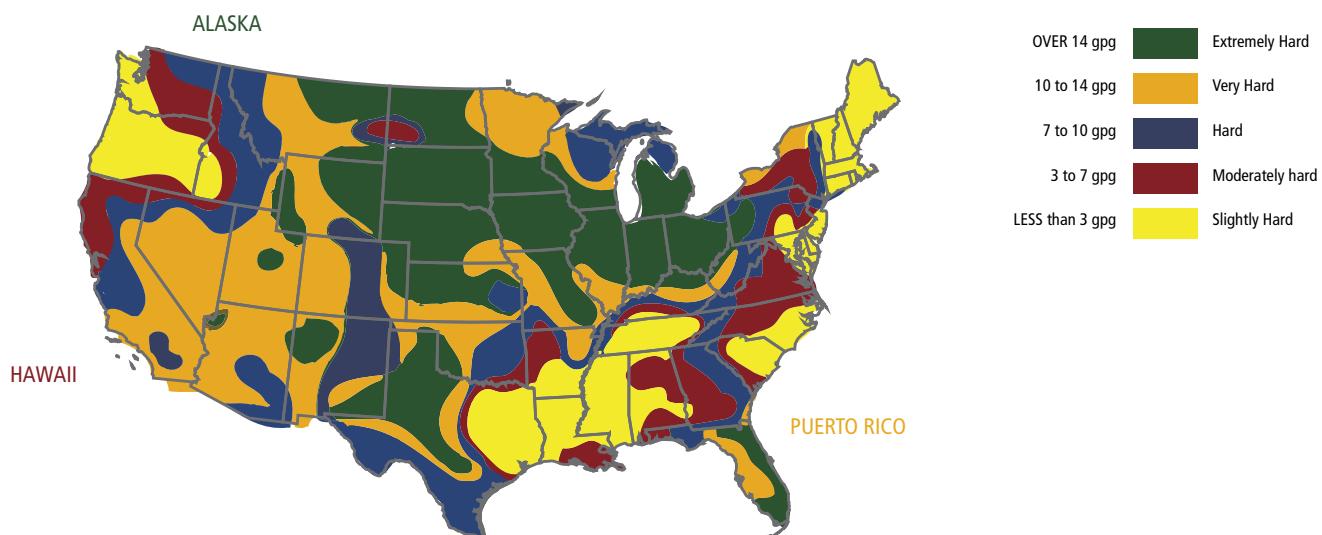

How do I prevent hard water scale?

Fortunately, there are quite a few great options to choose from when looking to protect water heating equipment from scale buildup. These solutions range in cost, maintenance and application, so it is always best to consult with water treatment professionals before making the final decision on a water treatment solution.

Product Preservers®: Prevents scale by transforming dissolved hardness minerals into harmless, inactive microscopic crystal particles. These crystals stay suspended in the water and are passed to drain.

- This system does not add chemicals to the water or require electricity. It is virtually maintenance free only requiring a simple filter change every two years.

Ion exchanger water softeners: Water softeners are probably the most common solution used today for eliminating hard water. Calcium and magnesium ions are removed from the water and replaced with sodium ions. Without the calcium and magnesium, hard water scale cannot form.

Siliphos: Interferes with the ability of (calcium and magnesium) scale to crystallize. The suspended scale stays in the water and goes down the drain.



Product Preservers®
protects your tankless
heat exchanger from
scale formation.

Refer to the chart to the
right to properly size for
your application.

Flow Rate Based Ground Water Temperature (assume 120°F Set point)

| Ground Water Temperature (°F) | Tankless Model | 110/U/C | 310/U/C | 510/U/C | 140 | 240 | 340 | 540/P | 910 | CT-199 |
|-------------------------------|----------------|---------|---------|---------|-----|-----|------|-------|------|--------|
| 85°F | 6.6 | 8 | 9.3 | 6.4 | 6.6 | 8.0 | 10.0 | 14.5 | 10.0 | |
| 80°F | 5.7 | 7.8 | 8.2 | 5.6 | 6.6 | 8.0 | 9.5 | 14.5 | 9.5 | |
| 75°F | 5.1 | 6.9 | 7.3 | 5.0 | 6.6 | 7.6 | 8.4 | 13.5 | 8.4 | |
| 70°F | 4.6 | 6.2 | 6.5 | 4.5 | 6.1 | 6.8 | 7.6 | 12.2 | 7.6 | |
| 65°F | 4.2 | 5.7 | 5.9 | 4.1 | 5.5 | 6.2 | 6.9 | 11.0 | 6.9 | |
| 60°F | 3.8 | 5.2 | 5.4 | 3.7 | 5.1 | 5.7 | 6.3 | 10.1 | 6.3 | |
| 55°F | 3.5 | 4.8 | 5.0 | 3.4 | 4.7 | 5.3 | 5.8 | 9.4 | 5.8 | |
| 50°F | 3.3 | 4.5 | 4.7 | 3.2 | 4.3 | 4.9 | 5.4 | 8.7 | 5.4 | |
| 45°F | 3.1 | 4.2 | 4.4 | 3.0 | 4.1 | 4.6 | 5.0 | 8.1 | 5.0 | |
| 40°F | 2.9 | 3.9 | 4.1 | 2.8 | 3.8 | 4.3 | 4.7 | 7.6 | 4.7 | |
| 35°F | 2.7 | 3.7 | 3.8 | 2.6 | 3.6 | 4.0 | 4.5 | 7.2 | 4.5 | |

| |
|---|
| 100291509 Product Preservers® Anti-Scale System |
| Requires Multiple Units |

MODELS

| | | | | | | | | | I = Indoor | O = Outdoor |
|------------------------|-------------|---|---|---|-----------------------------------|---|-------------------------------|--|------------------|--|
| | | Connection: Gas/Water Power | Venting Intake Exhaust | Easy-Link (EL) Multi-Unit (MU) | Temperature (with remote) | GPM (Max) Per Unit | Uniform Energy Factor | Max BTU/h | Dimension/Weight | |
| Condensing | 140 Series |  GT-140-NEH |  | High efficiency ultra-low NOx condensing tankless. 3" PVC venting. 0" clearance to combustible. | 1/2" Gas 3/4" Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | N/A | 120 - 140 (100 - 140) | 6.6 | I: 0.90 O: 0.91 120,000 H = 22-7/8" W = 13-7/8" D = 10-3/4" 44 lbs |
| | 240 Series |  GT-240-NEH |  | High efficiency ultra-low NOx condensing tankless. 3" PVC venting. 0" clearance to combustible. | 3/4" Gas/Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | N/A | 120 - 140 (100 - 140) | 6.6 | I: 0.94 O: 0.95 160,000 H = 23-5/8" W = 17-3/4" D = 11-3/4" 58 lbs |
| | 340 Series |  GT-340-NEH |  | High efficiency ultra-low NOx condensing tankless. 3" PVC venting. 0" clearance to combustible. | 3/4" Gas/Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | N/A | 120 - 140 (100 - 140) | 8.0 | I: 0.95 O: 0.94 180,000 H = 23-5/8" W = 17-3/4" D = 11-3/4" 58 lbs |
| | 540 Series |  GT-540-NEH  |  | High efficiency ultra-low NOx condensing tankless. 3" PVC venting. 0" clearance to combustible. | 3/4" Gas/Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | (EL) 4 units (MU) 20 units | 120 - 160 (100 - 160) | 10.0 | I: 0.93 O: 0.95 199,000 H = 23-5/8" W = 17-3/4" D = 11-3/4" 59 lbs |
| | 540P Series |  GT-540P-NEH |  | High efficiency ultra-low NOx condensing tankless with integrated recirculation pump. | 3/4" Gas/Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | (EL) 4 units | 120 - 140 (100 - 140) | 10.0 | I: 0.93 O: 0.95 199,000 H = 23-5/8" W = 17-3/4" D = 11-3/4" 59 lbs |
| Non-Condensing Low NOx | 110 Series |  |  | Great for apartments, condos and summer cabins. | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 50' Max 4" Exhaust, 50' Max | N/A | 113°F, 122°F, 131°F, 140°F (99 - 167) | 6.6 | I: 0.79 O: 0.79 140,000 H= 20-1/4" W= 13-3/4" D= 7-3/4" 33 lbs |
| | 310 Series |  |  | Adds 1 more shower over the 110 at minimal increase in cost. | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 50' Max 4" Exhaust, 50' Max | N/A | 113°F, 122°F, 131°F, 140°F (99 - 167) | 8.0 | I: 0.80 O: 0.80 190,000 H= 20-1/4" W= 13-3/4" D= 9-1/2" 38 lbs |
| | 510 Series |  |  | Well suited for light commercial applications. Commercial-grade copper | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 50' Max 4" Exhaust, 50' Max | (EL) 4 units | 104°F, 113°F, 122°F, 140°F (100 - 176) | 10.0 | I: 0.80 O: 0.80 199,000 H= 20-1/4" W= 13-3/4" D= 9-1/2" 39 lbs |

MODELS

| | | | | | | | | | | I = Indoor | O = Outdoor |
|------------------------------|---------------|--|---|--------------------------------|--|----------------------------|-----------------------|--|--|------------|--|
| | | Connection: Gas/Water Power | Venting Intake Exhaust | Easy-Link (EL) Multi-Unit (MU) | Temperature (with remote) | GPM (Max) Per Unit | Uniform Energy Factor | Max BTU/h | Dimension/ Weight | | |
| Non-Condensing Ultra-Low NOx | 110C Series |  | Great for apartments, condos and summer cabins. | 3/4" Gas/Water 120 VAC | 3" / 5" Concentric, 43' Max | N/A | 120 - 140 (100 - 140) | 6.6 | 0.81 | 140,000 | H= 20-1/4" W= 13-3/4" D= 7-3/4" 51 lbs |
| | 310C Series |  | Adds 1 more shower over the 110 at minimal increase in cost. | 3/4" Gas/Water 120 VAC | 3" / 5" Concentric, 43' Max | N/A | 120 - 140 (100 - 140) | 8.0 | 0.82 | 190,000 | H= 20-1/4" W= 13-3/4" D= 9-1/2" 51 lbs |
| | 510C Series |  | Well suited for light commercial applications. Commercial-grade copper | 3/4" Gas/Water 120 VAC | 3" / 5" Concentric, 43' Max | (EL) 4 units (MU) 20 unit | 104 - 160 (100 - 160) | 10.0 | 0.81 | 199,000 | H= 20-1/4" W= 13-3/4" D= 9-1/2" 51 lbs |
| | 110U Series |   | Great for apartments, condos and summer cabins. | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 60' Max 4" Exhaust, 60' Max | N/A | 120 - 140 (100 - 140) | 6.6 | I: 0.81 O: 0.81 | 140,000 | H= 20-1/4" W= 13-3/4" D= 7-3/4" 38 lbs |
| | 310U Series |   | Adds 1 more shower over the 110 at minimal increase in cost. | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 60' Max 4" Exhaust, 60' Max | N/A | 120 - 140 (100 - 140) | 8.0 | I: 0.82 O: 0.82 | 190,000 | H= 20-1/4" W= 13-3/4" D= 9-1/2" 38 lbs |
| | 510U Series |   | Well suited for light commercial applications. Commercial-grade copper | 3/4" Gas/Water 120 VAC | I Model: 3" Intake, 60' Max 4" Exhaust, 60' Max | (EL) 4 units (MU) 20 units | 120 - 140 (100 - 160) | 10.0 | I: 0.82 O: 0.81 | 199,000 | H= 20-1/4" W= 13-3/4" D= 9-1/2" 39 lbs |
| Commercial | 910 Series |  ASME model available   | Generates Most GPM in tankless industry. 14.5 GPM (Max). Commercial-grade copper alloy. LED display | 1" Gas/Water 120 VAC | 5" Intake, 50' Max 5" Exhaust, 50' Max | (EL) 4 units (MU) 10 units | 100 - 185 (100 - 185) | 14.5 (Up to 145 GPM max with 10 unit system) | Thermal Efficiency NG: 80.2% LP: 82.4% | 380,000 | H= 25-1/4" W= 24-3/4" D= 11-3/4" 112 lbs |
| | CT-199 Series |    | High efficiency ultra-low NOx condensing tankless. 3" PVC venting. 0" clearance to combustible. | 3/4" Gas/Water 120 VAC | Intake & Exhaust 3", 70' Max, 5 elbow Max OR 4", 100' Max, 5 elbow Max | (EL) 4 units (MU) 20 units | 100 - 185 (100 - 185) | 10.0 (Up to 200 GPM max with 20 unit system) | Thermal Efficiency 96% I: 0.93 O: 0.95 | 199,000 | H = 23-5/8" W = 17-3/4" D = 11-3/4" 59 lbs |



500 Tennessee Waltz Pkwy
Ashland City, TN 37015
Toll Free: 877.737.2840