



USB TO DIGI XBEE®
WIRELESS PAN ADAPTER
FOR LAPTOPS & PCS



XSTICK®

The XStick provides local connectivity to a wireless Digi XBee network from a laptop or PC, enabling local commissioning of the network and its devices

Digi's XStick is an easy-to-use USB to Digi XBee Wireless Personal Area Network (WPAN) adapter, providing local connectivity to wireless networks. Simply plug the XStick into the USB port of a laptop or PC for instant access to an Digi XBee network and its connected devices. This compact, USB-powered wireless adapter enables local network configuration, diagnostics or device monitoring.

Two versions are available. The XStick 802.15.4 version is compatible with Digi XBee and Digi XBee-PRO® 802.15.4 devices and uses a fast multipoint network. The XStick ZigBee

version is compatible with Digi XBee or Digi XBee-PRO ZigBee devices and utilizes the ZigBee PRO Feature Set for robust mesh networks.

XStick is part of Digi's XBee family of solutions, offering users seamless wireless communication between devices, including adapters, routers and gateways.

BENEFITS

- USB to XBee Wireless Personal Area Network adapter (WPAN)
- Provides local connectivity for access, configuration and network commissioning
- Available in self-healing, self-configuring ZigBee mesh or fast 802.15.4 multipoint versions
- USB powered
- LEDs for power status and network association

RELATED PRODUCTS



Digi XBee®
ZigBee Module



Digi XBee®
ZigBee Gateway



ConnectPort®
X2




ConnectPort®
X4/X4 H




XCTU

APPLICATION EXAMPLE

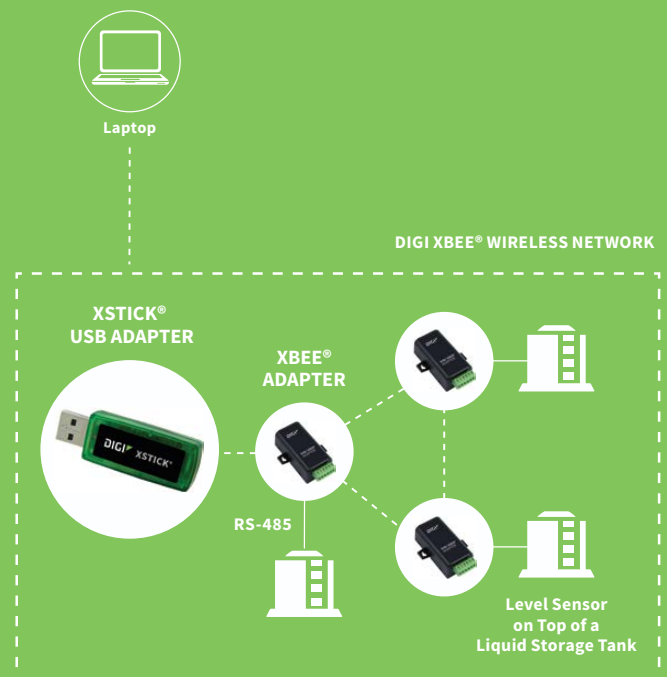


SPECIFICATIONS		XStick® ZigBee	XStick® 802.15.4
PERFORMANCE			
INDOOR/URBAN RANGE*	Up to 66 ft (20 m)	Up to 49 ft (15 m)	
OUTDOOR/RF LINE-OF-SIGHT RANGE*	Up to 164 ft (50 m)	Up to 131 ft (40 m)	
TRANSMIT POWER OUTPUT (NOMINAL 25° C)	2.8 mW (4.5 dBm)	1 mW (0 dBm)	
RF DATA RATE	250 Kbps		
SERIAL INTERFACE DATA RATE (SOFTWARE SELECTABLE)	1200 bps - 115.2 Kbps		
RECEIVER SENSITIVITY	-90 dBm		
POWER REQUIREMENTS			
SUPPLY VOLTAGE	5V from USB port of PC		
TRANSMIT CURRENT	51 mA	64 mA	
RECEIVE CURRENT	47 mA	64 mA	
POWER-DOWN CURRENT	XStick should not be put into sleep mode		
GENERAL			
FREQUENCY BAND	2.4 GHz ISM		
DIMENSIONS (L X W X H)	2.29 in x 0.80 in x 0.43 in (5.83 cm x 2.03 cm x 1.08 cm)		
OPERATING TEMPERATURE	-40° C to +85° C		
CONNECTOR	USB Type A		
ANTENNA OPTIONS	Internal only		
NETWORKING & SECURITY			
SUPPORTED NETWORK TOPOLOGIES	ZigBee Mesh	Point-to-Point, Point-to-Multipoint, Peer-to-Peer	
NUMBER OF CHANNELS (SOFTWARE SELECTABLE)	16		
ADDRESSING OPTIONS	PAN, Channel, Address		
REGULATORY APPROVALS			
FCC PART 15.247 (USA)	MCQ-XSTICK2	MCQ-XSTICK1	
IC (CANADA)	1846A-XSTICK2	1846A-XSTICK1	
ETSI (EUROPE)	Yes	Yes	
TELEC (JAPAN)	R201 WW 10215030	No	


XStick - Top View

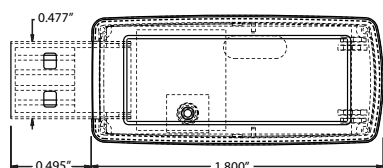

XStick - Side View



XStick - Connector



*Range figure estimates are based on free-air terrain with limited sources of interference. Actual range will vary based on transmitting power, orientation of transmitter and receiver, height of transmitting antenna, height of receiving antenna, weather conditions, interference sources in the area, and terrain between receiver and transmitter, including indoor and outdoor structures such as walls, trees, buildings, hills, and mountains.

PART NUMBERS	DESCRIPTION
XU-Z11	XStick USB Adapter, ZigBee
XU-A11	XStick 802.15.4

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved.
All trademarks are the property of their respective owners.

91001463
C6/518

DIGI INTERNATIONAL WORLDWIDE HQ
877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN
+81-3-5428-0261 / www.digi-intl.co.jp

DIGI INTERNATIONAL SINGAPORE
+65-6213-5380

DIGI INTERNATIONAL CHINA
+86-21-50492199 / www.digi.com.cn

