



Powerful, Brilliant and
Reliable For Large Venue Installation



PX9710 / PW9620 / PU9730 / PX9600 / PW9500
BenQ Professional High Brightness Installation Projectors



Because it matters

Stunning Visual Impact with Flexible Installation and Easy, Reliable Operation

- Advanced, yet simple installation flexibility
- Breathtaking DLP picture quality
- Powerful, yet easy operation
- Hassle-free maintenance and steadfast reliability

The Art and Science of Installation Versatility


Lens Options and Compatibility

Optimizing projector performance for all venues and applications, seven types of optical lenses comprising short-throw to long-throw are available. Featuring all-glass construction for ultraclear focus and high apertures for brighter images, these lenses are made in Japan for the highest optical quality control. In addition, an integrated adapter for leading third-party I-chip DLP lens design means installers can keep the main lens of an existing projector in replacement installation scenarios.



360° Rotation-Capable Projection

The projector can be tilted vertically at any angle, allowing projection onto ceilings, walls, floors, or angled signage. The possibilities of impactful visuals in shopping centers, galleries, museums, and theaters are endless.

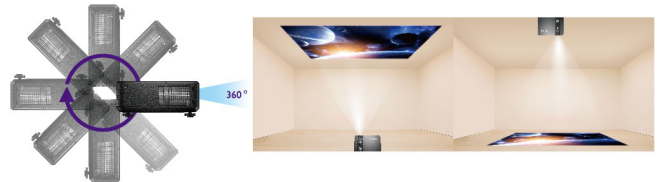

Motorized Zoom, Focus, and Lens Shift

The convenience and wide range of the powered zoom, focus and horizontal / vertical lens shift systems deliver perfectly proportioned images despite installation or placement challenges in any venue. Manual labor to relocate / reconstruct mounting locations is replaced simply by remote-control adjustments that allow omnidirectional adjustments to projection targets.



Lens Memory

Equipped with ten customizable memory settings for image size, position, and focus, the projector detects and optimizes source material with various aspect ratios onto the projection area. Users can easily recall lens settings without tedious adjustments, such as when maximizing full-screen viewing of different aspect ratios onto a 2.35:1 screen for a cinematic experience.



Central Lens Design and Hotkey

A new symmetrically centered lens design allows easy installation without the need for special considerations for offset installation. Additionally, in cases where horizontal or vertical lens shift has been applied, a hotkey quickly returns the projector to factory default for use in different environments and installations.



The protection lens is placed at the center.



Center Lens Hotkey

Comprehensive Built-in Test Patterns

Precision installation and setup is facilitated by 14 integrated test patterns, which allow easy calibration of linearity, color fidelity, bleed, and distortion.






BenQ, the world's #1 bestselling DLP projector brand, delivers industry-leading refinements and features in its new Professional High Brightness Optional Lens Series fixed-installation projectors. Pioneering features such as innovative HD Connect connectivity and lens memory augment the already-comprehensive installation advantages including compatibility with leading third-party lenses and omnidirectional projection dexterity. Similarly, breakthrough high brightness and resolution, a brand-new mechanical shutter, and new cooling / monitoring / maintenance features ensure the highest value and performance for installers, IT managers, and presenters alike in any venue or application.

HD Connect Advanced Digital Connectivity

Groundbreaking HD Connect connectivity combines video, audio, and device control signals from multiple sources including PCs, laptops, document cameras, Blu-ray, DVDs and gaming consoles onto a single CAT5 cable, capable of lossless transmissions up to 100 meters. This incredibly efficient and cost-effective connectivity is also ideal for ceiling-mounted and other permanent installations.

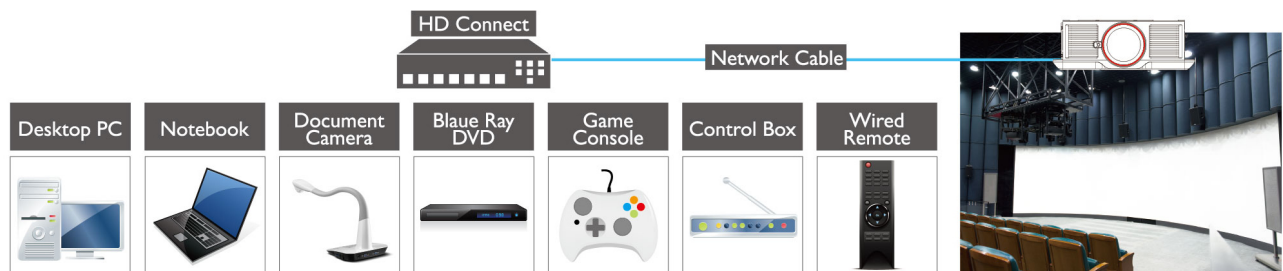

Spectacular Picture Quality for Captivating Visual Communication

Ultra High Brightness up to 7700 Lumens*


Even large-scale projection in bright environments remain clear and sharp with BenQ's high brightness technology powered by BenQ's unique dual-lamp design. The enhanced luminance boosts vivid color intensity and depth for lights-on presentations allowing audience interaction and note-taking.



*7700 lumen brightness available on PX9710 model.

Ultra High Resolution up to WUXGA*

With up to 2.3 million pixels of resolution far surpassing 1080p, audiences can view even high-quality Full HD content in breathtaking clarity, and presenters can show more content and detail without sacrificing legibility. High resolution brings out fine details and produces more lifelike three-dimensional appearance for pictures while resolving even small text with crisp precision.

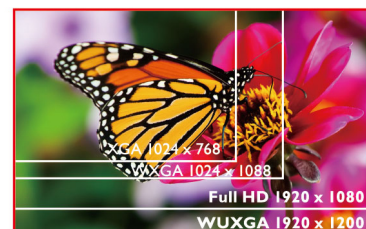

*WUXGA available on PU9730 model.

High Optical Quality Lens

Far superior to plastic lenses, BenQ High Brightness Projectors feature all-glass lenses for crystal clear focus and bright, vibrant images.


Long-Lasting DLP Image Perfection

Utilizing a nearly-sealed DLP projection engine, BenQ projectors exhibit virtually no image distortion from panel aging due to heat or dust buildup. Millions of micro mirrors on the advanced DMD chip reflect pure light through the color wheel, producing precise details and intensely saturated colors without degradation over time.

Interchangeable Color Wheel

An additional RGBYCM 6-segment color wheel is included as a standard accessory, which can be used to enhance subtle color details and mid-tones for more lifelike images and video. For operation in very brightly-lit lighting conditions, the built-in RGBYCW 6-segment color wheel ensures vibrant, bright images and presentation clarity.




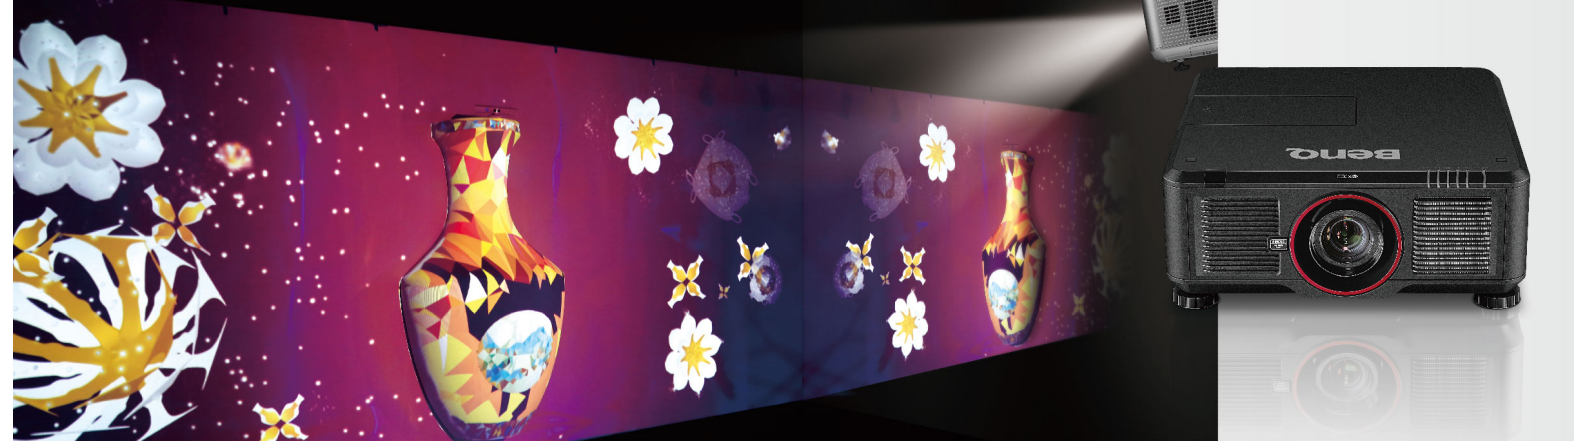

Hassle-Free Maintenance and Dependable Reliability

Dual-Lamp System for Uninterrupted Presentations

Employing two lamps for optimal brightness, the Dual-Lamp System also eliminates interruptions during presentations and viewing in case one of the lamps burns out. The system also detects remaining lamp life and balances individual lamp life in single-lamp mode.

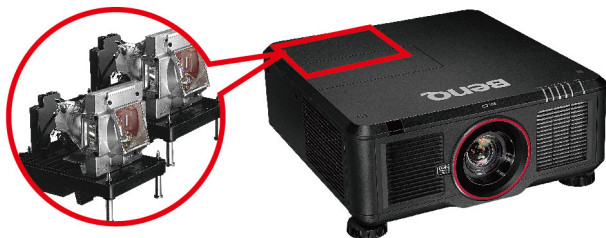

Integrated Filtration

Serving as additional protection to the nearly sealed DLP engine, two advanced filters ensure maximum performance even when the projector must be installed during dusty construction periods. The pleated, highly-protective filters can be easily cleaned or replaced from the front or right side of the projector, even if it is ceiling-mounted.



Advanced Air-Cooled Projection

An array of 10 fans thermodynamically arranged to maximize cooling maintains controlled operating temperatures and optimal projector performance even under extreme conditions, minimizing risk of thermal damage and consequent repair/maintenance costs.



Solid-State Heat-Pipe Cooling System

Utilizing a quiet, simple structure without moving parts or messy liquid chemicals, the copper heat-pipe system provides highly reliable cooling without complicated maintenance or environmental impact.

Clear LED Indicators

A set of six LED indicators provide notification for lamp replacement and facilitate other troubleshooting processes.



Multi-Projector Management via LAN (AMX/CRESTRON/PJ-Link)

IT managers can conveniently operate and check the status of multiple remote projectors via LAN to minimize cost and resources. The LAN interface is compatible with PJ-Link, Crestron, and AMX control systems for convenient system integration with various third-party components.



Eco-Conscious Standby Modes

Adhering to strict European regulations, networked standby power consumption is cut down to a miserly 6 watts to reduce environmental impact and total cost of ownership. When in eco mode, power consumption is a miniscule 0.5 watts.



Intuitive Operation and Total Ease of Use


Mechanical Shutter

For situations that require total darkness, such as during concerts, the mechanical shutter completely blocks out light to eliminate light leakage. This feature is also ideal for edge blending in multiple projector arrays, allowing color adjustment of the adjacent projector without interference.



Offline Cooling

An integrated capacitor keeps the cooling system operational in case of power outage, preventing heat damage to the lamps. This smart solution helps eliminate unexpected cost and downtime.

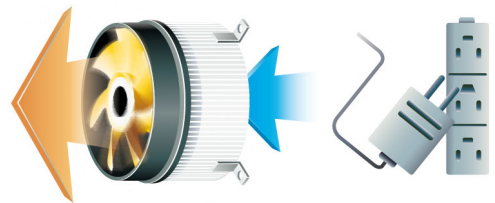

Quick-Release Button for Lens Swaps

The hot-swappable lens unlocks instantly with the quick-release button for lens changes.





Dual Side Handles

Dual side handles located at the bottom of the projector increase portability and allow two people to carry the projector comfortably.



Convenient Lamp & Color Wheel Access

Quick-access doors for lamp change are located at the rear side of the projector, allowing easy lamp replacement while the projector remains in the mounting bracket or dual stacked. For ceiling mount applications, a safety wire prevents the lamp from falling out. The color wheel is accessible from the top for convenient switching of the RGBYCM/RGBYCW color wheels.

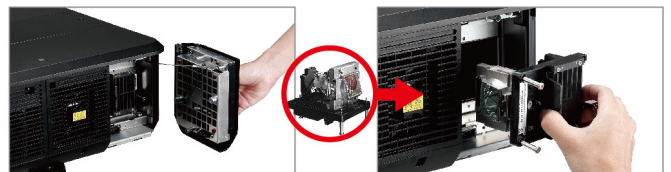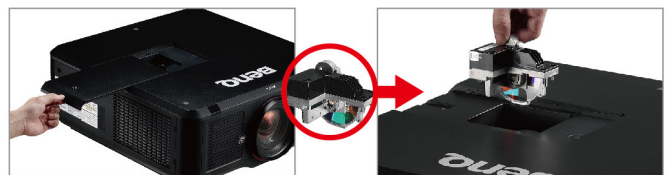

ecoFACTS
csr.BenQ.com

- PVC-free plastic packaging
- BFR/PVC-free casing plastics
- Certain phthalate-free wires/cables

- Arsenic-free optical glass
- >85% recycled papers in packaging box
- Eco-friendly ink printing in packaging box and user manual



Distance Chart

PU9730																															
Screen Size					Wide Fix 5JJAM37.01 I		Ultra Wide 5JJAM37.06 I				Wide Zoom 5JJAM37.02 I				Standard 5JJAM37.00 I				Semi Long 5JJAM37.05 I				Long Zoom I 5JJAM37.03 I				Long Zoom2 5JJAM37.04 I				
Diagonal		Width		Height	NA		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		
(Inch)	(m)	(Inch)	(m)	(Inch)	(Inch)	(m)	(Inch)	(Inch)	(m)	(Inch)	(m)	(Inch)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	
80	2.03	68	1.72	42	1.08	52	1.32	50.8	1.29	63.8	1.62	84.9	2.16	121.8	3.09	117	2.97	154.3	3.92	108	2.82	251.4	6.39	242.7	6.16	367.3	9.33	359.4	9.13	567	14.4
100	2.54	85	2.15	53	1.35	65.5	1.66	63.9	1.62	80.2	2.04	106.6	2.71	152.7	3.88	147	3.73	193.5	4.92	135	4.8	315	8	304.3	7.73	460.4	11.7	452.1	11.48	711.6	18.07
120	3.05	102	2.58	64	1.62	78.9	2.01	77.1	1.96	96.6	2.45	128.4	3.26	183.6	4.66	176.9	4.49	232.8	5.91	162	5.78	378.6	9.62	366.7	9.31	553.6	14.06	567	13.84	856.2	21.75
150	3.81	127	3.23	79	2.02	99.1	2.52	96.8	2.46	121.1	3.08	161	4.09	230	5.84	221.8	5.63	291.6	7.41	202	7.24	474.1	12.04	459.4	11.67	693.3	17.61	684	17.37	1073.1	27.26
200	5.08	153	3.88	95	2.42	132.8	3.37	129.7	3.29	162.1	4.12	215.3	5.47	307.3	7.81	296.6	7.53	389.7	9.9	242	9.68	633.1	16.08	614.7	15.6	926.4	23.53	915.9	23.26	1437.4	36.44
300	7.62	254	6.46	159	4.04	200.1	5.08	195.4	4.96	244	6.2	324	8.23	461.9	11.73	446.3	11.34	585.9	14.9	404	14.56	951.2	24.16	924	23.47	1392.1	35.36	1379.6	35.04	2157.8	54.81
400	10.16	339	8.62	212	5.38	267.4	6.79	261.2	6.63	325.9	8.28	432.7	10.99	616.6	15.66	595.9	15.14	782.3	19.87	538	19.44	1269.7	32.25	1233.9	31.34	1857.9	47.19	1843.3	46.81	2880.9	73.18
500	12.7	424	10.77	265	6.73	334.8	8.5	326.9	8.3	407.7	10.36	541.5	13.75	771.2	19.59	745.6	18.94	978.3	24.85	673	24.32	1587.8	40.33	1543.7	39.21	2323.6	59.02	2307.1	58.6	3604	91.54

PW9620																																
Screen Size					Wide Fix 5JJAM37.01 I				Ultra Wide 5JJAM37.06 I				Wide Zoom 5JJAM37.02 I				Standard 5JJAM37.00 I				Semi Long 5JJAM37.05 I				Long Zoom I 5JJAM37.03 I				Long Zoom2 5JJAM37.04 I			
Diagonal		Width		Height	NA		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele			
(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	
80	2.03	68	1.72	42	1.08	54.7	1.39	53.3	1.35	67.3	1.71	89.3	2.27	128	3.25	123.1	3.13	162.3	4.12	158.3	4.02	264.1	6.71	255.2	6.48	385.9	9.8	378.1	9.6	595.9	15.13	
100	2.54	85	2.15	53	1.35	68.8	1.75	67.1	1.7	84.5	2.15	112.1	2.85	160.5	4.08	154.5	3.93	203.5	5.17	198.7	5.05	330.7	8.41	320.3	8.14	483.7	12.29	475.6	12.08	747.7	18.99	
120	3.05	102	2.58	64	1.62	82.9	2.11	80.9	2.05	101.8	2.59	135	3.43	193	4.9	186	4.72	244.7	6.22	239	6.07	397.7	10.1	385.5	9.79	581.5	14.77	573	14.55	899.6	22.85	
150	3.81	127	3.23	79	2.02	104.1	2.64	101.6	2.58	127.6	3.24	169.2	4.3	241.7	6.14	233.1	5.92	306.5	7.79	299.6	7.61	498	12.65	483.2	12.27	728.2	18.5	719.1	18.27	1127.3	28.63	
200	5.08	153	3.88	95	2.42	139.4	3.54	136	3.45	170.8	4.34	226.4	5.75	322.9	8.2	311.7	7.92	409.6	10.4	400.5	10.17	665	16.89	646	16.41	972.7	24.71	962.7	24.45	1506.9	38.28	
300	7.62	254	6.46	159	4.04	210	5.33	204.9	5.2	257	6.53	340.6	8.65	485.3	12.33	468.9	11.91	615.7	15.64	602.3	15.3	999	25.38	971.7	24.68	1461.8	37.13	1449.9	36.83	2266.2	57.56	
400	10.16	339	8.62	212	5.38	280.6	7.13	273.8	6.95	343.2	8.72	454.8	11.55	647.7	16.45	626.1	15.9	821.9	20.88	804.1	20.42	1333.1	33.86	1297.3	32.95	1950.8	49.55	1937.1	49.2	3024.4	76.85	
500	12.7	424	10.77	265	6.73	351.2	8.92	342.7	8.7	429.4	10.91	569	14.45	810.1	20.58	783.3	19.9	1028	26.11	1005.9	25.55	1667.1	42.35	1623	41.22	2439.8	61.97	2424.2	61.58	3787.4	96.13	

PX9710																															
Screen Size					Wide Fix 5JJAM37.01 I		Ultra Wide 5JJAM37.06 I				Wide Zoom 5JJAM37.02 I				Standard 5JJAM37.00 I				Semi Long 5JJAM37.05 I				Long Zoom I 5JJAM37.03 I				Long Zoom2 5JJAM37.04 I				
Diagonal		Width		Height	NA		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		
(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)
80	2.03	64	1.63	48	1.22	50.8	1.29	49.5	1.26	62.5	1.59	82.9	2.11	119	3.02	114.3	2.9	150.8	3.83	147	3.73	245.7	6.24	237.1	6.02	358.9	9.12	350.9	8.91	554	14.07
100	2.54	80	2.03	60	1.52	63.9	1.62	62.4	1.58	78.6	2	104.1	2.65	149.2	3.79	143.5	3.65	189.1	4.8	184.6	4.69	307.9	7.82	297.7	7.56	450	11.43	441.6	11.22	695.3	17.66
120	3.05	96	2.44	72	1.83	77.1	1.96	75.2	1.91	94.7	2.4	125.4	3.28	179.4	4.56	172.8	4.39	227.4	5.78	222.1	5.64	370.1	9.4	358.2	9.1	541	13.74	532.2	13.52	816.7	21.25
150	3.81	120	3.05	90	2.29	96.8	2.46	94.4	2.4	118.8	3.02	157.3	3.99	224.8	5.71	216.7	5.5	285	7.24	278.4	7.07	463.4	11.07	449.1	11.41	677.6	17.21	668.2	16.97	1048.8	26.64
200	5.08	160	4.06	120	3.05	129.7	3.3	126.5	3.21	158.9	4.04	210.4	5.34	300.3	7.63	289.8	7.36	380.8	9.67	372.3	9.46	618.9	15.72	600.6	15.26	905.3	22.99	894.8	22.73	1202.2	35.62
300	7.62	240	6.1	180	4.57	195.5	4.97	190.7	4.84	239.2	6.08	316.6	8.04	451.5	11.47	436	11.07	572.6	14.54	560	14.23	930	23.62	903.6	22.95	1360.5	34.56	1348	34.24	2109.1	53.57
400	10.16	320	8.13	240	6.1	261.3	6.64	254.9	6.47	319.5	8.12	422.9	10.74	602.6	15.31	582.2	14.79	764.3	19.41	747.8	18.99	1241	31.52	1206.6	30.65	1815.8	46.12	1801.2	45.75	2816	71.51
500	12.7	400	10.16	300	7.62	327.1	8.31	319.1	8.1	399.9	10.16	529.1	13.44	753.7	19.14	728.5	18.5	956.1	24.28	935.5	23.76	1552	39.42	1509.5	38.34	2271.1	57.69	2254.3	57.26	3522.9	89.48

PX9600																															
Screen Size					Wide Fix 5JJAM37.01 I		Ultra Wide 5JJAM37.06 I				Wide Zoom 5JJAM37.02 I				Standard 5JJAM37.00 I				Semi Long 5JJAM37.05 I				Long Zoom I 5JJAM37.03 I				Long Zoom2 5JJAM37.04 I				
Diagonal		Width		Height	NA		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		Wide		Tele		
(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)	(Inch)	(m)
80	2.03	64	1.63	48	1.22	50.8	1.29	49.5	1.26	62.5	1.59	82.9	2.11	119	3.02	114.3	2.9	150.8	3.83	147	3.73	245.7	6.24	237.1	6.02	358.9	9.12	350.9	8.91	554	14.07
100	2.54	80	2.03	60	1.52	63.9	1.62	62.4	1.58	78.6	2	104.1	2.65	149.2	2.79	143.5	3.65	189.1	4.8	184.6	4.69	307.9	7.82	297.7	7.56	450	11.43	441.6	11.22	695.3	17.66
120	3.05	96	2.44	72	1.83	77.1	1.96	75.2	1.91	94.7	2.4	125.4	3.28	179.4	3.56	172.8	4.39	227.4	5.78	222.1	5.64	370.1	9.4	358.2	9.1	541	13.42	532.2	13.32	836.7	21.25
150	3.81	120	3.05	90	2.29	96.8	2.46	94.4	2.4	118.8	3.02	157.3	3.99	224.8	5.71	216.7	5.5	285	7.24	278.4	7.07	463.4	11.07	449.1	11.41	677.6	17.21	668.2	16.97	1048.8	26.64
200	5.08	160	4.06	120	3.05	129.7	3.3	126.5	3.21	158.9	4.04	210.4	5.34	300.3	7.63	289.8	7.36	380.8	9.67	373.2	9.46	618.9	15.72	600.6	15.26	905.3	22.99	894.8	22.73	1402.2	35.62
300	7.62	240	6.1	180	4.57	195.5	4.97	190.7	4.84	239.2	6.08	316.6	8.04	451.5	11.47	436	11.07	572.6	14.54	560	14.23	930	23.62	903.6	22.95	1360.5	34.56	1348	34.24	2109.1	53.57
400	10.16	320	8.13	240	6.1	261.3	6.64	254.9	6.47	319.5	8.12	422.9	10.74	602.6	15.31	582.2	14.79	764.3	19.41	747.8	18.99	1241	31.52	1206.6	30.65	1815.8	46.12	1801.2	45.75	2816	71.51
500	12.7	400	10.16	300	7.62	327.1	8.31	319.1	8.1	399.9	10.16	529.1	13.44	753.7	19.14	728.5	18.5	956.1	24.28	935.5	23.76	1552	39.42	1509.5	38.34	2271.1	57.69	2254.3	57.26	3522.9	89.48

Specification

	PX9600	PW9500	PX9710	PW9620	PU9730
Model Name					
Projection System	DLP	DLP	DLP	DLP	DLP
Native Resolution	XGA (1024x768)	WXGA (1280x800)	XGA (1024x768)	WXGA (1280x800)	WUXGA (1920x1200)
Brightness	6500 ANSI lumens	5700 ANSI lumens	7700 ANSI lumens	6700 ANSI lumens	7000 ANSI lumens
Contrast Ratio	2800:1	2800:1	2800:1	2800:1	2800:1
Display Color	1.07 Billion Colors	1.07 Billion Colors	1.07 Billion Colors	1.07 Billion Colors	1.07 Billion Colors
Lens	• Wide Fix: F = 1.85 • Ultra Wide: F=1.96-2.3 • Wide Zoom: F=1.85-2.50 • Standard: F=1.7-1.9 • Semi Long: F=1.86-2.48 • Long Zoom1: F=1.86-2.41 • Long Zoom2: F=1.85-2.48 (All lenses are purchased separately)				
Aspect Ratio	Native 4:3 (5 aspect ratio selectable)	Native 16:10 (5 aspect ratio selectable)	Native 4:3 (5 aspect ratio selectable)	Native 16:10 (5 aspect ratio selectable)	Native 16:10 (5 aspect ratio selectable)
Throw Ratio	• Wide Fix: 0.79 • Semi Long: 2.33~3.81 • Ultra Wide: 0.77~0.97 • Long Zoom1: 3.71~5.57 • Wide Zoom: 1.31~1.85 • Long Zoom2: 5.5~8.56 • Standard: 1.79~2.35	• Wide Fix: 0.8 • Semo Long: 2.33~3.86 • Ultra Wide: 0.75~0.93 • Long Zoom1: 3.76~5.64 • Wide Zoom: 1.31~1.87 • Long Zoom2: 5.56~8.67 • Standard: 1.81~2.38	• Wide Fix: 0.79 • Semi Long: 2.33~3.81 • Ultra Wide: 0.77~0.97 • Long Zoom1: 3.71~5.57 • Wide Zoom: 1.31~1.85 • Long Zoom2: 5.5~8.56 • Standard: 1.79~2.35	• Wide Fix: 0.8 • Semi Long: 2.33~3.86 • Ultra Wide: 0.78~0.98 • Long Zoom1: 3.76~5.64 • Wide Zoom: 1.31~1.87 • Long Zoom2: 5.56~8.67 • Standard: 1.81~2.38	• Wide Fix: 0.76 • Semi Long: 2.22~3.67 • Ultra Wide: 0.75~0.93 • Long Zoom1: 3.58~5.38 • Wide Zoom: 1.25~1.79 • Long Zoom2: 5.31~8.26 • Standard: 1.73~2.27
Image Size (Diagonal)	80"-500"	80"-500"	80"-500"	80"-500"	80"-500"
Zoom Ratio	• Wide Fix: Fixed • Ultra Wide: 1.25:1	• Wide Zoom: 1.4:1 • Standard: 1.3:1	• Semi Long: 1.65:1 • Long Zoom1: 1.5:1	• Long Zoom2: 1.55:1	
Lamp Wattage	280W x 2	280W x 2	350W x 2	350W x 2	350W x 2
Lamp Life (Normal/Eco)	2000/2500	2000/2500	2000/2500	2000/2500	2000/2500
Keystone Adjustment	ID, Vertical ± 30 degrees	ID, Vertical ± 30 degrees	ID, Vertical ± 30 degrees	ID, Vertical ± 30 degrees	ID, Vertical ± 30 degrees
Lens Shift	• Wide Fix: NA • Ultra Wide: V (0-45%) / H (+/-10%)	• Wide Zoom: V (0-50%) / H (+/-10%) • Standard: V (0-50%) / H (+/-10%)	• Semi Long: V (0-50%) / H (+/-10%) • Long Zoom1: V (0-50%) / H (+/-10%)	• Long Zoom2: V (0-50%) / H (+/-10%)	
Resolution Support	up to UXGA (1600 x 1200)	up to UXGA (1600 x 1200)	up to WUXGA (1920 x 1200)	up to WUXGA (1920 x 1200)	up to WUXGA (1920 x 1200)
Horizontal Frequency	31K-92KHz	31K-92KHz	15K-91KHz	15K-91KHz	15K-91KHz
Vertical Scan Rate	23-85Hz	23-85Hz	48-120Hz	48-120Hz	48-120Hz
Color Wheel Segment	RGBW	RGBW	6S -RYGCWB(built-in) , 6S-RGBCMY	6S -RYGCWB(built-in) , 6S-RGBCMY	6S -RYGCWB(built-in) , 6S-RGBCMY
Color Wheel Speed	2X	2X	3X	3X	3X
HDTV Compatibility	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	480i, 480p, 576i, 576p, 720p, 1080i, 1080p	480i, 480p, 576i, 567p, 720p, 1080i, 1080p	480i, 480p, 576i, 567p, 720p, 1080i, 1080p	480i, 480p, 576i, 567p, 720p, 1080i, 1080p
Video Compatibility	NTSC, PAL, SECAM	NTSC, PAL, SECAM	NA	NA	NA
Interface					
Computer in (D-sub 15pin)	x 1	x 1	x 1	x 1	x 1
Monitor out (D-sub 15pin)	x 1	x 1	x 1	x 1	x 1
DVI-D	x 1	x 1	x 1	x 1	x 1
HDMI (v1.4a)	No	No	x 1	x 1	x 1
Composite Video in (RCA)	x 1	x 1	No	No	No
S-Video in (Mini DIN 4pin)	x 1	x 1	No	No	No
Component Video in	x 1 (5BNC)	x 1 (5BNC)	x 1 (5BNC)	x 1 (5BNC)	x 1 (5BNC)
LAN (RJ45)	x1 (LAN Control)	x1 (LAN Control)	x 1 (LAN Control)	x 1 (LAN Control)	x 1 (LAN Control)
USB (Type A)	No	No	x 1 (Download)	x 1 (Download)	x 1 (Download)
USB (Type B)	x 1 (Download)	x 1 (Download)	No	No	No
DC 12V Trigger (3.5mm Jack)	x1	x1	x1	x1	x1
RS232 (DB-9pin)	x1	x1	x1	x1	x1
Wired Remote (Mini Jack)	x1	x1	x1	x1	x1
HD Connect (RJ45)	No	No	x1 (Share with LAN)	x1 (Share with LAN)	x1 (Share with LAN)
Display Port	No	No	x1	x1	x1
3D Sync	No	No	x1	x1	x1
Environment					
Dimensions (WxHxD)	505 x 194 x 385 mm	505 x 194 x 385 mm	510 x 230 x 540 mm	510 x 230 x 540 mm	510 x 230 x 540 mm
Weight	16.5kg (Lens Excluded)	16.5kg (Lens Excluded)	21kg (Lens Excluded)	21kg (Lens Excluded)	21kg (Lens Excluded)
Power Supply	AC 100 to 240 V, 50/60 Hz	AC 100 to 240 V, 50/60 Hz	AC 100 to 240 V, 50/60 Hz	AC 100 to 240 V, 50/60 Hz	AC 100 to 240 V, 50/60 Hz
Power Consumption	710W	710W	815-880W	815-880W	815-880W
Stand-by Power Consumption	<0.5W	<0.5W	<0.5W	<0.5W	<0.5W
Acoustic Noise (Typ./Eco)	39/34/35/32 (Dual Lamp Normal/Dual Lamp Eco/ Single Lamp Normal/Single Lamp Eco)	39/34/35/32 (Dual Lamp Normal/Dual Lamp Eco/ Single Lamp Normal/Single Lamp Eco)	41/36/38/35 (Dual Lamp Normal/Dual Lamp Eco/ Single Lamp Normal/Single Lamp Eco)	41/36/38/35 (Dual Lamp Normal/Dual Lamp Eco/ Single Lamp Normal/Single Lamp Eco)	41/36/38/35 (Dual Lamp Normal/Dual Lamp Eco/ Single Lamp Normal/Single Lamp Eco)
Accessories (Standard)					
Remote Control w/o Battery	x 1	x 1	x 1	x 1	x 1
User Manual CD	x 1 (12L)	x 1 (12L)	x 1 (12L)	x 1 (12L)	x 1 (12L)
Quick Start Guide	x 1 (12L)	x 1 (12L)	x 1 (12L)	x 1 (12L)	x 1 (12L)
VGA(D-sub 15pin) Cable	x1	x1	x1	x1	x1
Anti-dust Filter	x1	x1	x2	x2	x2
Lens cover	No	No	x1	x1	x1
Unique Accessory	Color Wheel (6 segments)	Color Wheel (6 segments)	Color Wheel (6 segments)	Color Wheel (6 segments)	Color Wheel (6 segments)
Accessories (Optional)					
Optional Lens	Yes	Yes	Yes	Yes	Yes
Spare Lamp Kit	Yes	Yes	Yes	Yes	Yes
Ceiling Mount	Yes	Yes	Yes	Yes	Yes