

AN11717

KMA22x; KMA32x handling information

Rev. 2 — 9 July 2018

Application note

Document information

Info	Content
Keywords	KMA220, KMA221, KMA320, KMA321, package, handling, assembly
Abstract	This document describes the limitations to package handling and precautions for safe assembly.



Revision history

Rev	Date	Description
2.0	20180622	changed type KMA332 to KMA320
1.0	20151021	initial version

Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

1. Introduction


1.1 General

NXP Semiconductors is not the owner of customer processes and cannot test them under all conditions. Therefore, the information below is a general guideline for product handling and package assembly.

It does not replace the process development and release by the customer.

1.2 Package information

The products KMA22x and KMA32x use the package SOT1188. It is fit for soldering and welding. The leads can be bent according to customer requirements. The products require gentle handling as especially the leads can bend unintentionally due to their small cross section and length.

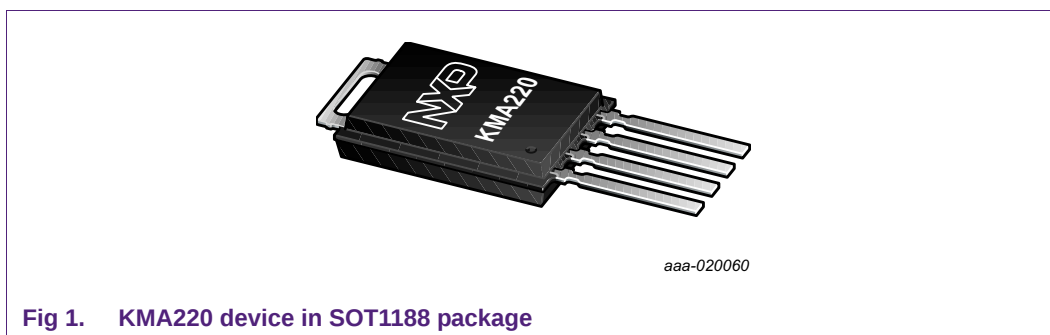

2. Storage

2.1 Store conditions

Secure and clean store areas must be provided to isolate and protect the products.

Conditions in the store areas shall be such that the quality of the products does not deteriorate due to, among others, harmful gasses or electrical fields.

Storage conditions:

- Temperature
 - Min. +8 °C
 - Max. +45 °C
- Humidity
 - Min. 25 %
 - Max. 75 %
 - No condensation is allowed under any condition
- Light intensity
 - No direct sunlight


2.2 Shelf life

The shelf life for packed products is 4 years after the date code.

3. Precautions

3.1 Stress to sensor head


As all MagnetoResistive (MR) sensors, KMA22x and KMA32x react on severe mechanical stress. It can compromise the accuracy of the device. Prevent bending (warping) of the sensor head as that applies enormous stress to the sensor chip.

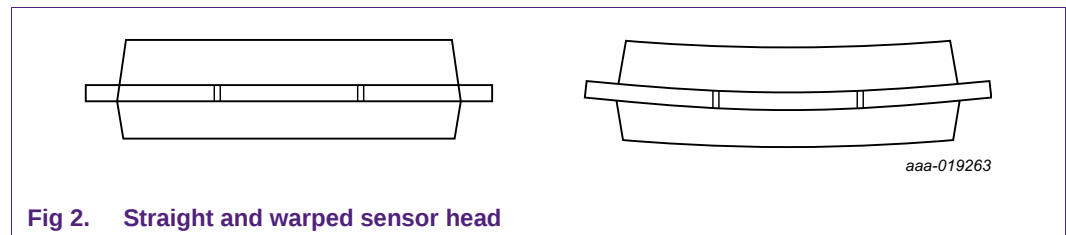

Often the sensor is attached to a substrate (e.g. a throttle body cover). The sensor should be decoupled as much as possible from the substrate, e.g. by using a soft silicone glue to fix the sensor.

3.2 Stress to sensor leads

Caused by differences in thermal expansion of sensor and environment (socket), high amount of stress can be generated. To reduce that stress, bend the sensor or external leads to prepare a flexible region. Bending recommendations see [Section 5.2](#).

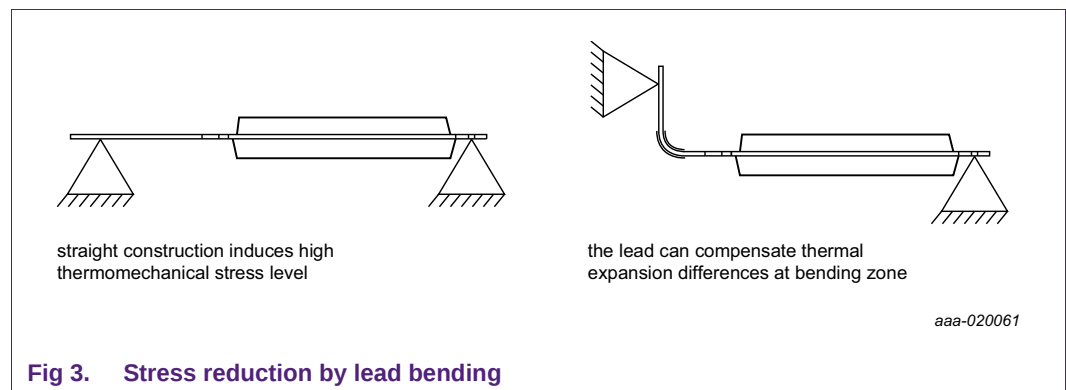

4. Product handling

4.1 ESD protection


Despite the KMA22x and KMA32x devices being equipped with capacitors to increase the ESD robustness, apply the usual ESD protection measures.

4.2 Forces on body

Forces on the plastic body during general handling should not exceed 10 N. Apply forces via flat surfaces, parallel to the sensor surface. Avoid stress concentrations at smaller areas.


4.3 Forces along leads

Maximum pull force along leads is limited to 10 N per lead. Forces in other directions should be prevented as the leads tend to bend easily. Pushing of leads can cause caving-in.

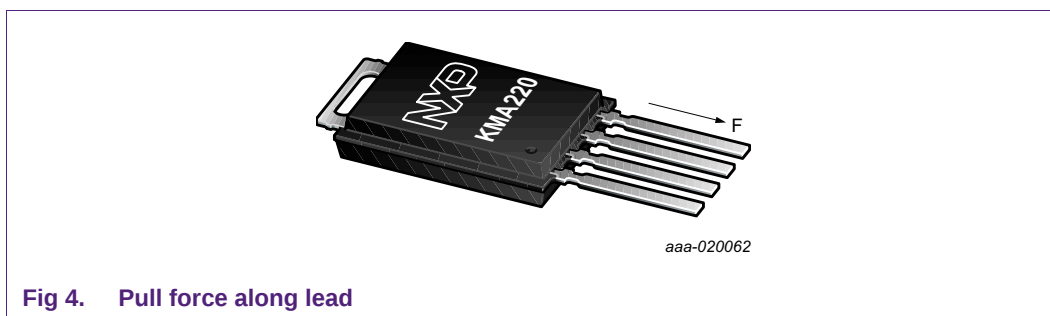


4.4 Forces at fin

Maximum pull force is limited to 15 N. Forces perpendicular to the fin should be prevented as the fin tends to bend easily.

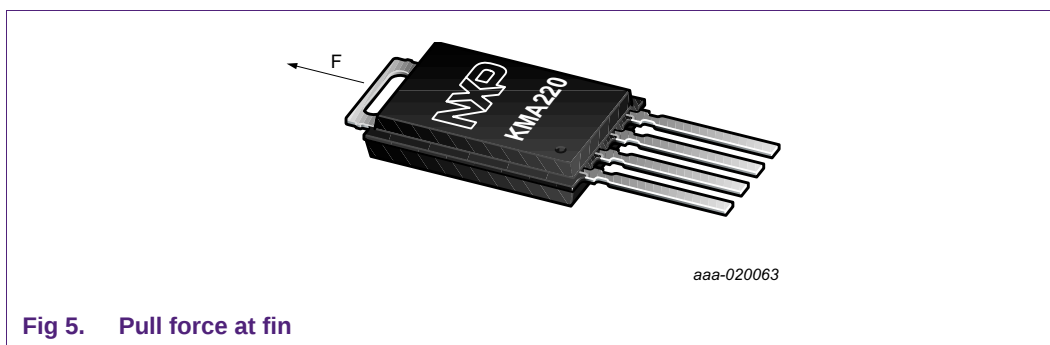

4.5 Product picking out of tape

Products should be picked by either a flat or cavity type sucker.

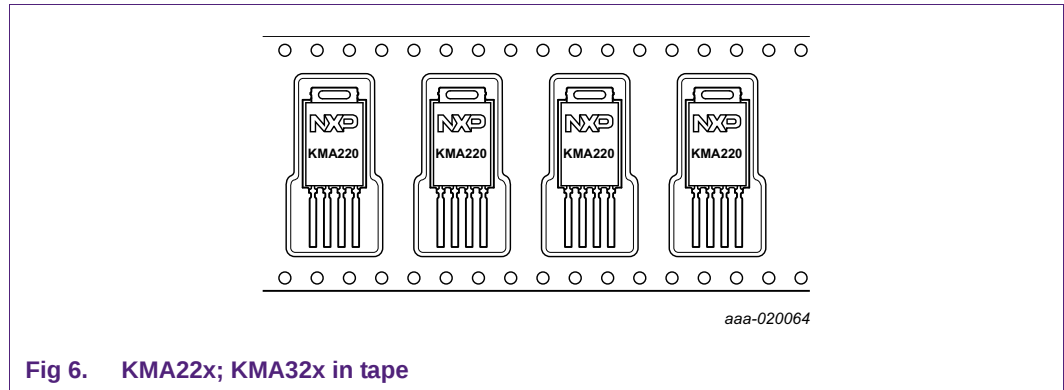

5. Product assembly


5.1 Product alignment

5.1.1 Package features for alignment

Blue areas are preferred for alignment in socket.

Red areas should not be used for alignment due to uncontrolled package outline caused by gate remains or potential mold compound flash.

Other areas can be used for alignment.

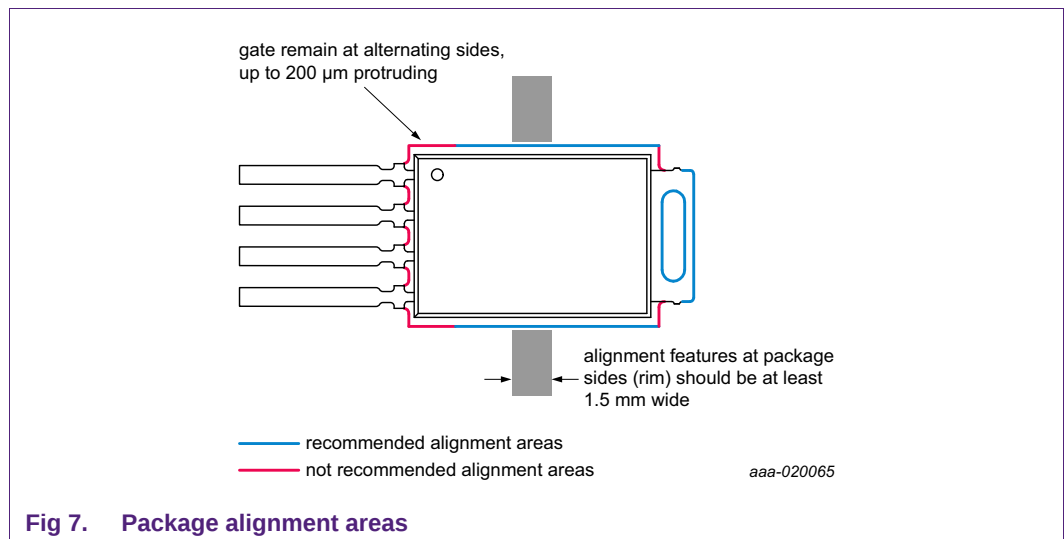

5.1.2 Reading point alignment

Best reference for the Reading Point (RP) is the Lead Frame (LF) as the die is attached to the LF.

- As the fin is part of the lead frame, it is the preferred alignment feature.
- The RP has a tolerance of ± 0.1 mm regarding the fin.
- The lead frame formed the rim (mold compound flowed to the lead frame edge, forming the rim). Therefore, it has the same tolerance of ± 0.1 mm.

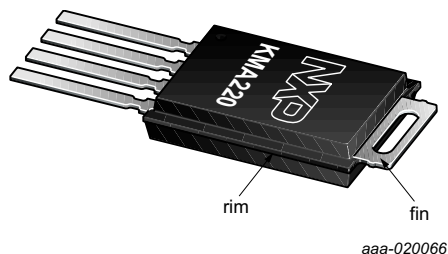


Fig 8. Reading point alignment features

5.1.3 Pin alignment

Just aligning the package at the sensor head may not be sufficient to ensure proper positioning of the pins to their external counterparts.

Align the product at the rim. It is also possible to align at the leads itself.

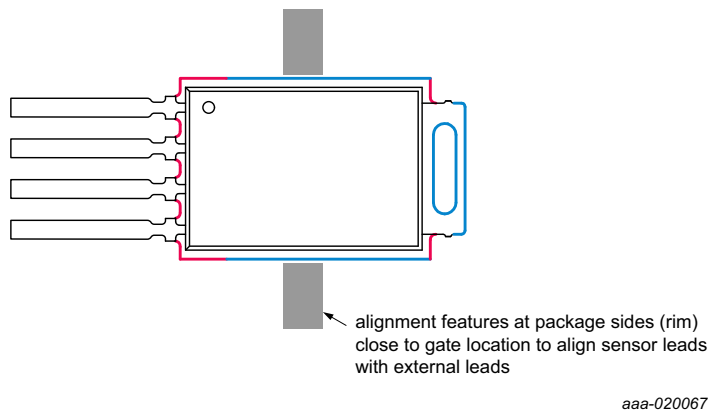




Fig 9. Align pins to external leads at lower body

5.2 Lead bending

To adapt the packages to customer requirements, the leads can be bent as shown in [Figure 10](#) and [Figure 11](#).

It is not recommended to bend the dambar (and fin) region (see [Figure note 1](#) of [Figure 11](#)) as the lead geometry in those areas can compromise the bending result. Instead, bending is recommended at the straight parts of the leads.


To prevent lead pull forces at the entrance to the plastic body, use proper clamping at the leads in between the bending position and the plastic body.

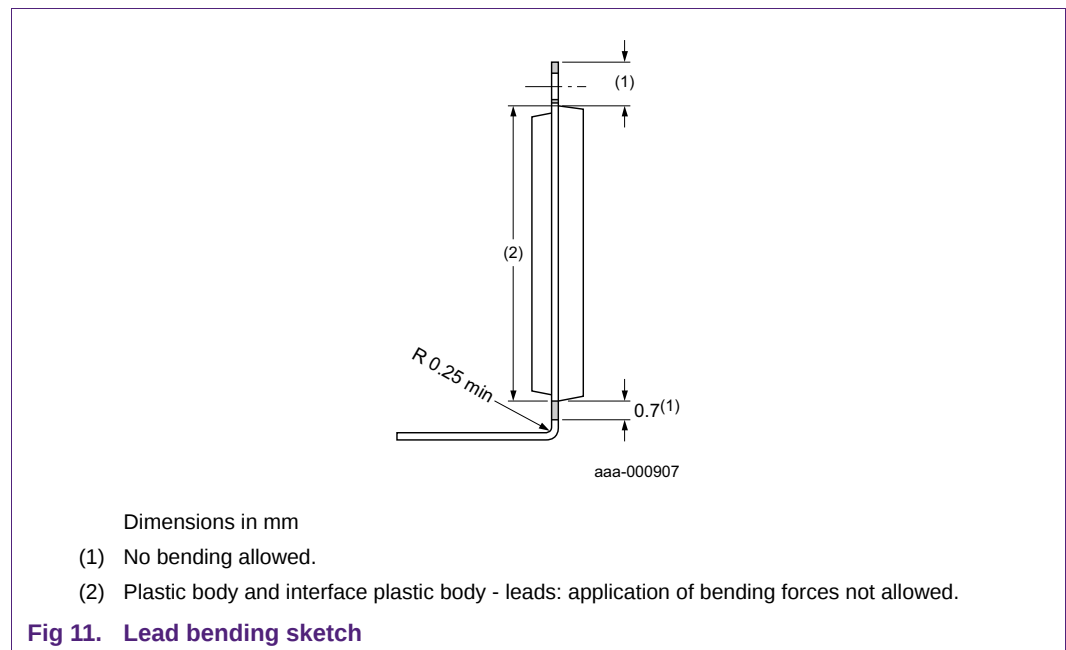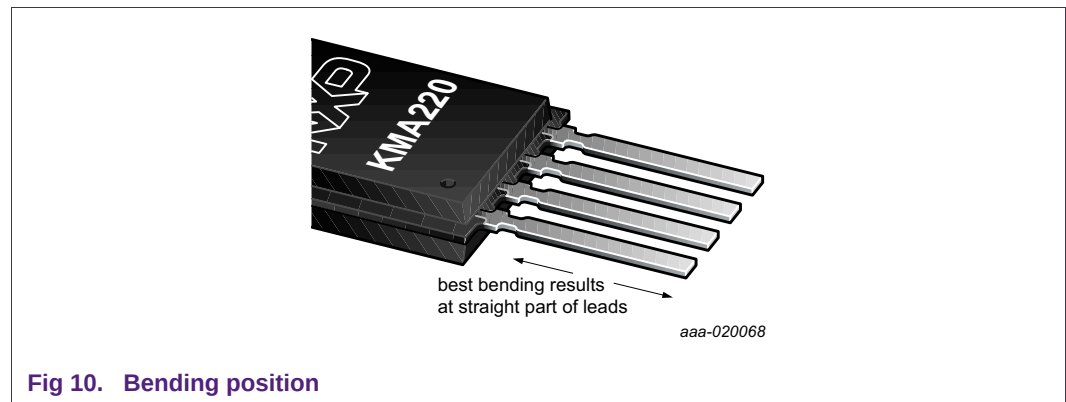

5.2.1 Lead bend control


After intentional or unintentional lead bending or twisting, verify that the products are not mechanically damaged.

Smooth bending without buckling in bending zone, inner radius > 250 μm .

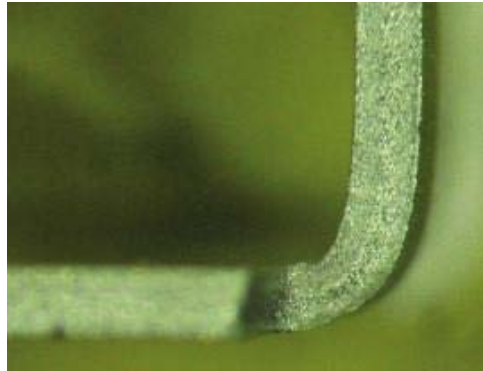

aaa-019270

Fig 12. Smooth bending

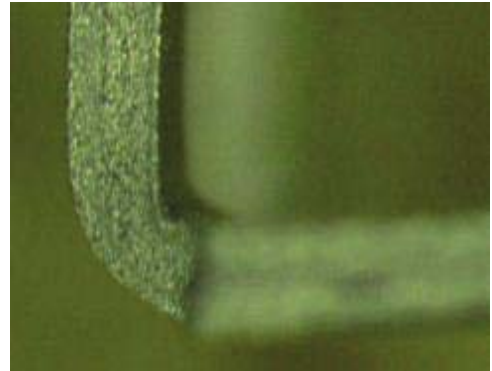


aaa-019271

Fig 13. Kink in bending zone, reject

No exposed Cu (Sn layer cracked, Cu core material exposed) allowed.

Leads just in front of package entrance not bent, no gaps at lead entrance all around leads.

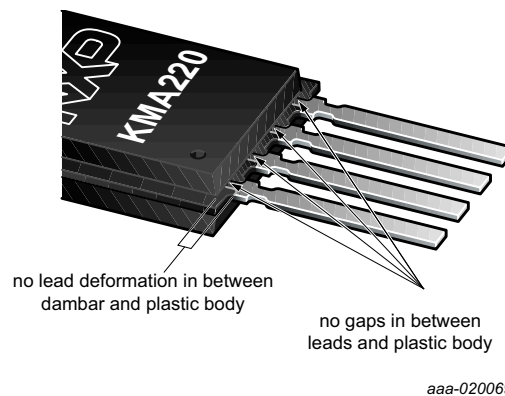

aaa-020069

Fig 14. Lead entrance to body check


5.3 Soldering

The solderability qualification is according to AEC-Q100 Rev-G. Recommended soldering process for leaded devices is wave soldering. The maximum soldering temperature is 260 $^{\circ}\text{C}$ for maximum 5 s.

Alternatively, the device can be reflow soldered.

5.4 Welding

During electrowelding, a heat wave travels along the leads causing high stress to the sensor product. To limit the stress, control the heat by verifying that the Sn reflow zone does stop in front of plastic body (at body entrance).

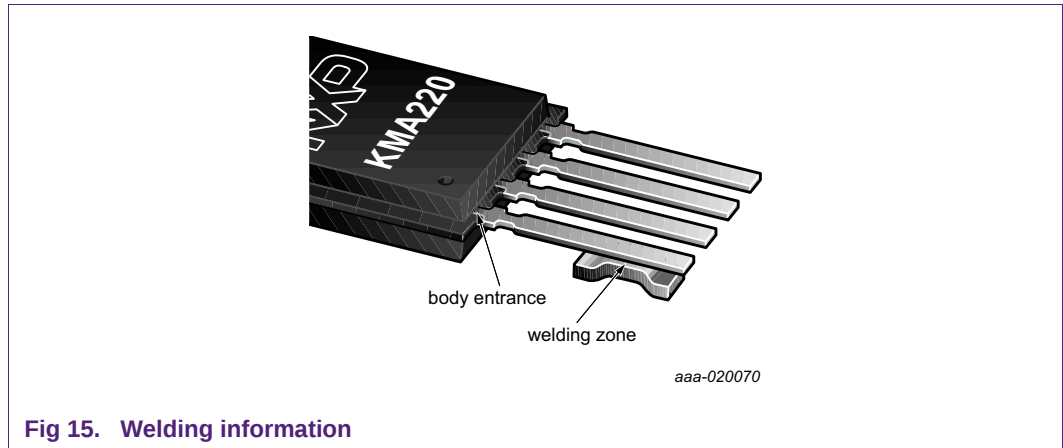

6. Legal information

6.1 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

6.2 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This NXP Semiconductors product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or

malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

6.3 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

7. Figures

Fig 1. KMA220 device in SOT1188 package3

Fig 2. Straight and warped sensor head4

Fig 3. Stress reduction by lead bending.4

Fig 4. Pull force along lead5

Fig 5. Pull force at fin5

Fig 6. KMA22x; KMA32x in tape6

Fig 7. Package alignment areas6

Fig 8. Reading point alignment features7

Fig 9. Align pins to external leads at lower body7

Fig 10. Bending position8

Fig 11. Lead bending sketch8

Fig 12. Smooth bending.9

Fig 13. Kink in bending zone, reject.9

Fig 14. Lead entrance to body check.9

Fig 15. Welding information10

8. Contents

1	Introduction	3
1.1	General	3
1.2	Package information	3
2	Storage	3
2.1	Store conditions	3
2.2	Shelf life	4
3	Precautions	4
3.1	Stress to sensor head	4
3.2	Stress to sensor leads	4
4	Product handling	4
4.1	ESD protection	4
4.2	Forces on body	5
4.3	Forces along leads	5
4.4	Forces at fin	5
4.5	Product picking out of tape	6
5	Product assembly	6
5.1	Product alignment	6
5.1.1	Package features for alignment	6
5.1.2	Reading point alignment	7
5.1.3	Pin alignment	7
5.2	Lead bending	8
5.2.1	Lead bend control	9
5.3	Soldering	9
5.4	Welding	10
6	Legal information	11
6.1	Definitions	11
6.2	Disclaimers	11
6.3	Trademarks	11
7	Figures	12
8	Contents	13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2018.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 9 July 2018

Document identifier: AN11717