

*Tenda*



All for better networking.

**TEG5312F**

L3 Managed Switch

[www.tendacn.com](http://www.tendacn.com)



# TEG5312F

## L3 Managed Switch

### Products Description

TEG5312F is a Tenda Layer-3 managed switch. To meet the demand of high-performance access, the switch provides 10 10/100/1000 Mbps Base-T Ethernet ports and 2 separate 1000 Mbps Base-X SFP ports. With an innovative hardware structure and software platform, it features a powerful processing capacity and complete security protection mechanism, making management and maintenance easy and simple, fully meeting the demands of high-density user access and high-performance aggregation, ideal for the aggregation layer or core layer of such medium to large networks as enterprises and campuses.

### Product Features

---

- Comply with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab, IEEE 802.3ad, IEEE 802.3z, IEEE 802.3x, IEEE 802.1p, IEEE 802.1q, IEEE 802.1w, IEEE 802.1d, IEEE 802.1s standards
- 10 x 10/100/1000 Base-T Ethernet ports, 2 separate 1000 Base-X SFP ports
- 16 K MAC address table and MAC address auto-learning
- 12Mb large cache queue
- Supports abundant services, such as static routing, DHCP server, VLAN, IGMP, ACL, SNMP and Telnet
- Built-in 6 kV professional lightning protection power, 19 inch/1 u standard rack-mounted design


# Key Features

---



## 6 kV professional lightning protection

Built-in professional lightning protection circuit, support 6KV port lightning protection, effectively reduce the damage caused to the network system by thunderstorms, and improve the robustness of the system




## Layer-3 routing protocol

Supports Layer-3 static routing protocol, meeting the demand of the 3-layer networking environment in which Layer-3 networks should be interconnected while Layer-2 networks should be isolated, thus realizing an efficient and fast layer-3 routing forwarding




## 12M large buffer

Provides a large 12Mb buffer, which can meet the network application requirements of large traffic bursts such as engine search, IPTV, P2P download, and no packet loss during traffic bursts



## Rich security features


Supports IP address filtering, MAC address filtering, ARP filtering, DoS attack defense, and ACL access control list, improving network security



## Map visualization

Supports auto discovery of ONVIF based ip-camera and access point, support automatically topology generate.

# Application

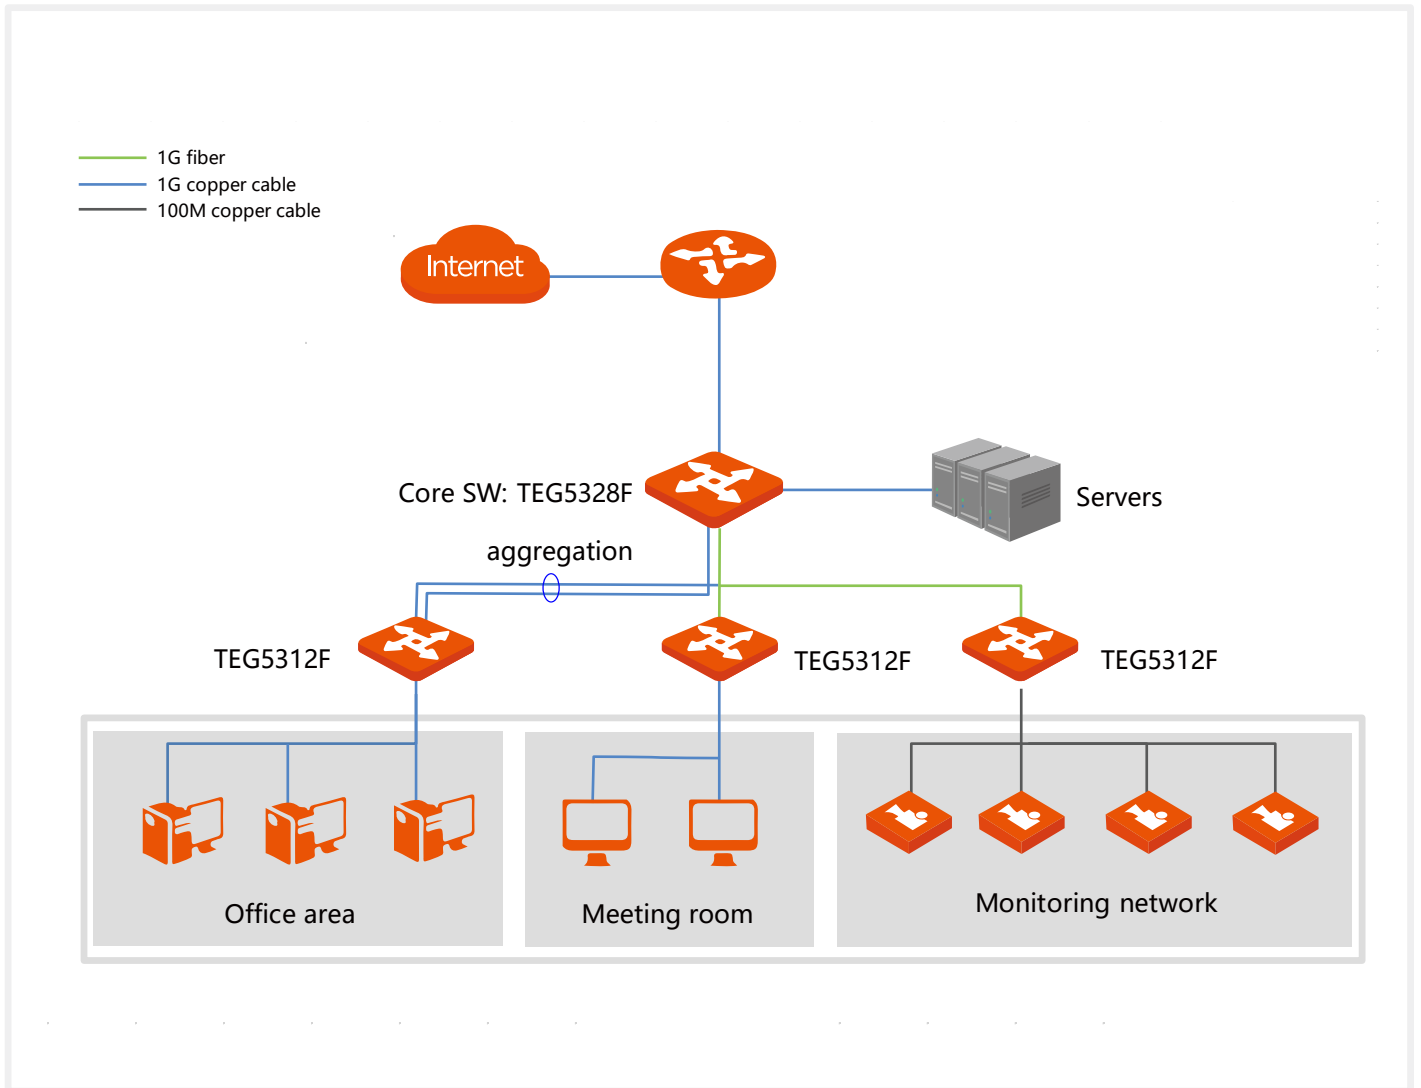

# Specifications

Hardware specifications	
Network standards	IEEE802.3、IEEE802.3u、IEEE802.3ab、IEEE802.3ad、IEEE802.3z、IEEE802.3x、IEEE802.1p、IEEE802.1q、IEEE802.1w、IEEE802.1d、IEEE802.1s
LED indicators	One Link/Act LED indicator for each port One Power LED indicator for each device One SYS LED indicator for each device
Fixed ports	10 x 10/100/1000 Base-T Ethernet ports 2 x 1000 Base-X SFP ports
Lightning protection	≥6 kV
Forwarding mode	Store-and-forward
MAC address table	16K
Input voltage	100-240V ~ 50/60Hz
Dimensions	294 mm x 179.6 mm x 44 mm
Operating environment	Operating temperature: 0°C - 40°C Storage temperature: -40°C - 70°C Operating humidity: (10% - 90%)RH, non-condensing, Storage humidity: (5% - 90%)RH, non-condensing
Software specifications	
Security features	ARP receiving limit Unknown MAC address discard DoS attack defense 802.1x security authentication Radius security authentication
VLAN	IEEE 802.1Q VLAN VLAN Layer-3 interfaces Supports three port modes: Access, Trunk and Hybrid
DHCP	DHCP Server DHCP Relay DHCP Snooping Supports Option 82 policy configuration
L3 Routing	VLAN-based routing IPv4 static routing adding Supports static ARP adding/deleting Supports ARP aging time configuration
Port aggregation	Static aggregation LACP dynamic aggregation
Spanning tree	IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) Supports edge port Supports BPDU statistics

# Specifications

---

## Software specifications

Multicast	IGMP Snooping V1/V2/V3 Supports port fast leave
Port Mirroring	Supports N: 1 port mirroring
QoS	SP (Strict Priority) SWRR (Simple Weighted Round Robin) WRR (Weighted Round Robin) Supports 802.1p port trust mode Supports DSCP port trust mode Supports a maximum of 8 queue service quality mapping
ACL	Supports MAC ACL and IP ACL
Loading and upgrade	Supports FTP/TFTP/HTTP upgrade Supports configuration import and export
Management and maintenance	Supports Telnet, Console Supports SNMP V1/V2/V3 Supports WEB management and maintenance Supports Ping/Tracert/Connection Detection Supports local visualization management
Certificates	CCC、FCC、CE、RoHS

---

## SHENZHEN TENDA TECHNOLOGY CO.,LTD.

Tenda Technology Bldg.Int'l E-City,  
#1001 Zhong Shan Yuan Rd.,Nanshan District,Shenzhen China.

E-mail:support@tenda.com.cn

Tel:+86-755-2765 7098

Fax:+86-755-2765 7178