



SECO-LARM®

Since
1971

Manufacturers of **ENFORCER®**

2015

FENCE AND GATE CATALOG

For All Your Security Needs



Wireless | Access | CCTV | Sensors | Security | Audio/Video | Vehicle Security

2015-B01B



Model Number:

DP-236Q

Camera and monitor set

NEW

DP-236-MQ

Additional wireless monitor

NEW

Wireless Video Door Phone

Features:

- Wireless operation – no need to run wires from camera to monitor
- Connect up to three additional monitors
- Wide camera angle eliminates need for adjustments
- Large 3 3/8" (86mm) screen
- Up to 492ft (150m) range
- Unlock doors, gates, etc. from the monitor with a single button press
- Built-in microphone and speaker for two-way communication
- Camera has built-in LEDs for use at night
- Handheld monitor can be carried around the property
- Monitor includes a rechargeable lithium ion battery
- Motion detection allows camera to take images of visitors
- Egress input allows the door phone to be connected with a request-to-exit plate or other egress device
- Four programmable ringtones available
- Optional accessories include:
 - DP-236-MQ (Additional monitor)
 - DP-236-BQ (Replacement battery)



Model Number:

DP-234Q

Camera and monitor set

NEW

DP-234-MQ

Additional hands-free monitor

NEW

Hands-Free Video Door Phone

Features:

- Install in apartment buildings to allow residents two-way communication with visitors
- Simple 2-wire connection
- Camera unit has built-in microphone and speaker for hands-free two-way communication
- Unlock doors with a single button press from the main monitor or secondary monitor (not included)
- Adjustable color tone, brightness, and contrast
- Adjustable speaker and ringer volume
- Camera has four LEDs for nighttime operation
- 1/3" Sony Super HAD II CCD
- 700 TV Line resolution
- Large 6 3/4" (171mm) screen
- Connect an additional monitor (DP-234-MQ) for up to three monitor stations

Electromagnetic Gate Locks



E-946FC-1K2Q



E-942FC-600

Model Number:

E-946FC-1K2Q

1,200-lb Gate lock, face or surface mount

NEW**E-946FC-600Q**

600-lb Gate lock, face or surface mount

NEW**E-942FC-1300**

1,200-lb Gate lock, face mount

E-942FC-600

600-lb Gate lock, face mount



Electromagnetic Gate Locks with Weldable Brackets



E-946FC-1K2SQ



E-942FC-1K3SQ

Model Number:

E-942FC-1K3SQ

1,200-lb Gate lock with face-mount bracket

E-942FC-600SQ

600-lb Gate lock with face-mount bracket

E-946FC-1K2SQ

1,200-lb Gate lock with surface-mount bracket

NEW

Features:

- For sliding or swinging gates
- Weld or bolt brackets directly to the gate
- Brackets are zinc plated and corrosion resistant
- Water resistant and vandal resistant
- Maintenance-free, factory-sealed design
- Dual-threaded conduit fitting
- Anodized aluminum housing (US 28)
- Dual voltage: 12/24 VDC Operation
- No residual magnetism
- MOV Surge protection



MAGLOCK ONLY



Model Number:

SK-3523-SDQ

Heavy-Duty Outdoor Keypad

Features:

- Heavy, stainless-steel faceplate with a coated steel backing
- Up to 210 unique 4~5 digit codes
- 12~24 VAC/VDC Operation
- Two Form C relays rated 12A@14VDC
- Door sensing input allows for anti-tailgating operation
- Overhead LEDs and programmable backlit keys for nighttime use
- Each relay output can be set for 1~99 seconds or toggle
- Tamper switch: N.C. Dry contact rated 3A@125/250 VAC
- Egress/pushbutton input



SK-1123-SQ

SK-1123-FQ

Outdoor Keypads

SK-1123-SQ

110 Users, 2 outputs, surface-mount

SK-1123-FQ

110 Users, 2 outputs, flush-mount

Features:

- 110 Unique 4~8 digit codes
- 12~24 VAC/VDC Operation tamper switch, security screws
- Each relay has programmable output time from 1~999 seconds or toggle
- Egress input for exiting the protected premises
- Programmable LED keys
- Tamper switch: N.C. Dry contact rated 3A@12VDC
- Program to emit beeps for key presses or to operate in silent mode
- Limited lifetime warranty



Model Number:

SD-9963-KSGQ

NEW

Post-Mount No-Touch Request-to-Exit Sensor

Features:

- "Goose-neck" mounting
- No touch – just wave a hand in front of the sensor
- Weatherproof for outdoor use
- 12/24 VDC Operation
- Adjustable sensing range up to 4" (10cm)
- Adjustable sensing range and delay time

Sealed-Housing Keypads



SK-2323-SDQ



SK-2323-SPAQ

SK-2323-SDQ*Mullion-style keypad***SK-2323-SPQ***Mullion-style keypad with built-in proximity card reader***SK-2323-SPAQ***Mullion-style piezoelectric keypad with built-in proximity card reader***Features:**

- 1,010 Unique 2~6 digit codes
- 12~24 VAC/VDC Operation
- Two Form C relay outputs
- Each relay has programmable output time from 1~99 seconds or toggle
- Rugged weatherproof design
- Backlit keys for easy nighttime use
- Two egress inputs
- Door sensor input
- All features are programmed from the keypad
- Circuitry is potted with epoxy for outdoor use
- Proximity cards (PR-K1S1-A) and proximity keyfobs (PR-K1K1-AQ) sold separately

SK-1323-SDQ*Sealed-housing keypad***SK-1323-SPQ***Sealed-housing keypad with built-in proximity card reader***Features:**

- 1,010 Unique 2~6 digit codes
- 12~24 VAC/VDC Operation
- Two Form C relay outputs
- Each relay has programmable output time from 1~99 seconds or toggle
- Rugged weatherproof design
- Backlit keys for easy nighttime use
- Two egress inputs
- Door sensor input
- All features are programmed from the keypad
- Circuitry is potted with epoxy for outdoor use
- Can mount to a single-gang backbox
- Proximity cards (PR-K1S1-A) and proximity keyfobs (PR-K1K1-AQ) sold separately



SK-1323-SDQ



SK-1323-SPQ



Model Number:

E-931-S35RRQ

Range: Up to 35ft (11m)

35ft Reflective Beam Sensor

Features:

- 10ms Response time
- 12~250 VDC or 24~240 VAC Operation
- Weatherproof (IP66) construction for indoor/outdoor use
- Pre-wired 6ft (1.8m) cord
- 2-Inch square reflector, mounting brackets, and mounting hardware included

Optional Mounting Brackets:



Model Number:

E-931-S45RRQ

Range: Up to 45ft (14m)

45ft Reflective Beam Sensor

Features:

- Response time adjustable from 5~100 ms
- 12~250 VAC/VDC Operation
- Weatherproof (IP66) construction for indoor/outdoor use
- Pre-wired 6ft (1.8m) cord
- 3-Inch round reflector, reflector hood, mounting brackets, and mounting hardware included
- Please see above (E-931-S35RRQ) for optional mounting brackets



Model Number:

E-931-S33PRQ

Range: Up to 33ft (10m)

33ft Polarized Reflective Beam Sensor

Features:

- Up to 33ft (10m) sensing range
- Polarized sensor is immune to shiny objects
- Triggers when correctly reflected light is detected
- 10ms Response time
- Tamper output will trigger an alarm if the sensor's cover is removed
- 12~250 VAC/VDC Operation
- Housing designed to prevent condensation
- Weatherproof (IP66) construction for indoor/outdoor use
- 3-Inch round reflector, sensor hood, and mounting hardware included

**Model Number:****E-960-D90Q***Single-frequency*Range: Up to 90ft (30m) outdoor
Up to 190ft (60m) indoor**Twin Photobeam Detectors****Features:**

- Twin beams provide reliable perimeter security, minimizing false alarms
- Typical applications include: Garage doors, outdoor gates, overhead doors, or manufacturing lines
- Weatherproof, sunlight-filtering case for indoor and outdoor conditions
- Automatically adjusts beam strength to compensate for different weather
- NO/NC Alarm output
- N.C. Tamper circuit included
- Built-in laser alignment system for quick, easy installation
- Adjustable interrupt time (50~700 ms)
- Additional models available with greater range:
 - E-960-D190Q
 - E-960-D290Q
 - E-964-D390Q (four beam frequencies)

**Model Number:****E-931-S50RRLQ**

Range: Up to 50ft (15m)

NEW**50ft Large Reflective Beam Sensor****Features:**

- Up to 50ft (15m) sensing range
- Typical applications include: Garage doors, outdoor gates, overhead doors, or manufacturing lines
- Large sensor with patented design and large reflector for a large sensing area and easier alignment
- Response time adjustable from 50~700 ms
- Tamper output will trigger an alarm if the sensor's cover is removed
- 12~250 VAC/VDC Operation
- Weatherproof construction for indoor/outdoor use
- Includes large reflector, sensor and reflector hoods, and mounting hardware

**Model Number:****E-931-S50RRQ**

Range: Up to 50ft (15m)

50ft Reflective Beam Sensor**Features:**

- Up to 50ft (15m) sensing range
- Housing designed to prevent condensation
- 10ms Response time
- Tamper output will trigger an alarm if the sensor's cover is removed
- 12~250 VAC/VDC Operation
- Weatherproof (IP66) construction for indoor/outdoor use
- 3-Inch round reflector, sensor hood, and mounting hardware included



SK-910RBQ

SK-910R4Q

Model Number:

SK-910RBQ

1 Channel, 315MHz

SK-910RB2Q

2 Channels, 315MHz

SK-910R3Q

3 Channels, 315MHz

SK-910R4Q

4 Channels, 315MHz

RF Receivers

Features:

- Control garage doors, gates, house lights, alarm panels, or other devices via remote
- LED Indicates programming options and output modes
- One-button programming – no need to cut jumpers

SK-910RBQ and SK-910RB2Q only:

- Five programmable relay output modes: 4-Second momentary, 1-second momentary, toggle, latch, and validity

SK-910R3Q and SK-910R4Q only:

- Four programmable relay output modes: Timed (1~60 seconds), toggle, latch, and validity

RF Transmitters

Model Number: Features:

SK-919TD1S-UP

1 Button, 1 channel

- Over 68 billion possible codes
- LED Transmission indicator
- Uncoded models also available



SK-919TP4J-NUQ

SK-919TD2A-UP

2 Buttons, 3 channels

SK-919TP3JRUQ

3 Buttons, 7 channels

SK-919TP4J-NUQ

4 Buttons, 15 channels

Handheld RF Transmitters

Model Number: Features:

SK-919TP1H-BUQ

1 Button, 1 channel

- Over 68 billion possible codes
- LED Transmission indicator

SK-919TP2H-NUQ

2 Buttons, 3 channels

SK-919TP4H-NUQ

4 Buttons, 15 channels



SK-919TP4H-NUQ



Model Number:

SK-91ERSD

Extended Range Antenna

Features:

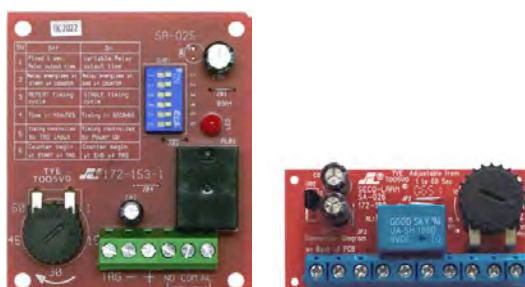
- Extends range for these SECO-LARM RF receivers:
SK-910RBQ, SK-910RB2Q, SK-910R3Q, SK-910R4Q
- Easily plugs into a connector on the receiver's motherboard – no extra wiring needed
- Includes 9-foot cable and double-stick mounting tape

**Model Number:****SA-027HQ****NEW****365-Day Annual Timer****Features:**

- Timer is contained in housing with protected terminals
- Two 10A@30VDC/120VAC Form C (SPDT) relay outputs
- Each relay can be programmed for 50 events for a total of 100 individual programmable events
- Events can be set weekly, daily, or hourly, 365 days a year
- Outputs can be programmed for 1~99 seconds or toggle
- One egress input per relay (two total)
- 12~24 VAC/VDC Operation

**Model Number:****SA-027WQ****7-Day Timer****Features:**

- Timer is contained in housing with protected terminals
- 10A@120VAC/28VDC Form C (SPDT) relay output
- Can be programmed for 60 events
- One egress input
- Outputs can be programmed for 1~99 seconds or toggle
- Manual mode button

**SA-025Q****SA-026Q****Programmable Timers****Features:****SA-025Q only:**

- Can be triggered by positive voltage (+DC), or via a dry contact
- Programmable to activate at the start or at the end of the timing cycle, or one second after the timing cycle
- 8A@120VAC/24VDC Form C (SPDT) relay output
- 12/24 VDC Operation (auto sensing)

SA-026Q only:

- NO/NC Switch trigger
- 3A@24VDC Form C (SPDT) relay output
- 12~24 VAC/VDC Operation
- Built-in beeper output (100mA@24VDC)

Model Number:**SA-025Q***1 Second to 60 minutes***SA-026Q***Miniature, 1~180 seconds*

Request-to-Exit Plates



SD-7204SGEX1Q

- 1" Pushbutton
- Single-gang stainless-steel faceplate
- One N.O. and one N.C. contact, each rated 5A@250VAC



SD-7104SGEX1Q

- 1" Pushbutton
- Slimline stainless-steel faceplate
- One N.O. and one N.C. contact, each rated 5A@250VAC



SD-7275SGEX1Q

- 1" Illuminated pushbutton
- Single-gang stainless-steel faceplate
- One N.O. and one N.C. contact, each rated 5A@250VAC



SD-7175SGEX1Q

- 1" Illuminated pushbutton
- Slimline stainless-steel faceplate
- One N.O. and one N.C. contact, each rated 5A@250VAC



SD-7201GC-PEQ

- 1 1/2" Green mushroom-cap pushbutton
- Single-gang stainless-steel faceplate
- NO/NC Contacts rated 5A@125VAC



SD-7202GC-PEQ

- 2" Square illuminated pushbutton
- Single-gang stainless-steel faceplate
- NO/NC Contacts rated 10A@125VAC
- Switchable English/Spanish/French text



SD-7201GAPT1Q

Similar to **SD-7201GC-PEQ**, but with:

- "EXIT" and "SALIDA" printed on faceplate
- Built-in timer: 1~180 seconds
- Buzzer output for audible status



SD-7202GC-PTQ

Similar to **SD-7202GC-PEQ**, but with:

- Built-in timer: 1~180 seconds
- Buzzer output for audible status

Outdoor No-Touch Request-to-Exit Sensors



SD-9263-KSVQ

SD-9263-KSVQ

Single-gang, English, manual override



SD-9163-KSVQ

SD-9163-KSVQ

Slimline, English, manual override

SD-9263-KSQ

Single-gang, English

SD-9163-KSQ

Slimline, English

SD-9263-KS1Q

Single-gang, Spanish

SD-9163-KS1Q

Slimline, Spanish

Features:

- No-touch operation reduces the risk of cross-contamination
- Adjustable sensor range up to 7" (18cm)
- 1 Amp relay, adjustable trigger duration 0.5~20 seconds
- Single-gang and slimline models also available in French (special order only)

SD-9263-KSVQ and SD-9163-KSVQ only:

- Manual override button functions without electricity in case of power failure

SD-9263-KS1Q and SD-9163-KS1Q only:

- Screen printed with "SALIDA" and "SIN TOCAR"

**Model Number:****E-931CS22RFCQ**Sensor range: Up to 22ft (7m)
Wireless range: Up to 328ft (100m)**NEW****Wireless Entry Alert System****Features:**

- For monitoring a driveway or for use as an entrance indicator
- No wiring necessary between the sensor and speaker
- Sensor range: Up to 22ft (7m)
- Sensor is weatherproof for outdoor use
- Speaker makes a chime or alarm sound when the beam is interrupted
- Wireless range: Up to 328ft (100m) between the sensor and speaker
- Each sensor can be connected to an unlimited number of speakers
- Each speaker can be connected to up to five sensors
- Simple installation with no hard wiring required – all components are either wireless or plug into each other

Rim-Type Exit Devices**Model Number:****SD-962AR-36A**

Steel, 30"~48" doors

**SD-962AR-36G**

Rugged ANSI Grade 1 steel, 33"~48" doors

**SD-962AR-36M**

Aluminum, modern flat design, 36"~48" doors

Features:

- Allows exit from inside while locked from outside
- Reversible, non-handed design
- For metal or wood doors up to 1 3/4" thick
- Includes all hardware for a typical installation



SD-962AR-36A



SD-962AR-36G

Vandal Rollerball Camera**Model Number:****EV-2706-N3WQ**

3.6mm Lens, 24 IR LEDs, white

EV-2706-NFWQ

2.8~12 mm Lens, 36 IR LEDs, white

Features:

- 700 TV Lines, 960H resolution
- 1/3" Sony Super HAD II CCD
- Weatherproof (IP65) construction
- Split-glass design to eliminate IR reflection
- Heavy-duty vandal-resistant design
- Additional models available with 24 or 36 IR LEDs, a 3.6mm or 2.8~12mm lens, and gray or white housing

Electric Door Strikes**Model Number:****SD-995C**

For metal doors, 12VDC

SD-995C24

For metal doors, 24VDC

Features:

- Field-selectable fail-safe or fail-secure operation
- Powered by a solenoid
- Reversible non-handed design fits either right-hand or left-hand doors
- Shallow design for use with most doors
- Stainless-steel lip for added strength and longer life
- Jaw strength – 2,000 lbs
- Models for wooden doors available

SECO-LARM®

Manufacturer of **ENFORCER®**

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue
Irvine, CA 92606
Phone: (800) 662-0800
(949) 261-2999
Fax: (949) 261-7326
Email: info@seco-larm.com
Website: www.seco-larm.com



Manufacturers of reliable security systems and accessories since 1971.



The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM's Security Systems and Accessories are protected by the following patents:

U.S. pat. nos. 7800644, 7164357, 6109110, 5760680, 5751072, 5739749, 5648754, 5483225, 5473305, 5298879, 5216407, 5084697, 4980666, 4975678, 4926160, 4835518, 4810998, 4761631, 4706064, 4700332, 4679033, 4550229, 4546629, 4543568, 4507945, D485774, D479708, D350494, D319196, D314791

Taiwan pat. nos. 158210, 133076, 118811, 116977, 105843, 100701, 94510, 89463, 86123, 84396, 76872, 75669, 66042, 61565, 59176, 56767, 52421, 50612, 46459, 43239, 40938, 40244, 39225, 37977, 37422, 35025, 33687, 33261, 33201, 32844, 32435, 32409, 31633, 30905, 30897, 30432, 30060, 28883, 28112, 26690, 24477, 23474, 22073, 21111, 20786, 20380, 19593, 18971, 17724, 16672, 16021, 15469, 14658, 12398, 11699, 9191, 3724, M335856, M328028, M319465, 319309

U.K. pat. nos. 2279792, 2271009, 2215895, 2179482, 2177797, 2177529, 2141480, 2036522, 1041888

German pat. nos. 29600370.0, G9203004.1, G9203003.3, G9212809.2

Hungary pat. no. 85927 Sweden pat. no. 9202706.9

Japan pat. no. 1882619 Korea pat. nos. 35097, 32332

China pat. nos. ZL200720126532.5, ZL2006200113040.8, SZ03311103.0, ZL02305808.0, ZL97312768.6, ZL96249150.0, ZL95201587.0, ZL94300564.7

Other international patents are pending.

Copyright © 2014 SECO-LARM U.S.A., Inc. All rights reserved.

Trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

ISO 9001 Quality You Can Count On!

Anyone can talk about quality. But can they make sure the products you source offer consistent quality, order after order?

SECO-LARM's quality control management system is compliant with all the requirements of ISO 9001, the accepted measure of quality worldwide.

ISO 9001 is not another quality control theory. SECO-LARM's entire manufacturing process was probed in great detail by an independent quality system certification body, and was found compliant with internationally accepted quality standards.

A quality management system certified as ISO 9001 compliant ensures that SECO-LARM can deliver products that meet your quality requirements time and time again.

ISO 9001. World-class quality management from a world-class security manufacturer.



ORDER PART# AD-CAT-EBME-A
2015_FenceTech_150120.docx