



# INSTRUCTION MANUAL


## LIGHT BULB CHANGER

THANK YOU FOR SELECTING THE BAYCO LIGHT BULB CHANGER!  
PLEASE SAVE THESE INSTRUCTIONS

Please read these instructions before using your Light Bulb Changer. They include important safety and operation information.

**WARNING: Electrical Shock Hazard – Never use the Light Bulb Changer around open wiring. Wear safety glasses when changing bulbs.**

Depending on the Light Bulb Changer kit that you purchased, you will have some combination of the following items:

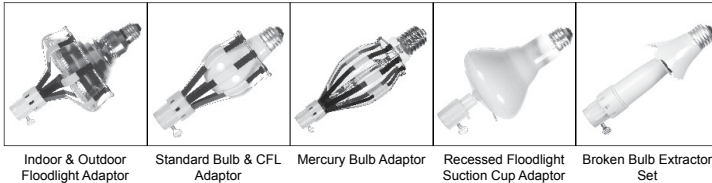

**NOT ALL ACCESSORIES ARE INCLUDED IN ALL LBC KITS**

### INSTRUCTIONS FOR USE

1. Always turn off electrical power to the bulb you are changing. Allow time for bulb to cool.
2. Select the appropriate attachment and screw onto the threaded end of the extension pole. Carefully hand-tighten the thumb-screw in the base of the attachment. **DO NOT OVER-TIGHTEN THE THUMB SCREW.**
3. Extend the pole and tighten each section as shown on the diagram on the pole. It is important to fully tighten each section so the pole doesn't loosen when being turned.

#### SPRING-CAGE ATTACHMENTS FOR FLOODLIGHT – STANDARD- CFL BULBS

**NOTE: THIS ATTACHMENT IS NOT FOR USE WITH RECESSED FLOODLIGHT HOUSINGS. IF THE SPRING-CAGE ATTACHMENT IS USED WITH A RECESSED FLOODLIGHT HOUSING, IT MAY BECOME LODGED BETWEEN THE BULB AND THE HOUSING AND MAY CAUSE DAMAGE TO THE HOUSING. USE THE SUCTION-CUP ATTACHMENT FOR THIS TYPE OF LIGHTING.**



**NO**



**YES**

- Follow steps 1, 2 & 3 above.
- Slide the attachment onto floodlight bulbs by pushing it over the bulb from the side. For standard bulbs, push directly on the bulb. Turn the pole counterclockwise to loosen and remove the bulb. Place new bulb in the attachment and insert into socket. Turn the pole clockwise to tighten. Pull the cage away from bulb.
- Bulbs which have been too tightly installed may require initial removal by hand. Using this light bulb changer after replacement will ensure easy removal in the future.

#### SUCTION-CUP ATTACHMENT FOR RECESSED FLOODLIGHTS

- Follow steps 1, 2 & 3 above.
- Thread the long string (included) through the eye on the base of the suction cup and then tie the string to the ear on the suction cup. The string should be several feet longer than the pole when fully extended.
- Gently, but firmly, push the cup onto the center of bulb to form suction. (NOTE: Suction can be increased with a slight application of moisture.)
- Turn pole counterclockwise to loosen bulb and carefully remove. Press new bulb into suction cup. Carefully lift and screw bulb into socket. Pull string to release suction.



#### BROKEN BULB REMOVAL – FITS REGULAR AND CANDELABRA BULBS

**WARNING: TURN OFF ELECTRICITY AT THE SOURCE BEFORE REMOVING BULB. WEAR HAND AND EYE PROTECTION WHEN HANDLING BROKEN GLASS AND BULBS.**

- Attach extractor adaptor to extension pole, tighten thumbscrew; do not over tighten. Choose suitable size extractor (regular or candelabra) to fit the base of broken bulb.
- Position the tip of the extractor over the glass filament of broken bulb. Gently push upward and twist counter clockwise. Increase upward pressure if base binds.
- Unscrew the broken bulb from the socket.

### WARRANTY

#### One Year Limited Warranty

This product is warranted to be free from defects in workmanship and materials to the original purchaser for one year from the date of purchase. Keep your proof of purchase.

#### Not Covered

Consequential damages, incidental damages or incidental expenses, including damage to property. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, which may vary from state to state.

#### Warranty Claims - USA

Contact Bayco Products, Inc. for USA warranty claims. Bayco Customer Service will provide a Return Goods Authorization (RGA) to facilitate rapid warranty action. After receiving the RGA, send the product (shipping prepaid) to BAYCO PRODUCTS. Include a dated proof of purchase and a brief description of the defect with your name, address and phone number. Your product will either be repaired or replaced at the option of Bayco and returned as soon as practical, but no later than 45 days after being received by Bayco.