


Microphone G1T/ G1L >>> User Manual

Thank you for choosing SYNCO product.
Please read this manual carefully before use and follow all instructions mentioned herein.


Caring For Your SYNCO Product

- Please keep the product in a dry, clean, dust-free environment.
- Keep corrosive chemicals, liquids and heat source away from the product to prevent mechanics damage.
- Use only a soft and dry cloth for cleaning the product.
- Malfunction may be caused by dropping, impact of external force.
- Do not attempt to disassemble the product. Doing so voids warranty.
- Please have the product checked or repaired by authorized technicians if any malfunctions happened.
- Failure to follow all the instructions may result in mechanics damage.
- Warranty does not apply to human errors.

Package List

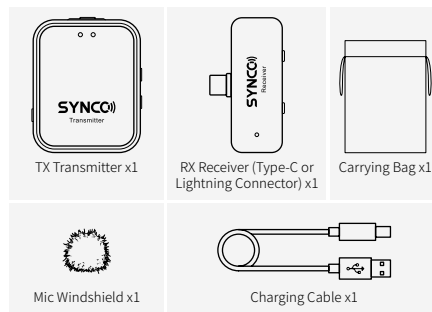


Product Instruction

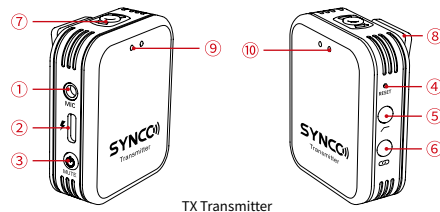

TX Transmitter

- | | |
|------------------------------|-----------------------------|
| ① External Mic Input | ⑥ Pairing |
| ② USB-C Port | ⑦ Built-in Mic |
| ③ Power/ Mute | ⑧ Pocket Clip |
| ④ Reset(Help with Eject Pin) | ⑨ Pairing/ Muting Indicator |
| ⑤ Low Cut | ⑩ Power Indicator |

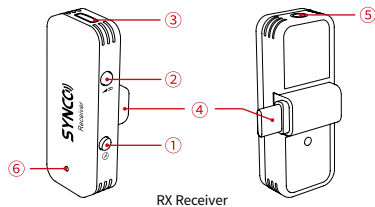

RX Receiver

- | | |
|-------------------------|--------------------------------|
| ① Vocal Effects | ④ Detachable Connector |
| ② Pairing/ Gain Control | ⑤ 3.5mm In-Ear Monitoring Jack |
| ③ USB-C Port | ⑥ Pairing Indicator |

Indicator — TX Transmitter

	Pairing/ Muting Indicator	Power Indicator
Slow flashes	System unpaired	/
Fast flashes	System pairing	/
Keeps on	System paired	Muting
Fast flashes twice	Low cut on	/

Indicator — RX Receiver

	Pairing Indicator	
Slow flashes	System unpaired	/
Fast flashes	System pairing	/
Keeps on	System paired	Vocal effects on

Operations


TX

1.Power/ Mute


- Long Press 3s: turn on/off the system
 Short Press: mute/unmute the microphone

2.Charging

- 5V/2A;
Please fully charge the product before use with USB-C charging cable.



3.External Mic Input



TRS Mic Only
(Note: When using an external mic, please insert it into the mic input properly.)

4.Mic Windshield & Device Installation




5.Reset




Gently poke the pin into Reset for 3 seconds to restore factory defaults.

6.Low Cut



Short Press: 150Hz Low Cut On
Short Press again: Low Cut Off

7.Pairing



The system will pair automatically after power on.
Manual pairing: long press the pairing button on the RX and TX for 3 seconds at the same time

RX


1.Vocal Effects

Short press to switch sound effects: Original - Studio FX - KTV FX - Voice Amplification - EDM (Electronic Dance Music) - Baby FX - Male to Female - Female to Male - Monster FX

2.Pairing/ Gain Control

The system will pair automatically after power on.

Manual pairing: long press the pairing button on the RX and TX for 3 seconds at the same time



Gain Control: 0-3 Level


Each short press increases gain by one level.


3.USB-C Port

For charging phone device

4.Detachable Connector

G1T: Type-C connector
G1L: Lightning connector
Extra Type-C or Lightning connector is available separately to adapt RX to more phone devices.



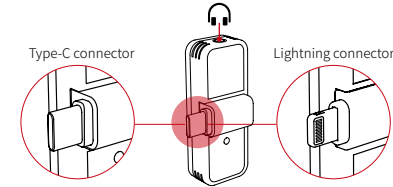

3.5mm In-Ear Monitoring Jack
For real-time monitoring mic recording and device's backgrounding with headphones

Specifications

TX Transmitter	
Wireless Transmission	Digital 2.4GHz
RF Frequency Band	2400-2483.5MHz
Working Distance	492ft/150m(LOS area); 164ft/50m(NLOS area)
Sampling Rate	48KHz
Bit Depth	16Bit
SNR	> 75dB
Audio Input	1/8" / 3.5mm TRS Mic Input
RF Output Power	20dB
Power Requirements	3.3V-4.7V
Battery Type	Built-in Lithium Battery, 400mAh
Charging Port	USB-C
Battery Charging Time	1.5H

Battery Life	8H
Dimensions	52×42×16mm
Material	ABS
Weight	35g

RX Receiver	
Wireless Transmission	Digital 2.4GHz
RF Frequency Band	2400-2483.5MHz
Working Distance	492ft/150m(LOS area); 164ft/50m(NLOS area)
Sampling Rate	48KHz
Bit Depth	16Bit
Antenna	Built-in
Number of Audio Channels	2
Monitoring	3.5mm In-Ear Monitoring
Audio Output	Lightning or Type-C Output
Gain	0-3 Level
Power Requirements	5V 1A
Dimensions	55X31X13mm
Material	ABS
Weight	12g

Microphone	
Form Factor	Built-in Mic
Sound Field	Mono
Polar Pattern	Omnidirectional
Frequency Range	50-20KHz
Sensitivity	-42dB (±3dB, re 1V/Pa at 1KHz)
Maximum SPL	110dB SPL (at 1KHz)

Warranty

Warranty Period
Thank you for purchasing SYNCO products.
1. Customers are entitled to free replacement or repair service in case of quality defect(s) found in the product under normal use within 30 days upon receipt of the product.
2. Original SYNCO products are entitled to **12-month** limited warranty service. The warranty period begins on the date of purchase of brand new, unused products by the first end-user.
Within the warranty period, if product defect or failure is attributable to material defection or technological problem, the defective product or defective part will be repaired or replaced without charge (service and materials fee).

Warranty Exclusions and Limitations
Faults resulted from inappropriate use of a product without following its operation specification

- Artificial damage, e.g. crash, squeeze, scratch, or soaking
- Modifications to a product by its user or a third party without prior written consent of SYNCO, e.g. replacement of element or circuit, label alteration
- The code on product is inconsistent with that of warranty certificate, or the code on the product or warranty certificate is altered or torn off
- All consumable accessory attached to a product, like cable, wind muff, battery
- Faults as a result of force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

- If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact SYNCO's customer service through email at support@syncoaudio.com.
- Please retain your sales receipt and warranty certificate as proof of purchase. If any of these documents is missing, only sales return or chargeable service will be provided.
- If the SYNCO product is out of the warranty coverage, the service and the parts cost will be charged.

Guangzhou Zhiying Technology Co., Ltd

📍 Block 15th, No.200 Fangcun Avenue East, Liwan District, Guangzhou, China, 510000
✉ support@syncoaudio.com
🌐 www.syncoaudio.com
📱 https://www.facebook.com/syncomicrophones

WARRANTY CERTIFICATE	
Please register your warranty. Meanwhile, you are welcomed to contact us via Email: support@syncoaudio.com	
USER INFORMATION	Customer Name:
	Phone Number:
	Email:
	Address:
SALES INFORMATION	Sales Date:
	Model:
	Product Code:
	Dealer:
REPAIR RECORD	Service Date:
	Technician:
	Issue:

RESULT ☐ Solved ☐ Unsolved ☐ Returned(Replaced)