



engineered by  
Snap


## SM-RBX-14

## Strong VersaBox™

### Overview

Thank you for purchasing a great product from Strong™. We appreciate your purchase and are committed to providing the highest quality products possible. The Strong VersaBox™ is designed to provide the best in-wall box solution for installers adding equipment behind low-profile displays and other wall-mounted equipment. It can easily be installed in existing ceilings and walls, or in new jobs using the optional SM-RBX-14-BKT Pre-Construction Bracket.

Inside the enclosure, up to two layers of components may be mounted using the built-in attachment points and the pivoting center mounting plate. Easy-to-remove cutouts allow outlet boxes and low-voltage rings to be installed in the sides of the box to save space for more equipment. The center support plate is perforated to aid in wire management and device mounting and can be set to different depths to allow for more varied installations. The plate can also be modified as needed so that larger components fit into the box.

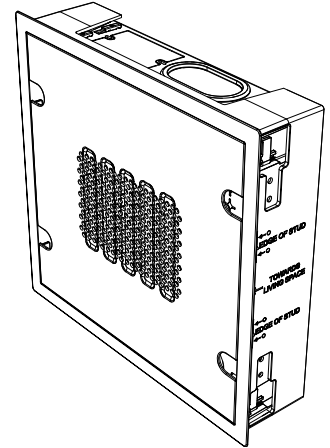

### Package Contents

- (1) SM-RBX-14
- (1) Cover Plate
- (1) Center Support Plate

### Recommended for Installation

#### Tools

- #1 Phillips Screwdriver
- Drywall Saw
- Tape Measure
- Level
- ¼" Flat Head Screwdriver (optional)
- Electric Drill and ¼" bit (optional)
- Tin Snips (optional)

#### Optional Accessories and Hardware

- SM-RBX-14-BKT (pre-construction bracket for new work)
- Drywall screws (needed for use with SM-RBX-14-BKT)
- Electrical box and low voltage ring for adding terminations to cutouts

***Use only standard size cover plates on boxes and rings installed in the Strong VersaBox™. Midi and jumbo size plates will not fit.***

### Important Instructions and Considerations for Installation

- Read and follow all instructions.
- Before beginning installation, carefully plan locations, accounting for potential electrical, ductwork, plumbing or other obstacles that may interfere with installation of the box, equipment, or wiring.
- Contact a suitable contractor if you are unsure of how to best install.




### CAUTION:

This equipment must be installed and assembled by qualified service personnel in accordance with local building codes. Total equipment weight stored in this enclosure must not exceed 50 pounds.

## Assembly Diagram


**Note:** To remove the cover with ease, swing door open pulling from the finger openings on the side of the cover first.

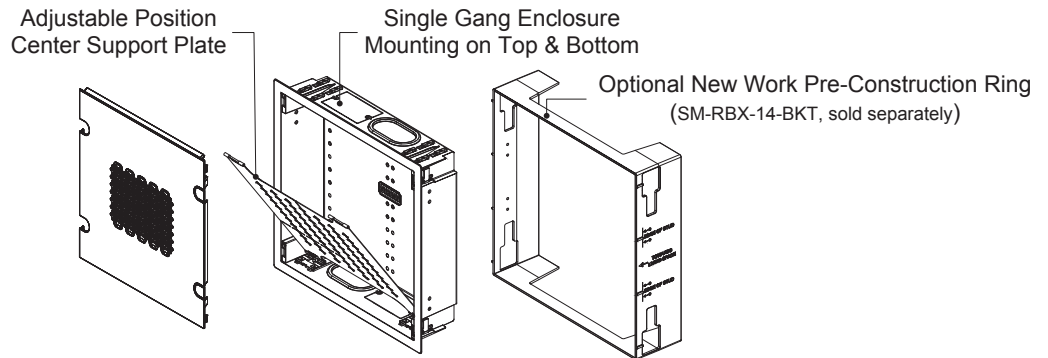

## Old Work Installation Instructions

1. Mark the desired height of the top of the SM-RBX-14 on the wall between two stud centers. Use a stud finder to locate the stud locations.
2. Press the rear of the SM-RBX-14 to the wall, using a level to line it up correctly. Mark the outline of the back of the box as neatly as possible, and then set the box aside.
3. Carefully cut the opening using a drywall saw.
4. After the hole is cut, test fit the box, and clean up the opening as needed.
5. Remove the center support plate from the Strong VersaBox™. The hinge clips may be left in place.
6. Insert the box into the opening. Using a #1 Phillips screwdriver, secure the box to the drywall using the dog legs on each side of the enclosure as illustrated.

**Note:** If any of the 4 dog legs will not extend correctly due to stud clearance beside the box, a screw may be inserted through the side of the box into the stud if one is close enough. Refer to the New Work Installation section later in the manual for reference of where to insert the screw/s.

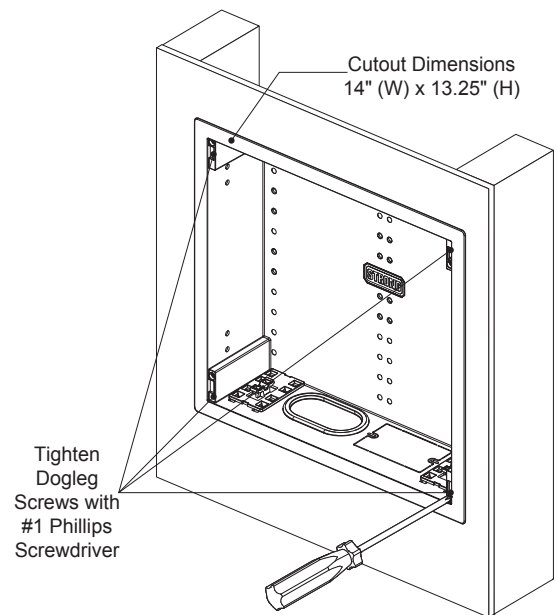

## Installing Equipment into the Strong VersaBox™

The center support plate allows for a variety of equipment configuration options. To accommodate equipment of different thicknesses, the plate hinges can be reversed. The plate is also perforated so that it can be trimmed down in size, or used for securing modules and wiring.

*Experiment with the equipment configuration to determine the best installation method. For images of different configurations of equipment installed in the VersaBox, see the VersaBox product page and Support Tab at [www.SnapAV.com](http://www.SnapAV.com).*


### Using Knockouts

The knockouts on the top and bottom of the VersaBox may be used for installing low voltage rings or for outlet boxes. If an outlet box is installed, it must be an old work, residential grade box with integrated work supports to allow for secure mounting.

When knocking out the opening, leave the small screw tabs installed if a low voltage ring is being mounted, or remove them to install an outlet box.

### Modules


The back wall of the VersaBox has holes and knockouts stamped into it on 6" centers to allow for easy structured can module installation. Use a 1/4" drill bit to open more of the knockout stamps as needed to mount equipment.

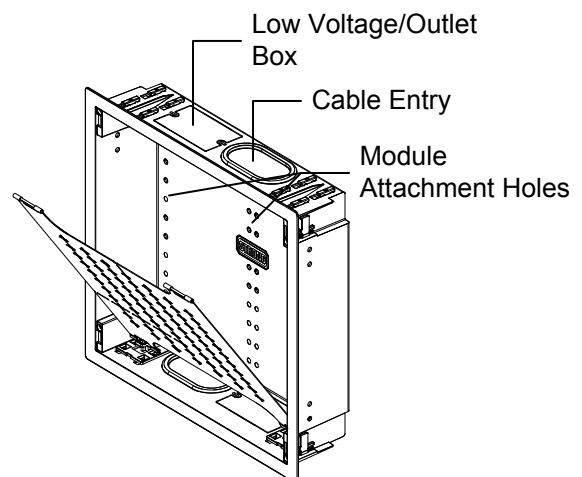

## Using the Center Support Plate


The center support allows for almost any mounting configuration possible. If a network music player or other larger equipment is being installed, the pre-stamped square can be removed to make the full mounting depth available. Additional sections may be trimmed out using a pair of tin snips.

*Dimensions in the illustration indicate the size of the removable pre-stamped square.*

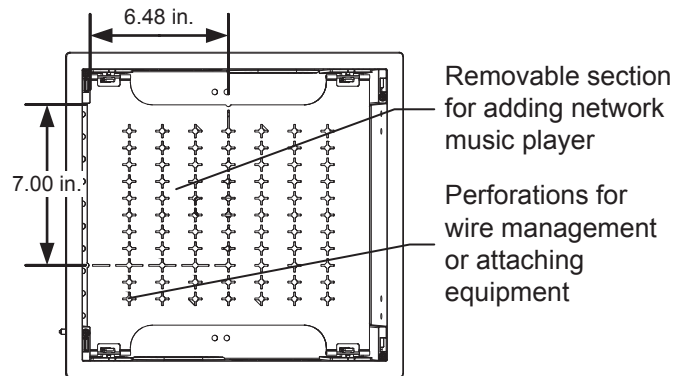


## Changing the Center Support Plate Position

1. Insert  $\frac{1}{4}$ " flat head screwdriver into the slot at the rear of the hinge clip and twist. Pry forward while pulling to remove it.
2. Rotate the hinge clip 180°.
3. Press the hinge clip back in with the screwdriver until it clicks into place.
4. Repeat for each of the 4 clips.

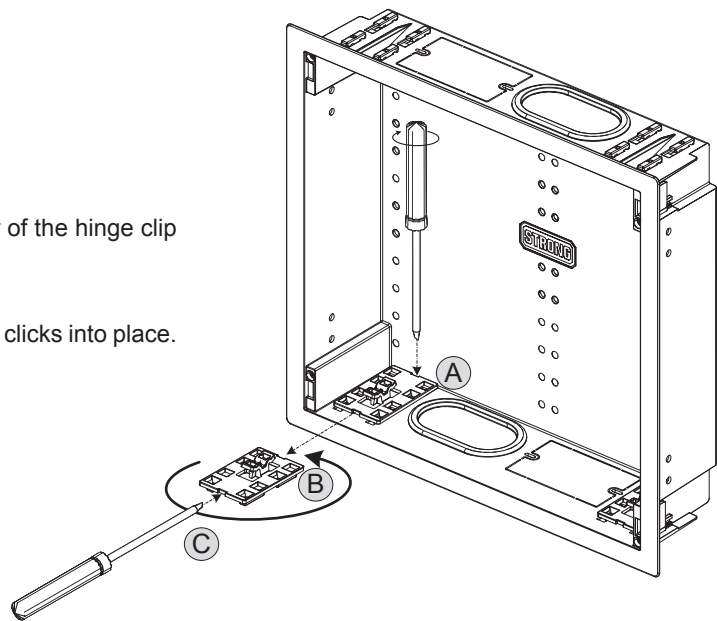

## Attaching the Strong VersaBox™ Cover

To attach the cover, knock out any additional wire pass-throughs needed, and then slid the cover on, seating the hooks on the right side first, and pushing the left side in until a "click" is heard.

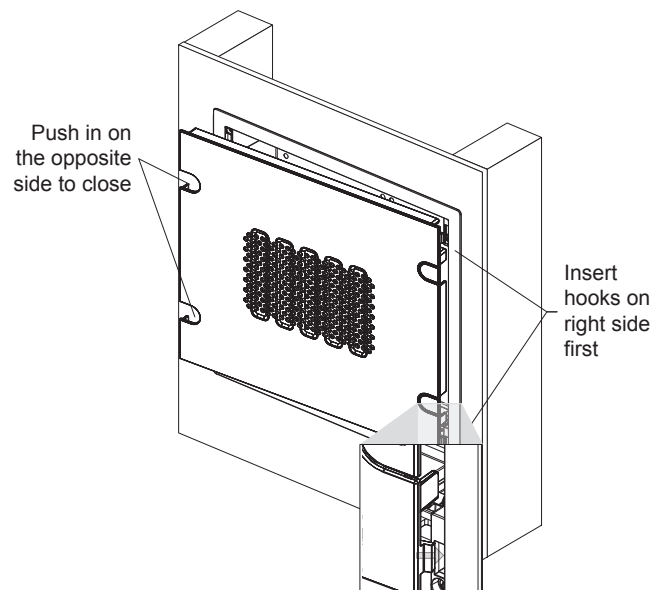

## New Work Installation Instructions


The SM-RBX-14-BKT Pre-Construction Bracket is designed to prepare a location for the Strong In-Wall VersaBox in new work applications before drywall is hung on the studs.

**Note:** Determine what thickness the drywall will be before installing the pre-construction bracket. If the studs are wider than 16" use dog ears.


### Strong VersaBox™ Installation (after drywall is installed)

1. Remove the center support plate from the VersaBox. The hinge clips may be left installed.
2. Open any knockouts in the VersaBox that will be used for wiring or electrical.
3. Pull the wires out of the wall opening and pull them into the desired openings of the VersaBox.
4. Insert the box into the opening left where the bracket is. Use standard drywall screws to secure the box to the studs on each side of the enclosure as illustrated.

See the documentation included with the SM-RBX-14 In-Wall VersaBox or go to the SM-RBX-14 product page at [www.SnapAV.com](http://www.SnapAV.com) for tips and instructions to install equipment into the VersaBox.

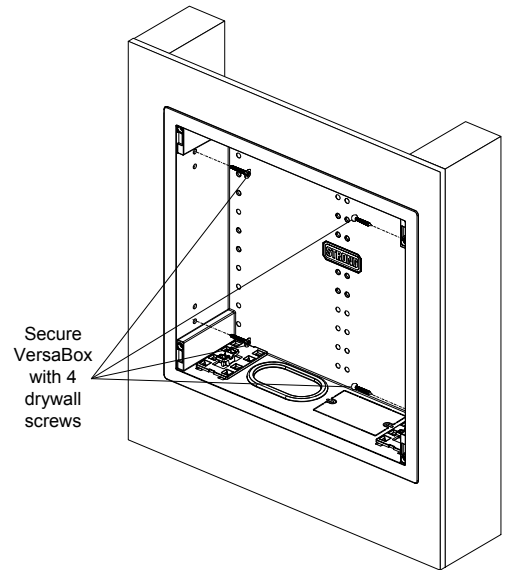

## Dimensions

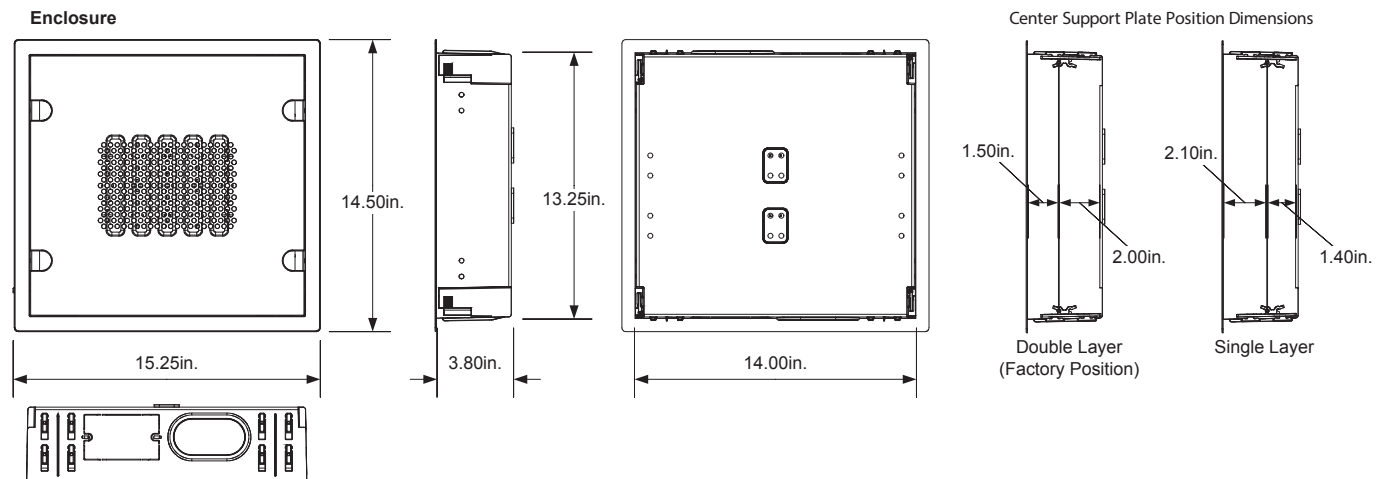

## Warranty



### Limited Lifetime Warranty

All Strong back-boxes and brackets have a Lifetime Limited Warranty. This warranty includes parts and labor repairs on all components found to be defective in material or workmanship under normal conditions of use. This warranty shall not apply to products which have been abused, modified or disassembled. Products to be repaired under this warranty must be returned to SnapAV or a designated service center with prior notification and an assigned return authorization number (RA).

## Contacting Technical Support

Phone: (866) 838-5052

Email: [Techsupport@snapav.com](mailto:Techsupport@snapav.com)



engineered by  
Snap