

## 1 Connect the Gateway to a Computer


- ▶ **Step 1** Get the **Wireless DSL Gateway** from your DSL Quick Start Kit.




- ▶ **Step 2** Get the **Power Cord** from your DSL Quick Start Kit.



- ▶ **Step 3** Plug the smaller end of the **Power Cord** into the **Black Port** on the back of the Gateway.



- ▶ **Step 4** Plug the larger end of the **Power Cord** into a **Power Outlet**.



- ▶ **Step 5** Make sure the **Power Switch** is ON.



- ▶ **Step 6** Confirm the **Power Light** on the Gateway is **SOLID Green**.




Power Light on Wireless DSL Gateway

**Note:** The DSL light may blink.


- ▶ **Step 7** Get the **Yellow Cable**.

- ▶ **Step 8** Plug one end of the **Yellow Cable** into one of the **Yellow Ports** on the back of the Wireless DSL Gateway.




- ▶ **Step 9** Make sure that your computer is turned on. Then, plug the other end of the **Yellow Cable** in the **Ethernet Port** on the back of the computer.

An **Ethernet Port** looks similar to a regular Phone Jack, but is slightly larger.




- ▶ **Step 10** Confirm that 1 of the 4 **Ethernet lights** on the Gateway is **Green**. This may take a few moments.




**Note:** If the Ethernet Light does **NOT** turn green, make sure the Yellow Cable is properly connected on both ends.

- ▶ **Step 11** Get the **Black or Gray DSL Cable** from your DSL Quick Start Kit.


- ▶ **Step 12** Plug one end of the **DSL Cable** into the **Gray Port** on the back of the Gateway.



- ▶ **Step 13** Plug the other end of the **DSL Cable** into the **Phone Jack** closest to your computer.



- ▶ **Step 14** Confirm that the **Power** and **DSL Lights** are solid **Green**. This may take up to 30 seconds.

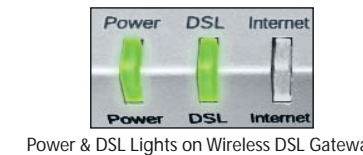


**Note:** If the DSL Light continues to blink, make sure you received notification from your DSL Internet Service Provider that your DSL service is **On**.

## 2 Install the Phone Filters


**What are Phone Filters?** Phone Filters separate the DSL signal from the voice signal, allowing you to talk on the telephone and be online at the same time.

**All Devices** with the same phone number as your DSL Line require Phone Filters. This includes telephones, fax machines, caller ID boxes, satellite TV receivers and answering machines.

- ▶ **Step 1** Unplug your **Telephones** (or other devices) from their current **Phone Jacks**.




- ▶ **Step 2** Open the **Clear Bag** and remove the **Phone Filters** from the bag.




**Note:** The number and type of Phone Filters included in this kit may vary.

- ▶ **Step 3** Plug a **Phone Filter** into every **Phone Jack** in your house as your DSL Line, and a telephone (or other device) connected to it.




If you need additional Phone Filters, contact your DSL Internet Service Provider.

- ▶ **Step 4** Plug one end of the **Phone Cord** into the **Phone Filter** and keep the other end attached to the telephone (or other device).




- ▶ **Step 5** Make sure you did **NOT** put a Phone Filter on the **Black DSL Cable**. Make sure your setup looks **EXACTLY** like the picture to the right.

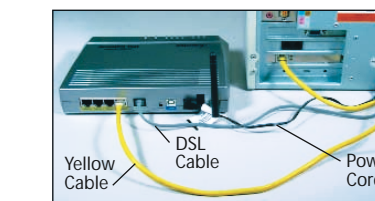


### 3 Configure the Gateway

**Step 1** Open a Web browser (Netscape Navigator or Internet Explorer, for example). In the address bar, enter **http://192.168.0.1**, then press **Enter** on the keyboard.

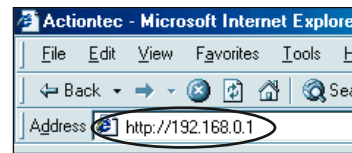


**Step 2** The "Main Menu" screen appears. Select **Setup/ Configuration**.

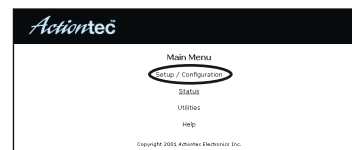

**Note:** If this screen does not appear, make sure your Ethernet port is configured for Dynamic IP.


**Step 3** Follow the instructions in the "Set Up/Configuration" screen, then click **Begin Basic Setup**.

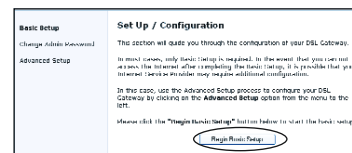


**Step 4** In the next window, follow the onscreen instructions, then click **Next**.



**Step 5** In the next window, select the type of connection by clicking on the circle next to **PPPoA** or **PPPoE**. If unsure about the selection, contact your ISP. Then click **Next**.

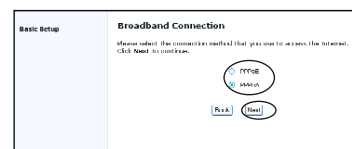


**Step 6** Enter the **User Name** and **Password** provided by the ISP in the 'DSL Broadband Connection - PPP' screen. Click **Next**.

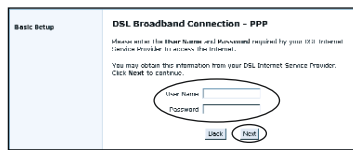

**Step 7** Click **Save and Restart** in the "Save and Restart" screen.




**Step 8** The "Congratulations" screen appears. The Power Light flashes rapidly while the Gateway restarts, then glows SOLID green when fully operational. The DSL Light will also glow SOLID green. Please go to Section 4 to complete the setup of this Gateway.

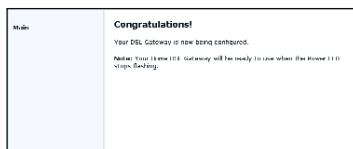


If your DSL Light flashes, please go to **Step 9**.


**Step 9** Go to the "Main Menu" screen. Select **Utilities**.

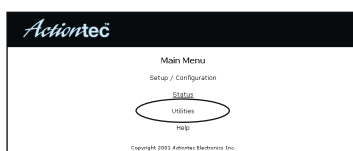


**Step 10** Click on **DSL Settings**.

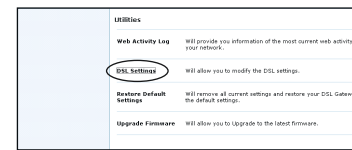

**Step 11** Input VPI/VCI settings as provided by your ISP. Click **Save and Restart**. This will take you to the "Save and Restart" screen.

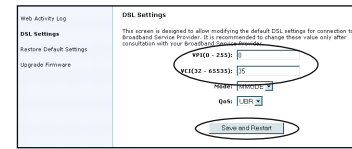

**Step 12** Click **Save and Restart** in the "Save and Restart" screen.

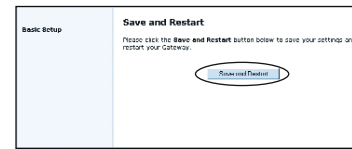

**Step 13** The "Congratulations" screen appears. The Power Light flashes rapidly while the Gateway restarts, then glows SOLID green when fully operational. The DSL Light will also glow steadily green. Now go to Section 4.




If an error stating the Web browser was unable to connect to the Internet appears, check the configuration settings. Ensure all the information required by the ISP is entered correctly.


### 4 Turn the Wireless Signal ON

Your Wireless DSL Gateway has the capability to transmit a wireless signal throughout your home. To turn the Wireless Signal ON, follow the instructions for steps 1-5 below.


**Step 1** Go back to the "Main Menu" screen. Select **Setup/ Configuration**.

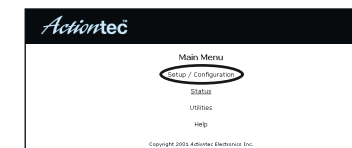


**Step 2** Select **Advanced Setup** from the menu on the left.

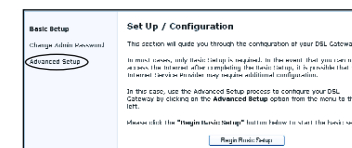


**Step 3** Click **Begin Advanced Setup**.

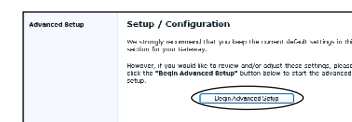

**Step 4** Select **Wireless Settings** from the menu on the left.

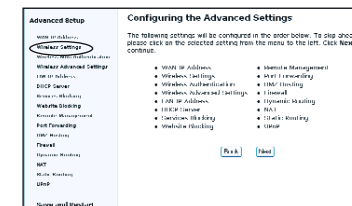

**Step 5** Make sure the circle next to **ON** is selected.

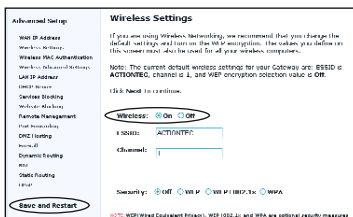

Then click **Save and Restart** from the menu on the left.

**Congratulations!** You have successfully installed your Wireless DSL Gateway. You can now access the Internet at high speed.

# Actiontec® Quick Start Guide

Wireless DSL Gateway with Voice Model# GT704WGRV

**Note:** If you are a Macintosh® User, or other non-Windows User, please use this Quick Start Guide.

This Quick Start Guide will walk you through the easy steps to set up your Wireless DSL Gateway. During this process, we'll show you how to:

- 1 **Connect the Gateway to a Computer**
- 2 **Install the Phone Filters**
- 3 **Configure the Gateway**
- 4 **Turn the Wireless Signal ON**

You will need the following items from your **Actiontec Quick Start Kit:**

- Wireless DSL Gateway
- Black or Gray DSL Cable
- Black Power Cord
- Yellow Cable
- Clear Bag

