



6500e, T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn, X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP

Technical Reference

March 2013

www.lexmark.com

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries. All other trademarks are the property of their respective owners.

© 2013 Lexmark International, Inc.

All rights reserved.

740 West New Circle Road
Lexington, Kentucky 40550

Edition notice

March 2013

The following paragraph does not apply to any country where such provisions are inconsistent with local law: LEXMARK INTERNATIONAL, INC., PROVIDES THIS PUBLICATION "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some states do not allow disclaimer of express or implied warranties in certain transactions; therefore, this statement may not apply to you.

This publication could include technical inaccuracies or typographical errors. Changes are periodically made to the information herein; these changes will be incorporated in later editions. Improvements or changes in the products or the programs described may be made at any time.

References in this publication to products, programs, or services do not imply that the manufacturer intends to make these available in all countries in which it operates. Any reference to a product, program, or service is not intended to state or imply that only that product, program, or service may be used. Any functionally equivalent product, program, or service that does not infringe any existing intellectual property right may be used instead. Evaluation and verification of operation in conjunction with other products, programs, or services, except those expressly designated by the manufacturer, are the user's responsibility.

For Lexmark technical support, visit support.lexmark.com.

For information on supplies and downloads, visit www.lexmark.com.

If you don't have access to the Internet, you can contact Lexmark by mail:

Lexmark International, Inc.
Bldg 004-2/CSC
740 New Circle Road NW
Lexington, KY 40550
USA

© 2013 Lexmark International, Inc.

All rights reserved.

Trademarks

Lexmark and Lexmark with diamond design are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Mac and the Mac logo are trademarks of Apple Inc., registered in the U.S. and other countries.

PCL® is a registered trademark of the Hewlett-Packard Company.

All other trademarks are the property of their respective owners.

UNITED STATES GOVERNMENT RIGHTS

This software and any accompanying documentation provided under this agreement are commercial computer software and documentation developed exclusively at private expense.

Contents

Edition notice.....	2
Introduction.....	5
Understanding letters after model numbers.....	5
Learning about the printer and the MFP option.....	7
Finding information about the printer.....	7
Printer Control Language (PCL) page formatting.....	9
Printable areas.....	9
Supported paper and envelope dimensions.....	10
Printer Job Language (PJL).....	12
PJL commands information.....	12
PostScript (PS) emulation.....	13
Supported paper sizes.....	13
PostScript paper tray support.....	14
PostScript envelope size support.....	16
PostScript envelope tray support.....	18
Printer and MFP option specifications.....	20
Airflow requirement.....	20
Noise emission levels.....	20
Electrical specifications.....	21
Power requirements.....	22
Physical specifications.....	23
Clearance requirements.....	26
Environmental conditions.....	26
Altitude specifications and atmospheric pressure.....	27
Appendix A: PCL support.....	28
PCL emulation commands.....	28
GL/2 commands.....	35

Appendix B: PJL support.....	39
Common variables for both printer languages.....	39
Lexmark-unique PJL variables for both printer languages.....	42
Common variables for PCL emulation.....	53
Lexmark-unique variables for PCL emulation.....	54
Common variables for PostScript emulation.....	55
Lexmark-unique variables for PostScript emulation.....	55
Printer-unique LRESOURCE variables.....	56
Status Readback commands.....	56
USTATUS unsolicited status variables.....	57
PJL messages for auto-continuable conditions.....	57
PJL messages for attendance conditions.....	69
PJL messages for paper handling.....	96
PJL messages for paper jams.....	102
Service errors.....	109
Device attendance messages.....	109
Lexmark-unique PJL commands.....	109
File and device protection commands.....	111
Appendix C: PostScript support.....	112
Supplemental operators.....	112
Page device parameters.....	116
User interpreter parameters.....	121
System interpreter parameters.....	122
Devices supported.....	125
Device parameters.....	128
PostScript message keys commands.....	138
Index.....	139

Introduction

Overview

This edition of the *Technical Reference* contains information about the 6500e option and the following single-function (SFP) and multifunction (MFP) printers:

T650
T650n
T652dn
T654dn
T656dne
X651de
X652de
X654de
X656de
X656dte
X658d
X658de
X658dme
X658dfe
X658dte
X658dtme
X658dtfe

Understanding letters after model numbers

Some Lexmark™ printers and MFP options may have one or more letters after the model number to indicate features.

Acronym	Meaning
d	duplex ¹
de	duplex and e-Task (electronic task) touch-screen interface
dfe	duplex, finisher/stapler, and e-Task touch-screen interface
dhe	duplex, high-capacity drawer, and e-Task touch-screen interface
dhn	duplex, high-capacity drawer, and network
dme	duplex, mailbox, and e-Task touch-screen interface
dn	duplex and network
dnf	duplex, network, and finisher/stapler
dnw or dw	duplex, network, and wireless
dt	duplex and additional tray ²

¹ Duplex (two-sided) printing using an optional duplex unit or an internal duplex unit based on the product

² The additional tray may be part of a drawer.

Acronym	Meaning
dte	duplex, additional tray ² , and e-Task touch-screen interface
dtfe	duplex, additional tray ² , finisher/stapler, and e-Task touch-screen interface
dtme	duplex, additional tray ² , mailbox, and e-Task touch-screen interface
dtn	duplex, additional tray ² , and network
dtpe	duplex, additional tray ² , finisher with hole punch, and e-Task touch-screen interface
dttn	duplex, tandem tray module, and network
dtse	duplex, additional tray ² , stacker, and e-Task touch-screen interface
dtwe	duplex, additional tray ² , wireless, and e-Task touch-screen interface
e	e-Task touch-screen interface
hdn	hard disk, duplex, and network
n	network
nl	network light model
ni	network and ImageQuick
tn	network and additional tray ²

¹ Duplex (two-sided) printing using an optional duplex unit or an internal duplex unit based on the product

² The additional tray may be part of a drawer.

Learning about the printer and the MFP option

Finding information about the printer

What are you looking for?	Find it here
Initial setup instructions: <ul style="list-style-type: none">• Connecting the printer• Installing the printer software	Setup documentation—The setup documentation came with the printer and is also available at http://support.lexmark.com .
Additional setup and instructions for using the printer: <ul style="list-style-type: none">• Selecting and storing paper and specialty media• Loading paper• Configuring printer settings• Viewing and printing documents and photos• Setting up and using the printer software• Configuring the printer on a network• Caring for and maintaining the printer• Troubleshooting and solving problems	<i>User's Guide</i> and <i>Quick Reference Guide</i> —The guides may be available on the <i>Software and Documentation</i> CD. For more information, visit http://support.lexmark.com .
Instructions for: <ul style="list-style-type: none">• Connecting the printer to an Ethernet network• Troubleshooting printer connection problems	<i>Networking Guide</i> —Open the <i>Software and Documentation</i> CD, and then navigate to: Documentation > User's Guide and other publications > Networking Guide
Help using the printer software	Windows or Mac Help—Open a printer software program or application, and then click Help . Click  to view context-sensitive information. Notes: <ul style="list-style-type: none">• Help is automatically installed with the printer software.• The printer software is located in the printer program folder or on the desktop, depending on your operating system.

What are you looking for?	Find it here
<p>The latest supplemental information, updates, and customer support:</p> <ul style="list-style-type: none">• Documentation• Driver downloads• Live chat support• E-mail support• Voice support	<p>Lexmark support Web site— http://support.lexmark.com</p> <p>Note: Select your country or region, and then select your product to view the appropriate support site.</p> <p>Support telephone numbers and hours of operation for your country or region can be found on the support Web site or on the printed warranty that came with your printer.</p> <p>Record the following information (located on the store receipt and at the back of the printer), and have it ready when you contact customer support so that they may serve you faster:</p> <ul style="list-style-type: none">• Machine Type number• Serial number• Date purchased• Store where purchased
Warranty information	<p>Warranty information varies by country or region:</p> <ul style="list-style-type: none">• In the U.S.—See the Statement of Limited Warranty included with this printer, or at http://support.lexmark.com.• In other countries and regions—See the printed warranty that came with your printer.


Printer Control Language (PCL) page formatting

For more information on PCL, see the *Printer Languages and Interfaces Technical Reference*. It contains a complete listing with descriptions of PCL commands.

To determine which PCL commands your printer supports, see “Appendix A: PCL support” on page 28.

Printable areas

The printable areas and logical pages for PCL emulation (both portrait and landscape orientation) are illustrated below. See the legend that follows for definitions of areas **A** through **I**.

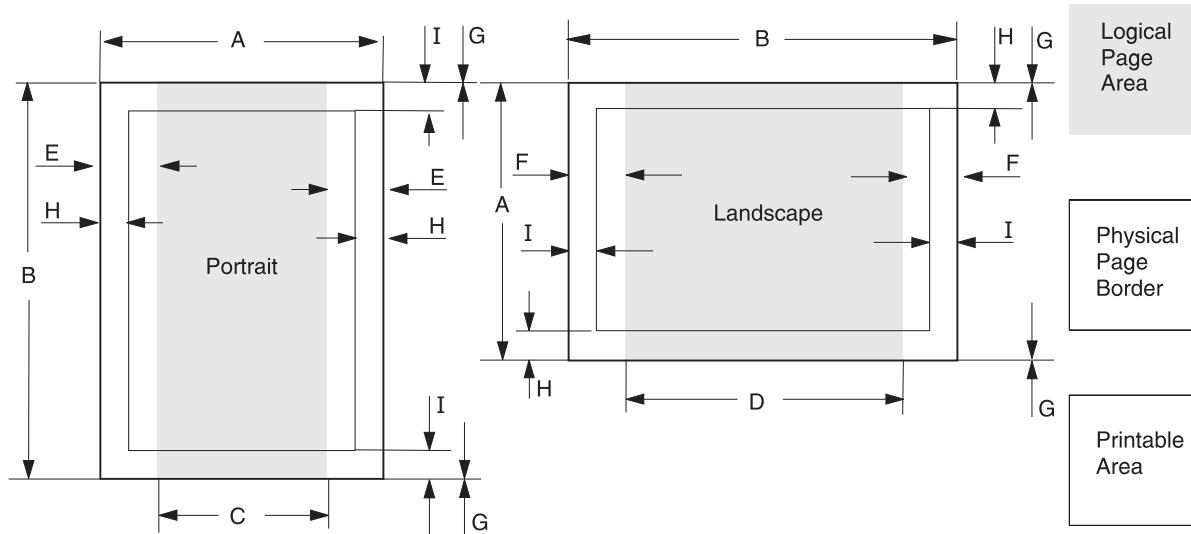

Legend:

A	Portrait physical page width and landscape physical page length
B	Portrait physical page length and landscape physical page width
C	Portrait logical page width
D	Landscape logical page width
E	Distance between the side edge of the physical page and the logical page in portrait
F	Distance between the side edge of the physical page and the logical page in landscape
G	Distance between the top and bottom edge of the physical page and logical page
H	Distance between the left and right edge of the physical page and the printable area in portrait, or distance between the top and bottom edge of the physical page and printable area in landscape
I	Distance between the top and bottom edge of the physical page and the printable area in portrait, or distance between the left and right edge of the physical page and the printable area in landscape

Note: The tables that follow in this chapter list the page sizes and dimensions of each area labeled on the preceding diagram for all paper and envelope sizes your printer supports.

Supported paper and envelope dimensions

The following table lists the page sizes and print area dimensions for all supported paper and envelope sizes. For more information about the printable areas and logical pages for PCL emulation, see “Printable areas” on page 9.

Selection		Paper/envelope dimensions		Dimensions by area (pels) ¹									
Page size parameters ²	Name	mm	inches	A	B	C	D	E	F	G	H	I	
Paper													
2, 602	Letter	216 x 279	8.5 x 11	5100	6600	4800	6360	150	120	0	100	100	
3, 603	Legal	216 x 356	8.5 x 14	5100	8400	4800	8160	150	120	0	100	100	
12, 45, 612	JIS B5	182 x 257	7.2 x 10.1	4300	6070	4000	5830	150	120	0	100	100	
26, 626	A4 (198 mm) ³	210 x 297	8.3 x 11.7	4960	7014	4676	6778	142	118	0	80	100	
26, 626	A4 (203 mm) ³	210 x 297	8.3 x 11.7	4960	7014	4800	6778	80	118	0	80	100	
1, 601	Executive	184 x 267	7.5 x 10.5	4350	6300	4050	6060	150	120	0	100	100	
13, 613	A5	148 x 210	5.8 x 8.27	3496	4960	3196	4720	142	118	0	100	100	
300	Oficio (México)	216 x 340	8.5 x 13.4	5100	8040	4800	7800	150	120	0	100	100	
4 or 10	Folio	216 x 330	8.5 x 13	5100	7800	4800	7560	150	120	0	100	100	
15	Statement	139.7 x 215.9	5.5 x 8.5	3300	5100	3000	4860	150	120	0	100	100	
24	A6	148 x 105	5.8 x 41	2480	3496	2199	3260	142	118	0	100	100	
101	Universal	215.9 x 359.92	8.5 x 14.17	1800–5100 ⁴	1800–8502 ⁴	1500–4800 ⁴	1500–8262 ⁴	150	120	0	100	100	
Envelope													
80	7 3/4 Envelope	98.4 x 190.5	3.875 x 7.5	2324	4500	2024	4260	150	120	0	100	100	
89	9 Envelope	98.4 x 225.4	3.875 x 8.875	2324	5324	2024	5084	150	120	0	100	100	

¹ Pel dimensions are for 600 dpi.

² Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

³ The width of the logical page for A4 paper can be changed from the printer control panel or your application.

⁴ For the Universal paper size, the area dimensions are listed in pel ranges.

⁵ Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

Note: The explanation of the printable area assumes that the Print Area menu item is set to **Normal**. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

Selection		Paper/envelope dimensions		Dimensions by area (pels) ¹								
Page size parameters ²	Name	mm	inches	A	B	C	D	E	F	G	H	I
81	10 Envelope	104.8 x 241.3	4.125 x 9.5	2474	5700	2174	5460	150	120	0	100	100
90	DL Envelope	220 x 110	8.66 x 4.33	2598	5196	2314	4960	142	118	0	100	100
91	C5 Envelope	229 x 162	9.02 x 6.38	3826	5408	3542	5172	142	118	0	100	100
99 ⁵ , 100	B5 envelope	176.0 x 250.0	6.93 x 9.84	4156	5904	3872	5668	142	118	0	100	100
600	Other Envelope	216 x 356	8.5 x 14	7012	8400	4800	8160	150	120	0	100	100

¹ Pel dimensions are for 600 dpi.

² Page Size Parameters are explained in the Page Control table in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

³ The width of the logical page for A4 paper can be changed from the printer control panel or your application.

⁴ For the Universal paper size, the area dimensions are listed in pel ranges.

⁵ Paper ID 99 will be supported for backward compatibility with other Lexmark printers. Paper ID 99 has the same logical paper size as ID 100 (compatible with HP LaserJet 5Si/5SiMx) but is 8 pels wider than the Lexmark 4039.

Note: The explanation of the printable area assumes that the Print Area menu item is set to **Normal**. For more information, see “Print Area Menu Item” in the PCL chapter in the *Printer Language and Interfaces Technical Reference*.

PJL commands information

Your printer or scanner supports complete PJL commands, including certain commands that cause the printer or scanner to enter PCL emulation, PostScript emulation, and Personal Printer Data Stream (PPDS).

For a complete listing with descriptions of PJL commands, see the *Printer Languages and Interfaces Technical Reference*.

To determine which commands your printer or scanner supports, see “Appendix B: PJL support” on page 39.

PostScript (PS) emulation

Your MFP option supports complete PostScript emulation supplemental operators. For full, detailed descriptions of these operators, see the PostScript emulation chapter of the *Printer Languages and Interfaces Technical Reference*.

To determine which commands your MFP option supports, see “Appendix C: PostScript support” on page 112.

Supported paper sizes

Paper sizes					Model		
Size	Literal name	Size (mm)	Size (inches)	Size (points)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
11 x 17	11x17	279.4 x 431.8	11 x 17	792 x 1224	✓	x	x
17 x 11	ledger	431.8 x 279.4	17 x 11	1224 x 792	✓	x	x
A3	a3	297 x 420	11.7 x 16.54	842 x 1191	x	x	x
A4	a4	210.0 x 297.0	8.3 x 11.7	595 x 842	✓	✓	✓
A5	a5	148.0 x 210.0	5.83 x 8.27	419 x 595	✓	✓	✓
A6	a6	105.0 x 148.0	4.13 x 5.83	297 x 419	✓	✓	✓
Executive	executivepage	184.2 x 266.7	7.25 x 10.5	522 x 756	✓	✓	✓
Folio	folio	215.9 x 330.2	8.5 x 13.0	612 x 936	✓	✓	✓
JIS B4	b4*	257 x 364	10.12 x 14.33	729 x 1032	x	x	x
JIS B5	b5*	182.0 x 257.0	7.2 x 10.1	516 x 729	✓	✓	✓
Legal	legal	215.9 x 355.6	8.5 x 14.0	612 x 1008	✓	✓	✓
Letter	letter	215.9 x 279.4	8.5 x 11.0	612 x 792	✓	✓	✓

✓ = Supported X = Not supported Paper sizes					Model		
Size	Literal name	Size (mm)	Size (inches)	Size (points)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Oficio	oficio	215.9 x 340.4	8.5 x 13.4	612 x 965 (Lexmark-unique size) 612 x 972 (official PostScript size)	✓	✓	✓
Statement	statement	139.7 x 215.9	5.5 x 8.5	396 x 612	✓	✓	✓
Universal	universal	215.9 x 359.92	8.5 x 14.17	612 x 1020	✓	✓	✓
Custom	custom	215.9 x 355.6	8.5 x 14.0	612 x 1020	✓	✓	✓
* This is a Japanese Industry Standard (JIS) paper size. The same named designation is used by JIS and the International Organization for Standardization (ISO) for different paper sizes.							

PostScript paper tray support

When the printer receives one of the operators listed in “Tray selected with tray operators” on page 15, it performs the actions listed in this section. This paper tray selection process ends when a suitable paper source is chosen and paper is fed from this tray.

- The printer checks the value of **manualfeed** in **statusdict** and the **ManualFeed** page device parameter. If either one is true, then the printer sends a message to load the requested size in the manual feeder or multipurpose feeder.
- The **PageSize Policy** is set to **0** by means of **setpagedevice**.
- The printer checks the paper size loaded in the current active source to determine if it matches the requested size. If the sizes match, then the paper is fed from the active source.

Note: The current active tray is the last source that was selected from the printer control panel or by the printer language.

- If the requested size and the size loaded in the active source do not match, then the sources are searched in the order defined by the **Priority** array in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, then the following search order is used:
 - Tray 1
 - Tray 2
 - Tray 3

- Multipurpose feeder
- Tray 4
- Tray 5
- If the requested size cannot be located in any automatic source, then a **configurationerror** is issued and the job is flushed.

For printers that support automatic two-sided printing (duplexing):

- Automatic two-sided printing is not supported for custom-size paper or for envelopes in the multipurpose feeder. Automatic two-sided printing is supported from the multipurpose feeder for all other papers.
- If the paper source is changed before the back side of a duplexed page prints, then a blank back page prints, the paper source changes, and the information for the back side of the page is printed on the front side of a page sent from the new paper source.

When these operators are used, it is equivalent to executing the following PostScript emulation sequence:

```
<< /PageSize [x y]/ImagingBBox null /Policies << /PageSize 0>> >>
setpagedevice
```

where **x** **y** are the PageSize in points.

Tray selected with tray operators

✓ = Supported X = Not supported		Model		
Operator	Tray selected (corresponding image size is set)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
11x17tray	tray with 11 x 17-size paper	✓	X	X
a3tray	tray with A3-size paper	X	X	X
a4tray	tray with A4-size paper	✓	✓	✓
a5tray	tray with A5-size paper	✓	✓	✓
a6tray	tray with A6-size paper	✓	✓	✓
b4tray	tray with B4-size paper	X	X	X
b5tray	tray with B5-size paper	✓	✓	✓
customtray	tray with custom-size paper	X	X	X
executivetray	tray with executive-size paper	✓	✓	✓
foliotray	tray with folio-size paper	✓	✓	✓
ledgertray	tray with ledger-size paper	X	X	X
legaltray	tray with legal-size paper	✓	✓	✓
lettertray	tray with letter-size paper	✓	✓	✓

✓ = Supported X = Not supported		Model		
Operator	Tray selected (corresponding image size is set)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
oficiotray	tray with oficio-size paper	✓	✓	✓
statementtray	tray with statement-size paper	✓	✓	✓

PostScript envelope size support

The literal names in “Envelope sizes supported” on page 16 are also supported as operators in **userdict**. These operators change the image size, but do not change the active paper source. Therefore, when these operators are used, part of the image may be clipped.

When these literal names are used as operators, it is equivalent to executing the following PostScript emulation sequence. The following example uses a 3.875 x 7.5 envelope.

```
<</Policies <</PageSize 7>> /PageSize [279 540]>> >>setpagedevice
```

Envelope sizes supported

✓ = Supported X = Not supported					Model		
Size name	Literal name	Size (mm)	Size (inches)	Size (points)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtm e, X658dtfe
7 3/4	3.875x7.5envelope	98.4 x 190.5	3.875 x 7.5	279 x 540	✓	✓	✓
Commercial 9	3.875x8.875envelop e	98.4 x 225.4	3.875 x 8.875	279 x 639	✓	✓	✓
Commercial 10	4.125x9.5envelope	104.8 x 241.3	4.125 x 9.5	297 x 684	✓	✓	✓

* For other envelopes, the page is formatted to 215.9 x 355.6 mm (8.5 x 14 in.) unless a size is specified by your software program.

✓ = Supported X = Not supported Envelope sizes					Model		
Size name	Literal name	Size (mm)	Size (inches)	Size (points)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
International B5	176x250envelope	176 x 250	6.93 x 9.84	499 x 708	✓	✓	✓
International C5	162x229envelope	162 x 229	6.38 x 9.02	459 x 649	✓	✓	✓
International DL	110x220envelope	110 x 220	4.33 x 8.66	312 x 624	✓	✓	✓
Other envelope	otherenvelope*	229.11x355.6	9.02 x 14	612 x 996	✓	✓	✓

* For other envelopes, the page is formatted to 215.9 x 355.6 mm (8.5 x 14 in.) unless a size is specified by your software program.

Literal names supported

✓ = Supported X = Not Supported Literal names		Model		
Literal name	Compatible literal name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
b5envelope	176x250envelope	✓	✓	✓
c5envelope	162x229envelope	✓	✓	✓
com10envelope	4.125x9.5envelope	✓	✓	✓
dlenvelope	110x220envelope	✓	✓	✓
monarcenvelope	3.875x7.5envelope	✓	✓	✓

PostScript envelope tray support

If **manualfeed** in **statusdict** and the **ManualFeed** page device parameter are false when the printer receives one of the **envelopetray** operators listed in “Envelopetray operator selections” on page 18, then the following occurs:

- The printer sets the **PageSize Policy** to **0**.
- The printer checks the active source to see if it matches the requested envelope size. If the sizes match, then the envelope is fed from the active source.

Note: The active source is the last source selected from the printer control panel or data stream.

- If the requested size and the size loaded in the active source do not match, then the sources are searched in the order defined by the **Priority array** in the **InputAttributes** dictionary in the **pagedevice** dictionary.
- If the requested media size is not found by the previous search, then the following search order is used:
 - Envelope feeder
 - Multipurpose feeder
- If the requested size and type are not available from any automatic source, then you are prompted to load the requested envelope size and type in the manual feed source.
- If the size is still not available, then a **configurationerror** is issued, and the print job is flushed.

If **manualfeed** or **ManualFeed** is true, then the printer prompts you to load the requested size manually. If no manual feed exists on the printer, then a **rangecheck** error message is issued.

The envelope tray the printer selects when it receives an **envelopetray** operator is listed in “Envelopetray operator selections” on page 18. These operators are equivalent to executing the following PostScript emulation sequence:

```
<</PageSize [x y] /ImagingBBox null /Policies<</PageSize 0>> >>
setpagedevice
```

where **x y** are the **PageSize** in points.

Envelopetray operator selections

✓ = Supported X = Not supported Tray operators		Model		
Operator	Tray selected (corresponding image size is set)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
110x220envelopetray	tray with 110 x 220-size envelopes	✓	✓	✓
d1envelopetray	tray with 110 x 220-size envelopes	✓	✓	✓
162x229envelopetray	tray with 162 x 229-size envelopes	✓	✓	✓
c5envelopetray	tray with 162 x 229-size envelopes	✓	✓	✓
176x250envelopetray	tray with 176 x 250-size envelopes	✓	✓	✓
b5envelopetray	tray with 176 x 250-size envelopes	✓	✓	✓

✓ = Supported X = Not supported Tray operators		Model		
Operator	Tray selected (corresponding image size is set)	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
3.875x7.5envelopetray	tray with 3.875 x 7.5-size envelopes	✓	✓	✓
monarcenvelopetray	tray with 3.875 x 7.5-size envelopes	✓	✓	✓
3.875x8.875envelopetray	tray with 3.875 x 8.875-size envelopes	✓	✓	✓
4.125x9.5envelopetray	tray with 4.125 x 9.5-size envelopes	✓	✓	✓
com10envelopetray	tray with 4.125 x 9.5-size envelopes	✓	✓	✓
otherenvelopetray	tray with other size envelopes	✓	✓	✓

Printer and MFP option specifications

Airflow requirement

The room should meet ASHRAE 62—1989 standards.

Noise emission levels

The following measurements were made in accordance with ISO 7779 and reported in conformance with ISO 9296.

Status	1-meter average sound pressure, dBA						
	6500e MFP Option	T650n	T652n/dn	T654n/dn	X651 MFP, X652 MFP	X654 MFP, X656 MFP	X658 MFP
ADF Color Scan	35	Not applicable					
ADF Mono Scan	50	Not applicable					
Copying	Not applicable	Not applicable	Not applicable	Not applicable	55	56	55
Printing	Not applicable	53 (simplex) 56 (duplex)	54 (simplex) 54 (duplex)	55 (simplex) 56 (duplex)	54 (simplex) 54 (duplex)	56 (simplex) 56 (duplex)	55 (simplex) 55 (duplex)
Quiet Mode printing	Not applicable	47	51	51	51	52	50
Robust mode Color Scan	45	Not applicable					
Robust mode Mono Scan	45	Not applicable					
Scanning	Not applicable	Not applicable	Not applicable	Not applicable	56	55	55
Standby (Idle without Power Saver)	35	26	30	30	29	29	28

Note: Measurements apply to 300-dpi, 600-dpi, and 1200-dpi printing.

Status	Declared sound power level, Bels						
	6500e MFP Option	T650n	T652n/dn	T654n/dn	X651 MFP, X652 MFP	X654 MFP, X656 MFP	X658 MFP
ADF Color Scan	5.0	Not applicable					
ADF Mono Scan	6.5	Not applicable					
Copying	Not applicable	Not applicable	Not applicable	Not applicable	7.0	7.0	7.0
Printing	Not applicable	6.8 (simplex) 7.1 (duplex)	7.0 (simplex) 7.0 (duplex)	7.1 (simplex) 7.2 (duplex)	6.9 (simplex) 6.9 (duplex)	7.1 (simplex) 7.1 (duplex)	7.1 (simplex) 7.1 (duplex)
Quiet Mode printing	Not applicable	6.2	6.7	6.7	6.7	6.7	6.6
Robust mode Color Scan	6.0	Not applicable					
Robust mode Mono Scan	6.0	Not applicable					
Scanning	Not applicable	Not applicable	Not applicable	Not applicable	7.2	7.2	7.2
Standby (Idle without Power Saver)	5.0	4.1	4.5	4.5	4.5	4.5	4.5
Note: Measurements apply to 300-dpi, 600-dpi, and 1200-dpi printing.							

Electrical specifications

Model	Electrical specification
6500e MFP Option low-voltage model	100–127 V at 57–63 Hz, nominal 90–137 V, extreme
6500e MFP Option high-voltage model	220–240 V at 47–63 Hz, nominal (available in some countries) 198–254 V, extreme
T65x low-voltage models*	100–127 V at 47–63 Hz, nominal 90–137 V, extreme
T65x high-voltage models	220–240 V at 47–63 Hz, nominal (not available in all countries) 198–254 V, extreme
X65x MFP low-voltage models	100–127 V at 50–60 Hz, nominal 90–137 V, extreme

* Using a 220–110 power converter with 110 V printer is not recommended.

Model	Electrical specification
X65x MFP high-voltage models	220–240 V at 50–60 Hz, nominal (not available in all countries) 198–259 V, extreme

* Using a 220–110 power converter with 110 V printer is not recommended.

Warning—Potential Damage: Do not use voltage converters with printers or scanners.

Power requirements

The following tables list the nominal average power requirements, including fuser power.

Lexmark 6500e MFP option

State	Nominal average power requirement		
	T650n	T652n	T654n
Idle	40 W (Ready mode) 25 W (Sleep mode)		
Continuous copying	810 W		
Scanning	70 W (ADF scan)		
Printing	36 W (low-voltage model) 18 W (high-voltage model)		
Normal mode	12.09 kWh*		
Eco-Mode	9.52 kWh*		
Off	0.0 W		

* The values were measured using the 6500e MFP option with the T654 printer.

Lexmark T65x

State	Nominal average power requirement		
	T650n	T652n	T654n
Average power while printing continuously			
1-sided (simplex)	640 W	725 W	740 W
2-sided (duplex)	540 W	565 W	575 W
Average power while idle			
Power Saver on	12 W	13 W	14 W
Ready mode	80 W	85 W	85 W
Max current while printing			
100–110 V	8.7 A	8.7 A	8.7 A
110–127 V	7.6 A	7.6 A	7.6 A
220–240 V	4.1 A	4.1 A	4.1 A

Lexmark X65x

State	Nominal average power requirement		
	X651 MFP, X652 MFP	X654 MFP, X656 MFP	X658 MFP
Continuous printing	700 W	800 W	800 W
Continuous copying	765 W	875 W	875 W
Continuous scanning	165 W	165 W	165 W
Average power while idle			
Power Saver on	24 W	28 W	30 W
Ready (Standby mode)	105 W	105 W	105 W
Average current while printing			
100 V	9.8 A	9.8 A	9.9 A
120 V	8.1 A	8.1 A	8.5 A
230 V	4.3 A	4.3 A	4.5 A

Physical specifications

Lexmark 6500e MFP option dimensions and weight - unpackaged

	Length	Width	Height	Weight
6500e MFP option	595 mm (23.43 in.)	562 mm (22.13 in.)	210 mm (8.27 in.)	17.2 kg (38.0 lb)

Lexmark T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn dimensions and weight

	Height	Width	Depth	Weight
T650n base printer	348 mm (13.7 in.)	425 mm (16.7 in.)	493 mm (19.4 in.)	18.4 kg (40.6 lb)
T650dn configured with an optional duplex unit	402 mm (15.8 in.)	425 mm (16.7 in.)	640 mm (25.2 in.)	23.4 kg (51.6 lb)
T650dn configured with an additional 550-sheet drawer	533 mm (24.2 in.)	425 mm (16.7 in.)	640 mm (25.2 in.)	27.4 kg (60.4 lb)
T652n/dn base printer	425 mm (16.7 in.)	425 mm (16.7 in.)	510 mm (20.1 in.)	23 kg (50.7 lb)
T652dn configured with an additional 550-sheet drawer	557 mm (21.7 in.)	425 mm (16.7 in.)	510 mm (20.1 in.)	59.5 kg (27 lb)
T654n/dn base printer	438 mm (17.2 in.)	425 mm (16.7 in.)	510 mm (20.1 in.)	23.4 kg (51.6 lb)
T654dn configured with an additional 550-sheet drawer	568 mm (22.4 in.)	425 mm (16.7 in.)	510 mm (20.1 in.)	60.4 kg (27.4 lb)

Input options for Lexmark T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn dimensions and weight

Option name	Height	Width	Depth	Weight
Duplex unit (attached to the T650 only)	54 mm (2.1 in.)	421 mm (16.6 in.)	640 mm (25.2 in.)	5 kg (11 lb)
550-sheet drawer	130 mm (5.1 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	4 kg (8.8 lb)
550-sheet tray	121 mm (4.8 in.)	421 mm (16.6 in.)	506 mm (19.9 in.)	1.4 kg (3.1 lb)
250-sheet drawer	90 mm (3.5 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	3.2 kg (7.1 lb)
250-sheet tray	56 mm (2.2 in.)	421 mm (16.6 in.)	488 mm (19.2 in.)	0.9 kg (2 lb)
2000-sheet drawer	357 mm (14.1 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	16.8 kg (37 lb)
200-sheet universally adjustable drawer	90 mm (3.5 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	3.2 kg (7.1 lb)
200-sheet universally adjustable tray	56 mm (2.2 in.)	421 mm (16.6 in.)	488 mm (19.2 in.)	0.9 kg (2 lb)
400-sheet universally adjustable drawer	130 mm (5.1 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	4 kg (8.8 lb)
400-sheet universally adjustable tray	121 mm (4.8 in.)	421 mm (16.6 in.)	506 mm (19.9 in.)	1.4 kg (3.1 lb)
Envelope feeder (closed position)	*	*	233 mm (9.2 in.)	2 kg (4.4 lb)
Envelope feeder (support fully extended)	*	*	350 mm (13.8 in.)	2 kg (4.4 lb)

* The envelope feeder fits within the height and width of the printer.

Output options for Lexmark T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn dimensions and weight

Option name	Height	Width	Depth	Weight
Output expander	160 mm (6.2 in.)	421 mm (16.6 in.)	378 mm (14.9 in.)	2.8 kg (5.7 lb)
5-bin mailbox	315 mm (12.4 in.)	421 mm (16.6 in.)	330 mm (12.9 in.)	5.2 kg (11.5 lb)
High capacity output stacker	323 mm (12.7 in.)	421 mm (16.6 in.)	378 mm (14.9 in.)	4.5 kg (9.9 lb)
StapleSmart™ II	320.4 mm (12.6 in.)	433 mm (17.1 in.)	403 mm (15.9 in.)	7.2 kg (15.9 lb)

Furniture for Lexmark T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn dimensions and weight

Furniture name	Height	Width	Depth	Weight
Spacer	130 mm (5.1 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	3.4 kg (7.5 lb)
T65x caster base	107 mm (4.2 in.)	768 mm (30.2 in.)	801 mm (31.5 in.)	38.5 kg (84.9 lb)

Lexmark X651de MFP, X652de MFP, X654de MFP, X656de MFP dimensions and weight - unpackaged

	Height	Width	Depth	Weight with cartridge
Base MFP	755 mm (29.7 in.)	548 mm (21.6 in.)	611 mm (24.1 in.)	45.4 kg (100 lb)
550-sheet drawer	130.4 mm (5.1 in.)	421 mm (16.6 in.)	510.2 mm (20.1 in.)	4.1 kg (9 lb)
250-sheet drawer	89.6 mm (3.5 in.)	421 mm (16.6 in.)	510.2 mm (20.1 in.)	3.2 kg (7 lb)
2000-sheet drawer	357 mm (14.1 in.)	421 mm (16.6 in.)	510.2 mm (20.1 in.)	16.8 kg (37 lb)
Caster base	107.5 mm (4.2 in.)	778 mm (30.6 in.)	803 mm (31.6 in.)	36.3 kg (80 lb)

Lexmark X656dte MFP preconfigured dimensions and weight - unpackaged

	Height	Width	Depth	Weight with cartridge
dte	885.4 mm (34.8 in.)	548 mm (21.6 in.)	611 mm (24.1 in.)	49.5 kg (109 lb)
250-sheet drawer	89.6 mm (3.5 in.)	421 mm (16.6 in.)	510.2 mm (20.1 in.)	4.1 kg (9 lb)
550-sheet drawer	130.4 mm (5.1 in.)	421 mm (16.6 in.)	510.2 mm (20.1 in.)	4.1 kg (9 lb)
2000-sheet drawer	357 mm (14.1 in.)	421 mm (16.6 in.)	510 mm (20.1 in.)	16.8 kg (37 lb)
Caster base	107.5 mm (4.2 in.)	778 mm (30.6 in.)	803 mm (31.6 in.)	36.3 kg (80 lb)

X658dxe MFP dimensions and weight - unpackaged

	Height	Width	Depth	Weight with cartridge
de, dfe, dme	1114 mm (43.9 in.)	548 mm (21.6 in.)*	596 mm (23.5 in.)*	de: 75 kg (165.3 lb) dfe: 75.1 kg (165.5 lb) dme: 72.8 kg (160.6 lb)
Models configured with an additional drawer	1246 mm (49.1 in.)	548 mm (21.6 in.)*	596 mm (23.5 in.)*	de: 80 kg (176.3 lb) dfe: 80.1 kg (176.5 lb) dme: 77.8 kg (171.5 lb)
MFP with all options - maximum dimensions	1378 mm (54.3 in.)	548 mm (21.6 in.)*	596 mm (23.5 in.)*	de: 85 kg (187.3 lb) dfe: 85.1 kg (187.5 lb) dme: 82.8 kg (182.6 lb)
550-sheet drawer option	132 mm (5.2 in.)	548 mm (21.6 in.)	548 mm (21.6 in.)	5 kg (11 lb)
Optional envelope feeder (closed position)	193 mm (7.6 in.)	421 mm (16.6 in.)	233 mm (9.2 in.)	2 kg (4.4 lb)
Optional envelope feeder (support fully extended)	193 mm (7.6 in.)	421 mm (16.6 in.)	350 mm (13.8 in.)	2 kg (4.4 lb)
Caster base	89 mm (3.5 in.)*	915 mm (36 in.)	771 mm (30.4 in.)	13.6 kg (30 lb)

* The bottom drawer fits 43 mm (1.7 in.) into the base.

Physical dimensions with extensions in open positions

Printer model	Height	Width	Depth
X651de, X652de, X654de, X656de	755 mm (29.7 in.)	548 mm (21.6 in.)	790 mm (31.1 in.)
X656dte	885.4 mm (34.8 in.)	548 mm (21.6 in.)	790 mm (31.1 in.)
X658de/dfe/dme	1114 mm (43.9 in.)	548 mm (21.6 in.)	787 mm (31 in.)
X658dte/dtfe/dtme	1246 mm (49.1 in.)	548 mm (21.6 in.)	787 mm (31 in.)

Clearance requirements

Lexmark 6500e MFP option

Model	Left side	Right side	Front	Rear	Top
6500e MFP option	368 mm (14.5 in.)	25 mm (1 in.)	25 mm (1 in.)	25 mm (1 in.)	348 mm (13.7 in.)

Lexmark T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn

Model	Left side	Right side	Front	Rear	Top
T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn	305 mm (12 in.)	305 mm (12 in.)	508 mm (20 in.)	305 mm (12 in.)	115 mm (4.5 in.)

Lexmark X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP

Model	Left side	Right side	Front	Rear	Top
X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP	304.8 mm (12 in.)	203.2 mm (8 in.)	508 mm (20 in.)	203.2 mm (8 in.)	304.8 mm (12 in.)

Environmental conditions

Lexmark 6500e MFP option

Air temperature ranges

Operating value	
Product operating	Product in power-off mode
15.6 to 32.20°C (60 to 90.0°F)	10.0 to 43.3°C (50 to 110°F)

Wet-bulb and ambient operating environment temperature

Operating value		
Wet-bulb temperature (product operating)	Wet-bulb temperature (product in power-off mode)	Ambient operating environment
22.80°C (73.0°F) maximum	26.70°C (80.10°F) maximum	15.6 to 32.2°C (60 to 90°F) 8 to 80% Relative Humidity (RH)

Humidity range

Operating value
8 to 80% RH

Lexmark T65x and X65x printer models

Note: When shipping or storing printers, always pack the printer supplies (such as cartridges and photoconductors) separately.

Air temperature ranges

Printer model	Operating value	Shipping value	Storage (unpacked)
T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn	15.6 to 32.2°C (60 to 90°F)	-40 to 43.3°C (-40 to 110°F)	0 to 40°C (32 to 104°F)
X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP	15.6 to 32.2°C (60 to 90°F)	-40 to 43.3°C (-40 to 110°F)	0 to 40°C (32 to 104°F)

Humidity ranges

Printer model	Operating value	Shipping value	Storage value
T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn	8% to 80%*	5% to 95%	5% to 80%
X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP	8% to 80%*	5% to 95%	8% to 80%

* Approaching 32°C (90°F) the maximum relative humidity is 60%.

Altitude specifications and atmospheric pressure

Lexmark 6500e MFP option

Altitude specification (above sea level)

Operating value
0 to 3048 m (10000 ft)

Lexmark T65x and X65x printer models

Altitude specifications (above sea level)

Printer model	Operating	Shipping/storage
T650n/dn/dtn, T652n/dn/dtn, T654n/dn/dtn	0 to 3048 M (10,000 ft.)	0.25 atmospheric pressure (equal to 10,300 M [34,000 ft.])
X651 MFP, X652 MFP, X654 MFP, X656 MFP, X658 MFP	0 to 3048 M (10,000 ft.)	Less than 10,300 M (34,000 ft.)

Atmospheric Pressure

74.6 kPa

Appendix A: PCL support

PCL emulation commands

\checkmark = Supported \times = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Decimal 8	Backspace (BS)	\checkmark	\checkmark	\checkmark
Decimal 9	Horizontal Tab (HT)	\checkmark	\checkmark	\checkmark
Decimal 10	Line Feed (LF)	\checkmark	\checkmark	\checkmark
Decimal 12	Form Feed (FF)	\checkmark	\checkmark	\checkmark
Decimal 13	Carrier Return (CR)	\checkmark	\checkmark	\checkmark
Decimal 14	Select Secondary Font (SO)	\checkmark	\checkmark	\checkmark
Decimal 15	Select Primary Font (SI)	\checkmark	\checkmark	\checkmark
Decimal 32	Space (SP)	\checkmark	\checkmark	\checkmark
ESC E	Printer Reset	\checkmark	\checkmark	\checkmark
ESC Y	Display Functions-On	\checkmark	\checkmark	\checkmark
ESC Z	Display Functions-Off	\checkmark	\checkmark	\checkmark
ESC Z	Print Test Page	\times	\times	\times
ESC &#C	Set Horizontal Cursor Position (Column Number)	\checkmark	\checkmark	\checkmark
ESC &#G	Duplex Page Side Selection	\checkmark	\checkmark	\checkmark
ESC &#H	Set Horizontal Cursor Position (in Decipoints)	\checkmark	\checkmark	\checkmark
ESC &#L	Set Left Margin	\checkmark	\checkmark	\checkmark
ESC &#M	Set Right Margin	\checkmark	\checkmark	\checkmark
ESC &#N	Negative Motion	\times	\times	\times
ESC &#P	Print Direction	\checkmark	\checkmark	\checkmark

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC&a#R	Set Vertical Cursor Position (Row Number)	✓	✓	✓
ESC&a#V	Set Vertical Cursor Position (in Decipoints)	✓	✓	✓
ESC&b#M	Monochrome Print Mode	✓	✓	✓
ESC&b#W[data]	Configuration Command	X	X	X
ESC&c#T	Character Text Path Direction	✓	✓	✓
ESC&d@	Disable Underline	✓	✓	✓
ESC&d#A	Collation - Collated Copies (QTY)	✓	✓	✓
ESC&d#D	Select Underline Type	✓	✓	✓
ESC&f#F	Set Universal Height	✓	✓	✓
ESC&f#G	Set Universal Width	✓	✓	✓
ESC&f#O	Set Universal Feed Direction	✓	✓	✓
ESC&f#W	Set Universal Custom Name	✓	✓	✓
ESC&f#S	Push/Pop Cursor	✓	✓	✓
ESC&f#X	Macro Control	✓	✓	✓
ESC&f#Y	Set Macro ID	✓	✓	✓
ESC&k#G	Set Line Termination	✓	✓	✓
ESC&k#H	Set Horizontal Motion Index (HMI)	✓	✓	✓
ESC&k#S	Select Primary and Secondary Pitch	✓	✓	✓
ESC&k#W	Text Scale Mode	X	✓	✓
ESC&l#A	Set Page Size	✓	✓	✓
ESC&l#C	Set Vertical Motion Index (VMI)	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
<code>ESC&#D</code>	Set Line Spacing	✓	✓	✓
<code>ESC&#E</code>	Set Top Margin	✓	✓	✓
<code>ESC&#F</code>	Set Text Length	✓	✓	✓
<code>ESC&#G</code>	Set Output Bin	✓	✓	✓
<code>ESC&#H</code>	Select Paper Feed	✓	✓	✓
<code>ESC&#L</code>	Skip Perforation	✓	✓	✓
<code>ESC&#O</code>	Select Orientation	✓	✓	✓
<code>ESC&#M(b)</code>	Media Type	X	X	X
<code>ESC&#P</code>	Set Page Length	✓	✓	✓
<code>ESC&#S</code>	Simplex/Duplex	✓	✓	✓
<code>ESC&#1T</code>	Job Separation	X	X	X
<code>ESC&#U</code>	Left (Long-Edge) Offset Registration	✓	✓	✓
<code>ESC&#X</code>	Set Copy Count	✓	✓	✓
<code>ESC&#Z</code>	Top (Short-Edge) Offset Registration	✓	✓	✓
<code>ESC&n#W [operation] [string id]</code>	Alphanumeric ID	✓	✓	✓
<code>ESC&p#C</code>	Palette Control	✓	✓	✓
<code>ESC&p#I</code>	Palette Control ID	✓	✓	✓
<code>ESC&p#S</code>	Select Palette	✓	✓	✓
<code>ESC&p#X[data]</code>	Transparent Print Data	✓	✓	✓
<code>ESC&r#F</code>	Flush All Pages	✓	✓	✓
<code>ESC&s#C</code>	End-Of-Line Text Wrap	✓	✓	✓
<code>ESC&t#P</code>	Text Parsing Method	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC&u#D	Unit of Measure	✓	✓	✓
ESC(#	Select Symbol Set	✓	✓	✓
ESC(#X	Select Font by ID	✓	✓	✓
ESC(3@	Select Default Primary Font	✓	✓	✓
ESC(f#W[data]	Define Symbol Set	✓	✓	✓
ESC(s#B	Select Font Stroke Weight	✓	✓	✓
ESC(s#H	Select Font Pitch	✓	✓	✓
ESC(s#P	Select Font Spacing	✓	✓	✓
ESC(s#S	Select Font Style	✓	✓	✓
ESC(s#T	Select Font Typeface	✓	✓	✓
ESC(s#V	Select Font Height (Point Size)	✓	✓	✓
ESC(s#W[data]	Load Character	✓	✓	✓
ESC)#	Secondary Font Symbol Set	X	✓	✓
ESC)#X	Select Secondary Download Font (by Font ID)	X	✓	✓
ESC)3@	Select Default Secondary Font	✓	✓	✓
ESC)s#B	Secondary Font Stroke Weight	X	✓	✓
ESC)s#H	Secondary Font Pitch	X	✓	✓
ESC)s#P	Secondary Font Spacing	X	✓	✓
ESC)s#S	Secondary Font Style	X	✓	✓
ESC)s#T	Secondary Font Typeface Selection	X	✓	✓
ESC)s#V	Secondary Font Height (Point Size)	X	✓	✓
ESC)s#W[data]	Load Font Header	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC*b#M	Set Raster Compression Mode	✓	✓	✓
ESC*b#V[data]	Transfer Raster Data (Plane)	✓	✓	✓
ESC*b#W[data]	Transfer Raster Data (Row/Block)	✓	✓	✓
ESC*b#Y	Y Offset	✓	✓	✓
ESC*c#A	Horizontal Rectangle Size (in PCL Units)	✓	✓	✓
ESC*c#B	Vertical Rectangle Size (in PCL Units)	✓	✓	✓
ESC*c#D	Set Font ID	✓	✓	✓
ESC*c#E	Set Character Code	✓	✓	✓
ESC*c#F	Font Control	✓	✓	✓
ESC*c#G	Area Fill ID	✓	✓	✓
ESC*c#H	Horizontal Rectangle Size (in Decipoints)	✓	✓	✓
ESC*c#K	Horizontal Plot Size (in Inches)	✓	✓	✓
ESC*c#L	Vertical Plot Size (in Inches)	✓	✓	✓
ESC*c#P	Fill Rectangular Area	✓	✓	✓
ESC*c#Q	Pattern Control	✓	✓	✓
ESC*c#R	Symbol Set ID Code	✓	✓	✓
ESC*c#S	Symbol Set Control	✓	✓	✓
ESC*cOT	Set Picture Frame Anchor Point	✓	✓	✓
ESC*c#V	Vertical Rectangle Size (in Decipoints)	✓	✓	✓
ESC*c#W[data]	Define Pattern	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC*c#X	Picture Frame Horizontal Size (in Decipoints)	✓	✓	✓
ESC*c#Y	Picture Frame Vertical Size (in Decipoints)	✓	✓	✓
ESC*l#O	Logical Operation	✓	✓	✓
ESC*l#R	Pixel Placement	✓	✓	✓
ESC*l#W[data]	Color Lookup Tables	X	X	X
ESC*m#W[data]	Download Dither Matrix	✓	✓	✓
ESC{o#M(b)}	Print Quality	X	✓	✓
ESC{o#Q	Mechanical Print Quality	X	X	X
ESC{o#W[data]	Driver Configuration	✓	✓	✓
ESC*p#P	Push/Pop Palette	✓	✓	✓
ESC*p#R	Set Pattern Reference Point	✓	✓	✓
ESC*p#X	Set Horizontal Cursor Position (in PCL Units)	✓	✓	✓
ESC*p#Y	Set Vertical Cursor Position (in PCL Units)	✓	✓	✓
ESC*r#A	Start Raster Graphics	✓	✓	✓
ESC*r#F	Raster Graphics Presentation	✓	✓	✓
ESC*r#S	Raster Width (Source)	✓	✓	✓
ESC*r#T	Raster Height (Source)	✓	✓	✓
ESC*r#U	Simple Color	✓	✓	✓
ESC*rB	End Raster Graphics (Version B)	✓	✓	✓
ESC*rC	End Raster Graphics (Version C)	✓	✓	✓
ESC*s#I	Inquire Status Readback Entity	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC*s#M	Free Space	✓	✓	✓
ESC*s#T	Set Status Readback Location Type	✓	✓	✓
ESC*s#U	Set Status Readback Location Unit	✓	✓	✓
ESC*s#X	Echo	✓	✓	✓
ESC*t#H	Raster Width (Destination)	✓	✓	✓
ESC*t#I	Gamma Correction	✓	✓	✓
ESC*t#J	Render Algorithm	X	X	X
ESC*t#K	Scale Algorithm	X	X	X
ESC*t#R	Set Raster Resolution	✓	✓	✓
ESC*t#V	Raster Height (Destination)	✓	✓	✓
ESC*g#W	Set Raster Configuration	X	✓	✓
ESC*v#A	Color Component One	✓	✓	✓
ESC*v#B	Color Component Two	✓	✓	✓
ESC*v#C	Color Component Three	✓	✓	✓
ESC*v#I	Assign Color Index	✓	✓	✓
ESC*v#N	Source Transparency Mode	✓	✓	✓
ESC*v#O	Pattern Transparency Mode	✓	✓	✓
ESC*v#S	Foreground Color	✓	✓	✓
ESC*v#T	Select Current Pattern	✓	✓	✓
ESC*v#W[data]	Configure Image Data	✓	✓	✓
ESC*i#W[data]	Viewing Illuminant	✓	X	X
ESCg	Clear Horizontal Margins	✓	✓	✓
ESC=	Half Line-Feed	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ESC%#A	Enter PCL Emulation	✓	✓	✓
ESC%#B	Enter HP-GL/2 Language Note: The values of -1, 2, and 3 are not supported by any of the printers included in this document.	✓	✓	✓
ESC%12345X	Universal Exit Language (UEL) / Start of PJL	✓	✓	✓

GL/2 commands

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
AA	Arc Absolute	✓	✓	✓
AC	Anchor Corner	✓	✓	✓
AD	Define Alternate Font	✓	✓	✓
AR	Arc Relative	✓	✓	✓
AT	Arc Absolute Three Point	✓	✓	✓
BR	Bezier Relative	✓	✓	✓
BZ	Bezier Absolute	✓	✓	✓
CF	Character Fill	✓	✓	✓
CI	Circle	✓	✓	✓
CO	Comment	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
CP	Character Plot	✓	✓	✓
CR	Color Range	✓	✓	✓
DF	Default	✓	✓	✓
DI	Absolute Direction	✓	✓	✓
DR	Relative Direction	✓	✓	✓
DT	Define Label Terminator	✓	✓	✓
DV	Define Variable Text Path	✓	✓	✓
EA	Edge Rectangle Absolute	✓	✓	✓
EP	Edge Polygon	✓	✓	✓
ER	Edge Rectangle Relative	✓	✓	✓
ES	Extra Space	✓	✓	✓
EW	Edge Wedge	✓	✓	✓
FI	Primary Font	✓	✓	✓
FN	Secondary Font	✓	✓	✓
FP	Fill Polygon, Odd/Even	✓	✓	✓
FP	Fill Polygon, Non-Zero Winding	✓	✓	✓
FT	Fill Type	✓	✓	✓
FT	Fill Type - 22	✓	✓	✓
FT	Fill Type - 9	✓	✓	✓
IN	Initialize	✓	✓	✓
IP	Input P1 and P2	✓	✓	✓
IR	Input Relative P1 and P2	✓	✓	✓
IW	Input Window	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LA	Line Attributes	✓	✓	✓
LB	Label, Default Terminator = '03'x	✓	✓	✓
LO	Label Origin	✓	✓	✓
LO	Uses PCL Label Origin	✓	✓	✓
LT	Line Type	✓	✓	✓
LM	Label Mode	X	X	X
MC	Logical Operation	✓	✓	✓
NP	Number of Pens	✓	✓	✓
PA	Plot Absolute	✓	✓	✓
PC	Pen Color	✓	✓	✓
PD	Pen Down	✓	✓	✓
PE	Polyline Encoded	✓	✓	✓
PM	Polygon Mode	✓	✓	✓
PP	Pixel Placement	✓	✓	✓
PR	Plot Relative	✓	✓	✓
PU	Pen Up	✓	✓	✓
PW	Pen Width	✓	✓	✓
RA	Fill Rectangle Absolute	✓	✓	✓
RF	Define Raster Fill	✓	✓	✓
RO	Rotate Coordinate System	✓	✓	✓
RR	Fill Rectangle Relative	✓	✓	✓
RT	Arc Relative Three Point	✓	✓	✓
SA	Select Alternate Font	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	Function	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
SB	Scalable/Bitmapped Fonts	✓	✓	✓
SC	Scale	✓	✓	✓
SD	Define Standard Font	✓	✓	✓
SI	Absolute Character Size	✓	✓	✓
SL	Character Slant	✓	✓	✓
SM	Symbol Mode	✓	✓	✓
SP	Select Pen	✓	✓	✓
SR	Relative Character Size	✓	✓	✓
SS	Select Standard Font	✓	✓	✓
SV	Screened Vectors	✓	✓	✓
SV	Screened Vectors - 9, level	✓	✓	✓
TD	Transparent Data	✓	✓	✓
TM	Threshold Matrix	✓	✓	✓
TR	Transparency Mode	✓	✓	✓
UL	User Defined Line	✓	✓	✓
WG	Fill Wedge	✓	✓	✓
WU	Pen Width Units	✓	✓	✓

Appendix B: PJL support

Common variables for both printer languages

Variable name	6500e MFP option	Model
✓ = Supported		X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
X = Not supported		
AUTOCONT	✓	✓
AUTOSELECT	x	x
BINDING	✓	✓
BITSPERPIXEL	✓	✓
CLEARABLEWARNINGS	✓	✓
CONTEXTSWITCH	x	x
COPIES	✓	✓
CPLOCK	✓	✓
DENSITY	✓	✓
DISKLOCK	x	x
DUPLEX	✓	✓
ECONOMODE	✓	✓
FORMATTERNUMBER	✓	✓
FORMLINES	✓	✓
HELDJOBTIMEOUT	✓	✓
HOLD	✓	✓
HOLDKEY	✓	✓
HOLDTYPE	✓	✓
IMAGEADAPT	x	x
INTRAY1	x	x

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
INTRAY2	✓	✓	✓
INTRAY3	✓	✓	✓
INTRAY4	✓	✓	✓
INTRAY5	✓	✓	✓
INTRAY1SIZE	✓	✓	✓
INTRAY2SIZE	✓	✓	✓
INTRAY3SIZE	✓	✓	✓
INTRAY4SIZE	✓	✓	✓
INTRAY5SIZE	✓	✓	✓
IOBUFFER	x	x	x
IOSIZE	x	x	x
JOBATTR	x	x	x
JOBNAME	✓	✓	✓
JOBOFFSET	✓	✓	✓
LANG	✓	✓	✓
LOWTONER	✓	✓	✓
MANUALFEED	✓	✓	✓
MEDIASOURCE	x	x	x
MEDIATYPE	✓	✓	✓
MPTRAY	✓	✓	✓
ORIENTATION	✓	✓	✓
OUTBIN	✓	✓	✓
PAGEPROTECT	✓	✓	✓
PAPER	✓	✓	✓

Variable name	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
PARALLEL	✓	✓	✓
PASSWORD	✓	✓	✓
PERSONALITY	✓	✓	✓
POWERSAVE	✓	✓	✓
POWERSAVETIME	✓	✓	✓
PRINTQUALITY	x	x	x
QTY	✓	✓	✓
RENDERMODE	x	x	x
REPEATJOBTIMEOUT	✓	x	x
REPRINT	✓	✓	✓
RESERVEJOBTIMEOUT	✓	x	x
RESOLUTION	✓	x	x
RESOURCESAVE	✓	✓	✓
RESOURCESAVESIZE	x	x	x
RET	x	x	x
STRINGCODESET	✓	✓	✓
TIMEOUT	✓	✓	✓
USERNAME	✓	✓	✓
VERIFYJOBTIMEOUT	✓	x	x
WIDEA4	✓	✓	✓

Lexmark-unique PJL variables for both printer languages

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LACTIVEBINRESET	✓	✓	✓
LADVANCEDSTATUS	✓	✓	✓
LALARMCONTROL	✓	✓	✓
LAUTOCRLF	✓	✓	✓
LAUTOLFCR	✓	✓	✓
LBAYERSCREENLIMIT	✓	✓	✓
LBLANKPAGES	✓	✓	✓
LBONDLENGTH	x	x	x
LBONDLOADING	✓	✓	✓
LBONDOUTBIN	✓	✓	✓
LBONDTEXTURE	✓	✓	✓
LBONDWEIGHT	✓	✓	✓
LBOTTOMMARGINFOFFSET	x	✓	✓
LBWLOCK	x	x	x
LCANCEL	✓	✓	✓
LCARDSTOCKLENGTH	x	x	x
LCARDSTOCKLOADING	✓	✓	✓
LCARDSTOCKOUTBIN	✓	✓	✓
LCARDSTOCKTEXTURE	✓	✓	✓
LCARDSTOCKWEIGHT	✓	✓	✓
LCOLLATION	✓	✓	✓
LCOLORBALANCEBLACK	x	x	x
LCOLORBALANCECYAN	x	x	x

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LCOLORBALANCEMAGENTA	x	x	x
LCOLORBALANCEYELLOW	x	x	x
LCOLORCORRECTION	✓	✓	✓
LCOLOREDLENGTH	x	x	x
LCOLOREDLOADING	✓	✓	✓
LCOLOREDOUTBIN	✓	✓	✓
LCOLOREDTEXTURE	✓	✓	✓
LCOLOREDWEIGHT	✓	✓	✓
LCOLORMODEL	x	x	x
LCOLORSAVER	x	x	x
LCOLORTRAPPING	x	x	x
LCUSTOMPAPERUNITS	✓	✓	✓
LCUSTOMPAPERWIDTH	✓	✓	✓
LCUSTOMPAPERHEIGHT	✓	✓	✓
LCUSTOMPAPERFEED	✓	✓	✓
LCUSTOMTYPE1LENGTH	x	x	x
LCUSTOMTYPE1LOADING	✓	✓	✓
LCUSTOMTYPE1MEDIA	✓	✓	✓
LCUSTOMTYPE1NAME	✓	✓	✓
LCUSTOMTYPE1OUTBIN	✓	✓	✓
LCUSTOMTYPE1TEXTURE	✓	✓	✓
LCUSTOMTYPE1WEIGHT	✓	✓	✓
LCUSTOMTYPE2LENGTH	x	x	x
LCUSTOMTYPE2LOADING	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LCUSTOMTYPE2MEDIA	✓	✓	✓
LCUSTOMTYPE2NAME	✓	✓	✓
LCUSTOMTYPE2OUTBIN	✓	✓	✓
LCUSTOMTYPE2TEXTURE	✓	✓	✓
LCUSTOMTYPE2WEIGHT	✓	✓	✓
LCUSTOMTYPE3LENGTH	x	x	x
LCUSTOMTYPE3LOADING	✓	✓	✓
LCUSTOMTYPE3MEDIA	✓	✓	✓
LCUSTOMTYPE3NAME	✓	✓	✓
LCUSTOMTYPE3OUTBIN	✓	✓	✓
LCUSTOMTYPE3TEXTURE	✓	✓	✓
LCUSTOMTYPE3WEIGHT	✓	✓	✓
LCUSTOMTYPE4LENGTH	x	x	x
LCUSTOMTYPE4LOADING	✓	✓	✓
LCUSTOMTYPE4MEDIA	✓	✓	✓
LCUSTOMTYPE4NAME	✓	✓	✓
LCUSTOMTYPE4OUTBIN	✓	✓	✓
LCUSTOMTYPE4TEXTURE	✓	✓	✓
LCUSTOMTYPE4WEIGHT	✓	✓	✓
LCUSTOMTYPE5LENGTH	x	x	x
LCUSTOMTYPE5LOADING	✓	✓	✓
LCUSTOMTYPE5MEDIA	✓	✓	✓
LCUSTOMTYPE5NAME	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LCUSTOMTYPE5OUTBIN	✓	✓	✓
LCUSTOMTYPE5TEXTURE	✓	✓	✓
LCUSTOMTYPE5WEIGHT	✓	✓	✓
LCUSTOMTYPE6LENGTH	x	x	x
LCUSTOMTYPE6LOADING	✓	✓	✓
LCUSTOMTYPE6MEDIA	✓	✓	✓
LCUSTOMTYPE6NAME	✓	✓	✓
LCUSTOMTYPE6OUTBIN	✓	✓	✓
LCUSTOMTYPE6TEXTURE	✓	✓	✓
LCUSTOMTYPE6WEIGHT	✓	✓	✓
LDOWNLOADTARGET	✓	✓	✓
LDRYTIMEDELAY	x	x	x
LDUPLEXLEFTMARGINOFFSET	x	x	x
LDUPLEXTOPMARGINOFFSET	x	✓	✓
LDUPLICATEHELDJOBS	✓	✓	✓
LECOMODE	✓	✓	✓
LENVELOPEENHANCE	✓	✓	✓
LENVELOPELENGTH	x	x	x
LENVELOPEOUTBIN	✓	✓	✓
LENVELOPETEXTURE	✓	✓	✓
LENVELOPEWEIGHT	✓	✓	✓
LESCCHAR	✓	✓	✓
LFAXFOLD	x	x	x
LFAXJOBWAITFORTONER	✓	✓	✓

Variable name	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LFXREDIAL	✓	x	✓
LFXREDIALFREQUENCY	✓	x	✓
LFXRESOLUTION	✓	x	✓
LFXTRANSMISSIONLOG	✓	x	✓
LFOLD	x	x	x
LFEEDERPAPERTYPE	✓	✓	✓
LGLOSSYLOADING	x	x	x
LGLOSSYOUTBIN	x	x	x
LGLOSSYTEXTURE	x	x	x
LGLOSSYWEIGHT	x	x	x
LHEAVYGLOSSYLOADING	x	x	x
LHEAVYGLOSSYOUTBIN	x	x	x
LHEAVYGLOSSYTEXTURE	x	x	x
LHEAVYGLOSSYWEIGHT	x	x	x
LHEAVYPAPERLOADING	✓	✓	✓
LHEAVYPAPEROUTBIN	✓	✓	✓
LHEAVYPAPERTEXTURE	✓	✓	✓
LHEAVYPAPERWEIGHT	✓	✓	✓
LHELDJOBPRTORDER	✓	✓	✓
LHOLEPUNCHALARM	x	x	x
LHOLEPUNCHMODE	x	x	x
LHONORINIT	✓	✓	✓
LIMAGEESS	✓	x	x
LIMAGEBRIGHTNESS	x	✓	✓
LIMAGECONTRAST	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LIMAGEENHANCE	✓	✓	✓
LIMAGEENHANCETYPE	✓	✓	✓
LIMAGEORIENTATION	✓	✓	✓
LIMAGESATURATION	x	x	x
LIMAGESMOOTHING	x	x	x
LINFEEDER	x	x	x
LINFEEDERSIZE	✓	✓	✓
LINKALERT	x	x	x
LINMPFEEDERSIZE	✓	✓	✓
LJAMRECOVERY	✓	✓	✓
LJOBPARKPERSIST	✓	✓	✓
LJOBWAITFORSUPPLIES	✓	✓	✓
LLABELSLENGTH	x	x	x
LLABELSLOADING	✓	✓	✓
LLABELSOUTBIN	✓	✓	✓
LLABELSTEXTURE	✓	✓	✓
LLABELSWEIGHT	✓	✓	✓
LLASTTRAYRENUMBER	✓	✓	✓
LLEFTMARGINOFFSET	x	✓	✓
LLETTERHEADLENGTH	x	x	x
LLETTERHEADLOADING	✓	✓	✓
LLETTERHEADOUTBIN	✓	✓	✓
LLETTERHEADTEXTURE	✓	✓	✓
LLETTERHEADWEIGHT	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LLIGHTPAPERLOADING	✓	✓	✓
LLIGHTPAPEROUTBIN	✓	✓	✓
LLIGHTPAPERTEXTURE	✓	✓	✓
LLIGHTPAPERWEIGHT	✓	✓	✓
LLINEDETAIL	✓	✓	✓
LMANUALCOLORRGBTEXT	x	x	x
LMANUALCOLORRGBGRAPHICS	x	x	x
LMANUALCOLORRGBIMAGE	x	x	x
LMANUALCOLORCMYKTEXT	x	x	x
LMANUALCOLORCMYKGRAFPHICS	x	x	x
LMANUALCOLORCMYKIMAGE	x	x	x
LMANUALENVELOPESIZE	✓	✓	✓
LMANUALENVELOPETYPE	✓	✓	✓
LMANUALPAPERSIZE	✓	✓	✓
LMANUALPAPERTYPE	✓	✓	✓
MICRJOB	✓	✓	✓
LMAXSTATUSMSG	x	x	x
LMPFEEDERPAPERTYPE	✓	✓	✓
LMPFEEDERRENUMBER	✓	✓	✓
LMULTIPAGEBORDER	✓	✓	✓
LMULTIPAGEORDER	✓	✓	✓
LMULTIPAGEPRINT	✓	✓	✓
LMULTIPAGEVIEW	✓	✓	✓
LNPAP	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LOPTIONALOUTBIN1NAME	✓	✓	✓
LOPTIONALOUTBIN2NAME	✓	✓	✓
LOPTIONALOUTBIN3NAME	✓	✓	✓
LOPTIONALOUTBIN4NAME	✓	✓	✓
LOPTIONALOUTBIN5NAME	✓	✓	x
LOPTIONALOUTBIN6NAME	✓	✓	x
LOPTIONALOUTBIN7NAME	✓	✓	x
LOPTIONALOUTBIN8NAME	✓	✓	x
LOPTIONALOUTBIN9NAME	✓	✓	x
LOPTIONALOUTBIN10NAME	✓	✓	x
LOUTBINCONFIG	✓	✓	✓
LOVERFLOWOUTBIN	✓	✓	✓
LOVERFLOWTIMER	✓	✓	✓
LPAGECOUNT	✓	✓	✓
LPAGEMODE	✓	✓	✓
LPAPERSOURCE	✓	✓	✓
LPICTUREGRADE	x	x	x
LPLAINLENGTH	x	x	x
LPLAINOUTBIN	✓	✓	✓
LPLAINTEXTURE	✓	✓	✓
LPLAINWEIGHT	✓	✓	✓
LPOWERSAVER	✓	✓	✓
LPPDS	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LPPDSFORMLINES	✓	✓	✓
LPPDSLINESPERINCH	✓	✓	✓
LPREPRINTEDLENGTH	x	x	x
LPREPRINTEDLOADING	✓	✓	✓
LPREPRINTEDOUTBIN	✓	✓	✓
LPREPRINTEDTEXTURE	✓	✓	✓
LPREPRINTEDWEIGHT	✓	✓	✓
LPRINTBUFFER	✓	✓	✓
LPRINTSCREENS	✓	✓	✓
LPRINTHEADIDLETIME	✓	✓	✓
LPRINTERUSAGE	x	x	x
LPRINTMENUSBUTTON	x	x	x
LPRINTQUALITY	x	x	x
LPUNCH	x	x	x
LQUIETMODE	✓	✓	✓
LREAROUTBINNAME	x	x	x
LRECYCLEDLOADING	✓	✓	✓
LRECYCLEDMEDIA	✓	✓	✓
LRECYCLEDOUTBIN	✓	✓	✓
LRECYCLEDTEXTURE	✓	✓	✓
LRECYCLEDWEIGHT	✓	✓	✓
LREPEATPRINTLIMIT	✓	✓	✓
LRESET	✓	✓	✓
LRESOURCESAVE	✓	✓	✓

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LRIGHTMARGINOFFSET	x	✓	✓
LROUGHENVELOPELOADING	x	x	x
LROUGHENVELOPEOUTBIN	✓	✓	✓
LROUGHENVELOPETEXTURE	✓	✓	✓
LROUGHENVELOPEWEIGHT	✓	✓	✓
LROUGHPAPERLOADING	✓	✓	✓
LROUGHPAPEROUTBIN	✓	✓	✓
LROUGHPAPERTEXTURE	✓	✓	✓
LROUGHPAPERWEIGHT	✓	✓	✓
LSCREENING	x	x	x
LSEPARATORSHEETS	✓	✓	✓
LSEPARATORSOURCE	✓	✓	✓
LSMALLFONTHANCER	✓	✓	✓
LSSGALVO	✓	✓	x
LSTANDARDOUTBINNAME	✓	✓	✓
LSTAPLE	✓	✓	✓
LSTAPLEEMPTYALARM	✓	✓	✓
LSTAPLETESBIN	x	x	x
LSTAPLETESOURCE	x	x	x
LSSTROKETHICKNESS	x	x	x
LSUBSTITUTESIZE	✓	✓	✓
LTOPBINROTATE	✓	✓	✓
LTOPMARGINOFFSET	x	✓	✓
LTRANSPARENCYLENGTH	x	x	x

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LTRANSPARENCYOUTBIN	✓	✓	✓
LTRANSPARENCYTEXTURE	✓	✓	✓
LTRANSPARENCYWEIGHT	✓	✓	✓
LTRAY1AUTOSIZE	✓	✓	✓
LTRAY2AUTOSIZE	✓	✓	✓
LTRAY3AUTOSIZE	✓	✓	✓
LTRAY4AUTOSIZE	✓	✓	✓
LTRAY5AUTOSIZE	✓	✓	✓
LTRAY1PAPERTYPE	✓	✓	✓
LTRAY2PAPERTYPE	✓	✓	✓
LTRAY3PAPERTYPE	✓	✓	✓
LTRAY4PAPERTYPE	✓	✓	✓
LTRAY5PAPERTYPE	✓	✓	✓
LTRAY1RENUMBER	✓	✓	✓
LTRAY1SENSEDTYPEPAPER	x	x	x
LTRAY1SENSEDTYPETRANSPARENCY	x	x	x
LTRAY2SENSEDTYPEPAPER	x	x	x
LTRAY2SENSEDTYPETRANSPARENCY	x	x	x
LTRAY3SENSEDTYPEPAPER	x	x	x
LTRAY3SENSEDTYPETRANSPARENCY	x	x	x
LTRAY4SENSEDTYPEPAPER	x	x	x
LTRAY4SENSEDTYPETRANSPARENCY	x	x	x
LTRAYINSERTMESSAGEDELAY	x	x	x
LTYPE1FONTS	✓	✓	✓

✓ = Supported X = Not supported		Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
LUSDEFAULTS	✓	✓	✓	
LVINYLABELSLOADING	✓	✓	✓	
LVINYLABELSOUTBIN	✓	✓	✓	
LVINYLABELSTEXTURE	✓	✓	✓	
LVINYLABELSWEIGHT	✓	✓	✓	
LWRITECOVERAGE	✓	✓	✓	

Common variables for PCL emulation

✓ = Supported X = Not supported		Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
FONTPRINTNUMBER	✓	✓	✓	
FONTPRINTSOURCE	✓	✓	✓	
PITCH	✓	✓	✓	
PTSIZE	✓	✓	✓	
SYMSET	✓	✓	✓	

Lexmark-unique variables for PCL emulation

Variable name	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LA4WIDTH	✓	✓	✓
LASSIGNFEEDER	✓	✓	✓
LASSIGNMANUALENVELOPE	✓	✓	✓
LASSIGNMANUALPAPER	✓	✓	✓
LASSIGNMPFEEDER	✓	✓	✓
LASSIGNTRAY1	✓	✓	✓
LASSIGNTRAY2	✓	✓	✓
LASSIGNTRAY3	✓	✓	✓
LASSIGNTRAY4	✓	✓	✓
LASSIGNTRAY5	✓	✓	✓
LBITMAPROUNDING	✓	✓	✓
LCOLOREXTENSIONS	✓	✓	✓
LFONTCOMPATIBILITY	✓	✓	✓
LFONTPRIORITY	✓	✓	✓

Common variables for PostScript emulation

✓ = Supported X = Not supported	Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
JAMRECOVERY	✓	✓	✓
PRTPSERRS	✓	✓	✓
ADOBEMBT	x	x	x

Lexmark-unique variables for PostScript emulation

Lexmark-unique variables for PostScript emulation

✓ = Supported X = Not supported	Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LPICTUREGRADE	x	x	x
LPSFONTPRIORITY	✓	✓	✓

Printer-unique LRESOURCE variables

✓ = Supported X = Not supported	Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LDESCRIPTION	✓	✓	✓
LRWLOCK	✓	✓	✓
LWLOCK	✓	✓	✓

Status Readback commands

✓ = Supported X = Not supported	Model		
Command	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
DINQUIRE	✓	✓	✓
ECHO	✓	✓	✓
INFO	✓	✓	✓
INFO MICR	✓	✓	✓
INQUIRE	✓	✓	✓
USTATUS	✓	✓	✓
USTATUSOFF	✓	✓	✓

USTATUS unsolicited status variables

\checkmark = Supported \times = Not supported		Model		
Variable name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
DEVICE	\checkmark	\checkmark	\checkmark	
JOB	\checkmark	\checkmark	\checkmark	
PAGE	\checkmark	\checkmark	\checkmark	
TIMED	\checkmark	\checkmark	\checkmark	

PJL messages for auto-continuable conditions

\checkmark = Supported \times = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - PPDS Font Error	30014	50 PPDS font error	\checkmark	\checkmark	\checkmark
Intervention Required - Insufficient Collation Area	30016	37 Insufficient Collation Area	\times	\times	\times
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient Defrag Memory	\times	\times	\times

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Insufficient Memory	30016	37 Insufficient memory, some Held Jobs were deleted	✓	✓	✓
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory, some Held Jobs were deleted	X	X	X
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory, some Held Jobs will not be restored	X	✓	✓
Intervention Required - Insufficient Defragment Memory	30016	37 Insufficient memory for Flash Memory Defragment operation	✓	X	X
Intervention Required - Insufficient Collation Area	30016	37 Insufficient memory to collate job	✓	✓	✓
Intervention Required - Memory Full	30016	38 Memory full	✓	✓	✓
Intervention Required - Configuration Change	30016	57 Configuration Change	X	X	X
Intervention Required - Held Jobs May Not Be Restored (57 Configuration Change)	30016	57 Configuration change, some held jobs were not restored	✓	✓	✓

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfc, X658dte, X658dtme, X658dtfc
Intervention Required - Held Jobs May Not Be Restored	30016	Held Jobs May Not Be Restored	X	X	X
Intervention Required - Held Jobs May Not Be Restored	30016	Some held jobs were not restored	✓	✓	✓
Intervention Required - Held Jobs May Not Be Restored	30016	37 Insufficient memory, some held jobs will not be restored	✓	X	X
Intervention Required - Complex Page	30017	39 Complex page, some data may not have printed	✓	✓	✓
Intervention Required - Parallel Error	30018	54 Parallel Error	X	X	X
Intervention Required - Serial Option Error	30018	54 Serial option [slot #] error	X	X	X
Intervention Required - Standard Serial Error	30018	54 Standard Serial Error	X	X	X
Intervention Required - Standard Network Software Error	30018	54 Standard network software error	✓	✓	✓
Intervention Required - Standard Serial Fax Connection Lost	30018	54 Std Ser Fax Connection Lost	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Parallel Port Disabled	30018	56 Parallel Port Disabled	X	X	X
Intervention Required - Parallel Port Error	30018	56 Parallel Port Disabled	X	X	X
Intervention Required - Serial Option Disabled	30018	56 Serial [slot #] Port Disabled	X	X	X
Intervention Required - Standard Serial Disabled	30018	56 Standard Serial Disabled	X	X	X
Intervention Required - Standard USB Port Disabled	30018	56 Standard USB port disabled	✓	✓	✓
Intervention Required - Std Parallel Port Disabled	30018	56 Std Parallel Port Disabled	X	X	X
Intervention Required - Resource Save Off Deficient Memory	30019	35 Res Save Off Deficient Memory	X	X	X
Intervention Required - Insufficient Fax Buffer	30026	55 Insufficient Fax Buffer	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Std Par ENA Connection Lost	30027	54 Std Par ENA Connection Lost	X	X	X
Intervention Required - Standard Parallel Port Disabled	30027	56 Standard Parallel Port Disabled	X	✓	X
Intervention Required - Std Parallel Port Disabled	30027	56 Std Parallel Port Disabled	X	X	X
Intervention Required - Resolution Reduced	30029	36 Resolution Reduced	X	X	X
Intervention Required - Print Jobs on Disk Request	30031	Print Jobs on Disk? or Print Jobs on Disk. Go/Stop?	X	X	X
Intervention Required - Restore Held Jobs. Go/Stop?	30031	Restore held jobs?	✓	✓	✓
Intervention Required - Short Paper	30034	34 Short Paper	X	✓	✓
Intervention Required - Short Paper	30034	34 Incorrect paper size, open [source]	✓	X	X
Intervention Required - Flash Full	30035	52 Flash Full	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Disk Full	30035	62 Disk Full	X	X	X
Intervention Required - Defective Flash	30036	51 Defective Flash	X	X	X
Intervention Required - Unformatted Flash	30036	53 Unformatted Flash	X	X	X
Intervention Required - Defective Disk	30036	61 Defective Disk	X	X	X
Intervention Required - Unformatted Disk	30036	63 Unformatted Disk	X	X	X
Intervention Required - Scheduled Maintenance	30075	80 Scheduled Maintenance	X	X	X
Intervention Required - Scheduled maintenance ADF kit	30075	80 Scheduled maintenance ADF kit	X	X	X
Intervention Required - Res Save Off Deficient Memory	30076	35 Insufficient memory to support Resource Save feature	✓	X	✓
Intervention Required - Insufficient memory	30076	35 Insufficient memory to support Resource Save feature	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Resource Save Off Deficient Memory	30076	35 Res Save Off Deficient Memory	X	✓	X
Intervention Required - Insufficient Collation Area	30076	37 Insufficient Collation Area	X	X	X
Intervention Required - Service Required	30095	36 Printer service required	X	X	X
Intervention Required - Empty Box M	30107	Empty Box M	X	X	X
Intervention Required - Empty Hole Punch Box	30107	Empty Hole Punch Box	X	X	X
Intervention Required - Insert Box M	30107	Insert Box M	X	X	X
Intervention Required - Insert Staple Cartridge	30107	Insert staple cartridge	✓	✓	✓
Intervention Required - Insert Stapler	30107	Insert Stapler	X	X	X
Intervention Required - Priming Failed	30107	Priming Failed, Retry. Go/Stop?	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Network [x] Software Error	30112	54 Network [x] software error	✓	✓	✓
Intervention Required - Serial [x] Fax Connection Lost	30112	54 Ser [x] Fax Connection Lost	X	X	X
Intervention Required - Serial Option [x] Error	30112	54 Serial option [x] error	✓	✓	✓
Intervention Required - Serial Port [x] Disabled	30112	56 Serial port [x] disabled	✓	✓	✓
Intervention Required - USB Port [x] Disabled	30112	56 USB port [x] disabled	✓	✓	✓
Intervention Required - Parallel [x] ENA Connection Lost	30113	54 Par [x] ENA Connection Lost	X	X	X
Intervention Required - Parallel Port [x] Disabled	30113	56 Parallel port [x] disabled	✓	✓	✓
Intervention Required - Disk Operation Failed Faxes on Disk	32001	Operation Failed Faxes on Disk	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Disk Operation Failed Jobs on Disk	32001	Operation Failed Jobs on Disk	X	X	X
Intervention Required - Flash Full	32002	52 Flash Full	X	X	X
Intervention Required - Flash Full	32002	52 Not enough free space in flash memory for resources	✓	✓	✓
Intervention Required - Disk Full	32002	62 Disk full	✓	✓	✓
Intervention Required - Disk Corrupted	32015	Disk Corrupted	X	✓	✓
Intervention required - Disk Corrupted. Reformat?	32015	Disk Corrupted. Reformat?	X	X	X
Intervention required - Too Many Bins Attached	32030	58 Too many bins attached	X	✓	✓
Intervention Required - Too Many Flash Options Installed	32030	58 Too Many Flash Options	X	X	X
Intervention Required - Too Many Flash Options Installed	32030	58 Too many flash options installed	X	✓	✓

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Unformatted Flash	32052	53 Unformatted flash detected	X	X	X
Intervention Required - Unformatted Flash Detected	32052	53 Unformatted Flash detected	X	X	X
Intervention Required - Unformatted Disk	32052	63 Unformatted disk	X	X	✓
Intervention Required - Unsupported Disk Format	32052	64 Unsupported Disk Format	X	X	X
Intervention Required - Defective Flash	32056	51 Defective Flash	X	X	X
Intervention Required - Defective Flash	32056	51 Defective flash detected	✓	✓	✓
Intervention Required - Defective Disk	32056	61 Defective Disk	X	X	X
Intervention Required - Defective Disk	32056	61 Remove defective disk	X	✓	✓
Intervention Required - Scheduled Maintenance	35075	80 Scheduled Maintenance	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Scheduled Maintenance	35075	81 Scheduled Maintenance	X	X	X
Intervention Required - Scheduled Maintenance	40315	81 Scheduled Maintenance [x]	X	X	X
Intervention Required - Scheduled Maintenance	40316	81 Scheduled Maintenance [x]	X	X	X
Intervention Required - Belt Life Warning	40038	80 Belt Life Warning	X	X	X
Intervention Required - Belt Exhausted	40038	80 Belt Exhausted	X	X	X
Intervention Required - Fuser Maintenance	40038	80 Fuser Maintenance	X	X	X
Intervention Required - Fuser Life Warning	40038	80 Fuser Life Warning	X	X	X
Intervention Required - Fuser Exhausted	40038	80 Fuser Exhausted	X	X	X
Intervention Required - Fuser/Belt Life Warning	40038	80 Fuser/Belt Life Warning	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Fuser/Belt Exhausted	40038	80 Fuser/Belt Exhausted	X	X	X
Intervention Required - ITU Maintenance	40038	83 ITU Maintenance	X	X	X
Intervention Required - Cartridge low	40038	88 Cartridge low	X	✓	✓
Intervention Required - Cartridge nearly low	40038	88.yy Cartridge nearly low	X	✓	✓
Intervention Required - PJL OP Message	40048	[Pick up text from 'data1' and 'data2' but not 'userMessage1' and 'userMessage2']	✓	✓	✓
Intervention Required - PJL ST Message	40049	[Pick up text from 'data1' and 'data2' but not 'userMessage1' and 'userMessage2']	✓	✓	✓

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Waste Toner Nearly Full	40141	82.xx Waste toner bottle nearly full or 82.xx Waste toner box nearly full	X	X	X
Intervention Required - Transfer Module Life Warning	40215	83.xx Transfer module life warning	✓	X	X

PJL messages for attendance conditions

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Empty Hole Punch Box	30107	Empty the hole punch box	X	X	X
Intervention Required - Insert Staple Cartridge	30107	Insert staple cartridge	✓	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention required - Disk Corrupted. Reformat?	32015	Disk corrupted	✓	✓	✓
Intervention Required - Too Many Bins Attached	32030	58 Too many bins attached	✓	✓	✓
Intervention Required - Too Many Flash Options Installed	32030	58 Too many flash options installed	✓	✓	✓
Intervention Required - Remove Defective Disk	32056	61 Remove defective disk	✓	✓	✓
Intervention Required - Defective Flash	32056	61 Defective flash detected	X	X	X
Intervention Required - Defective Flash	32056	51 Defective flash detected	X	✓	✓
Intervention Required - Insert Hole Punch Box	40010	Insert Hole Punch Box	X	X	X
Intervention Required - Insert PC Cartridge	40010	Insert PC Cartridge	X	X	X
Intervention Required - 30 CMYK* Print Unit Missing	40010	30 CMYK* Print Unit Missing	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - 30 Coating Roll Missing	40010	30 Coating Roll Missing	X	X	X
Intervention Required - Remove Originals from Scanner ADF	40019	Remove originals from the scanner automatic document feeder	X	X	X
Intervention Required - Remove Paper Standard Bin	40019	Remove paper from standard output bin	✓	✓	✓
Intervention Required - Remove Paper Output Bin [x]	40019	Remove paper from bin [x]	✓	✓	✓
Intervention Required - Remove Paper [All Output Bins]	40019	Remove paper from all bins	✓	✓	✓
Intervention Required - Remove Paper [linked set bin name]	40019	Remove paper from [linked set bin name]	✓	✓	✓
Intervention Required - Install MICR cartridge	40020	Install MICR cartridge	X	✓	✓
Intervention Required - Cartridge Life Expired	40021	Cartridge Life Expired CMYK*	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Cartridge Life Warning	40021	Cartridge Life Warning CMYK*	X	X	X
Intervention Required - Change Cartridge Invalid Refill	40021	Change Cartridge Invalid Refill	X	X	X
Intervention Required - Close Cover [x]	40021	Close cover [x]	X	X	X
Intervention Required - Close Cover [x]	40021	Close paper transport cover	X	X	X
Intervention Required - Printer Cover Open	40021	Close Cover	X	X	X
Intervention Required - Close Toner Box Cover	40021	Close Cover	X	X	X
Intervention Required - Close Deflector G	40021	Close Deflector G	X	X	X
Intervention Required - Close Door	40021	Close Door	X	X	X
Intervention Required - Close Door [x]	40021	Close door [x]	X	X	X
Intervention Required - Close Door [x]	40021	Close stapler door	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Close Door Insert Cartridge	40021	Close door or insert cartridge	X	✓	✓
Intervention Required - Close Finisher Door	40021	Close Finisher Door	X	X	X
Intervention Required - Close Finisher Side Door	40021	Close finisher side door	✓	✓	✓
Intervention Required - Close Finisher Top Cover	40021	Close finisher top cover	X	X	X
Intervention Required - Close Front Door	40021	Close front door	X	X	X
Intervention Required - Close Left Side Door	40021	Close left side door	X	X	X
Intervention Required - Close Low ADF Door	40021	Close lower automatic feeder door	X	X	X
Intervention Required - Close Side Door	40021	Close Side Door	X	X	X
Intervention Required - Close Surface	40021	Close surface H	X	X	X
Intervention Required - Close Cover	40021	Close top access cover	✓	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Close Cover and Door	40021	Close top access cover and front door	X	X	X
Intervention Required - Close Door	40021	Close [tray] door	✓	X	X
Intervention Required - Close Tray [x] Top Cover	40021	Close Tray [x] Top Cover	X	X	X
Intervention Required - Printer Upper Door Open	40021	Cover Open, Close Top Covers, Close Door, or Insert Cartridge	X	X	X
Intervention Required - Insert Print Cartridge	40021	Insert Print Cartridge	X	X	X
Intervention Required - Open Cover	40021	Open Cover	X	X	X
Intervention Required - Open Rear Door	40021	Open Rear Door	X	X	X
Intervention Required - Invalid Refill	40021	30 Invalid Refill Change Cartridge	X	✓	✓
Intervention Required - Defective Ink Cartridge	40021	31 Defective Cartridge CMYK*	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Defective Print Cartridge	40021	31 Defective Print Cartridge	X	X	X
Intervention Required - Missing Cartridge	40021	31 Missing Cartridge CMYK*	X	X	X
Intervention Required - Missing Printhead	40021	31 Missing Printhead	X	X	X
Intervention Required - Defective Print Cartridge	40021	31 Replace defective cartridge	X	X	X
Intervention Required - Invalid Refill	40021	31.xx Invalid refill, change cartridge	X	X	X
Intervention Required - Defective Print Cartridge	40021	31.xx Replace defective cartridge	X	✓	✓
Intervention Required - Defective Print Cartridge	40021	31.xx Replace defective print cartridge	X	X	X
Intervention Required - Unsupported Cartridge	40021	32 Unsupported Cartridge	X	X	X
Intervention Required - Unsupported CMYK* Cartridge	40021	32 Unsupported CMYK* Cartridge	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Unsupported Print Cartridge	40021	32 Unsupported Print Cartridge	X	X	X
Intervention Required - Unsupported Printhead	40021	32 Unsupported Printhead	X	X	X
Intervention Required - Unsupported Cartridge	40021	32.xx Cartridge part number unsupported by device	X	✓	✓
Intervention Required - Tray Size Sense Error	40021	40 Tray [x] Size Sense Error	X	X	X
Intervention Required - Open Bin Exit Tray	40021	41 Open Bin 1 Exit Tray	X	X	X
Intervention Required - Cartridge Region Mismatch	40021	42.xy Cartridge region mismatch	X	✓	✓
Intervention Required - Paper Jam	40022	2xx Paper Jam	X	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material	X	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material, [area name]	X	✓	✓

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Waste Toner Missing	40025	82 Waste toner bottle missing	X	X	X
Intervention Required - Waste Toner Bottle Missing	40025	82.xx Waste toner bottle missing	X	X	X
Intervention Required - Check Tray Connection	40027	Check tray [paper source #] connection	X	X	X
Intervention Required - Install Tray [x] or Cancel Job	40027	Install tray [x]	✓	X	X
Intervention Required - Install Tray [x] or Cancel Job	40027	Install Tray [x] or Cancel Job	X	✓	✓
Intervention Required - Check Tray [x] Connection	40027	Check tray [x] connection	X	✓	✓
Intervention Required - Install Env Feed or Cancel Job	40028	Install envelope feeder	✓	✓	✓
Intervention Required - Install Env Feeder or Cancel Job	40028	Install Env Feed or Cancel Job	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Reattach Envelope Feeder	40028	Reattach Envelope Feeder	X	✓	✓
Intervention Required - Reattach MP Feeder	40028	Reattach MP Feeder	X	X	X
Intervention Required - Check Finisher Installation	40029	Check Finisher Installation	X	X	X
Intervention Required - Check Mailbox Installation	40029	Check Mailbox Installation	X	X	X
Intervention Required - Install Bin [x] or Cancel Job	40029	Install bin [x]	✓	✓	✓
Intervention Required - Reattach Bin	40029	Reattach bin [x]	X	X	X
Intervention Required - Reattach Bins	40029	Reattach bins [x]-[y]	✓	✓	✓
Intervention Required - Reattach Output Bin	40029	Reattach bin [x]	✓	✓	✓
Intervention Required - Tray Config Error	40030	33 Tray [x] Config Error	X	X	X
Intervention Required - Input Config Error	40030	58 Input config error	✓	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Too Many Bins Attached	40030	58 Too Many Bins Attached	X	X	X
Intervention Required - Too Many Disks Installed	40030	58 Too many disks installed	✓	✓	✓
Intervention Required - Too Many Trays Attached	40030	58 Too many trays attached	✓	✓	✓
Intervention Required - Too Many Disks Installed	40036	58 Too Many Disks Installed	X	X	X
Intervention Required - PerfectFinish Missing	40037	31 PerfectFinish Missing	X	X	X
Intervention Required - PerfectFinish Empty	40037	87 PerfectFinish Empty	X	X	X
Intervention Required - Replace Oil Coating Roll	40038	Replace Oil Coating Roll	X	X	X
Intervention Required - Replace PC Kit	40038	Replace PC Kit	X	X	X
Intervention Required - Replace PC Kit To Continue	40038	Replace PC Kit To Continue	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Replace Toner Cartridge	40038	Replace Toner Cartridge	X	X	X
Intervention Required - Replace Toner Cartridge To Continue	40038	Replace Toner To Continue	X	X	X
Intervention Required - 84 All Photo Devs Exhausted	40038	84 All Photo Devs Exhausted	X	X	X
Intervention Required - 84 Black Photo Dev Exhausted	40038	84 Black Photo Dev Exhausted	X	X	X
Intervention Required - 84 Black Photo Dev Life Warning	40038	84 Black Photo Dev Life Warning	X	X	X
Intervention Required - 84 Color Photo Dev Life Warning	40038	84 Color Photo Dev Life Warning	X	X	X
Intervention Required - Cartridge Low	40038	88 Cartridge Low	X	✓	✓
Intervention Required - Cartridge nearly low	40038	88.yy Cartridge nearly low	X	✓	✓
Intervention Required - [Color] Cartridge Low	40038	88 [Color] cartridge is low	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Toner Low	40038	88 Cartridge low	X	X	X
Intervention Required - Cartridge Low	40038	88 Cartridge Low [CMYK]	X	X	X
Intervention Required - Toner Low	40038	88 Toner is low	X	X	X
Intervention Required - Toner Low	40038	88 Toner Low	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Toner Low	40038	88 Yellow Toner Low	X	X	X
		88 Magenta Toner Low			
		88 Cyan Toner Low			
		88 Black Toner Low			
		88 Color Print Cartridge Low	X	X	X
		88 Black Print Cartridge Low			
		88 Photo Print Cartridge Low			
		88 Yellow Toner Empty	X	X	X
		88 Magenta Toner Empty			
		88 Cyan Toner Empty			
		88 Black Toner Empty			
Intervention Required - Cartridge Nearly Low	40038	88.xx Cartridge nearly low	X	✓	✓
Intervention Required - Cartridge Empty	40039	89 Cartridge Empty [CMYK]	X	X	X
Intervention Required - Load Staples	40040	Load Staples	X	X	X
* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.					

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Priming Failed. Retry?	40041	Priming Failed. Retry?	X	X	X
Intervention Required - PJL OP Message	40048	OPMSG message	✓	X	X
Intervention Required - PJL OP Message	40048	[pick up text from 'data1' and 'data2' but not 'userMessage1' and 'userMessage2']	X	✓	✓
Intervention Required - PJL ST Message	40049	[pick up text from 'data1' and 'data2' but not 'userMessage1' and 'userMessage2']	X	✓	✓
Intervention Required - PJL ST Message	40049	STMSG message	✓	X	X
Intervention Required - Replace Fuser	40050	Replace Fuser	X	X	X
Intervention Required - Replace Transfer Kit	40050	Replace Transfer Kit	X	X	X
Intervention Required - Incompatible Bin [x]	40087	59 Incompatible Bin [x]	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Incompatible Output Bin [x]	40087	59 Incompatible output bin [x]	✓	✓	✓
Intervention Required - Incompatible Duplex	40088	59 Incompatible Duplex	X	✓	✓
Intervention Required - Incompatible Tray [x]	40089	59 Incompatible Tray [x]	X	✓	✓
Intervention Required - Paper Size Unsupported	40089	Tray [x] paper size unsupported	✓	X	X
Intervention Required - Incompatible Envelope Feeder	40090	59 Incompatible envelope feeder	X	✓	✓
Intervention Required - Check Duplex Connection	40095	Check duplex connection	X	✓	✓
Intervention Required - Install Duplex or Cancel Job	40095	Install Duplex or Cancel Job	X	X	X
Intervention Required - Install Duplex or Cancel Job	40095	Install duplex	X	✓	✓
Intervention Required - Duplex Cover Open	40096	Close Duplex Door	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Insert Duplex Option	40096	Insert Duplex Option	X	X	X
Intervention Required - Load Staples	40101	Load staples	✓	✓	✓
Intervention Required - Insert Hole Punch Box	40107	Insert hole punch box	X	X	X
Intervention Required - Replace Color PC Units	40129	84 Replace color PC Units	X	X	X
Intervention Required - Replace Photoconductor	40129	84.xx Replace [Color] photoconductor	X	X	X
Intervention Required - Replace Waste Toner Bottle	40141	82.xx Replace waste toner bottle	X	X	X
Intervention Required - Replace Waste Toner	40141	82 Replace waste toner bottle	X	X	X
Intervention Required - Waste Toner Bottle Nearly Full	40141	82.xx Waste toner bottle nearly full	X	X	X
Intervention Required - Waste Toner Nearly Full	40141	82 Waste toner bottle nearly full	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Transfer Module Missing	40143	83.xx Transfer module missing	✓	X	X
Intervention Required - Cartridge Low	40200	88.xx Black cartridge low	X	X	X
Intervention Required - Cartridge Nearly Low	40200	88.1x black cartridge nearly low	X	X	X
Intervention Required - Cartridge Very Low	40200	88.xx Black cartridge very low	X	X	X
Intervention Required - Replace Cartridge	40200	88.xx black cartridge critically low	X	X	X
Intervention Required - Replace Cartridge	40200	88.2x Replace black cartridge	X	X	X
Intervention Required - Cartridge Low	40201	88.xx Cyan cartridge low	X	X	X
Intervention Required - Cartridge Nearly Low	40201	88.1x cyan cartridge nearly low	X	X	X
Intervention Required - Cartridge Very Low	40201	88.xx Cyan cartridge very low	X	X	X
Intervention Required - Replace Cartridge	40201	88.xx cyan cartridge critically low	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Replace Cartridge	40201	88.2x Replace cyan cartridge	X	X	X
Intervention Required - Cartridge Low	40202	88.xx Magenta cartridge low	X	X	X
Intervention Required - Cartridge Nearly Low	40202	88.1x magenta cartridge nearly low	X	X	X
Intervention Required - Cartridge Very Low	40202	88.xx Magenta cartridge very low	X	X	X
Intervention Required - Replace Cartridge	40202	88.xx magenta cartridge critically low	X	X	X
Intervention Required - Replace Cartridge	40202	88.2x Replace magenta cartridge	X	X	X
Intervention Required - Cartridge Low	40203	88.xx Yellow cartridge low	X	X	X
Intervention Required - Cartridge Nearly Low	40203	88.1x yellow cartridge nearly low	X	X	X
Intervention Required - Cartridge Very Low	40203	88.xx Yellow cartridge very low	X	X	X
Intervention Required - Replace Cartridge	40203	88.xx yellow cartridge critically low	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Replace Cartridge	40203	88.2x Replace yellow cartridge	X	X	X
Black PC Unit Life Warning	40204	84 Black pc unit life warning	X	X	X
Intervention Required - Unsupported PC Unit	40204	84 unsupported [color] pc unit	X	X	X
Intervention Required - Color PC Units Life Warning	40204	84.xx Color PC Unit Life warning	X	X	X
Intervention Required - PC Kit Life Warning	40204	84 PC kit life warning	X	X	X
Intervention Required - Photoconductor Low	40204	84.xx [Color] photoconductor low	X	X	X
Intervention Required - Photoconductor Low	40204	84 Photoconductor low	X	X	X
Intervention Required - Photoconductor Nearly Low	40204	84.xx [color] photoconductor nearly low	X	X	X
Intervention Required - Transfer Module Life Warning	40215	83.xx Transfer module life warning	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Transfer Module Near Life Warning	40215	83.xx Transfer module near life warning	X	X	X
Intervention Required - Fuser Life Warning	40216	87 Fuser Life Warning	X	X	X
Intervention Required - Fuser Life Warning	40216	80.xx Fuser life warning	✓	X	X
Intervention Required - Fuser Near Life Warning	40216	80.xx Fuser near life warning	✓	X	X
Intervention Required - Replace Toner	40300	88 Replace black toner	X	X	X
Intervention Required - Replace Toner	40301	88 Replace cyan toner	X	X	X
Intervention Required - Replace Toner	40302	88 Replace magenta toner	X	X	X
Intervention Required - Replace Toner	40303	88 Replace yellow toner	X	X	X
Intervention Required - Replace PC Kit	40304	84 Replace PC Kit	X	X	X
Intervention Required - Replace Photoconductor	40304	84 Replace photoconductor	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - 84 Replace Black PC Unit	40305	84 Replace black PC Unit	X	X	X
Intervention Required - Cartridge Part Number Unsupported	40309	32.xx Black cartridge part number unsupported by device	X	X	X
Intervention Required - Replace unsupported cartridge	40309	32.xx Replace unsupported black cartridge	X	X	X
Intervention Required - Invalid Refill, Change Cartridge	40309	40 Black invalid refill, change cartridge	✓	X	X
Intervention Required - Cartridge Part Number Unsupported	40310	32.xx Cyan cartridge part number unsupported by device	X	X	X
Intervention Required - Replace unsupported cartridge	40310	32.xx Replace unsupported cyan cartridge	X	X	X
Intervention Required - Invalid Refill, Change Cartridge	40310	40 Cyan invalid refill, change cartridge	✓	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Cartridge Part Number Unsupported	40311	32.xx Magenta cartridge part number unsupported by device	X	X	X
Intervention Required - Replace unsupported cartridge	40311	32.xx Replace unsupported magenta cartridge	X	X	X
Intervention Required - Invalid Refill, Change Cartridge	40311	40 Magenta invalid refill, change cartridge	✓	X	X
Intervention Required - Cartridge Part Number Unsupported	40312	32.xx Yellow cartridge part number unsupported by device	X	X	X
Intervention Required - Replace unsupported cartridge	40312	32.xx Replace unsupported yellow cartridge	X	X	X
Intervention Required - Invalid Refill, Change Cartridge	40312	40 Yellow invalid refill, change cartridge	✓	X	X
Intervention Required - Scheduled Maintenance	40315	80 Scheduled maintenance [x] Note: [x] indicates 600K kit.	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Replace Transfer Module	40315	83.xx Replace transfer module	✓	X	X
Intervention Required - Install Finisher	40316	Slide finisher to the left	X	X	X
Intervention Required - Replace Fuser	40316	80.xx Replace fuser	✓	X	X
Intervention Required - Replace Fuser	40316	87.xx Replace fuser	X	X	X
Intervention Required - Scheduled Maintenance	40316	80 Scheduled maintenance [x] Note: [x] indicates 100K kit.	X	X	X
Intervention Required - Replace Cartridge	40400	31.xx Replace defective or missing cartridge	X	X	X
Intervention Required - Insert Photoconductor	40404	84 Insert photoconductor	X	X	X
Intervention Required -	40404	84 Photoconductor abnormal	X	X	X
Intervention Required - [Color] PC Unit Missing	40405	84.41 Black PC Unit missing	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - [Color] Photoconductor Missing	40405	84.41 Black photoconductor missing	X	X	X
Intervention Required - [Color] PC Unit Missing	40406	84.41 Cyan PC Unit missing	X	X	X
Intervention Required - [Color] Photoconductor Missing	40406	84.41 Cyan photoconductor missing	X	X	X
Intervention Required - [Color] PC Unit Missing	40407	84.41 Magenta PC Unit missing	X	X	X
Intervention Required - [Color] Photoconductor Missing	40407	84.41 Magenta photoconductor missing	X	X	X
Intervention Required - [Color] PC Unit Missing	40408	84.41 Yellow PC Unit missing	X	X	X
Intervention Required - [Color] Photoconductor Missing	40408	84.41 Yellow photoconductor missing	X	X	X
* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.					

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Toner Cartridge Missing	40409	30.xx Black toner cartridge missing	X	X	X
Intervention Required - Defective Cartridge	40409	31.xx Defective black cartridge	X	X	X
Intervention Required - Missing or Defective Cartridge	40409	31.41 Missing or defective black cartridge	X	X	X
Intervention Required - Toner Cartridge Missing	40410	30.xx Cyan toner cartridge missing	X	X	X
Intervention Required - Defective Cartridge	40410	31.xx Defective cyan cartridge	X	X	X
Intervention Required - Missing or Defective Cartridge	40410	31.41 Missing or defective cyan cartridge	X	X	X
Intervention Required - Toner Cartridge Missing	40411	30.xx Magenta toner cartridge missing	X	X	X
Intervention Required - Defective Cartridge	40411	31.xx Defective magenta cartridge	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Missing or Defective Cartridge	40411	31.41 Missing or defective magenta cartridge	X	X	X
Intervention Required - Toner Cartridge Missing	40412	30.xx Yellow toner cartridge missing	X	X	X
Intervention Required - Defective Cartridge	40412	31.xx Defective yellow cartridge	X	X	X
Intervention Required - Missing or Defective Cartridge	40412	31.41 Missing or defective yellow cartridge	X	X	X
Intervention Required - Fuser Missing	40416	80.xx Fuser missing	✓	X	X
Intervention Required - Fuser Missing	40416	87.xx Fuser missing	X	X	X
Intervention Required - Insert Duplex Pages in Tray [x]	41202	Reload printed pages in Tray [x]	X	X	X

* This message contains a subset of letters CMYK, where CMYK denotes Cyan, Magenta, Yellow, and Black cartridges, respectively.

PJL messages for paper handling

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Tray [x] Empty	11xyy	Tray [paper source #] Empty	X	X	X
Intervention Required - Tray [x] Missing	12x01	Tray [paper source #] Missing	X	X	X
Intervention Required - Bin [x] Full	15ww1	Bin [Bin #] Full	X	X	X
Intervention Required - Short Paper	30034	34 Incorrect paper size, open [paper source]	✓	X	X
Intervention Required - Wrong Paper Size in Tray [x]	30034	34 Wrong Paper Size in Tray [x]	X	X	X
Intervention Required - Wrong Paper Size Manual Feed	30034	34 Wrong Paper Size Manual Feed	X	X	X
Intervention Required - Short Paper	30034	34 Short Paper	X	✓	✓
Intervention Required - Remove Paper [All Output Bins]	40019	Remove paper from all bins	✓	✓	✓
Intervention Required - Remove Paper From All Bins	40019	Remove paper from all bins	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Remove Paper From Output Bin [x]	40019	Remove paper from bin [x]	✓	✓	✓
Intervention Required - Remove Paper Output Bin [bin #]	40019	Remove Paper Output Bin [bin #]	X	X	X
Intervention Required - Remove Paper [linked set bin name]	40019	Remove paper from [linked set bin name]	✓	✓	✓
Intervention Required - Remove Paper [linked set bin name]	40019	Remove Paper [linked set bin name]	X	X	X
Intervention Required - Remove Paper From Standard Output Bin	40019	Remove paper from standard output bin	✓	✓	✓
Intervention Required - Remove Paper Standard Bin	40019	Remove Paper Standard Bin	X	X	X
Intervention Required - Photoconductor Exposure Warning	40025	Photoconductor exposure warning	X	X	X
Intervention Required - Remove Packaging Material	40025	Remove packaging material, check [area name]	X	✓	✓

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Check [Paper Source] Orientation or Guides	4100x	Check [paper source] orientation or guides	X	X	X
Intervention Required - Check [Paper Source] Paper Guide	4100x	Check [paper source] Paper Guide	X	X	X
Intervention Required - Incorrect Media	41xy	Paper changes needed	X	✓	✓
Intervention Required - Load [paper source] [Custom Type Name]	41xyy	Load [paper source] with [Custom Type Name]	✓	✓	✓
Intervention Required - Load [paper source] [Custom String]	41xyy	Load [paper source] with [Custom String]	✓	✓	✓
Intervention Required - Load [paper source] [paper size]	41xyy	Load [paper source] with [paper size]	✓	✓	✓
Intervention Required - Load [paper source] [paper type] [paper size]	41xyy	Load [paper source] with [paper type] [paper size]	✓	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [Custom Type Name]	✓	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [Custom String]	✓	✓	✓

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [paper size]	✓	✓	✓
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [paper type] [paper size]	✓	✓	✓
Intervention Required - Load Manual [Custom Type Name]	41xyy	Load single sheet feeder with [Custom Type Name]	X	X	X
Intervention Required - Load Manual [Custom String]	41xyy	Load single sheet feeder with [Custom String]	X	X	X
Intervention Required - Load Manual [paper size]	41xyy	Load single sheet feeder with [paper size]	X	X	X
Intervention Required - Load Manual [paper type] [paper size]	41xyy	Load single sheet feeder with [paper type] [paper size]	X	X	X
Intervention Required - Change Request	41xyy	Change [paper source] to [Custom Type Name]	✓	✓	✓
Intervention Required - Change Request	41xyy	Change [paper source] to [Custom Type Name], load [orientation]	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Change Request	41xyy	Change [paper source] to [Custom String]	✓	✓	✓
Intervention Required - Change Request	41xyy	Change [paper source] to [Custom String] load [orientation]	X	X	X
Intervention Required - Change Request	41xyy	Change [paper source] to [paper type] [paper size]	✓	✓	✓
Intervention Required - Change Request	41xyy	Change [paper source] to [paper type] [paper size] load [orientation]	X	X	X
Intervention Required - Change Request	41xyy	Change [src] to [size]	X	✓	✓
Intervention Required - Load Manual Request	41xxy	Load Manual Feeder with [Custom Type Name]	X	X	X
Intervention Required - Load Manual Request	41xxy	Load Manual Feeder with [Custom String]	X	X	X
Intervention Required - Load Manual Request	41xxy	Load Manual Feeder with [paper size]	X	X	X

✓ = Supported X = Not supported			Model		
Message	Status code	Return string	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Load Manual Request	41xyy	Load Manual Feeder with [paper type] [paper size]	X	X	X
Intervention Required - Incorrect Media	41xyy	34 Incorrect Media	X	X	X
Intervention Required - Insert Duplex Pages & Press Go.	412yy	Insert Duplex Pages & Press Go.	X	X	X
Intervention Required - Insert Tray [x]	4300x	Insert tray [x]	✓	✓	✓
Intervention Required - Insert Tray Request	4300x	Insert Tray [x]	X	X	X

PJL messages for paper jams

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4200x	X	X	X
Intervention Required - Paper Jam	4200z	✓	✓	✓
Intervention Required - Paper Jam	4201x	X	X	X
Intervention Required - Paper Jam	4201z	✓	✓	✓
Intervention Required - Paper Jam	4202x	X	X	X
Intervention Required - Paper Jam	4202z	✓	✓	✓
Intervention Required - Paper Jam	4203x	X	X	X
Intervention Required - Paper Jam	4203z	✓	✓	✓
Intervention Required - Paper Jam	4204x	X	X	X
Intervention Required - Paper Jam	4205x	X	X	X
Intervention Required - Paper Jam	4206x	X	X	X
Intervention Required - Paper Jam	4207x	X	X	X
Intervention Required - Paper Jam	4208x	X	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4209x	X	X	X
Intervention Required - Paper Jam	4210x	X	X	X
Intervention Required - Paper Jam	4211x	X	X	X
Intervention Required - Paper Jam	4220x	X	X	X
Intervention Required - Paper Jam	4221x	X	X	X
Intervention Required - Paper Jam	4222x	X	X	X
Intervention Required - Paper Jam	4230x	X	X	X
Intervention Required - Paper Jam	4230z	✓	✓	✓
Intervention Required - Paper Jam	4231x	X	X	X
Intervention Required - Paper Jam	4231z	X	X	X
Intervention Required - Paper Jam	4232x	X	X	X
Intervention Required - Paper Jam	4233x	X	X	X
Intervention Required - Paper Jam	4234	X	X	X
Intervention Required - Paper Jam	424yx	X	X	X
w indicates that this message includes a letter indicating a door or cover that needs to be opened. x represents the number of jammed pages in the printer. y represents the tray number. z represents the bin number.				

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	424xz	✓	✓	✓
Intervention Required - Paper Jam	4241wy	X	X	X
Intervention Required - Paper Jam	4241z	X	X	X
Intervention Required - Paper Jam	4242wy	X	X	X
Intervention Required - Paper Jam	4242z	X	X	X
Intervention Required - Paper Jam	4243w	X	X	X
Intervention Required - Paper Jam	4243z	X	X	X
Intervention Required - Paper Jam	4244wy	X	X	X
Intervention Required - Paper Jam	4244z	X	X	X
Intervention Required - Paper Jam	4245w	X	X	X
Intervention Required - Paper Jam	4246w	X	X	X
Intervention Required - Paper Jam	4247wy	X	X	X
Intervention Required - Paper Jam	4248w	X	X	X
Intervention Required - Paper Jam	4249w	X	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4250w	X	X	X
Intervention Required - Paper Jam	4250x	X	X	X
Intervention Required - Paper Jam	4250z	✓	✓	✓
Intervention Required - Paper Jam	4251wy	X	X	X
Intervention Required - Paper Jam	4251x	X	X	X
Intervention Required - Paper Jam	4252w	X	X	X
Intervention Required - Paper Jam	4253w	X	X	X
Intervention Required - Paper Jam	4254wy	X	X	X
Intervention Required - Paper Jam	4255	X	X	X
Intervention Required - Paper Jam	4256w	X	X	X
Intervention Required - Paper Jam	4257w	X	X	X
Intervention Required - Paper Jam	4258w	X	X	X
Intervention Required - Paper Jam	4259wy	X	X	X
Intervention Required - Paper Jam	4260w	X	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4260x	X	X	X
Intervention Required - Paper Jam	4260z	X	✓	✓
Intervention Required - Paper Jam	4261w	X	X	X
Intervention Required - Paper Jam	4261x	X	X	X
Intervention Required - Paper Jam	427xz	✓	✓	✓
Intervention Required - Paper Jam	427zx	X	X	X
Intervention Required - Paper Jam	4271	X	X	X
Intervention Required - Paper Jam	4271z	X	X	X
Intervention Required - Paper Jam	4272	X	X	X
Intervention Required - Paper Jam	4272z	X	X	X
Intervention Required - Paper Jam	4273	X	X	X
Intervention Required - Paper Jam	4280w	X	X	X
Intervention Required - Paper Jam	4280x	X	X	X
Intervention Required - Paper Jam	4280z	✓	✓	✓
w indicates that this message includes a letter indicating a door or cover that needs to be opened. x represents the number of jammed pages in the printer. y represents the tray number. z represents the bin number.				

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4281w	X	X	X
Intervention Required - Paper Jam	4281x	X	X	X
Intervention Required - Paper Jam	4281z	X	✓	✓
Intervention Required - Paper Jam	4282w	X	X	X
Intervention Required - Paper Jam	4282x	X	X	X
Intervention Required - Paper Jam	4282z	X	✓	✓
Intervention Required - Paper Jam	4283w	X	X	X
Intervention Required - Paper Jam	4283x	X	X	X
Intervention Required - Paper Jam	4283z	✓	✓	✓
Intervention Required - Paper Jam	4284w	X	X	X
Intervention Required - Paper Jam	4284x	X	X	X
Intervention Required - Paper Jam	4284z	X	X	X
Intervention Required - Paper Jam	4285w	X	X	X
Intervention Required - Paper Jam	4285z	X	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

✓ = Supported X = Not supported		Model		
Message	Status code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Intervention Required - Paper Jam	4286w	X	X	X
Intervention Required - Paper Jam	4286z	X	X	X
Intervention Required - Paper Jam	4287	X	X	X
Intervention Required - Paper Jam	4287z	X	X	X
Intervention Required - Paper Jam	4288	X	X	X
Intervention Required - Paper Jam	4288z	X	X	X
Intervention Required - Paper Jam	4289	X	X	X
Intervention Required - Paper Jam	4289z	X	X	X
Intervention Required - Paper Jam	4290	X	X	X
Intervention Required - Paper Jam	4291	X	X	X
Intervention Required - Paper Jam	4292	X	X	X
Intervention Required - Paper Jam	4293	X	X	X
Intervention Required - Paper Jam	4294	X	X	X
Intervention Required - Paper Jam	4295	X	X	X

w indicates that this message includes a letter indicating a door or cover that needs to be opened.
x represents the number of jammed pages in the printer.
y represents the tray number.
z represents the bin number.

Service errors

✓ = Supported X = Not supported		Model		
Message	Error code	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
ALL SERVICE MESSAGES	50000	X	X	X

Device attendance messages

✓ = Supported X = Not supported		Model		
Message	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
RDYMSG	✓	✓	✓	
OPMSG	✓	✓	✓	
STMSG	✓	✓	✓	

Lexmark-unique PJL commands

These commands are Lexmark extensions which have been added to the PJL command set to provide the user with remote control of many printer functions.

✓ = Supported X = Not supported		Model	
Command	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LBEEP	✓	✓	✓
LPORTROTATE	✓	✓	✓

Command	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
LPRINT testpage	✓	✓	✓
• LPRINTDIRECTORY	✓	✓	✓
• LPRINTTESTPAGE	✓	✓	✓
• LPRINTMENUS	✓	✓	✓
• LPRINTPCLFONTS	✓	✓	✓
• LPRINTPSFONTS	✓	✓	✓
• LPRINTDIAG1TEST	✓	✓	✓
• LPRINTDIAG2TEST	✓	✓	✓
• LPRINTDIAG3TEST	✓	✓	✓
LENGINEPRT	✓	✓	✓
LENTTERTAILMODE	✓	✓	✓
LEXITRETAILMODE	✓	✓	✓
LFLASH	✓	✓	✓
LESCAPECHAR	✓	✓	✓
LFAX PHONENUMBER	✓	x	✓
LOPENFILE	✓	✓	✓
LCLOSEFILE	✓	✓	✓
LREADFILE	✓	✓	✓
LWRITEFILE	✓	✓	✓
LRUNFILE	✓	✓	✓
LRENAMEFILE	✓	✓	✓
LDELETEFILE	✓	✓	✓
LFORMAT	✓	✓	✓

✓ = Supported X = Not supported		Model		
Command	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
LDEFrag	✓	✓	✓	
LPROGRAM	✓	✓	✓	
LPROGRAMADAPTOR	✓	✓	✓	
LPROGRAMCOFF	✓	✓	✓	
LPROGRAMENG	✓	✓	✓	
LPROGRAMRIP	✓	✓	✓	
LWRITEOM	✓	✓	✓	

File and device protection commands

✓ = Supported X = Not supported		Model		
Command	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
LBYPASSPASSWORD KEY	✓	✓	✓	
LDECLARE LRESOURCE	✓	✓	✓	
LDELETEPASSWORD	✓	✓	✓	
LQUERYSEED	✓	✓	✓	

Appendix C: PostScript support

Supplemental operators

Operator name	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
appletalktype	✓	✓	✓
buildtime	✓	✓	✓
byteorder	✓	✓	✓
checkpassword	✓	✓	✓
currentfilenameextend	✓	✓	✓
currentmanualduplexmode	✓	✓	✓
currentuniversalsize	✓	✓	✓
default timeouts	x	x	x
deletefile	✓	✓	✓
devcontrol	✓	✓	✓
devdismount	✓	✓	✓
devforall	✓	✓	✓
devformat	✓	✓	✓
devmount	✓	✓	✓
devstatus	✓	✓	✓
diskonline	✓	✓	✓
diskstatus	✓	✓	✓
displayoperatormsg	✓	✓	✓
doidlefonts	✓	✓	✓
dojamrecovery	✓	✓	✓

Operator name	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
doprinterrors	✓	✓	✓
doret	x	x	x
dostartpage	✓	✓	✓
dosysstart	✓	✓	✓
duplexer	✓	✓	✓
duplexmode	✓	✓	✓
enginesync	✓	✓	✓
file	✓	✓	✓
filenameforall	✓	✓	✓
fileposition	✓	✓	✓
firstside	✓	✓	✓
fontnonzerowinding	✓	✓	✓
hardwareiomode	✓	✓	✓
idlefonts	✓	✓	✓
ignoresize	✓	✓	✓
initializedisk	✓	✓	✓
jobname	✓	✓	✓
jobsource	✓	✓	✓
jobtimeout	x	✓	✓
manualfeed	✓	✓	✓
manualfeedtimeout	x	✓	✓
newsheet	✓	✓	✓
pagecount	✓	✓	✓
pagesprinted	✓	✓	✓

Operator name	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
papertray	✓	✓	✓
printername	✓	✓	✓
product	✓	✓	✓
PS2fonts	✓	✓	✓
PS3fonts	✓	✓	✓
quiet	✓	✓	✓
ramsize	✓	✓	✓
realformat	✓	✓	✓
renamefile	✓	✓	✓
resolution	✓	✓	✓
revision	✓	✓	✓
sccbatch	✓	✓	✓
sccinteractive	✓	✓	✓
setcoverpage	x	x	x
setdefault timeouts	✓	✓	✓
setdoidlefonts	✓	✓	✓
setdojamrecovery	✓	✓	✓
setdoprinterrors	✓	✓	✓
setdoret	x	x	x
setdosstartpage	✓	✓	✓
setdosysstart	✓	✓	✓
setduplexmode	✓	✓	✓
setenginesync	✓	✓	✓
setethernetaddress	✓	✓	✓

✓ = Supported X = Not supported	Model		
Operator name	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
setfilenameextend	✓	✓	✓
setfileposition	✓	✓	✓
sethardwareiomode	✓	✓	✓
setidlefonts	✓	✓	✓
setignoresize	✓	✓	✓
setjobtimeout	x	x	x
setmanualduplexmode	✓	✓	✓
setpapertray	✓	✓	✓
setprintername	✓	✓	✓
setquiet	✓	✓	✓
setresolution	✓	✓	✓
setsccbatch	✓	✓	✓
setsccinteractive	✓	✓	✓
setsoftwareiomode	✓	✓	✓
settumble	✓	✓	✓
setuniversalsize	✓	✓	✓
setuserdiskpercent	✓	✓	✓
softwareiomode	✓	✓	✓
tumble	✓	✓	✓
userdiskpercent	✓	✓	✓
waittimeout	x	✓	✓

Page device parameters

Key	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
BeginPage	✓	✓	✓
Collate	✓	✓	✓
DeferredMediaSelection	✓	✓	✓
DeviceRenderingInfo	✓	✓	✓
• Screening	x	x	x
- ColorGrade	x	x	x
- PictureGrade	x	x	x
- IET	x	x	x
- IETImagesOnly	x	x	x
- IETPictureGrade	x	x	x
- None	x	x	x
• TonerSaver	✓	✓	✓
• PictureGrade	x	x	x
• ImageEnhancement	✓	✓	✓
• ImageEnhancementType	✓	✓	✓
• PrintDarkness	✓	✓	✓
• AutoMediaType	✓	✓	✓
• EdgeToEdge	✓	✓	✓
• DefaultPoliciesPageSize	x	x	x
• SubstituteSize	✓	✓	✓
• LineDetail	✓	✓	✓
• Type	✓	✓	✓
• ColorCorrection	✓	✓	✓
• ColorBalance	x	x	x

Key	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
• ColorSaver	x	x	x
• ImageBrightness	x	✓	✓
• Imageess	✓	x	x
• ImageContrast	✓	✓	✓
• ImageSaturation	x	x	x
• ManualColor	x	x	x
• PrintQuality	x	x	x
Duplex	✓	✓	✓
EndPage	✓	✓	✓
ExitJamRecovery	✓	✓	✓
HWResolution	✓	✓	✓
ImagingBBox	✓	✓	✓
InputAttributes	✓	✓	✓
• 0 - Tray 1	✓	✓	✓
• 1 - Tray 2	✓	✓	✓
• 2 - Envelope Feeder	✓	✓	✓
• 3 - Tray 3	✓	✓	✓
• 4 - Multipurpose Feeder	✓	✓	✓
• 5 - Tray 4	✓	✓	✓
• 6 - Tray 5	✓	✓	✓
- PageSize	✓	✓	✓
- MatchAll	✓	✓	✓
- MediaColor	✓	✓	✓
- MediaType	✓	✓	✓

✓ = Supported X = Not supported	Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
- MediaWeight	✓	✓	✓
- InputLocation	✓	✓	✓
• Mode	✓	✓	✓
• Priority	✓	✓	✓
Install	✓	✓	✓
Jog	✓	✓	✓
ManualFeed	✓	✓	✓
ManualFeedTimeout	✓	✓	✓
MediaColor	✓	✓	✓
MediaPosition	✓	✓	✓
MediaType	✓	✓	✓
MediaWeight	✓	✓	✓
NumCopies	✓	✓	✓
Nup	✓	✓	✓
NupDetails	✓	✓	✓
• Rows	✓	✓	✓
• Columns	✓	✓	✓
• Orientation	✓	✓	✓
• Border	✓	✓	✓
• Order	✓	✓	✓
• Type	✓	✓	✓
• LandscapeOverride	✓	✓	✓
OutputAttributes	✓	✓	✓

✓ = Supported X = Not supported	Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
• 0 - Standard Bin	✓	✓	✓
• 1 - Optional Bin 1	✓	✓	✓
• 2 - Optional Bin 2	✓	✓	✓
• 3 - Optional Bin 3	✓	✓	✓
• 4 - Optional Bin 4	✓	✓	✓
• 5 - Optional Bin 5	✓	✓	✓
• 6 - Optional Bin 6	✓	✓	X
• 7 - Optional Bin 7	✓	✓	X
• 8 - Optional Bin 8	✓	✓	X
• 9 - Optional Bin 9	✓	✓	X
• 10 - Optional Bin 10	✓	✓	X
- OutputType	✓	✓	✓
- OutputLocation	✓	✓	✓
- PunchModesSupported	X	X	X
• Priority	✓	✓	✓
OutputPage	✓	✓	✓
OutputType	✓	✓	✓
PageDeviceName	✓	✓	✓
PageSize	✓	✓	✓
Policies	✓	✓	✓
• PageSize	✓	✓	✓
• PolicyNotFound	✓	✓	✓
• PolicyReport	✓	✓	✓
PostRenderingEnhance	X	X	X

Key	6500e MFP option	Model	
✓ = Supported			X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
X = Not supported		T650, T650n, T652dn, T654dn, T656dne	
PostRenderingEnhanceDetails	X	X	X
• REValue	X	X	X
• Type	X	X	X
PowerSave	✓	✓	✓
ProcessColorModel	X	X	X
Punch	X	X	X
SlipSheet	✓	✓	✓
SlipSheetDetails	✓	✓	✓
• SlipSheetSource	✓	✓	✓
• Type	✓	✓	✓
Staple	✓	✓	✓
TraySwitch	✓	✓	✓
Tumble	✓	✓	✓
UniversalDetails	✓	✓	✓
• Type	✓	✓	✓
• PageSize	✓	✓	✓
• Orientation	✓	✓	✓
• Prompt	✓	✓	✓

User interpreter parameters

\checkmark = Supported \times = Not supported		Model		
Key	Default	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
AccurateScreens	false	\checkmark	\checkmark	\checkmark
CollatedCopies	Collation - Collated Copies (QTY) value	\checkmark	\checkmark	\checkmark
HalftoneMode	0	\checkmark	\checkmark	\checkmark
IdiomRecognition	true	\checkmark	\checkmark	\checkmark
JobName	()	\checkmark	\checkmark	\checkmark
JobTimeout	JobTimeout system parameter	\checkmark	\checkmark	\checkmark
MaxDictStack	255	\checkmark	\checkmark	\checkmark
MaxExecStack	10015	\checkmark	\checkmark	\checkmark
MaxFontItem	12500	\checkmark	\checkmark	\checkmark
MaxFormItem	100000	\checkmark	\checkmark	\checkmark
MaxLocalVM	2147483647	\checkmark	\checkmark	\checkmark
MaxOpStack	100000	\checkmark	\checkmark	\checkmark
MaxPatternItem	20000	\checkmark	\checkmark	\checkmark
MaxScreenItem	48000	\checkmark	\checkmark	\checkmark
MaxSuperScreen	1024	\checkmark	\checkmark	\checkmark
MaxUPathItem	5000	\checkmark	\checkmark	\checkmark
MinFontCompress	2147483647	\checkmark	\checkmark	\checkmark
PageCount	0	\checkmark	\checkmark	\checkmark
UseOldcopypage	false	\checkmark	\checkmark	\checkmark
VMReclaim	0	\checkmark	\checkmark	\checkmark
VMThreshold	25000 per MB of RAM	\checkmark	\checkmark	\checkmark

✓ = Supported X = Not supported		Model		
Key	Default	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
WaitTimeout	WaitTimeout system parameter	✓	✓	✓

System interpreter parameters

✓ = Supported X = Not supported		Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
BuildTime	✓	✓	✓	
ByteOrder	✓	✓	✓	
CurDisplayList	✓	✓	✓	
CurFontCache	✓	✓	✓	
CurFormCache	✓	✓	✓	
CurlInputDevice	✓	✓	✓	
CurOutlineCache	✓	✓	✓	
CurOutputDevice	✓	✓	✓	
CurPatternCache	✓	✓	✓	
CurScreenStorage	✓	✓	✓	
CurSourceList	✓	✓	✓	
CurUPathCache	✓	✓	✓	
DisableFastProcs	✓	✓	✓	
DoPrintErrors	✓	✓	✓	

Key	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
DoStartPage	✓	✓	✓
EnableExtraFonts	✓	✓	✓
EngineBoot	✓	✓	✓
EngineCode	✓	✓	✓
EngineSpeed	✓	✓	✓
EnvironmentSave	✓	✓	✓
FactoryDefaults	✓	✓	✓
FatalErrorAddress	✓	✓	✓
FontResourceDir	✓	✓	✓
FontVersion	✓	✓	✓
GenericResourceDir	✓	✓	✓
GenericResourcePathSep	✓	✓	✓
InstalledRam	✓	✓	✓
JobTimeout	✓	✓	✓
languagelevel	✓	✓	✓
MaxDisplayList	✓	✓	✓
MaxDisplayAndSourceList	✓	✓	✓
MaxFontCache	✓	✓	✓
MaxFormCache	✓	✓	✓
MaxImageBuffer	✓	✓	✓
MaxOutlineCache	✓	✓	✓
MaxPatternCache	✓	✓	✓
MaxPermanentVM	✓	✓	✓

Key	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
MaxRasterMemory	✓	✓	✓
MaxScreenStorage	✓	✓	✓
MaxSourceList	✓	✓	✓
MaxUPathCache	✓	✓	✓
PageCount	✓	✓	✓
PanelCode	✓	✓	✓
PrinterCode	✓	✓	✓
PrinterName	✓	✓	✓
RamSize	✓	✓	✓
RealFormat	✓	✓	✓
Revision	✓	✓	✓
SearchBuiltinFontsFirst	✓	✓	✓
SerialNumber	✓	✓	✓
StartJobPassword	✓	✓	✓
StartupMode	✓	✓	✓
StaticRamSize	✓	✓	✓
SystemParamsPassword	✓	✓	✓
UseOldcopypage	✓	✓	✓
UseOldfonts	✓	✓	✓
ValidNV	✓	✓	✓
WaitTimeout	✓	✓	✓

Devices supported

Device	Model		
	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
%AppSocketA%	✓	✓	✓
%AppSocketB%	✓	✓	✓
%AppSocketC%	✓	✓	✓
%AppSocketD%	✓	✓	✓
%EthernetPhysicalA%	✓	✓	✓
%EthernetPhysicalB%	✓	✓	✓
%EthernetPhysicalC%	✓	✓	✓
%EthernetPhysicalD%	✓	✓	✓
%EtherTalkA%	✓	✓	✓
%EtherTalkB%	✓	✓	✓
%EtherTalkC%	✓	✓	✓
%EtherTalkD%	✓	✓	✓
%IP_A%	✓	✓	✓
%IP_B%	✓	✓	✓
%IP_C%	✓	✓	✓
%IP_D%	✓	✓	✓
%IR_A%	x	✓	✓
%IR_B%	x	✓	✓
%IR_C%	x	✓	✓
%IR_D%	x	✓	✓
%LexLinkA%	x	✓	✓
%LexLinkB%	x	✓	✓

✓ = Supported X = Not supported	Model		
Device	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
%LexLinkC%	X	✓	✓
%LexLinkD%	X	✓	✓
%LocalTalkA%	✓	✓	✓
%LocalTalkB%	✓	✓	✓
%LocalTalkC%	✓	✓	✓
%LocalTalkD%	✓	✓	✓
%LPR_A%	✓	✓	✓
%LPR_B%	✓	✓	✓
%LPR_C%	✓	✓	✓
%LPR_D%	✓	✓	✓
%ParallelA%	✓	✓	✓
%ParallelB%	✓	✓	✓
%ParallelC%	✓	✓	✓
%ParallelD%	✓	✓	✓
%PrintServerA%	✓	✓	✓
%PrintServerB%	✓	✓	✓
%PrintServerC%	✓	✓	✓
%PrintServerD%	✓	✓	✓
%RemotePrinterA%	✓	✓	✓
%RemotePrinterB%	✓	✓	✓
%RemotePrinterC%	✓	✓	✓
%RemotePrinterD%	✓	✓	✓
%SerialA%	✓	✓	✓

Device	6500e MFP option	Model	
		T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
%SerialB%	✓	✓	✓
%SerialC%	✓	✓	✓
%SerialD%	✓	✓	✓
%TokenRingPhysicalA%	x	✓	✓
%TokenRingPhysicalB%	x	✓	✓
%TokenRingPhysicalC%	x	✓	✓
%TokenRingPhysicalD%	x	✓	✓
%TokenTalkA%	x	✓	✓
%TokenTalkB%	x	✓	✓
%TokenTalkC%	x	✓	✓
%TokenTalkD%	x	✓	✓
%USB_A%	✓	✓	✓
%USB_B%	✓	✓	✓
%USB_C%	✓	✓	✓
%USB_D%	✓	✓	✓

Device parameters

Key	Model
Device Parameters for the Communication Device %Parallel%, %ParallelA%, %ParallelB%, %ParallelC%, %ParallelD%	
DelayedOutputClose	✓
Enabled	✓
Filtering	✓
Handshake	✓
HasNames	✓
Interpreter	✓
On	✓
OutputDevice	✓
PCLSmartSwitch	✓
PortLocation	✓
PSSmartSwitch	✓
Type	✓
Device Parameters for the Communication Device %Serial%, %SerialA%, %SerialB%, %SerialC%, %SerialD%	
Baud	✓
CheckParity	✓
DataBits	✓
DelayedOutputClose	✓
Enabled	✓
Filtering	✓
FlowControl	✓

Key	6500e MFP option	Model	
HasNames	✓	✓	✓
HonorDSR	✓	✓	✓
Interpreter	✓	✓	✓
On	✓	✓	✓
Parity	✓	✓	✓
PCLSmartSwitch	✓	✓	✓
PortLocation	✓	✓	✓
PSSmartSwitch	✓	✓	✓
RobustXon	✓	✓	✓
SerialMode	✓	✓	✓
StopBits	✓	✓	✓
Type	✓	✓	✓
Device Parameters for the Communication Device %LocalTalk%, %LocalTalkA%, %LocalTalkB%, %LocalTalkC%, %LocalTalkD%			
DelayedOutputClose	✓	✓	✓
Enabled	✓	✓	✓
Filtering	✓	✓	✓
HasNames	✓	✓	✓
Interpreter	✓	✓	✓
LocalTalkType	✓	✓	✓
NodeID	✓	✓	✓
On	✓	✓	✓
PCLSmartSwitch	✓	✓	✓
X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	T650, T650n, T652dn, T654dn, T656dne		

Key	6500e MFP option	Model	
✓ = Supported			
X = Not supported			
PortLocation	✓	✓	✓
PSSmartSwitch	✓	✓	✓
Type	✓	✓	✓
Device Parameters for the Communication Device %EtherTalk%, %EtherTalkA%, %EtherTalkB%, %EtherTalkC%, %EtherTalkD%			
DelayedOutputClose	✓	✓	✓
Enabled	✓	✓	✓
EthernetAddress	✓	✓	✓
EtherTalkType	✓	✓	✓
EtherTalkZone	✓	✓	✓
Filtering	✓	✓	✓
HasNames	✓	✓	✓
Interpreter	✓	✓	✓
NodeID	✓	✓	✓
On	✓	✓	✓
PCLSmartSwitch	✓	✓	✓
PortLocation	✓	✓	✓
PSSmartSwitch	✓	✓	✓
Type	✓	✓	✓
Device Parameters for the Communication Device %IR%, %IR_A%, %IR_B%, %IR_C%, %IR_D%			
DelayedOutputClose	x	✓	✓
Enabled	x	✓	✓
Filtering	x	✓	✓

Key	6500e MFP option	Model
HasNames	X	✓
Interpreter	X	✓
On	X	✓
PCLSmartSwitch	X	✓
PortLocation	X	✓
PSSmartSwitch	X	✓
Type	X	✓
Device Parameters for the Communication Device %USB%, %USB_A%, %USB_B%, %USB_C%, %USB_D%		
DelayedOutputClose	✓	✓
Enabled	✓	✓
Filtering	✓	✓
HasNames	✓	✓
Interpreter	✓	✓
On	✓	✓
PCLSmartSwitch	✓	✓
PortLocation	✓	✓
PSSmartSwitch	✓	✓
Type	✓	✓
Device Parameters for the Communication Device %TokenTalk%, %TokenTalkA%, %TokenTalkB%, %TokenTalkC%, %TokenTalkD%		
Address	X	✓
Bridging	X	✓
DelayedOutputClose	X	✓

✓ = Supported X = Not supported	Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Enabled	X	✓	✓
Filtering	X	✓	✓
HasNames	X	✓	✓
Interpreter	X	✓	✓
NodeID	X	✓	✓
On	X	✓	✓
PCLSmartSwitch	X	✓	✓
PortLocation	X	✓	✓
PSSmartSwitch	X	✓	✓
TokenTalkType	X	✓	✓
Type	X	✓	✓
Zone	X	✓	✓
Device Parameters for the Communication Device %AppSocket%, %AppSocketA%, %AppSocketB%, %AppSocketC%, %AppSocketD%			
DelayedOutputClose	✓	✓	✓
Enabled	✓	✓	✓
Filtering	✓	✓	✓
HasNames	✓	✓	✓
Interpreter	✓	✓	✓
On	✓	✓	✓
PortLocation	✓	✓	✓
Type	✓	✓	✓

Key		Model		
		6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Device Parameters for the Communication Device %RemotePrinter%, %RemotePrinterA%, %RemotePrinterB%, %RemotePrinterC%, %RemotePrinterD%				
DelayedOutputClose		✓	✓	✓
Enabled		✓	✓	✓
Filtering		✓	✓	✓
HasNames		✓	✓	✓
Interpreter		✓	✓	✓
On		✓	✓	✓
PortLocation		✓	✓	✓
Type		✓	✓	✓
Device Parameters for the Communication Device %PrintServer%, PrintServerA%, PrintServerB%, %PrintServerC%, %PrintServerD%				
DelayedOutputClose		✓	✓	✓
Enabled		✓	✓	✓
Filtering		✓	✓	✓
HasNames		✓	✓	✓
Interpreter		✓	✓	✓
On		✓	✓	✓
PortLocation		✓	✓	✓
Type		✓	✓	✓
Device Parameters for the Communication Device %LPR%, %LPR_A%, %LPR_B%, %LPR_C%, %LPR_D%				
Enabled		✓	✓	✓
Filtering		✓	✓	✓

Key	6500e MFP option	Model	
HasNames	✓	✓	✓
Interpreter	✓	✓	✓
On	✓	✓	✓
PortLocation	✓	✓	✓
Type	✓	✓	✓
Device Parameters for the Communication Device %LexLink%, %LexLinkA%, %LexLinkB%, %LexLinkC%, %LexLinkD%			
DelayedOutputClose	x	✓	✓
Enabled	x	✓	✓
HasNames	x	✓	✓
Interpreter	x	✓	✓
On	x	✓	✓
PortLocation	x	✓	✓
Type	x	✓	✓
Device Parameters for the Communication Device %IP%, %IP_A%, %IP_B%, %IP_C%, %IP_D%			
GatewayAddress	✓	✓	✓
IPAddress	✓	✓	✓
IPAddressDynamic	✓	✓	✓
NetworkMask	✓	✓	✓
On	✓	✓	✓
Physical	✓	✓	✓
PortLocation	✓	✓	✓
Type	✓	✓	✓
X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe			

Key	Model
✓ = Supported X = Not supported	
	6500e MFP option
	T650, T650n, T652dn, T654dn, T656dne
	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Device Parameters for the Communication Device %EthernetPhysical%, %EthernetPhysicalA%, %EthernetPhysicalB%, %EthernetPhysicalC%, %EthernetPhysicalD%	
EthernetAddress	✓
On	✓
PortLocation	✓
Type	✓
Device Parameters for the Communication Device %TokenRingPhysical%, %TokenRingPhysicalA%, %TokenRingPhysicalB%, %TokenRingPhysicalC%, %TokenRingPhysicalD%	
Address	X
On	X
PortLocation	X
Speed	X
Type	X
Device Parameters for the Parameters Device %Engine%	
BSizeStandard	✓
Darkness	✓
PageCount	✓
TimeToStandby	✓
Type	✓
Device Parameters for the Parameters Device %Console%	
Language	✓
Type	✓

Key		Model		
		6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
Device Parameters for the Parameters Device %Calendar%, %CalendarA%, %CalendarB%, %CalendarC%, %CalendarD%				
Day		✓	✓	✓
Hour		✓	✓	✓
Minute		✓	✓	✓
Month		✓	✓	✓
Running		✓	✓	✓
Second		✓	✓	✓
Type		✓	✓	✓
Year		✓	✓	✓
DateTime		✓	✓	✓
DayOfWeekLong		✓	✓	✓
DayOfWeekNum		✓	✓	✓
DayOfWeekShort		✓	✓	✓
Device Parameters for the Parameters Device %disk1%				
BlockSize		✓	✓	✓
Free		✓	✓	✓
HasNames		✓	✓	✓
InitializeAction		✓	✓	✓
LogicalSize		✓	✓	✓
Mounted		✓	✓	✓
PhysicalSize		✓	✓	✓
Removable		✓	✓	✓
Searchable		✓	✓	✓

✓ = Supported X = Not supported	Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe
SearchOrder	✓	✓	✓
Type	✓	✓	✓
Writable	✓	✓	✓
Device Parameters for the Parameters Device %flash1%			
BlockSize	✓	✓	✓
Free	✓	✓	✓
HasNames	✓	✓	✓
InitializeAction	✓	✓	✓
LogicalSize	✓	✓	✓
Mounted	✓	✓	✓
PhysicalSize	✓	✓	✓
Removable	✓	✓	✓
Searchable	✓	✓	✓
SearchOrder	✓	✓	✓
Type	✓	✓	✓
Writable	✓	✓	✓
Device Parameters for the Parameters Device %rom%			
BlockSize	✓	✓	✓
Free	✓	✓	✓
HasNames	✓	✓	✓
InitializeAction	✓	✓	✓
LogicalSize	✓	✓	✓
Mounted	✓	✓	✓
PhysicalSize	✓	✓	✓

✓ = Supported X = Not supported		Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
Removable	✓	✓	✓	✓
Searchable	✓	✓	✓	✓
SearchOrder	✓	✓	✓	✓
Type	✓	✓	✓	✓
Writeable	✓	✓	✓	✓

PostScript message keys commands

✓ = Supported X = Not supported		Model		
Key	6500e MFP option	T650, T650n, T652dn, T654dn, T656dne	X651de, X652de, X654de, X656de, X656dte, X658d, X658de, X658dme, X658dfe, X658dte, X658dtme, X658dtfe	
job	✓	✓	✓	✓
status	✓	✓	✓	✓
source	✓	✓	✓	✓

Index

Numerics

- 6500e MFP option
 - altitude 27
 - atmospheric pressure 27
 - clearance requirements 26
- 6500e MFP option specifications
 - environmental conditions 26

A

- air temperature ranges 27
- airflow requirement 20
- altitude specifications 27
- atmospheric pressure 27

C

- clearance requirements
 - 6500e MFP option 26
 - printer specifications 26
- commands
 - PJL, file and device protection 111
 - PJL, Lexmark-unique 109
 - PostScript, message keys 138
- commands supported
 - GL/2 35
 - PCL emulation 28
 - PJL, common variables for both languages 39
 - PJL, common variables for PCL emulation 53
 - PJL, common variables for PostScript emulation 55
 - PJL, Status Readback 56
 - PJL, unique variables for both languages 42
 - PJL, unique variables for LRESOURCE 56
 - PJL, unique variables for PCL emulation 54
 - PJL, unique variables for PostScript emulation 55
 - PJL, USTATUS variables 57

D

- devices supported
 - PostScript 125
- dimensions, 6500e MFP option 23
- dimensions, printer 23

E

- electrical specifications 21
- envelope sizes
 - support in PostScript 16
- envelope sizes supported
 - Lexmark X548 10
- envelope tray support
 - PostScript operators 18
- environmental conditions 26
- errors
 - PJL, service 109

F

- finding more information about the printer 7

G

- GL/2
 - commands supported 35

H

- humidity ranges 27

L

- letter meanings 5
- logical page
 - PCL emulation 9

M

- meanings, letters after model number 5
- messages
 - PJL, attendance conditions 69
 - PJL, auto-continuable conditions 57
 - PJL, device attendance 109
 - PJL, paper handling 96
 - PJL, paper jams 102
- model numbers
 - understanding letters 5

N

- noise emission levels 20

O

- operators, envelope sizes
 - PostScript 16

P

- page, printable
 - PCL emulation 9
- paper sizes supported
 - Lexmark X548 10
- paper sizes, PostScript
 - supported by printer 13
- paper tray
 - operators, PostScript 14, 16
 - support in PostScript 14
- parameters
 - PostScript, device 128
 - PostScript, page device 116
 - PostScript, system interpreter 122
 - PostScript, user interpreter 121

PCL emulation

- commands supported 28
- PCL emulation, paper and envelope dimensions
 - Lexmark X548 10
- physical page
 - PCL emulation 9
- physical specifications 23
- PJL commands
 - common variables, both languages 39
 - common variables, PCL emulation 53
 - common variables, PostScript emulation 55
- file and device protection 111
- Lexmark-unique 109
- Status Readback 56
- unique variables, both languages 42
- unique variables, LRESOURCE 56
- unique variables, PCL emulation 54
- unique variables, PostScript emulation 55
- USTATUS variables 57

PJL commands, information
location
 Printer Languages and Interfaces
 Technical Reference 12
PJL errors
 service errors 109
PJL messages
 attendance conditions 69
 auto-continuable conditions 57
 device attendance 109
 paper handling 96
 paper jams 102
PostScript
 device parameters 128
 devices supported 125
 operators, envelope sizes 16
 page device parameters 116
 supplemental operators 112
 supported paper sizes 13
 tray operators 14
PostScript commands
 message keys 138
PostScript operators
 envelope tray support 18
PostScript parameters
 system interpreter 122
 user interpreter 121
power requirements 22
printable areas 9
printer information
 where to find 7
printer specifications 23
 airflow requirement 20
 altitude 27
 atmospheric pressure 27
 clearance requirements 26
 electrical 21
 environmental conditions 26
 noise emission levels 20
 power requirements 22
publications
 where to find 7

T

tray operators
 PostScript 14

W

weight, 6500e MFP option 23
weight, printer 23

R
required clearance 26

S
size, printer 23
supplemental operators
 PostScript 112