

*Revolution*TM



User Manual

Version 1.00

Part Number:

Contents

Contents	i
Dear Valued Customer,.....	iv
Technical Alteration Disclaimer.....	v
Copyright Notice.....	v
Symbols used in this Manual	vi
Introduction to User Manual.....	1
Safety Instructions.....	2
Operation of Laser Source Devices	2
Safety Instructions for the CMOS Lithium Battery	3
Safety Instructions for the Removable Lithium Battery Modules	3
FCC Statement	3
Care and Maintenance	4
Display	4
Other Areas.....	4
Base Unit and Optional Parts.....	5
Base Units.....	5
Optional Parts	5
The ReVolusion Convertible Laptop and Tablet	7
ReVolusion at a Glance	8
Front Panel	8
Bottom Panel	8
Front Panel – LEDs	9
Front Laptop View	9
Front Laptop View (continued).....	10
Interface Panel	10
Interface Panel – Right Side	11
Interface Panel - Left Side	11
I/O Extension Stick (Port Replicator)	12
Cabled I/O Extension.....	13
In-Vehicle Mount.....	13
Getting Started	15
Connecting to Power.....	15
Connecting the AC/DC Adapter.....	16
Power On/Off Button	16
Power On and Power Off	17
Turning on the System.....	17
Turning off the System.....	19
Battery Power.....	19
Converting from Laptop to Tablet and Back.....	20
Open to Laptop Position	20
Convert from Laptop to Tablet.....	20
Convert from Tablet to Laptop	20
Close from Laptop Position.....	21
Windows Set-up	21
Accessing the User Manual	21

Modifying the System	23
Alternative Display	23
Battery Packs.....	24
Removing Battery from Right Bay	24
Inserting Battery into Right Bay	25
Hard Disk Drive - Master.....	26
Removing a Hard Disk Drive (HDD)	26
Inserting a Hard Disk Drive (HDD).....	27
Left Bay Modules	28
CD-ROM, CD-RW, DVD and DVD/CD-RW Modules	28
Removing any Left Bay Module.....	29
Inserting any Left Bay Module	29
PCMCIA Cards.....	30
Shoulder Straps	31
Audio.....	32
Volume Level.....	32
CD-ROM, CD-RW, DVD and DVD/CD-RW Combo Module Drives	32
Software Installation- CD writer	32
Software Installation - DVD player.....	32
Chipset.....	33
Driver Installation: Chipset.....	33
Driver Installation: Application Accelerator	33
LAN - Embedded.....	33
Modem	33
Power Management Modes	34
Windows	34
Battery Operations.....	35
Touchscreen	36
User Settings	36
Driver Installation	36
Calibrate	37
Touch Pad.....	38
Touch Pad Basics:.....	38
USB Ports	39
Driver Installation	39
Video.....	40
Driver Installation	41
Video Rotation	42
Wireless - 802.11b (WLAN)	43
Driver	43
Wireless - Bluetooth	45
Technical Data	46
ReVolution	46
Main Specification	46
Mechanical Specification	47
Environmental Specifications.....	47
CE-Directives and Standards	48
CD-ROM Module.....	49
CD-RW Module	49
DVD Module.....	49
DVD/CD-RW Module	49
Floppy Disk Drive Module	50
Lithium Ion Battery Pack	50

Technical Appendices	51
RS232 Serial Port (COM A)	51
Parallel Port (I/O Stick Option Only).....	51
Analog Monitor (VGA-Output, I/O Stick Option Only).....	52
USB 2.0 Ports	52
Power Supply Connector	52
PS/2 Keyboard/Mouse Connector (I/O Stick Option Only).....	53
RJ-11 Modem Port.....	53
RJ-45 LAN Port.....	53
Line-In	54
MIC-In	54
Speakers	54
System Hardware Assignments	55
Table of IRQ Assignment by BIOS	55
DMA Channel Table	55
Embedded Controller.....	56
Embedded Controller LEDs	56
Power and Battery Indicators	56
Phoenix BIOS Setup	57
Navigating the Setup Menus	57
Legend Bar	57
Field Help Window	58
General Help Window	58
Advanced Hard Disk Features.....	58
Memory Cache.....	60
Boot Features Menu.....	60
Advanced Menu	61
OEM Platform Advanced Memory Menu	61
Integrated Device Control Sub-Menu	62
Advanced Chipset Control Menu	62
I/O Device Configuration Menu	63
Keyboard Features.....	64
Security Menu	64
Boot Menu.....	65
Exit Menu	65
Exit Saving Values.....	65
Exit Discarding Changes	65
Load Setup Defaults.....	66
Discard Changes	66
Save Changes	66
BIOS Messages	67
Test Points and Beep Codes	70
Customer Service.....	74
Technical Support	74
Returning Defective Merchandise	75



Dear Valued Customer,

At Kontron Mobile Computing, we strive to be the worldwide leader in customer-specific computing solutions for demanding environments. Our mission is to provide you with a total system solution for your field automation needs.

The ReVolusion convertible laptop/tablet is a computing platform designed for off-site and in-vehicle users requiring remote, high-powered computing capabilities. The ReVolusion expands to integrate multiple technologies into one powerful solution specific to your application needs.

Kontron Mobile Computing has built its reputation around the endurance of its products in demanding environments. The ReVolusion meets strict standards for computing equipment in shock, vibration, temperature, humidity and altitude testing. It withstands the toughest conditions and proves itself again and again in mission-critical field applications.

When we deliver your new ReVolusion, our job at Kontron Mobile Computing will have just begun. We will do what it takes to ensure your complete satisfaction with our services and your ReVolusion. We want this to be the beginning of a long and outstanding experience for you, our valued customer.

Kontron Mobile Computing
7631 Anagram Drive
Eden Prairie, MN 55344-7310

Technical Alteration Disclaimer

The information contained in this manual may be subject to technical alteration, as a result of the continual upgrading of our products. The attached documentation does not guarantee the technical processes or product characteristics described in the manual.

Kontron Mobile Computing does not accept any liability for printing errors or other inaccuracies in this manual. This manual only contains a general description of technical processes and instructions that may not be applicable in every case. If in doubt, please contact your nearest Kontron Mobile Computing representative or office listed in the "Technical Support" section of this manual.

Copyright Notice


This manual is protected by copyright. All rights reserved by Kontron Mobile Computing Inc. Copies of all or part of this manual or translations into different languages may only be made with the prior written consent of Kontron Mobile Computing. This manual only reflects the technical status of the ReVolution product at the time of printing.

©2002 Kontron Mobile Computing Inc.

Printing and duplication, even of sections, is permissible only with the express approval of:

Kontron Mobile Computing
7631 Anagram Drive
Eden Prairie, MN 55344-7310

Symbols used in this Manual

Symbol	Meaning
	This symbol indicates the danger of injury to the user or the risk of damage to the product if the corresponding warning notices are not observed. It may also cause interference with radio-sensitive equipment.
	This symbol indicates that the product or parts that may be damaged if the corresponding warning notices are not observed.
	This symbol indicates general information about the product and the user manual.
	This symbol precedes helpful hints and tips for daily use.
SYSM	Program names are printed in <i>italics</i> .
format a:	Commands are printed in Courier.

- ® Windows, Windows XP Professional, Windows 2000 Professional and Windows 98SE, MS-DOS, are registered trademarks of the Microsoft Corporation.
- ® IBM, PC-AT, OS/2 and PS/2 are registered trademarks of the International Business Machines Corporation.
- ® Intel and Pentium are registered trademarks of Intel Corporation.
- ® UNIX is a registered trademark and exclusively licensed from the X/Open Company Limited.
- ® LINUX is a registered trademark and exclusively licensed by Linus Thorwald
Other product names cited in this manual may also be trademarks and are used here solely for identification purposes.
- ® Solaris is a registered trademark of Sun Microsystems, Inc.



Introduction to User Manual

The *ReVolution User Manual* provides information to assist in using your ReVolution computer in the most productive manner for your organization. It includes safety instructions, care and maintenance advice, and photographs of the ReVolution, specific components and accessories.

The manual also includes a "Getting Started" section for first-time operations, or as a refresher on starting up the system. The "Modifying the System" section describes how to use and adjust the components and devices. Refer to the "Technical Data" section for component specifications, and the "Technical Appendices" section for programming information. The "Customer Service" section offers technical support contact information.

To obtain additional copies of this user manual, or to view it online:

1. Insert the ReVolution Utilities CD that came with the original shipment of your ReVolution computer. This contains an electronic copy of the manual.
2. Go to www.kontronmobile.com. Select the following path: Technical Support → Technical Search → Manual
3. Call or write the Kontron Technical Support department to order additional hard copies. Contact information is located on the Technical Support page.

Safety Instructions



Please read this section carefully and observe the following instructions – and those on the computer - for your own safety and correct use of the ReVolusion.

Kontron Mobile Computing built and tested the ReVolusion computer in accordance with EN60950. In order to maintain this condition and ensure safe operation, you must observe the instructions and warnings contained here and elsewhere in this manual.




Do not operate the ReVolusion in areas sensitive to radio interference, such as airplanes and hospitals. There is no means to shut off the Bluetooth and WLAN radios installed in the system.

- Operate the ReVolusion in accordance with the instructions for use.
- Make sure electrical receptacles match the regulations in your area.
- Place cables, especially the power cable, out of traffic areas where people could trip over them.
- Do not put an AC power connection in sockets shared by a number of other power users.
- Do not use an extension cable.
- Plug the power cable into a nearby socket to prevent an accidental disconnection.
- Use only the cables supplied by Kontron.
- Do not place the ReVolusion in the proximity of heat sources or in a damp location. Make sure it has adequate ventilation.
- Connect to ReVolusion interfaces: only devices and components that meet the requirements of a SELV circuit (security low voltage output) in accordance with EN60950.
- Lock or screw down all plugs on the connection cables to the housing.
- You may not safely operate the ReVolusion if:
 - it has visible damage or
 - it no longer functions.Shut down the computer and secure it against unintentional operation.
- Any extensions to the computer must meet legal stipulations and the device specifications.
- Only authorized Kontron technical repair personnel may perform assembly, extensions, new settings, alterations or repairs while under warranty.
- Only use original accessories approved by Kontron.

Operation of Laser Source Devices



Class 1 laser products typically contain a label similar to the following. Use caution when dealing with such devices.

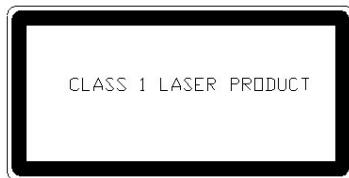

The CD-ROM, CD-RW, DVD, DVD/CD-RW Combo modules and others contain a light-emitting diode (classified in accordance with IEC 825-1:1993: LASER CLASS 1) and must not be opened. When the cover is opened, invisible laser radiation is emitted. Do not expose yourself to this radiation.

Safety Instructions for the CMOS Lithium Battery

The CPU board is equipped with an internal, rechargeable CMOS lithium battery. Please refer to the "Technical Data" section for information about battery type.

- This battery is not user-replaceable.
- Kontron shall not assume any warranty obligation if any attempt is made to replace the battery by individuals other than those at Kontron repair facilities.
- Please observe local regulations for the disposal of the battery and the disposal information of the battery-manufacturers.

Safety Instructions for the Removable Lithium Battery Modules

The ReVolusion is equipped with a removable lithium battery. Please observe following instructions:

- Refer to the "Getting Started" and "Technical Data" sections for information about the battery type.
- Only use batteries supplied by Kontron.
- Kontron shall not assume any warranty obligation if a different battery, a different battery type or a different power source is used.
- Please observe local regulations for the disposal of the battery and the disposal information of the battery-manufacturers.

FCC Statement

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the user manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area may cause harmful interference in which case the user will be required to correct the interference at their own expense.

Canadian Notice

This digital apparatus does not exceed the Class B limits for radio noise for digital apparatus set out in the Radio Interference Regulations of the Canadian Department of Communications.

European Union Notice

Warning: This is a Class B product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures to mitigate such interference.

CAUTION

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions.

ACHTUNG

Explosionsgefahr bei falsch eingesetzter Batterie. Batteriewechsel nur mit gleichen oder ähnlichen, vom Hersteller empfohlenen, Batterien.

WARNING

Only authorized service personnel should attempt to repair this equipment. Improper repairs can create a safety hazard.

WARNUNG

Lebensgefahr Achtung, nur autorisiertes Kundendienst Fachpersonal darf dieses Gerät reparieren. Falsche Reparaturen können lebensgefährlich sein.

FCC Caution

1. The device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference, and
 - (2) This device must accept any interference received, including interference that may cause undesired operation.
2. FCC RF Radiation Exposure Statement

This device was tested for compliance with FCC RF Exposure (SAR) limits in typical lap held operations with the back side of the notebook computer directly contacted to the human body. To maintain compliance with FCC RF exposure compliance requirements, avoid direct contact to the transmitting antenna during transmitting. This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter. Use only the supplied or an approved antenna. Unauthorized antennas, modifications, or attachments could result in violation of FCC regulations.
3. This device must not be co-located or operating in conjunction with any other antenna or transmitter.
4. Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

Care and Maintenance

Display

Use a soft cloth to clean the display. You can use a slightly dampened cloth if display is soiled but DO NOT use any abrasive substances or materials on the display surface.

Other Areas

Clean all other areas of the ReVolusion with a damp, soft cloth. You may dampen the cloth with a mild household cleaner or simply water. If a mild household cleaner is used, wipe again with a damp cloth only and then with a dry cloth.



- *Do not use strong solvents, such as benzene, thinner or rubbing alcohol that could discolor paint or plastic.*
- *Do not use commercial household cleaners or cosmetics, as they may harm the surface.*
- *Do not spray water, as liquid damages the computer or causes it to work improperly.*
- *TOUCH PAD: Avoid using sharp objects such as pen or pencil tips because they can permanently damage the touch pad's surface. Use the stylus provided.*
- *TOUCHSCREEN Avoid using sharp objects such as pen or pencil tips because they can permanently damage the touch pad's surface. Use the stylus provided.*

Base Unit and Optional Parts


This section displays the base unit and optional parts of the ReVision laptop and tablet computer. Get in touch with your Kontron sales representative for order information.

Base Units

	Description
	<p>Convertible Laptop and Tablet Standard Components:</p> <ul style="list-style-type: none">• Resistive Matrix Touchscreen• Master Hard Drive• CD-ROM Drive• Battery Pack• AC/DC Adapter• Power Cord• Stylus• Shoulder Strap

Optional Parts

	Description
	Master Removable Hard Drive Module – 40GB std; upgradeable to 60GB
	CD-ROM Drive Module
	CD-RW Drive Module
	DVD Drive Module
	DVD/CD-RW Combo Module
	Floppy Disk Drive Module
	Slave Removable Hard Drive Module – 40GB or 60GB
	Backlit, Sealed Keyboard

	Description
	Battery Pack
	External Battery Charger
	I/O Extension Stick (Port Replicator)
	Hard Case
	Soft Case
	Shoulder Strap
	In-Vehicle Mount with or without Docking Station
	AC Power Adapter
	DC to DC Converter, 11-32 VDC
	DC Power Cord with cigarette lighter plug, 12 ft.

The ReVolusion Convertible Laptop and Tablet

Before using your ReVolusion convertible laptop/tablet computer, please take a few minutes to learn about its features. This section displays “at a glance” the components and options.



The ReVolusion converts from a laptop to a tablet – and back! Switch-It™ is the unique hinge that turns the display 180 clockwise. The ReVolusion consists of the following additional features:

- QuickSilver™ CPU module with 1.06 GHz (or higher) Intel Mobile Pentium III-M processor
- Rugged, lightweight, magnesium alloy construction tested to specific U.S. Military and NEMA standards for resistance to shock, vibration, water, temperature and dust
- 40GB master removable hard drive (60GB upgrade)
- 128 MB SDRAM (upgradeable to 640 MB)
- CD-ROM drive module
- Windows XP Professional, 2000 Professional and Windows 98SE operating system support
- Bluetooth technology for wireless PAN connectivity
- 2 PCMCIA slots
- Spread Spectrum wireless LAN connectivity
- 56Kb Modem (V.90)
- Video RAM, 8-48MB (shared)
- Wide range of optional components


Drive Options:

- CD-ROM module
- CD-RW module
- 40 GB or 60 GB slave removable hard drive
- DVD module
- DVD/CD-RW combo
- Floppy Disk Drive module

You can configure the ReVolusion for almost any application, through the user-friendly Phoenix BIOS setup, outlined in the “Technical Appendices” section.

ReVolution at a Glance


Front Panel

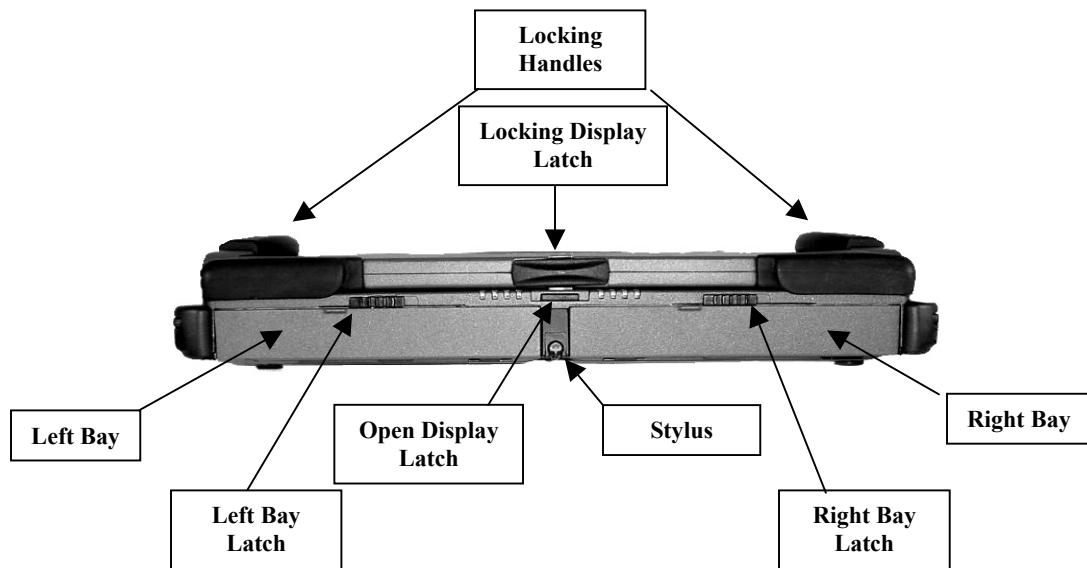


Bottom Panel




Front Panel – LEDs

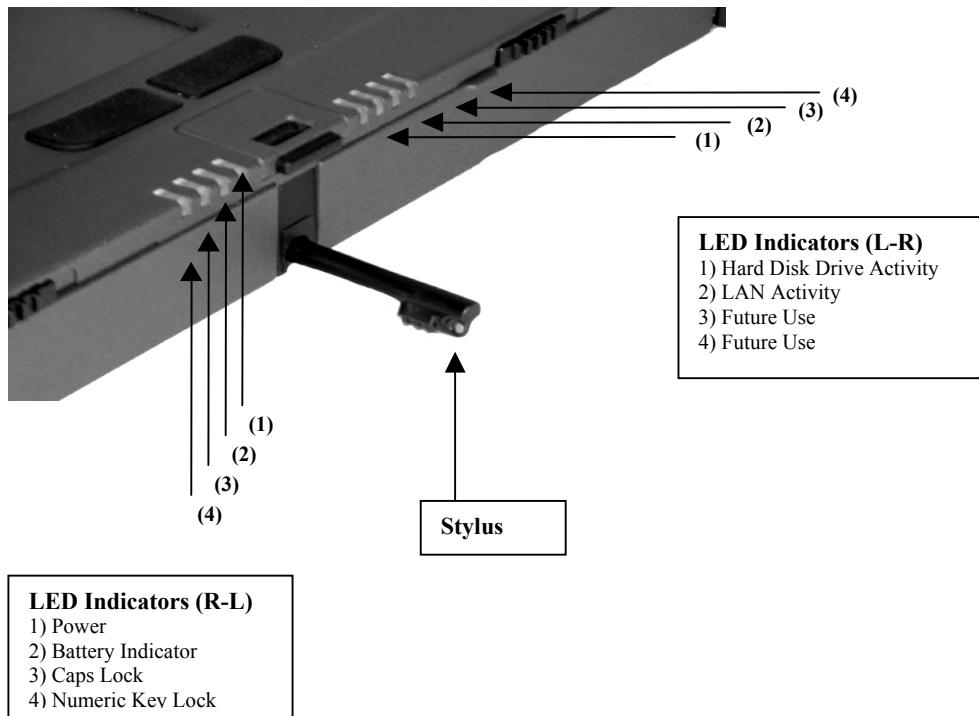

Front Laptop View

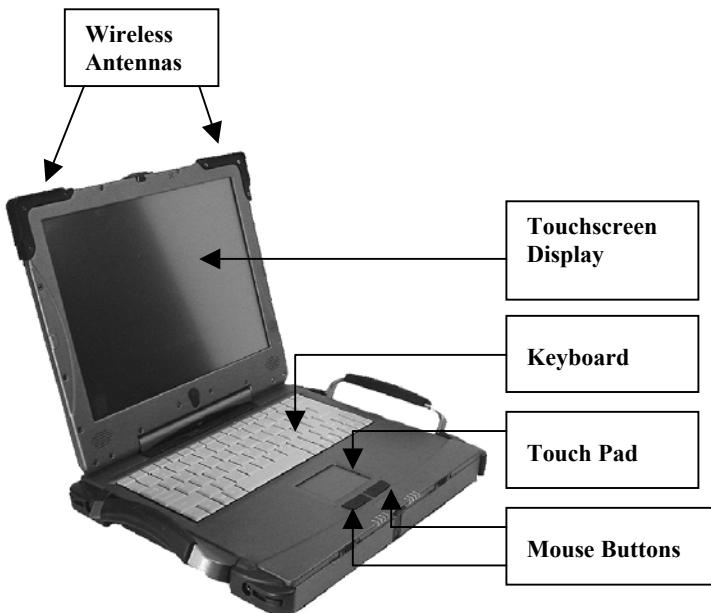

Front Laptop View (continued)

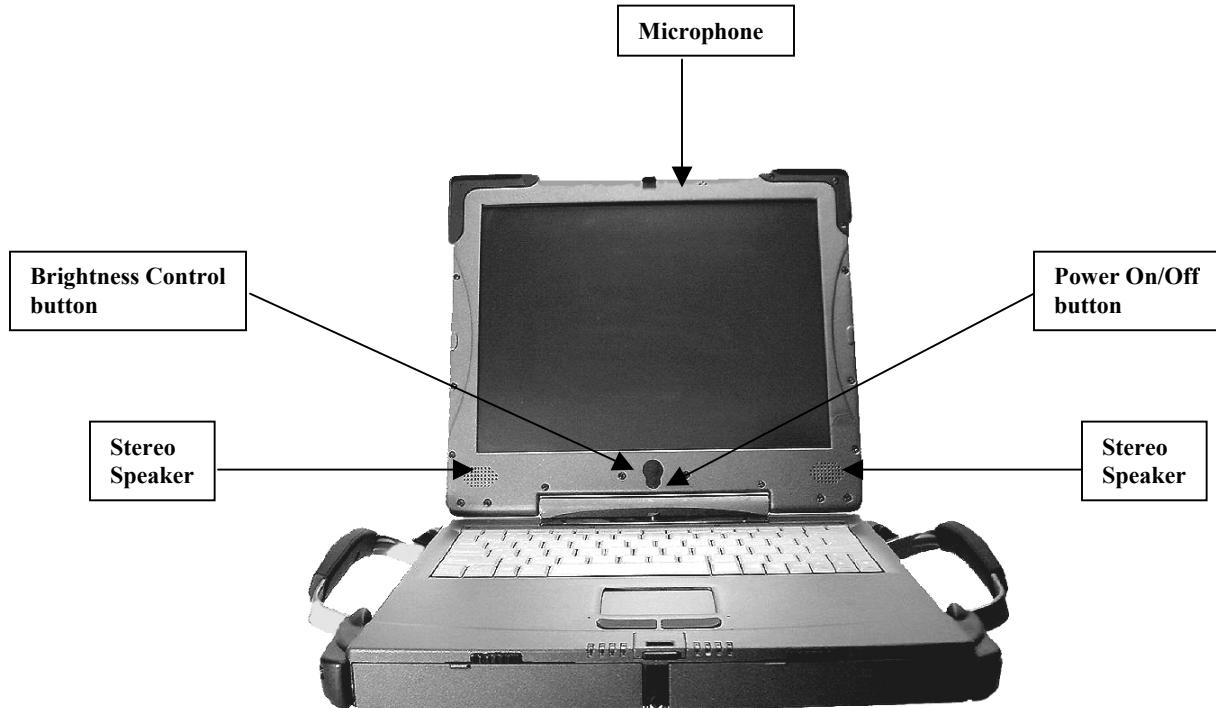


Interface Panel


The Interface Panel along the back spine of the ReVolution provides access to the ports and operating controls described on the following page.



Interface Panel – Right Side

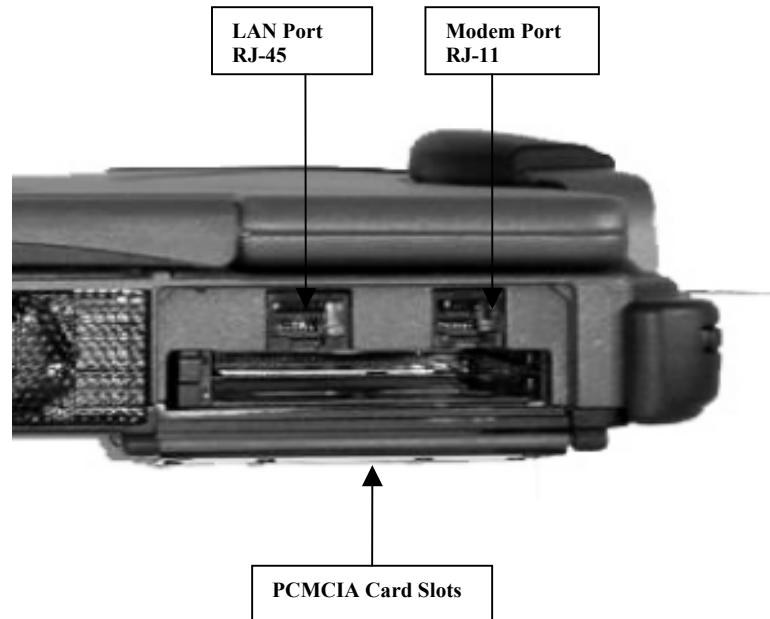

Interface Panel - Left Side

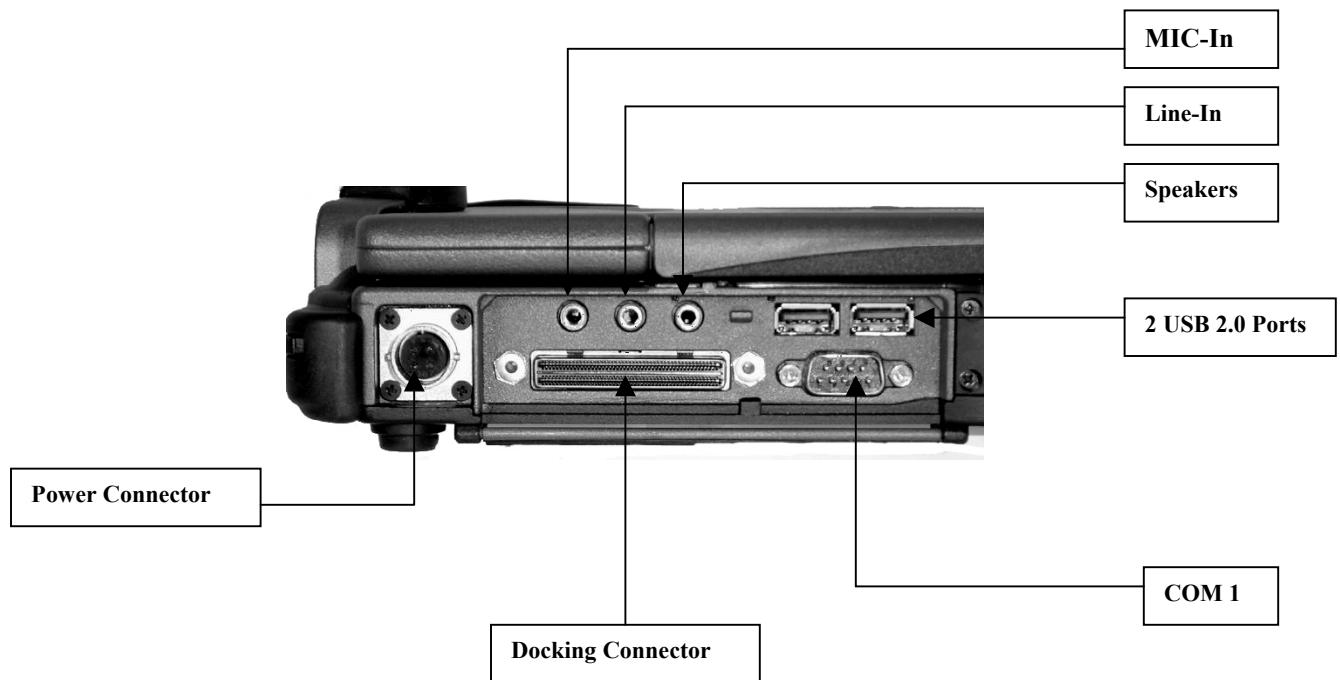

I/O Extension Stick (Port Replicator)


The I/O Extension Stick fits into the docking connector on the back interface panel, and provides additional I/O ports not standard on the back interface panel.



- **If PS2 or USB devices are attached to the I/O Extension Stick, and the I/O Stick is “hotplugged” (the system is running), these devices may fail to run. The system must be rebooted. If these devices are plugged into the I/O Stick after it is plugged into the system, they will operate normally.**



Docking Connector

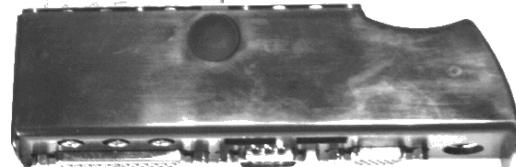

I/O Extension Stick

