

WLAN AP Router

User Manual V1.0

Trademarks

Copyright ©2006

Contents are subject to change without notice.

All trademarks belong to their respective proprietors.

Copyright Statement

THIS DOCUMENT CONTAINS PROPRIETARY TECHNICAL INFORMATION THAT IS THE PROPERTY OF THIS COMPANY. AND NO PART OF THIS DOCUMENTATION MAY BE REPRODUCED, STORED IN A RETRIEVAL SYSTEM OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRICAL OR MECHANICAL, BY PHOTOCOPYING, RECORDING, OR OTHERWISE, WITHOUT THE PRIOR WRITTEN CONSENT OF THIS COMPANY.

Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

IMPORTANT NOTE:**FCC Radiation Exposure Statement:**

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Table of Contents

REVISION HISTORY	I
TERMINOLOGY	II
1 INTRODUCTION	1
1.1 PACKAGE CONTENTS	1
1.2 PRODUCT SPECIFICATIONS	1
1.3 PRODUCT FEATURES	2
1.4 FRONT PANEL DESCRIPTION.....	3
1.5 REAR PANEL DESCRIPTION.....	4
2 INSTALLATION	6
2.1 HARDWARE INSTALLATION	6
2.2 SOFTWARE INSTALLATION.....	6
3 SOFTWARE CONFIGURATION	7
3.1 PREPARE YOUR PC TO CONFIGURE THE WLAN AP ROUTER	7
3.2 CONNECT TO THE WLAN AP ROUTER	9
3.3 MANAGEMENT AND CONFIGURATION ON THE WLAN AP ROUTER.....	9
3.3.1 Status.....	9
3.3.2 Setup Wizard.....	11
I Operation Mode	11
II Time Zone Setting.....	12
III LAN Interface Setup	12
IV WAN Interface Setup	13
V Wireless Basic Settings.....	13
VI Wireless Security Setup	14
3.3.3 Operation Mode	14
3.3.4 Wireless - Basic Settings.....	15
3.3.5 Wireless - Advanced Settings	16
3.3.6 Wireless - Security Setup.....	18
I WEP Key Setup	20
3.3.7 Wireless - Access Control	21
3.3.8 WDS Settings.....	22

I	WDS Security Setup	23
II	WDS AP Table	24
3.3.9	Site Survey	25
3.3.10	LAN Interface Setup	25
3.3.11	WAN Interface Setup	27
I	Static IP	27
II	DHCP Client	28
III	PPPoE	30
IV	PPTP	32
3.3.12	Firewall - Port Filtering	33
3.3.13	Firewall - IP Filtering	34
3.3.14	Firewall - MAC Filtering	35
3.3.15	Firewall - Port Forwarding.....	36
3.3.16	Firewall - DMZ	38
3.3.17	VPN(Optional)Settings	38
I	VPN Setup - Edit Tunnel	40
II	Advanced IKE Setup.....	42
3.3.18	Management - Statistics	43
3.3.19	Management - DDNS	44
3.3.20	Management - Time Zone Setting.....	45
3.3.21	Management - Log	45
3.3.22	Management - Upgrade Firmware.....	46
3.3.23	Management Save/ Reload Settings.....	47
3.3.24	Management - Password Setup.....	48
3.3.25	Logout	48
4	FREQUENTLY ASKED QUESTIONS (FAQ).....	50
4.1	WHAT AND HOW TO FIND MY PC'S IP AND MAC ADDRESS?	50
4.2	WHAT IS WIRELESS LAN?	50
4.3	WHAT ARE ISM BANDS?	50
4.4	HOW DOES WIRELESS NETWORKING WORK?.....	50
4.5	WHAT IS BSSID?	51
4.6	WHAT IS ESSID?	51
4.7	WHAT ARE POTENTIAL FACTORS THAT MAY CAUSES INTERFERENCE?	52
4.8	WHAT ARE THE OPEN SYSTEM AND SHARED KEY AUTHENTICATIONS?	52
4.9	WHAT IS WEP?	52
4.10	WHAT IS FRAGMENT THRESHOLD?.....	52

4.11	WHAT IS RTS (REQUEST TO SEND) THRESHOLD?	53
4.12	WHAT IS BEACON INTERVAL?.....	53
4.13	WHAT IS PREAMBLE TYPE?	54
4.14	WHAT IS SSID BROADCAST?	54
4.15	WHAT IS WI-FI PROTECTED ACCESS (WPA)?	54
4.16	WHAT IS WPA2?	55
4.17	WHAT IS 802.1X AUTHENTICATION?	55
4.18	WHAT IS TEMPORAL KEY INTEGRITY PROTOCOL (TKIP)?	55
4.19	WHAT IS ADVANCED ENCRYPTION STANDARD (AES)?	55
4.20	WHAT IS INTER-ACCESS POINT PROTOCOL (IAPP)?.....	55
4.21	WHAT IS WIRELESS DISTRIBUTION SYSTEM (WDS)?.....	56
4.22	WHAT IS UNIVERSAL PLUG AND PLAY (UPNP)?	56
4.23	WHAT IS MAXIMUM TRANSMISSION UNIT (MTU) SIZE?.....	56
4.24	WHAT IS CLONE MAC ADDRESS?.....	56
4.25	WHAT IS DDNS?.....	56
4.26	WHAT IS NTP CLIENT?	56
4.27	WHAT IS VPN?.....	56
4.28	WHAT IS IPSEC?.....	57

Revision History

DATE	REVISION OF USER'S MANUAL	FIRMWARE
2006/11/17	First release (Version 1.0)	v1.4b

Terminology

3DES	Triple Data Encryption Standard
AES	Advanced Encryption Standard
ANSI	American National Standards Institute
AP	Access Point
CCK	Complementary Code Keying
CSMA/CA	Carrier Sense Multiple Access/Collision Avoidance
CSMA/CD	Carrier Sense Multiple Access/Collision Detection
DDNS	Dynamic Domain Name Server
DH	Diffie-Hellman Algorithm
DHCP	Dynamic Host Configuration Protocol
DSSS	Direct Sequence Spread Spectrum
EAP	Extensible Authentication Protocol
ESP	Encapsulating Security Payload
FCC	Federal Communications Commission
FTP	File Transfer Protocol
IEEE	Institute of Electrical and Electronic Engineers
IKE	Internet Key Exchange
IP	Internet Protocol
ISM	Industrial, Scientific and Medical
LAN	Local Area Network
MAC	Media Access Control
MD5	Message Digest 5
NAT	Network Address Translation
NT	Network Termination
NTP	Network Time Protocol
PPTP	Point to Point Tunneling Protocol
PSD	Power Spectral Density
RF	Radio Frequency
SHA1	Secure Hash Algorithm
SNR	Signal to Noise Ratio
SSID	Service Set Identification
TCP	Transmission Control Protocol
TFTP	Trivial File Transfer Protocol

TKIP	Temporal Key Integrity Protocol
UPNP	Universal Plug and Play
VPN	Virtual Private Network
WDS	Wireless Distribution System
WEP	Wired Equivalent Privacy
WLAN	Wireless Local Area Network
WPA	Wi-Fi Protected Access

1 Introduction

The WLAN AP Router is IEEE 802.11b/g WLAN AP router solution; setting SOHO and enterprise standard for high performance, secure, manageable and reliable WLAN.

This document describes the steps required for the initial IP address assignment and other WLAN router configuration. The description includes the implementation of the above steps.

1.1 Package contents

The package of the WLAN AP Router includes the following items,

- ✓ The WLAN AP Router
- ✓ The AC to DC power adapter
- ✓ The Documentation CD

1.2 Product Specifications

Product Name	WLAN AP Router
Standard	802.11b/g(Wireless), 802.3(10BaseT), 802.3u(100BaseT)
Data Transfer Rate	54Mbps(Wireless), 100Mbps(Ethernet)
Modulation Method	CCK(802.11b), OFDM(802.11g)
Frequency Band	2.4GHz – 2.483GHz ISM Band, DSSS
RF Output Power	CCK< 17 dBm, OFDM< 13.5 dBm
Receiver Sensitivity	802.11b -80 dBm@10%, 802.11g -68 dBm@8%
Operation Range	30 to 280 meters (dependent on surroundings)
Antenna	External Antenna
LED	Power, Active (WLAN), Act/Link (Ethernet)
Security	64 bit/ 128 bit WEP, WPA, WPA2, port filtering, IP filtering, MAC filtering, port forwarding and DMZ hosting
LAN interface	One 10/100BaseT with RJ45 connector (WAN) Four 10/100BaseT with RJ45 connectors (LAN)
Power Consumption	12V, 1A DC Power Adapter
Operating Temperature	0 ~ 50°C ambient temperature
Storage Temperature	-20 ~ 70°C ambient temperature
Humidity	5 to 90 % maximum (non-condensing)
Dimension	160 x 120 x 30 mm

1.3 Product Features

- Complies with IEEE 802.11b/g standard for 2.4GHz Wireless LAN.
- Supports bridging, routing, VPN, WISP functions between wireless and wired Ethernet interfaces.
- Supports 64-bit and 128-bit WEP, WPA, WPA2 encryption/decryption function to protect the wireless data transmission.
- Supports IEEE 802.1x Authentication.
- Support Wi-Fi Protected Access Authentication with Radius and Pre-Shared Key mode.
- Supports Inter-Access Point Protocol (IAPP).
- Supports Wireless Distribution System (WDS).
- Supports IEEE 802.3x full duplex flow control on 10/100M Ethernet interface.
- Supports DHCP server to provide clients auto IP addresses assignment.
- Supports DHCP client for Ethernet WAN interface auto IP address assignment.
- Supports static and dynamic IP routing.
- Supports PPPoE on Ethernet WAN interface.
- Supports clone MAC address function.
- Supports firewall security with port filtering, IP filtering, MAC filtering, port forwarding, trigger port and DMZ hosting functions.
- Supports WEB based management and configuration.
- Supports PPTP Client on Ethernet WAN interface.
- Supports UPnP for automatic Internet access.
- Supports Dynamic DNS service.
- Supports NTP client service.
- Supports Log table and remote Log service.
- Support Setup Wizard mode.
- Supports Virtual Private Network (VPN) connection.
- Supports IPSEC tunnel encryption(3DES/AES128) and authentication(MD5/SHA1)
- Supports WISP (Wireless ISP).

1.4 Front Panel Description



Figure 1 –WLAN AP Router Front Panel

LED Indicator	State	Description
1. POWER LED	On	The WLAN AP Router is powered on.
	Off	The WLAN AP Router is powered off.
2. WLAN LED	Flashing	Data is transmitting or receiving on the antenna.
	Off	No data is transmitting or receiving on the antenna.
3. LAN LED ACT (LAN1~4)	On	Data is transmitting or receiving on the LAN interface.
	Off	No data is transmitting or receiving on the LAN interface.
4. WAN LED ACT	Flashing	Data is transmitting or receiving on the WAN interface.
	Off	No data is transmitting or receiving on the WAN interface.

1.5 Rear Panel Description

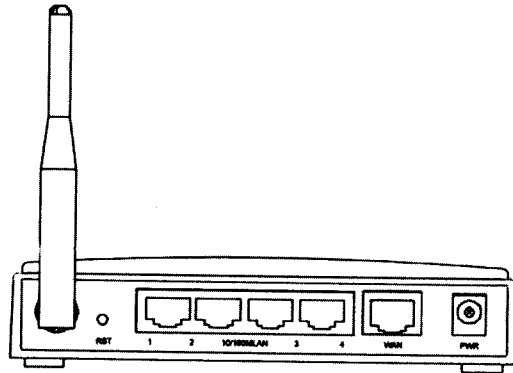


Figure 2 – WLAN AP Router Rear Panel (SMA Antenna)

Interfaces	Description
1. Antenna (SMA)	The Wireless LAN Antenna. (Figure 2)
2. Reset	Push continually the reset button 5 ~ 10 seconds to reset the configuration parameters to factory defaults.
3. WAN	The RJ-45 socket allows WAN connection through a Category 5 cable. Support auto-sensing on 10/100M speed and half/ full duplex; comply with IEEE 802.3/ 802.3u respectively.
4. LAN	The RJ-45 sockets allow LAN connection through Category 5 cables. Support auto-sensing on 10/100M speed and half/ full duplex; comply with IEEE 802.3/ 802.3u respectively.
5. Power	The power jack allows an external DC 12 V power supply connection. The external AC to DC adaptor provide adaptive power requirement to the WLAN AP Router.

2 Installation


2.1 Hardware Installation

- Step 1: Place the WLAN AP Router to the optimum transmission location. The best transmission location for your WLAN AP Router is usually at the geographic center of your wireless network, with line of sight to all of your mobile stations.
- Step 2: Connect the WLAN AP Router to your wired network. Connect the Ethernet WAN interface of WLAN AP Router by category 5 Ethernet cable to your switch/ hub/ xDSL modem or cable modem. A straight-through Ethernet cable with appropriate cable length is needed.
- Step 3: Supply DC power to the WLAN AP Router. Use only the AC/DC power adapter supplied with the WLAN AP Router; it may occur damage by using a different type of power adapter.

The hardware installation is finished.

2.2 Software Installation

- There are no software drivers, patches or utilities installation needed, but only the configuration setting. Please refer to chapter 3 for software configuration.

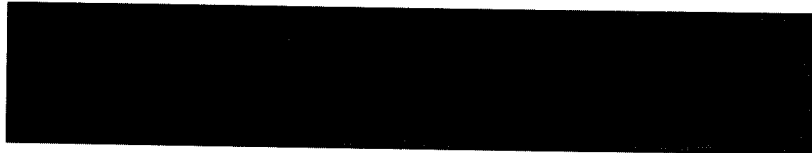

3 Software configuration

The web based management and configuration functions allow you to do the step-by-step easily.

The WLAN AP Router is delivered with the following factory default parameters on the Ethernet LAN interfaces.

- Default IP Address: **192.168.1.254**
- Default IP subnet mask: **255.255.255.0**
- WEB login User Name: **<empty>**
- WEB login Password: **<empty>**

3.1 Prepare your PC to configure the WLAN AP Router

For Microsoft Windows 95/ 98/ ME:

1. Click the **Start** button and select **Settings**, then click **Control Panel**. The **Control Panel** window will appear.
Note: Windows Me users may not see the Network control panel. If so, **select View all Control Panel options** on the left side of the window
2. Move mouse and double-click the right button on **Network** icon. The **Network** window will appear.
3. Check the installed list of **Network Components**. If TCP/IP is not installed, click the **Add** button to install it; otherwise go to step 6.
4. Select **Protocol** in the **Network Component Type** dialog box and click **Add** button.
5. Select **TCP/IP** in **Microsoft of Select Network Protocol** dialog box then click **OK** button to install the TCP/IP protocol, it may need the Microsoft Windows CD to complete the installation. Close and go back to **Network** dialog box after the TCP/IP installation.
6. Select **TCP/IP** and click the **properties** button on the **Network** dialog box.
7. Select **Specify an IP address** and type in values as following example.
 - ✓ IP Address: **192.168.1.1**, IP address within the range of 192.168.1.1 to 192.168.1.253 is used to connect the WLAN AP Router.
 - ✓ IP Subnet Mask: **255.255.255.0**
8. Click **OK** and reboot your PC after completing the IP parameters setting.

For Microsoft Windows 2000/XP:

1. Click the **Start** button and select **Settings**, then click **Control Panel**. The **Control**

Panel window will appear.

2. Move mouse and double-click the right button on *Network and Dial-up Connections* icon. Move mouse and double-click the *Local Area Connection* icon. The *Local Area Connection* window will appear. Click *Properties* button in the *Local Area Connection* window.
3. Check the installed list of *Network Components*. If TCP/IP is not installed, click the *Add* button to install it; otherwise go to step 6.
4. Select *Protocol* in the *Network Component Type* dialog box and click *Add* button.
5. Select *TCP/IP* in *Microsoft* of *Select Network Protocol* dialog box then click OK button to install the TCP/IP protocol, it may need the Microsoft Windows CD to complete the installation. Close and go back to *Network* dialog box after the TCP/IP installation.
6. Select *TCP/IP* and click the *properties* button on the *Network* dialog box.
7. Select *Specify an IP address* and type in values as following example.
 - ✓ IP Address: **192.168.1.1**, IP address within the range of 192.168.1.1 to 192.168.1.253 is used to connect the WLAN AP Router.
 - ✓ IP Subnet Mask: **255.255.255.0**
8. Click OK to complete the IP parameters setting.

For Microsoft Windows NT:

1. Click the *Start* button and select *Settings*, then click *Control Panel*. The *Control Panel* window will appear.
2. Move mouse and double-click the right button on *Network* icon. The *Network* window will appear. Click *Protocol* tab from the *Network* window.
3. Check the installed list of *Network Protocol* window. If TCP/IP is not installed, click the *Add* button to install it; otherwise go to step 6.
4. Select *Protocol* in the *Network Component Type* dialog box and click *Add* button.
5. Select *TCP/IP* in *Microsoft* of *Select Network Protocol* dialog box then click OK button to install the TCP/IP protocol, it may need the Microsoft Windows CD to complete the installation. Close and go back to *Network* dialog box after the TCP/IP installation.
6. Select *TCP/IP* and click the *properties* button on the *Network* dialog box.
7. Select *Specify an IP address* and type in values as following example.
 - ✓ IP Address: **192.168.1.1**, IP address within the range of 192.168.1.1 to 192.168.1.253 is used to connect the Wireless LAN Access Point.
 - ✓ IP Subnet Mask: **255.255.255.0**
8. Click OK to complete the IP parameters setting.

3.2 Connect to the WLAN AP Router

Open a WEB browser, i.e. Microsoft Internet Explore, then enter 192.168.1.254 on the URL to connect the WLAN AP Router.

3.3 Management and configuration on the WLAN AP Router

3.3.1 Status

This page shows the current status and some basic settings of the device, includes system, wireless, Ethernet LAN and WAN configuration information.

Access Point Status

This page shows the current status and some basic settings of the device.

System	
Uptime	0:00:25.12
Firmware Version	v1.0
Wireless Configuration	
Mode	AP
Band	2.4 GHz (B/G)
SSID	OP-WR2540
Channel Number	11
Encryption	Disabled
BSSID	00:04:81:86:21
Associated Clients	0
LAN Configuration	
Main IP Protocol	Fixed IP
IP Address	192.168.1.254
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.254
DHCP Server	Enabled
MAC Address	00:04:81:86:21
WAN Configuration	
Main IP Protocol	DHCP
IP Address	192.168.1.1
Subnet Mask	255.255.255.0
Default Gateway	192.168.1.1
MAC Address	00:04:81:86:22

Screen snapshot – Status

Item	Description
System	
Uptime	It shows the duration since WLAN AP Router is powered on.
Firmware version	It shows the firmware version of WLAN AP Router.

Wireless configuration

Mode	It shows wireless operation mode
Band	It shows the current wireless operating frequency.
SSID	It shows the SSID of this WLAN AP Router. The SSID is the unique name of WLAN AP Router and shared among its service area, so all devices attempts to join the same wireless network can identify it.
Channel Number	It shows the wireless channel connected currently.
Encryption	It shows the status of encryption function.
Associated Clients	It shows the number of connected clients (or stations, PCs).
BSSID	It shows the BSSID address of the WLAN AP Router. BSSID is a six-byte address.

LAN configuration

IP Address	It shows the IP address of LAN interfaces of WLAN AP Router.
Subnet Mask	It shows the IP subnet mask of LAN interfaces of WLAN AP Router.
Default Gateway	It shows the default gateway setting for LAN interfaces outgoing data packets.
DHCP Server	It shows the DHCP server is enabled or not.
MAC Address	It shows the MAC address of LAN interfaces of WLAN AP Router.

WAN configuration

Attain IP Protocol	It shows how the WLAN AP Router gets the IP address. The IP address can be set manually to a fixed one or set dynamically by DHCP server or attain IP by PPPoE / PPTP connection.
IP Address	It shows the IP address of WAN interface of WLAN AP Router.
Subnet Mask	It shows the IP subnet mask of WAN interface of WLAN AP Router.
Default Gateway	It shows the default gateway setting for WAN interface outgoing data packets.
MAC Address	It shows the MAC address of WAN interface of WLAN AP Router.

3.3.2 Setup Wizard

This page guides you to configure wireless AP router for first time

Setup Wizard

The setup wizard will guide you to configure access point for first time. Please follow the setup wizard step by step.

Welcome to Setup Wizard.

The Wizard will guide you the through following steps. Begin by clicking on Next.

1. Setup Operation Mode
2. Choose your Time Zone
3. Setup LAN Interface
4. Setup WAN Interface
5. Wireless LAN Setting
6. Wireless Security Setting

Screen snapshot – Setup Wizard

I Operation Mode

This page followed by Setup Wizard page to define the operation mode.

1. Operation Mode

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

Gateway: In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in four LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPOE, DHCP client, PPTP client or static IP.

Bridge: In this mode, all ethernet ports and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

Wireless ISP: In this mode, all ethernet ports are bridged together and the wireless client will connect to ISP access point. The NAT is enabled and PCs in ethernet ports share the same IP to ISP through wireless LAN. You must set the wireless to client mode first and connect to the ISP AP in Site-Survey page. The connection type can be setup in WAN page by using PPPOE, DHCP client, PPTP client or static IP.

Screen snapshot – Operation Mode

II Time Zone Setting

This page is used to enable and configure NTP client

2. Time Zone Setting

You can maintain the system time by synchronizing with a public time server over the Internet.

Enable NTP client update

Time Zone Select :

NTP server :

Screen snapshot – Time Zone Settings

III LAN Interface Setup

This page is used to configure local area network IP address and subnet mask

3. LAN Interface Setup

This page is used to configure the parameters for local area network which connects to the LAN port of your Access Point. Here you may change the setting for IP address, subnet mask, DHCP, etc.

IP Address:

Subnet Mask:

Screen snapshot – LAN Interface Setup

IV WAN Interface Setup

This page is used to configure WAN access type

4. WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type: DHCP Client

Cancel
<<Back
Next>>

Screen snapshot – WAN Interface Setup

V Wireless Basic Settings

This page is used to configure basic wireless parameters like Band, Mode, Network Type SSID, Channel Number, Enable Mac Clone(Single Ethernet Client)

Wireless Basic Settings

This page is used to configure the parameters for wireless LAN client which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters.

Disable Wireless LAN Interface

Band: 11 GHz (802.11g)

Mode: AP

Network Type: Infrastructure

SSID: QPHR254G

Channel Number: 11

Associated Clients: Show Active Clients

Enable Mac Clone (Single Ethernet Client)

Enable Universal Repeater Mode (Acting as AP and client simultaneously)

SSID of Broadband Interface:

Apply Changes
Save

Screen snapshot – Wireless Basic Settings

VI Wireless Security Setup

This page is used to configure wireless security

6. Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Encryption:

Screen snapshot – Wireless Security Setup

3.3.3 Operation Mode

This page is used to configure which mode wireless AP router acts

Operation Mode

You can setup different modes to LAN and WLAN interface for NAT and bridging function.

Gateway: In this mode, the device is supposed to connect to internet via ADSL/Cable Modem. The NAT is enabled and PCs in LAN ports share the same IP to ISP through WAN port. The connection type can be setup in WAN page by using PPPoE, DHCP client, PPTP client or static IP.

Bridge: In this mode, all ethernet ports and wireless interface are bridged together and NAT function is disabled. All the WAN related function and firewall are not supported.

Wireless ISP: In this mode, all ethernet ports are bridged together and the wireless client will connect to ISP access point. The NAT is enabled and PCs in ethernet ports share the same IP to ISP through wireless LAN. You must set the wireless to client mode first and connect to the ISP AP in Site-Survey page. The connection type can be setup in WAN page by using PPPoE, DHCP client, PPTP client or static IP.

Screen snapshot – Operation Mode

Item	Description
Gateway	Traditional gateway configuration. It always connects internet via ADSL/Cable Modem. LAN interface, WAN

	interface, Wireless interface, NAT and Firewall modules are applied to this mode
Bridge	Each interface (LAN, WAN and Wireless) regards as bridge. NAT, Firewall and all router's functions are not supported
Wireless ISP	Switch Wireless interface to WAN port and all Ethernet ports in bridge mode. Wireless interface can do all router's functions
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.4 Wireless - Basic Settings

This page is used to configure the parameters for wireless LAN clients that may connect to your AP Router. Here you may change wireless encryption settings as well as wireless network parameters.

Wireless Basic Settings

This page is used to configure the parameters for wireless LAN clients which may connect to your Access Point. Here you may change wireless encryption settings as well as wireless network parameters.

Disable Wireless LAN Interface

Band:

Mode:

Network Type:

SSID:

Channel Number:

Associated Clients:

Enable Mac Clone (Single Ethernet Client)

Enable Universal Router Mode (Acting as AP and client simultaneously)

SSID of Ethernet Interface:

Screen snapshot – Wireless Basic Settings

Item	Description
Disable Wireless LAN Interface	Click on to disable the wireless LAN data transmission.
Band	Click to select 2.4GHz(B) / 2.4GHz(G) / 2.4GHz(B+G)

Mode	Click to select the WLAN AP / Client / WDS / AP+WDS wireless mode.
Site Survey	The <i>Site Survey</i> button provides tool to scan the wireless network. If any Access Point or IBSS is found, you could choose to connect it manually when client mode is enabled. Refer to 3.3.9 Site Survey .
SSID	It is the wireless network name. The SSID can be 32 bytes long.
Channel Number	Select the wireless communication channel from pull-down menu.
Associated Clients	Click the <i>Show Active Clients</i> button to open Active Wireless Client Table that shows the MAC address, transmit-packet, receive-packet and transmission-rate for each associated wireless client.
Enable Mac Clone (Single Ethernet Client)	Take Laptop NIC MAC address as wireless client MAC address. [Client Mode only]
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.5 Wireless - Advanced Settings

These settings are only for more technically advanced users who have a sufficient knowledge about wireless LAN. These settings should not be changed unless you know what effect the changes will have on your WLAN AP Router.

Wireless Advanced Settings

These settings are only for more technically advanced users who have a sufficient knowledge about wireless LAN. These settings should not be changed unless you know what effect the changes will have on your Access Point.

Authentication Type: Open System Shared Key Auto

Fragment Threshold: (256-2346)

RTS Threshold: (0-2347)

Beacon Interval: (20-1024 ms)

Data Rate: ▾

Preamble Type: Long Preamble Short Preamble

Broadcast SSID: Enabled Disabled

IAPP: Enabled Disabled

802.11g Protection: Enabled Disabled

Screen snapshot – Wireless Advanced Settings

Item	Description
Authentication Type	Click to select the authentication type in <i>Open System</i> , <i>Shared Key</i> or <i>Auto</i> selection.
Fragment Threshold	Set the data packet fragmentation threshold, value can be written between 256 and 2346 bytes. Refer to 4.10 What is Fragment Threshold?
RTS Threshold	Set the RTS Threshold, value can be written between 0 and 2347 bytes. Refer to 4.11 What is RTS(Request To Send) Threshold?
Beacon Interval	Set the Beacon Interval, value can be written between 20 and 1024 ms. Refer to 4.12 What is Beacon Interval?
Data Rate	Select the transmission data rate from pull-down menu. Data rate can be auto-select, 11M, 5.5M, 2M or 1Mbps.
Preamble Type	Click to select the <i>Long Preamble</i> or <i>Short Preamble</i> support on the wireless data packet transmission. Refer to 4.13 What is Preamble Type?
Broadcast SSID	Click to enable or disable the SSID broadcast function. Refer to 4.14 What is SSID Broadcast?
IAPP	Click to enable or disable the IAPP function. Refer to 4.20 What is Inter-Access Point Protocol(IAPP)?

802.11g Protection	Protect 802.11b user.
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.6 Wireless - Security Setup

This page allows you setup the wireless security. Turn on WEP, WPA, WPA2 by using encryption keys could prevent any unauthorized access to your wireless network.

Wireless Security Setup

This page allows you setup the wireless security. Turn on WEP or WPA by using Encryption Keys could prevent any unauthorized access to your wireless network.

Encryption:

Use 802.1x Authentication * WEP 64bits * WEP 128bits

WPA Authentication Mode: * Enterprise (RADIUS) * Personal (Pre-Shared Key)

Pre-Shared Key Format:

Pre-Shared Key:

Enable Pre-Authentication

Authentication RADIUS Server: Port IP address Password

Note: When encryption WEP is selected, you must set WEP key value.

Screen snapshot – Wireless Security Setup

Item	Description
Encryption	Select the encryption supported over wireless access. The encryption method can be None, WEP, WPA(TKIP), WPA2 or WPA2 Mixed Refer to 4.9 What is WEP? 4.15 What is Wi-Fi Protected Access (WPA)? 4.16 What is WPA2(AES)? 4.17 What is 802.1X Authentication? 4.18 What is Temporal Key Integrity Protocol (TKIP)? 4.19 What is Advanced Encryption Standard (AES)?

Use 802.1x Authentication	While Encryption is selected to be WEP. Click the check box to enable IEEE 802.1x authentication function. Refer to 4.16 What is 802.1x Authentication?
WPA Authentication Mode	While Encryption is selected to be WPA. Click to select the WPA Authentication Mode with Enterprise (RADIUS) or Personal (Pre-Shared Key). Refer to 4.15 What is Wi-Fi Protected Access (WPA)?
Pre-Shared Key Format	While Encryption is selected to be WPA. Select the Pre-shared key format from the pull-down menu. The format can be Passphrase or Hex (64 characters). [WPA, Personal(Pre-Shared Key) only]
Pre-Shared Key	Fill in the key value. [WPA, Personal(Pre-Shared Key) only]
Enable Pre-Authentication	Click to enable Pre-Authentication. [WPA2/WPA2 Mixed only, Enterprise only]
Authentication RADIUS Server	Set the IP address, port and login password information of authentication RADIUS sever.
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

I WEP Key Setup

Wireless WEP Key Setup

This page allows you setup the WEP key value. You could choose use 64-bit or 128-bit as the encryption key, and select ASCII or Hex as the format of input value.

Key Length:

Key Format:

Default Tx Key:

Encryption Key 1:

Encryption Key 2:

Encryption Key 3:

Encryption Key 4:

Screen snapshot – WEP Key Setup

Item	Description
Key Length	Select the WEP shared secret key length from pull-down menu. The length can be chose between 64-bit and 128-bit (known as "WEP2") keys. The WEP key is composed of initialization vector (24 bits) and secret key (40-bit or 104-bit).
Key Format	Select the WEP shared secret key format from pull-down menu. The format can be chose between plant text (ASCII) and hexadecimal (HEX) code.
Default Tx Key	Set the default secret key for WEP security function. Value can be chose between 1 and 4.
Encryption Key 1	Secret key 1 of WEP security encryption function.
Encryption Key 2	Secret key 2 of WEP security encryption function.
Encryption Key 3	Secret key 3 of WEP security encryption function.
Encryption Key 4	Secret key 4 of WEP security encryption function.
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Close	Click to close this WEP Key setup window.
Reset	Click the <i>Reset</i> button to abort change and recover the

previous configuration setting.

WEP encryption key (secret key) length:

Length	64-bit	128-bit
ASCII	5 characters	13 characters
HEX	10 hexadecimal codes	26 hexadecimal codes

3.3.7 Wireless - Access Control

If you enable wireless access control, only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When this option is enabled, no wireless clients will be able to connect if the list contains no entries.

Wireless Access Control

If you choose 'Allowed Listed', only those clients whose wireless MAC addresses are in the access control list will be able to connect to your Access Point. When 'Deny Listed' is selected, these wireless clients on the list will not be able to connect the Access Point.

Wireless Access Control Mode:

MAC Address: Comment:

Current Access Control List:

Screen snapshot – Wireless Access Control

Item	Description
Wireless Access Control Mode	Click the <i>Disabled</i> , <i>Allow Listed</i> or <i>Deny Listed</i> of drop down menu choose wireless access control mode. This is a security control function; only those clients registered in the access control list can link to this WLAN AP Router.
MAC Address	Fill in the MAC address of client to register this WLAN

	AP Router access capability.
Comment	Fill in the comment tag for the registered client.
Apply Changes	Click the <i>Apply Changes</i> button to register the client to new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Current Access Control List	It shows the registered clients that are allowed to link to this WLAN AP Router.
Delete Selected	Click to delete the selected clients that will be access right removed from this WLAN AP Router.
Delete All	Click to delete all the registered clients from the access allowed list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.8 WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other AP that you want to communicate with in the table and then enable the WDS.

WDS Settings

Wireless Distribution System uses wireless media to communicate with other APs, like the Ethernet does. To do this, you must set these APs in the same channel and set MAC address of other APs which you want to communicate with in the table and then enable the WDS.

Enable WDS

Add WDS AP: MAC Address Comment

Current WDS AP List:

Screen snapshot – WDS Setup

Item	Description
Enable WDS	Click the check box to enable wireless distribution system. Refer to 4.21 What is Wireless Distribution System (WDS)?
MAC Address	Fill in the MAC address of AP to register the wireless distribution system access capability.
Comment	Fill in the comment tag for the registered AP.
Apply Changes	Click the Apply Changes button to register the AP to new configuration setting.
Reset	Click the Reset button to abort change and recover the previous configuration setting.
Set Security	Click button to configure wireless security like WEP(64bits) , WEP(128bits) , WPA(TKIP) , WPA2(AES) or None
Show Statistics	It shows the TX, RX packets, rate statistics
Delete Selected	Click to delete the selected clients that will be removed from the wireless distribution system.
Delete All	Click to delete all the registered APs from the wireless distribution system allowed list.
Reset	Click the Reset button to abort change and recover the previous configuration setting.

I WDS Security Setup

Requirements: [Wireless] -> [Basic Settings] -> [Mode] -> AP+WDS

This page is used to configure the wireless security between APs. Refer to [3.3.6 Wireless Security Setup](#).

WDS Security Setup

This page allows you setup the wireless security for WDS. When enabled, you must make sure each WDS device has adopted the same encryption algorithm and Key.

Encryption:

WEP Key Format:

WEP Key:

Pre-Shared Key Format:

Pre-Shared Key:

Screen snapshot – WDS Security Setup

II WDS AP Table

This page is used to show WDS statistics

WDS AP Table

This table shows the MAC address, transmission, reception packet counters and state information for each configured WDS AP.


Screen snapshot – WDS AP Table

Item	Description
MAC Address	It shows the MAC Address within WDS.
Tx Packets	It shows the statistic count of sent packets on the wireless LAN interface.
Tx Errors	It shows the statistic count of error sent packets on the Wireless LAN interface.
Rx Packets	It shows the statistic count of received packets on the wireless LAN interface.

Tx Rate (Mbps)	It shows the wireless link rate within WDS.
Refresh	Click to refresh the statistic counters on the screen.
Close	Click to close the current window.

3.3.9 Site Survey

This page is used to view or configure other APs near yours.

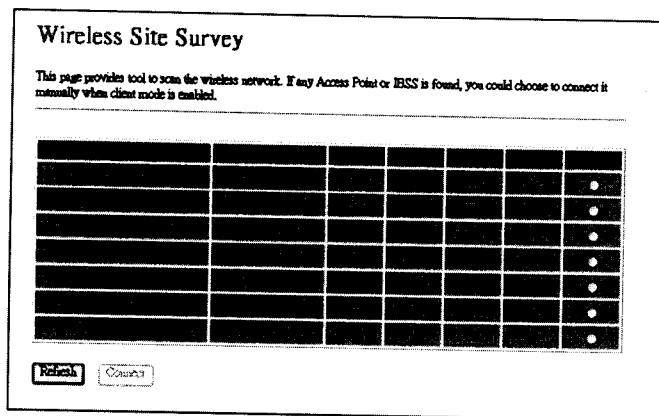

Screen snapshot – Wireless Site Survey

Item	Description
SSID	It shows the SSID of AP.
BSSID	It shows BSSID of AP.
Channel	It show the current channel of AP occupied.
Type	It show which type AP acts.
Encrypt	It shows the encryption status.
Signal	It shows the power level of current AP.
Select	Click to select AP or client you'd like to connect.
Refresh	Click the <i>Refresh</i> button to re-scan site survey on the screen.
Connect	Click the <i>Connect</i> button to establish connection.

3.3.10 LAN Interface Setup

This page is used to configure the parameters for local area network that connects to the LAN ports of your WLAN AP Router. Here you may

change the setting for IP address, subnet mask, DHCP, etc.

LAN Interface Setup

This page is used to configure the parameters for local area network, which connects to the LAN port of your Access Point. Here you may change the setting for IP address, subnet mask, DHCP, etc.

IP Address:

Subnet Mask:

Default Gateway:

DHCP: Server Client

DHCP Client Range: -

Domain Name:

802.1d Spanning Tree: Disabled Enabled

Clone MAC Address:

Screen snapshot – LAN Interface Setup

Item	Description
IP Address	Fill in the IP address of LAN interfaces of this WLAN AP Router.
Subnet Mask	Fill in the subnet mask of LAN interfaces of this WLAN AP Router.
Default Gateway	Fill in the default gateway for LAN interfaces out going data packets.
DHCP Server	Click to select <i>Disabled</i> , <i>Client</i> or <i>Server</i> in different operation mode of wireless AP router.
DHCP Client Range	Fill in the start IP address and end IP address to allocate a range of IP addresses; client with DHCP function set will be assigned an IP address from the range.
Show Client	Click to open the <i>Active DHCP Client Table</i> window that shows the active clients with their assigned IP address, MAC address and time expired information. [Server mode only]
802.1d Spanning Tree	Select to enable or disable the IEEE 802.1d Spanning Tree function from pull-down menu.
Clone MAC Address	Fill in the MAC address that is the MAC address to be cloned. Refer to 4.24 What is Clone MAC Address?

Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.11 WAN Interface Setup

This page is used to configure the parameters for wide area network that connects to the WAN port of your WLAN AP Router. Here you may change the access method to *Static IP*, *DHCP*, *PPPoE* or *PPTP* by click the item value of WAN Access Type.

I Static IP

WAN Interface Setup

This page is used to configure the parameters for internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type:

IP Address:

Subnet Mask:

Default Gateway:

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

Enable uPNP

Enable Web Server Access on WAN

Enable WAN Echo Reply

Screen snapshot – WAN Interface Setup – Static IP

Item	Description
Static IP	Click to select Static IP support on WAN interface. There are IP address, subnet mask and default gateway settings need to be done.
IP Address	If you select the Static IP support on WAN interface, fill in the IP address for it.
Subnet Mask	If you select the Static IP support on WAN interface, fill

	in the subnet mask for it.
Default Gateway	If you select the Static IP support on WAN interface, fill in the default gateway for WAN interface out going data packets.
DNS 1	Fill in the IP address of Domain Name Server 1.
DNS 2	Fill in the IP address of Domain Name Server 2.
DNS 3	Fill in the IP address of Domain Name Server 3.
Clone MAC Address	Fill in the MAC address that is the MAC address to be cloned. Refer to 4.24 What is Clone MAC Address?
Enable uPNP	Click the checkbox to enable uPNP function. Refer to 4.22 What is Universal Plug and Play (uPNP)?
Enable Web Server Access on WAN	Click the checkbox to enable web configuration from WAN side.
Enable WAN Echo Reply	Click the checkbox to enable WAN ICMP response.
Apply Changes	Click the Apply Changes button to complete the new configuration setting.
Reset	Click the Reset button to abort change and recover the previous configuration setting.

II DHCP Client

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN part of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type: DHCP Client

Obtain DNS Automatically
 Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

Enable uPNP
 Enable Web Server Access on WAN
 Enable WAN Echo Reply

Screen snapshot – WAN Interface Setup – DHCP Client

Item	Description
DHCP Client	Click to select DHCP support on WAN interface for IP address assigned automatically from a DHCP server.
Attain DNS Automatically	Click to select getting DNS address for <i>DHCP</i> support. Please select <i>Set DNS Manually</i> if the <i>DHCP</i> support is selected.
Set DNS Manually	Click to select getting DNS address for <i>DHCP</i> support.
DNS 1	Fill in the IP address of Domain Name Server 1.
DNS 2	Fill in the IP address of Domain Name Server 2.
DNS 3	Fill in the IP address of Domain Name Server 3.
Clone MAC Address	Fill in the MAC address that is the MAC address to be cloned. Refer to 4.24 What is Clone MAC Address?
Enable uPNP	Click the checkbox to enable uPNP function. Refer to 4.22 What is Universal Plug and Play (uPNP)?
Enable Web Server Access on WAN	Click the checkbox to enable web configuration from WAN side.
Enable WAN Echo Reply	Click the checkbox to enable WAN ICMP response.
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

III PPPoE

WAN Interface Setup

This page is used to configure the parameters for Internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type:

User Name:

Password:

Connection Type:

Idle Time: (1-1000 minutes)

MTU Size: (1400-1492 bytes)

Obtain DNS Automatically
 Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

Enable uPNP
 Enable Web Server Access on WAN
 Enable WAN Echo Reply

Screen snapshot – WAN Interface Setup – PPPoE

Item	Description
PPPoE	Click to select PPPoE support on WAN interface. There are user name, password, connection type and idle time settings need to be done.
User Name	If you select the PPPoE support on WAN interface, fill in the user name and password to login the PPPoE server.
Password	If you select the PPPoE support on WAN interface, fill in the user name and password to login the PPPoE server.
Connection Type	Select the connection type from pull-down menu. There are <i>Continuous</i> , <i>Connect on Demand</i> and <i>Manual</i> three types to select. <i>Continuous</i> connection type means to setup the connection through PPPoE protocol whenever this WLAN AP Router is powered on. <i>Connect on Demand</i> connection type means to setup the

connection through PPPoE protocol whenever you send the data packets out through the WAN interface; there are a watchdog implemented to close the PPPoE connection while there are no data sent out longer than the idle time set.

Manual connection type means to setup the connection through the PPPoE protocol by clicking the **Connect** button manually, and clicking the **Disconnect** button manually.

Idle Time	If you select the PPPoE and Connect on Demand connection type, fill in the idle time for auto-disconnect function. Value can be between 1 and 1000 minutes.
MTU Size	Fill in the mtu size of MTU Size. The default value is 1400. Refer to 4.23 What is Maximum Transmission Unit (MTU) Size?
Attain DNS Automatically	Click to select getting DNS address for PPPoE support. Please select Set DNS Manually if the PPPoE support is selected.
Set DNS Manually	Click to select getting DNS address for Static IP support.
DNS 1	Fill in the IP address of Domain Name Server 1.
DNS 2	Fill in the IP address of Domain Name Server 2.
DNS 3	Fill in the IP address of Domain Name Server 3.
Clone MAC Address	Fill in the MAC address that is the MAC address to be cloned. Refer to 4.24 What is Clone MAC Address?
Enable uPNP	Click the checkbox to enable uPNP function. Refer to 4.22 What is Universal Plug and Play (uPNP)?
Enable Web Server Access on WAN	Click the checkbox to enable web configuration from WAN side.
Enable WAN Echo Reply	Click the checkbox to enable WAN ICMP response.
Apply Changes	Click the Apply Changes button to complete the new configuration setting.
Reset	Click the Reset button to abort change and recover the previous configuration setting.

IV PPTP

WAN Interface Setup

This page is used to configure the parameters for internet network which connects to the WAN port of your Access Point. Here you may change the access method to static IP, DHCP, PPPoE or PPTP by click the item value of WAN Access type.

WAN Access Type: PPTP

IP Address:

Subnet Mask:

Server IP Address:

User Name:

Password:

MTU Size: (1400-1492 bytes)

Obtain DNS Automatically

Set DNS Manually

DNS 1:

DNS 2:

DNS 3:

Clone MAC Address:

Enable uPNP

Enable Web Server Access on WAN

Enable WAN Echo Reply

Screen snapshot – WAN Interface Setup – PPTP

Item	Description
PPTP	Allow user to make a tunnel with remote site directly to secure the data transmission among the connection. User can use embedded PPTP client supported by this router to make a VPN connection.
IP Address	If you select the PPTP support on WAN interface, fill in the IP address for it.
Subnet Mask	If you select the PPTP support on WAN interface, fill in the subnet mask for it.
Server IP Address	Enter the IP address of the PPTP Server.
User Name	If you select the PPTP support on WAN interface, fill in the user name and password to login the PPTP server.

Password	If you select the PPTP support on WAN interface, fill in the user name and password to login the PPTP server.
MTU Size	Fill in the mtu size of MTU Size. The default value is 1400. Refer to 4.23 What is Maximum Transmission Unit (MTU) Size?
Attain DNS Automatically	Click to select getting DNS address for <i>PPTP</i> support. Please select <i>Set DNS Manually</i> if the <i>PPTP</i> support is selected.
Set DNS Manually	Click to select getting DNS address for <i>PPTP</i> support.
DNS 1	Fill in the IP address of Domain Name Server 1.
DNS 2	Fill in the IP address of Domain Name Server 2.
DNS 3	Fill in the IP address of Domain Name Server 3.
Clone MAC Address	Fill in the MAC address that is the MAC address to be cloned. Refer to 4.24 What is Clone MAC Address?
Enable uPNP	Click the checkbox to enable uPNP function. Refer to 4.22 What is Universal Plug and Play (uPNP)?
Enable Web Server Access on WAN	Click the checkbox to enable web configuration from WAN side.
Enable WAN Echo Reply	Click the checkbox to enable WAN ICMP response.
Apply Changes	Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.12 Firewall - Port Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Port Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable Port Filtering

Port Range: - Protocol: Both Comment:

Current Filter Table:

			■

Screen snapshot – Firewall - Port Filtering

Item	Description
Enable Port Filtering	Click to enable the port filtering security function.
Port Range	To restrict data transmission from the local network on certain ports, fill in the range of start-port and end-port, and the protocol, also put your comments on it.
Protocol	The <i>Protocol</i> can be TCP, UDP or Both.
Comments	<i>Comments</i> let you know about whys to restrict data from the ports.
Apply Changes	Click the <i>Apply Changes</i> button to register the ports to port filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Delete Selected	Click to delete the selected port range that will be removed from the port-filtering list.
Delete All	Click to delete all the registered entries from the port-filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.13 Firewall - IP Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

IP Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable IP Filtering

Local IP Address: Protocol: Comment:

Current Filter Table:

Screen snapshot – Firewall - IP Filtering

Item	Description
Enable IP Filtering	Click to enable the IP filtering security function.
Local IP Address	To restrict data transmission from local network on certain IP addresses, fill in the IP address and the
Protocol	protocol, also put your comments on it.
Comments	The <i>Protocol</i> can be TCP, UDP or Both. <i>Comments</i> let you know about why to restrict data from the IP address.
Apply Changes	Click the <i>Apply Changes</i> button to register the IP address to IP filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Delete Selected	Click to delete the selected IP address that will be removed from the IP-filtering list.
Delete All	Click to delete all the registered entries from the IP-filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.14 Firewall - MAC Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be

helpful in securing or restricting your local network.

MAC Filtering

Entries in this table are used to restrict certain types of data packets from your local network to Internet through the Gateway. Use of such filters can be helpful in securing or restricting your local network.

Enable MAC Filtering

MAC Address: Comment:

Current Filter Table:

Screen snapshot – Firewall - MAC Filtering

Item	Description
Enable MAC Filtering	Click to enable the MAC filtering security function.
MAC Address	To restrict data transmission from local network on certain MAC addresses, fill in the MAC address and your comments on it.
Comments	<i>Comments</i> let you know about whys to restrict data from the MAC address.
Apply Changes	Click the <i>Apply Changes</i> button to register the MAC address to MAC filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Delete Selected	Click to delete the selected MAC address that will be removed from the MAC-filtering list.
Delete All	Click to delete all the registered entries from the MAC-filtering list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.15 Firewall - Port Forwarding

Entries in this table allow you to automatically redirect common network services to a specific machine behind the NAT firewall. These settings are only

necessary if you wish to host some sort of server like a web server or mail server on the private local network behind your Gateway's NAT firewall.

Port Forwarding

Entries in this table allow you to automatically redirect common network services to a specific machine behind the NAT firewall. These settings are only necessary if you wish to host some sort of server like a web server or mail server on the private local network behind your Gateway's NAT firewall.

Enable Port Forwarding

IP Address: Protocol: Port Range: - Comment:

Current Port Forwarding Table:

			<input type="checkbox"/>

Screen snapshot – Firewall - Port Forwarding

Item	Description
Enable Port Forwarding	Click to enable the Port Forwarding security function.
IP Address	To forward data packets coming from WAN to a specific IP address that hosted in local network behind the NAT firewall, fill in the IP address, protocol, port range and your comments.
Protocol	The <i>Protocol</i> can be TCP, UDP or Both.
Port Range	The <i>Port Range</i> for data transmission.
Comment	<i>Comments</i> let you know about whys to allow data packets forward to the IP address and port number.
Apply Changes	Click the <i>Apply Changes</i> button to register the IP address and port number to Port forwarding list.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Delete Selected	Click to delete the selected IP address and port number that will be removed from the port-forwarding list.
Delete All	Click to delete all the registered entries from the port-forwarding list.

Reset Click the *Reset* button to abort change and recover the previous configuration setting.

3.3.16 Firewall - DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.

DMZ

A Demilitarized Zone is used to provide Internet services without sacrificing unauthorized access to its local private network. Typically, the DMZ host contains devices accessible to Internet traffic, such as Web (HTTP) servers, FTP servers, SMTP (e-mail) servers and DNS servers.

Enable DMZ

DMZ Host IP Address:

Screen snapshot – Firewall - DMZ

Item	Description
Enable DMZ	Click to enable the DMZ function.
DMZ Host IP Address	To support DMZ in your firewall design, fill in the IP address of DMZ host that can be access from the WAN interface.
Apply Changes	Click the <i>Apply Changes</i> button to register the IP address of DMZ host.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.17 VPN (Option) Settings

This page is used to show VPN connection table, configure IPSEC VPN, NAT Traversal, Generate RSA Key, Show RSA Public Key.

Note: VPN is optional.

VPN Setup

This page is used to enable/disable VPN function and select a VPN connection to edit/delete.

Enable IPSEC VPN

Enable NAT Traversal

Current VPN Connection Table: WAN IP:192.168.3.254

No.	Name	Local IP	Remote IP	Local Port	Remote Port	Status
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

Screen snapshot – VPN Setup

Item	Description
Enable IPSEC VPN	Click to enable IPSEC VPN function. Refer to 4.27 What is VPN? and 4.28 What is IPSEC?
Enable NAT Traversal	Click to enable NAT Traversal function.
Generate RSA Key	Click to generate RSA key.
Show RSA Public Key	Click to show RSA public key that we generate.
Apply Changes	Click the <i>Apply Changes</i> button to enable IPSEC VPN, NAT Traversal settings.
Current VPN Connection Table	It shows current WAN interface information and VPN connection table.
Edit	Click to enter the current VPN tunnel configuration page.
Delete	Click to delete the current VPN tunnel that radio button stay.
Refresh	Click to refresh the current VPN connection table.

I VPN Setup - Edit Tunnel

VPN Setup

Enable Tunnel 1

Connection Name:

Auth Type:

Local Site:

Local IP Address/Network:

Local Subnet Mask:

Remote Site:

Remote Secure Gateway:

Remote IP Address/Network:

Remote Subnet Mask:

Local/Peer ID:

Local ID Type:

Local ID:

Remote ID Type:

Remote ID:

Screen snapshot – VPN Setup-Edit-1

Item	Description
Enable Tunnel #	Click to enable the IPSEC VPN current tunnel.
Connection Name	Assign the connection name tag.
Auth Type	Click to select <i>PSK</i> or <i>RSA</i> .
Local Site	Click to select <i>Single Address</i> or <i>Subnet Address</i> VPN connection.
Local IP Address/Network	Fill in IP address or subnet address depends on which Local Site option you choose.
Local Subnet Mask	Fill in the local subnet mask.
Remote Site	Click to select <i>Single Address</i> , <i>Subnet Address</i> , <i>Any Address</i> or <i>NAT-T Any Address</i> VPN remote connection.
Remote Secure Gateway	Fill in remote gateway IP address
Remote IP Address/Network	Fill in IP address or subnet address depends on which Remote Site option you choose.
Remote Subnet Mask	Fill in remote subnet mask
Local/Peer ID	Define IKE exchange information type
Local ID Type	Click to select <i>IP</i> , <i>DNS</i> or <i>E-mail</i> as local exchange type
Local ID	Fill in local ID except IP selected
Remote ID Type	Click to select <i>IP</i> , <i>DNS</i> or <i>E-mail</i> as remote exchange

type

Remote ID Fill in remote ID except IP selected

The screenshot shows a configuration window titled 'VPN Setup-Edit-2'. At the top, there are radio buttons for 'IKE' (selected), 'Manual', and an 'Advanced' button. Below this are several sections: 'Connection Type' with 'Responder' selected and 'Connect' and 'Disconnect' buttons; 'ESP' with '3DES' selected for encryption and 'MD5' for authentication; 'PreShared Key' with the value '1234567' entered; 'Remote RSA Key' with an empty field; and 'Status' showing 'Connected'. At the bottom, there are buttons for 'Apply Changes', 'Reset', 'Refresh', and 'Back'.

Screen snapshot – VPN Setup-Edit-2

Item	Description
Key Management	Click to select <i>IKE</i> or <i>Manual</i> mode.
Advanced	Click <i>Advanced</i> button to configure more IKE settings.
Connection Type	Click to select <i>Initiator</i> or <i>Responder</i> mode.
Connect	Click to connect manually. [Responder mode only]
Disconnect	Click to disconnect manually. [Responder mode only].
ESP	Click to configure <i>3DES</i> , <i>AES128</i> or <i>NULL</i> encryption. Click to configure <i>MD5</i> or <i>SHA1</i> authentication.
PreShared Key	Fill in the key value. [IKE mode only]
Remote RSA Key	Fill in the remote gateway RSA key. [IKE mode only]
Status	It shows connection status. [IKE mode only]
SPI	Fill in Security Parameter Index value. [Manual mode only]
Encryption Key	Fill in encryption key. [Manual mode only]
Authentication Key	Fill in authentication key. [Manual mode only]
Apply Change	Click the <i>Apply Changes</i> button to save current tunnel settings.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Refresh	It shows the current connection status. [Manual mode only]
Back	It returns back to VPN Setup page.

II Advanced IKE Setup

Advanced VPN Setting for IKE

This page is used to provide advanced setting for IKE mode

Tunnel 1

Phase 1:

Negotiation Mode: Main mode

Encryption Algorithm:

Authenticaiton Algorithm:

Key Group:

Key Life Time:

Phase 2:

Active Protocol: ESP

Encryption Algorithm:

Authenticaiton Algorithm:

Key Life Time:

Encapsulation: Tunnel mode

Perfect Forward Secrecy (PFS):

Screen snapshot – Advanced VPN Settings for IKE

Item	Description
Phase 1	
Negotiation Mode	Main mode.
Encryption Algorithm	Click to select <i>3DES</i> or <i>AES128</i> encryption.
Authentication Algorithm	Click to select <i>MD5</i> or <i>SHA1</i> authentication.
Key Group	Click to select <i>DH1(modp768)</i> , <i>DH2(modp1024)</i> or <i>DH5(modp1536)</i> key group. Default value is <i>DH2</i>
Key Life Time	Fill in the key life time value by seconds.
Phase 2	

Active Protocol	ESP.
Encryption Algorithm	Click to select <i>3DES</i> , <i>AES128</i> or <i>NULL</i> encryption.
Authentication Algorithm	Click to select <i>MD5</i> or <i>SHA1</i> authentication.
Key Life Time	Fill in the key life time value by seconds.
Encapsulation	Tunnel mode.
Perfect Forward Secrecy (PFS)	Click to select <i>ON</i> or <i>NONE</i> .
Ok	Click the <i>Ok</i> button to save current tunnel settings.
Cancel	Click the <i>Cancel</i> button to close current window without any changes.

3.3.18 Management - Statistics

This page shows the packet counters for transmission and reception regarding to wireless, Ethernet LAN and Ethernet WAN networks.

Statistics

This page shows the packet counters for transmission and reception regarding to wireless and Ethernet networks.

Wireless LAN	<i>Sent Packets</i>	1361
	<i>Received Packets</i>	25883
Ethernet LAN	<i>Sent Packets</i>	1529
	<i>Received Packets</i>	1269
Ethernet WAN	<i>Sent Packets</i>	597
	<i>Received Packets</i>	30386

Screen snapshot – Management - Statistics

Item	Description
Wireless LAN <i>Sent Packets</i>	It shows the statistic count of sent packets on the wireless LAN interface.
Wireless LAN <i>Received Packets</i>	It shows the statistic count of received packets on the wireless LAN interface.
Ethernet LAN <i>Sent Packets</i>	It shows the statistic count of sent packets on the Ethernet LAN interface.
Ethernet LAN <i>Received Packets</i>	It shows the statistic count of received packets on the Ethernet LAN interface.

Received Packets	Ethernet LAN interface.
Ethernet WAN	It shows the statistic count of sent packets on the
Sent Packets	Ethernet WAN interface.
Ethernet WAN	It shows the statistic count of received packets on the
Received Packets	Ethernet WAN interface.
Refresh	Click the refresh the statistic counters on the screen.

3.3.19 Management - DDNS

This page is used to configure Dynamic DNS service to have DNS with dynamic IP address.

Dynamic DNS Setting

Dynamic DNS is a service, that provides you with a valid, unchanging, internet domain name (an URL) to go with that (possibly everchanging) IP-address.

Enable DDNS

Service Provider :

Domain Name :

User Name/Email:

Password/Key:

Note:
For IZO, you can have a 30 days free trial [here](#) or manage your IZO account in control panel
For DynDNS, you can create your DynDNS account [here](#)

Screen snapshot – Management – DDNS

Item	Description
Enable DDNS	Click the checkbox to enable DDNS service. Refer to 4.25 What is DDNS?
Service Provider	Click the drop down menu to pickup the right provider.
Domain Name	To configure the Domain Name.
User Name/Email	Configure User Name, Email.
Password/Key	Configure Password, Key.
Apply Change	Click the Apply Changes button to save the enable DDNS service.
Reset	Click the Reset button to abort change and recover the previous configuration setting.

3.3.20 Management - Time Zone Setting

This page is used to configure NTP client to get current time.

Time Zone Setting

You can maintain the system time by synchronizing with a public time server over the Internet.

Current Time : Yr Mon Day Hr Min Sec

Time Zone Select :

Enable NTP client update

NTP server : 192.5.41.41 - North America

(Manual IP Setting)

Screen snapshot – Management – Time Zone Settings

Item	Description
Current Time	It shows the current time.
Time Zone Select	Click the time zone in your country.
Enable NTP client update	Click the checkbox to enable NTP client update. Refer to 4.26 What is NTP Client?
NTP Server	Click select default or input NTP server IP address.
Apply Change	Click the <i>Apply Changes</i> button to save and enable NTP client service.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.
Refresh	Click the refresh the current time shown on the screen.

3.3.21 Management - Log

This page is used to configure the remote log server and shown the current log.

System Log

This page can be used to set remote log server and show the system log.

Enable Log
 wireless only *system all*
 Enable Remote Log Log Server IP Address:

```

0day 00:00:18 klogd started: BusyBox v1.00-pre8 (2004.12.03-
02:38+0000)
0day 00:00:18 Linux version 2.4.18-MIPS-01.00 (root@RH80) (gcc
version 3.3.3) #2 Mon Mar 7 15:15:14 CST 2005
0day 00:00:18 early printk enabled
0day 00:00:18 Determined physical RAM map:
0day 00:00:18 memory: 01000000 @ 00000000 (usable)
0day 00:00:18 initial ramdisk at: 0x801bb000 (5324800 bytes)
0day 00:00:18 On node 0 totalpages: 4096
0day 00:00:18 zone(0): 4096 pages.
0day 00:00:18 zone(1): 0 pages.
0day 00:00:18 zone(2): 0 pages.
0day 00:00:18 Kernel command line: root=/dev/ram console=0
ramdisk_start=0 single
0day 00:00:18 Calibrating delay loop... 179.40 BogoMIPS
    
```

Screen snapshot – Management – Log

Item	Description
Enable Log	Click the checkbox to enable log.
<i>Wireless only</i>	Only show wireless log
<i>System all</i>	Show all log of wireless AP router
<i>Enable Remote Log</i>	Click the checkbox to enable remote log service.
<i>Log Server IP Address</i>	Input the remote log IP address
Apply Changes	Click the <i>Apply Changes</i> button to save above settings.
Refresh	Click the refresh the log shown on the screen.
Clear	Clear log display screen

3.3.22 Management - Upgrade Firmware

This page allows you upgrade the Access Point firmware to new version. Please note, do not power off the device during the upload because it may crash the system.

Upgrade Firmware

This page allows you upgrade the Access Point firmware to new version. Please note, do not power off the device during the upload because it may crash the system.

Select File:

Screen snapshot – Management - Upgrade Firmware

Item	Description
Select File	Click the <i>Browse</i> button to select the new version of web firmware image file.
Upload	Click the <i>Upload</i> button to update the selected web firmware image to the WLAN AP Router.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.23 Management Save/ Reload Settings

This page allows you save current settings to a file or reload the settings from the file that was saved previously. Besides, you could reset the current configuration to factory default.

Save/Reload Settings

This page allows you save current settings to a file or reload the settings from the file which was saved previously. Besides, you could reset the current configuration to factory default.

Save Settings to File:

Load Settings from File:

Reset Settings to Default:

Screen snapshot – Management - Save/Reload Settings

Item	Description
Save Settings to File	Click the <i>Save</i> button to download the configuration parameters to your personal computer.
Load Settings from File	Click the <i>Browse</i> button to select the configuration files then click the <i>Upload</i> button to update the selected

	configuration to the WLAN AP Router.
Reset Settings to Default	Click the <i>Reset</i> button to reset the configuration parameter to factory defaults.

3.3.24 Management - Password Setup

This page is used to set the account to access the web server of Access Point. Empty user name and password will disable the protection.

Password Setup

This page is used to set the account to access the web server of Access Point. Empty user name and password will disable the protection.

User Name:

New Password:

Confirmed Password:

Screen snapshot -- Management - Password Setup

Item	Description
User Name	Fill in the user name for web management login control.
New Password	Fill in the password for web management login control.
Confirmed Password	Because the password input is invisible, so please fill in the password again for confirmation purpose.
Apply Changes	Clear the <i>User Name</i> and <i>Password</i> fields to empty, means to apply no web management login control. Click the <i>Apply Changes</i> button to complete the new configuration setting.
Reset	Click the <i>Reset</i> button to abort change and recover the previous configuration setting.

3.3.25 Logout

This page is used to logout web management page. This item will be activated next time you login after you define user account and password.

Logout

This page is used to logout.

Do you want to logout ?

Screen snapshot – Logout

Change setting successfully!

Screen snapshot – Logout - OK

Item	Description
Apply Change	Click the <i>Apply Change</i> button, Then click <i>OK</i> button to logout.

4.7 What are potential factors that may causes interference?

Factors of interference:

- Obstacles: walls, ceilings, furniture... etc.
- Building Materials: metal door, aluminum studs.
- Electrical devices: microwaves, monitors and electrical motors.

Solutions to overcome the interferences:

- ✓ Minimizing the number of walls and ceilings.
- ✓ Position the WLAN antenna for best reception.
- ✓ Keep WLAN devices away from other electrical devices, eg: microwaves, monitors, electric motors, ... etc.
- ✓ Add additional WLAN Access Points if necessary.

4.8 What are the Open System and Shared Key authentications?

IEEE 802.11 supports two subtypes of network authentication services: open system and shared key. Under open system authentication, any wireless station can request authentication. The station that needs to authenticate with another wireless station sends an authentication management frame that contains the identity of the sending station. The receiving station then returns a frame that indicates whether it recognizes the sending station. Under shared key authentication, each wireless station is assumed to have received a secret shared key over a secure channel that is independent from the 802.11 wireless network communications channel.

4.9 What is WEP?

An optional IEEE 802.11 function that offers frame transmission privacy similar to a wired network. The Wired Equivalent Privacy generates secret shared encryption keys that both source and destination stations can use to alert frame bits to avoid disclosure to eavesdroppers.

WEP relies on a secret key that is shared between a mobile station (e.g. a laptop with a wireless Ethernet card) and an access point (i.e. a base station). The secret key is used to encrypt packets before they are transmitted, and an integrity check is used to ensure that packets are not modified in transit.

4.10 What is Fragment Threshold?

The proposed protocol uses the frame fragmentation mechanism defined in IEEE 802.11 to achieve parallel transmissions. A large data frame is fragmented into several

fragments each of size equal to fragment threshold. By tuning the fragment threshold value, we can get varying fragment sizes. The determination of an efficient fragment threshold is an important issue in this scheme. If the fragment threshold is small, the overlap part of the master and parallel transmissions is large. This means the spatial reuse ratio of parallel transmissions is high. In contrast, with a large fragment threshold, the overlap is small and the spatial reuse ratio is low. However high fragment threshold leads to low fragment overhead. Hence there is a trade-off between spatial re-use and fragment overhead.

Fragment threshold is the maximum packet size used for fragmentation. Packets larger than the size programmed in this field will be fragmented.

If you find that your corrupted packets or asymmetric packet reception (all send packets, for example). You may want to try lowering your fragmentation threshold. This will cause packets to be broken into smaller fragments. These small fragments, if corrupted, can be resent faster than a larger fragment. Fragmentation increases overhead, so you'll want to keep this value as close to the maximum value as possible.

4.11 What is RTS (Request To Send) Threshold?

The RTS threshold is the packet size at which packet transmission is governed by the RTS/CTS transaction. The IEEE 802.11-1997 standard allows for short packets to be transmitted without RTS/CTS transactions. Each station can have a different RTS threshold. RTS/CTS is used when the data packet size exceeds the defined RTS threshold. With the CSMA/CA transmission mechanism, the transmitting station sends out an RTS packet to the receiving station, and waits for the receiving station to send back a CTS (Clear to Send) packet before sending the actual packet data.

This setting is useful for networks with many clients. With many clients, and a high network load, there will be many more collisions. By lowering the RTS threshold, there may be fewer collisions, and performance should improve. Basically, with a faster RTS threshold, the system can recover from problems faster. RTS packets consume valuable bandwidth, however, so setting this value too low will limit performance.

4.12 What is Beacon Interval?

In addition to data frames that carry information from higher layers, 802.11 includes management and control frames that support data transfer. The beacon frame, which is a type of management frame, provides the "heartbeat" of a wireless LAN, enabling

stations to establish and maintain communications in an orderly fashion.

Beacon Interval represents the amount of time between beacon transmissions. Before a station enters power save mode, the station needs the beacon interval to know when to wake up to receive the beacon (and learn whether there are buffered frames at the access point).

4.13 What is Preamble Type?

There are two preamble types defined in IEEE 802.11 specification. A long preamble basically gives the decoder more time to process the preamble. All 802.11 devices support a long preamble. The short preamble is designed to improve efficiency (for example, for VoIP systems). The difference between the two is in the Synchronization field. The long preamble is 128 bits, and the short is 56 bits.

4.14 What is SSID Broadcast?

Broadcast of SSID is done in access points by the beacon. This announces your access point (including various bits of information about it) to the wireless world around it. By disabling that feature, the SSID configured in the client must match the SSID of the access point.

Some wireless devices don't work properly if SSID isn't broadcast (for example the D-link DWL-120 USB 802.11b adapter). Generally if your client hardware supports operation with SSID disabled, it's not a bad idea to run that way to enhance network security. However it's no replacement for WEP, MAC filtering or other protections.

4.15 What is Wi-Fi Protected Access (WPA)?

Wi-Fi's original security mechanism, Wired Equivalent Privacy (WEP), has been viewed as insufficient for securing confidential business communications. A longer-term solution, the IEEE 802.11i standard, is under development. However, since the IEEE 802.11i standard is not expected to be published until the end of 2003, several members of the Wi-Fi Alliance teamed up with members of the IEEE 802.11i task group to develop a significant near-term enhancement to Wi-Fi security. Together, this team developed Wi-Fi Protected Access.

To upgrade a WLAN network to support WPA, Access Points will require a WPA software upgrade. Clients will require a software upgrade for the network interface card, and possibly a software update for the operating system. For enterprise networks, an

4 Frequently Asked Questions (FAQ)

4.1 What and how to find my PC's IP and MAC address?

IP address is the identifier for a computer or device on a TCP/IP network. Networks using the TCP/IP protocol route messages based on the IP address of the destination. The format of an IP address is a 32-bit numeric address written as four numbers separated by periods. Each number can be zero to 255. For example, 191.168.1.254 could be an IP address.

The MAC (Media Access Control) address is your computer's unique hardware number. (On an Ethernet LAN, it's the same as your Ethernet address.) When you're connected to the Internet from your computer (or host as the Internet protocol thinks of it), a correspondence table relates your IP address to your computer's physical (MAC) address on the LAN.

To find your PC's IP and MAC address,

- ✓ Open the Command program in the Microsoft Windows.
- ✓ Type in *ipconfig /all* then press the *Enter* button.

- Your PC's IP address is the one entitled IP Address and your PC's MAC address is the one entitled Physical Address.

4.2 What is Wireless LAN?

A wireless LAN (WLAN) is a network that allows access to Internet without the need for any wired connections to the user's machine.


4.3 What are ISM bands?

ISM stands for Industrial, Scientific and Medical; radio frequency bands that the Federal Communications Commission (FCC) authorized for wireless LANs. The ISM bands are located at 915 +/- 13 MHz, 2450 +/- 50 MHz and 5800 +/- 75 MHz.

4.4 How does wireless networking work?

The 802.11 standard define two modes: infrastructure mode and ad hoc mode. In infrastructure mode, the wireless network consists of at least one access point connected to the wired network infrastructure and a set of wireless end stations. This configuration is called a Basic Service Set (BSS). An Extended Service Set (ESS) is a set of two or more BSSs forming a single subnetwork. Since most corporate WLANs require access

to the wired LAN for services (file servers, printers, Internet links) they will operate in infrastructure mode.

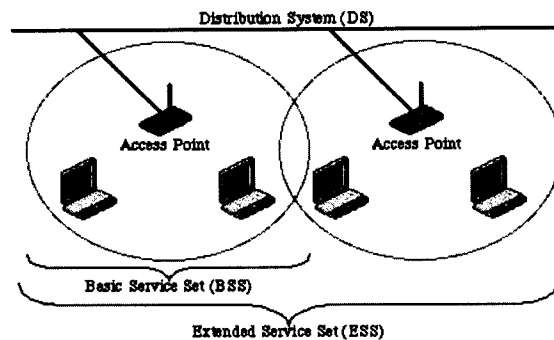

Example 1: wireless Infrastructure Mode

Ad hoc mode (also called peer-to-peer mode or an Independent Basic Service Set, or IBSS) is simply a set of 802.11 wireless stations that communicate directly with one another without using an access point or any connection to a wired network. This mode is useful for quickly and easily setting up a wireless network anywhere that a wireless infrastructure does not exist or is not required for services, such as a hotel room, convention center, or airport, or where access to the wired network is barred (such as for consultants at a client site).



Example 2: wireless Ad Hoc Mode

4.5 What is BSSID?

A six-byte address that distinguishes a particular a particular access point from others. Also know as just SSID. Serves as a network ID or name.

4.6 What is ESSID?

The Extended Service Set ID (ESSID) is the name of the network you want to access. It is used to identify different wireless networks.

4.21 What is Wireless Distribution System (WDS)?

The Wireless Distribution System feature allows WLAN AP to talk directly to other APs via wireless channel, like the wireless bridge or repeater service.

4.22 What is Universal Plug and Play (uPNP)?

UPnP is an open networking architecture that consists of services, devices, and control points. The ultimate goal is to allow data communication among all UPnP devices regardless of media, operating system, programming language, and wired/wireless connection.

4.23 What is Maximum Transmission Unit (MTU) Size?

Maximum Transmission Unit (MTU) indicates the network stack of any packet is larger than this value will be fragmented before the transmission. During the PPP negotiation, the peer of the PPP connection will indicate its MRU and will be accepted. The actual MTU of the PPP connection will be set to the smaller one of MTU and the peer's MRU. The default is value 1400.

4.24 What is Clone MAC Address?

Clone MAC address is designed for your special application that request the clients to register to a server machine with one identified MAC address.

Since that all the clients will communicate outside world through the WLAN AP Router, so have the cloned MAC address set on the WLAN AP Router will solve the issue.

4.25 What is DDNS?

DDNS is the abbreviation of Dynamic Domain Name Server. It is designed for user own the DNS server with dynamic WAN IP address.

4.26 What is NTP Client?

NTP client is designed for fetching the current timestamp from internet via Network Time protocol. User can specify time zone, NTP server IP address.

4.27 What is VPN?

VPN is the abbreviation of Virtual Private Network. It is designed for creating point-to-point private link via shared or public network.

4.28 What is IPSEC?

IPSEC is the abbreviation of IP Security. It is used to transferring data securely under VPN.