

Overview of the “Barrier Approach”
to lower the upper bound of the
de Bruijn-Newman constant.


D.H.J. Polymath

June 2018

High level storyline

- The basic De Bruijn idea leading to the function $H_t(x+iy)$.
- How to effectively bound a good estimate for H_t ?
- Some observations on the zeros of H_t .
- How could zeros of H_t be 'blocked' to lower the Λ upper bound.
- The key ideas behind the “Barrier approach”.
- How to ensure no zeros have passed the Barrier?
- How to show that H_t doesn't vanish from the Barrier to N_b ?
- Numerical results showing $\Lambda < 0.22$ (and lower, but conditionally on RH).
- Software used and detailed results available.

Basic idea by De Bruijn

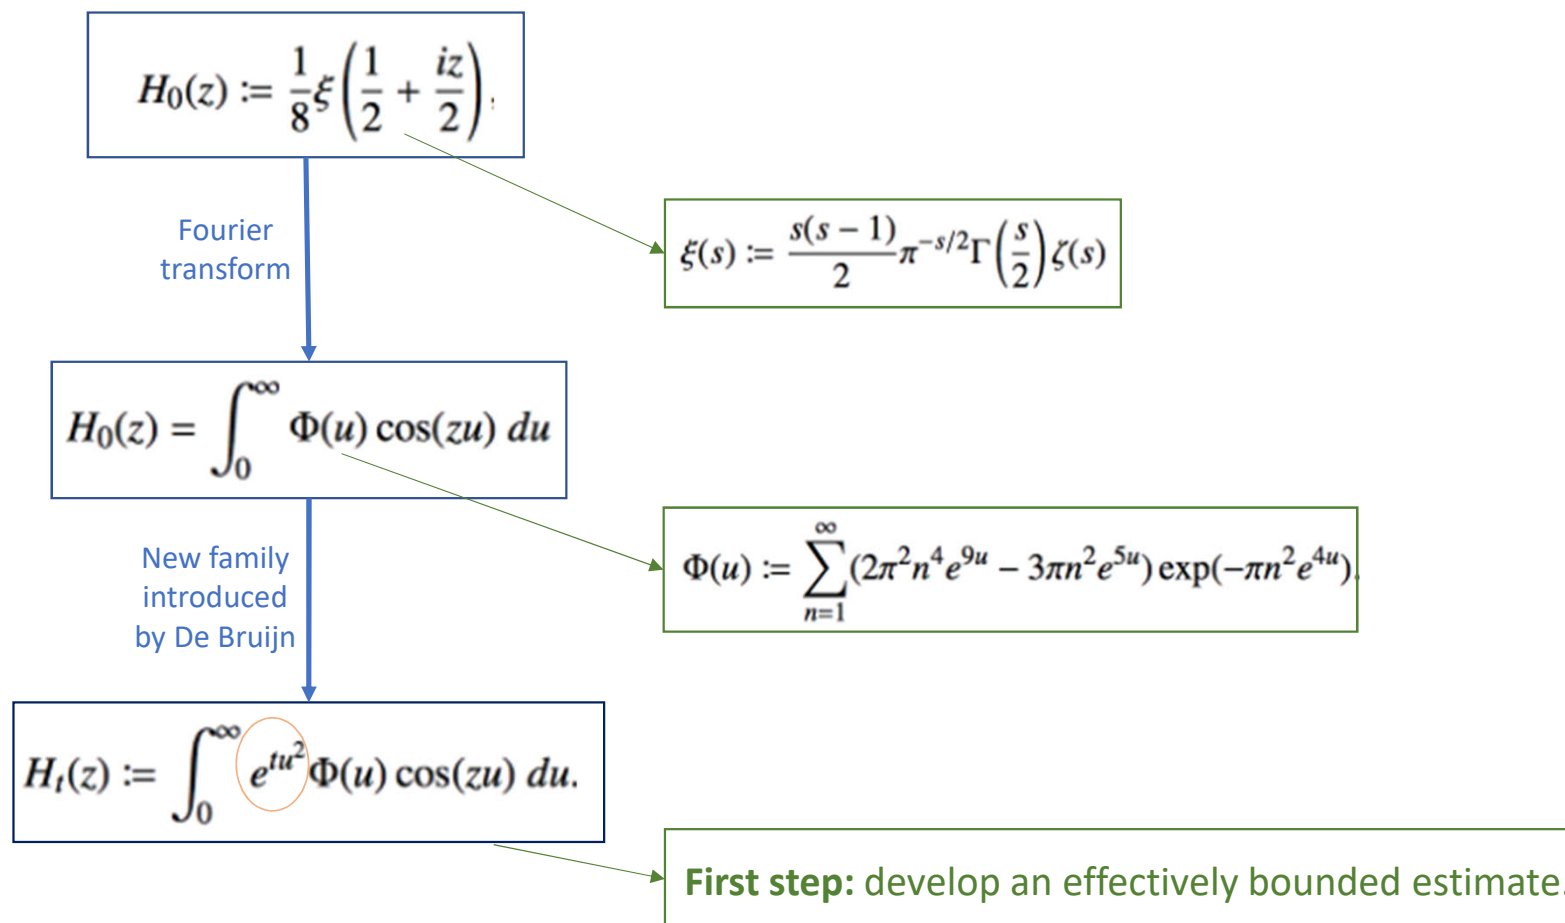

Estimating and effectively bounding $H_t(x+iy)$

Main estimate

$$A(x+iy) := M_t\left(\frac{1-y+ix}{2}\right) \sum_{n=1}^N \frac{b'_n}{n^{\frac{1-y+ix}{2} + \frac{i}{2}\alpha\left(\frac{1-y+ix}{2}\right)}}$$

$$B(x+iy) := M_t\left(\frac{1+y-ix}{2}\right) \sum_{n=1}^N \frac{b'_n}{n^{\frac{1+y-ix}{2} + \frac{i}{2}\alpha\left(\frac{1+y-ix}{2}\right)}}$$

Optionally: a more effective C-term is available

Designed for:
 $0 < t \leq \frac{1}{2}; \quad 0 \leq y \leq 1; \quad x \geq 200.$

Error terms

$$E_A(x+iy) := \left| M_t\left(\frac{1-y+ix}{2}\right) \right| \sum_{n=1}^N \frac{b'_n}{n^{\frac{1-y}{2} + \frac{i}{2}\text{Re}\alpha\left(\frac{1-y+ix}{2}\right)}} \varepsilon_{t,n}\left(\frac{1-y+ix}{2}\right)$$

$$E_B(x+iy) := \left| M_t\left(\frac{1+y+ix}{2}\right) \right| \sum_{n=1}^N \frac{b'_n}{n^{\frac{1+y}{2} + \frac{i}{2}\text{Re}\alpha\left(\frac{1+y+ix}{2}\right)}} \varepsilon_{t,n}\left(\frac{1+y+ix}{2}\right)$$

$$E_{C,0}(x+iy) := \exp\left(\frac{t\pi^2}{64}\right) |M_0(it')| \left(1 + \tilde{\varepsilon}\left(\frac{1-y+ix}{2}\right) + \tilde{\varepsilon}\left(\frac{1+y+ix}{2}\right)\right).$$

$$H_t(x+iy) = A(x+iy) + B(x+iy) + O_{\leq}(E_A(x+iy) + E_B(x+iy) + E_{C,0}(x+iy))$$

Normalize by B_0 and bound effectively

$$\frac{H_t(x+iy)}{B_0(x+iy)} = \sum_{n=1}^N \frac{b'_n}{n^{s_*}} + \gamma \sum_{n=1}^N n^y \frac{b'_n}{n^{\overline{s_*} + \kappa}} + O_{\leq}(e_A + e_B + e_{C,0})$$

Main estimate lower bound

(triangle) $|f_t(x+iy)| \geq 1 - |\gamma| - \sum_{n=2}^N \frac{b'_n}{n^{\sigma}} (1 + |\gamma| n^{y - \text{Re}(s)})$

(lemma) $|f_t(x+iy)| \geq \left(\left| \sum_{n=1}^N \frac{b'_n}{n^{s_*}} \right| - \left| \sum_{n=1}^N \frac{|\gamma| b'_n n^y}{n^{s_*}} \right| \right)_+ - |\gamma| \sum_{n=1}^N \frac{b'_n (n^{|\kappa|} - 1)}{n^{\sigma - y}}$

Error upper bounds

$$e_A + e_B \leq \sum_{n=1}^N (1 + |\gamma| N^{|\kappa|} n^y) \frac{b'_n}{n^{\text{Re}(s_*)}} \left(\exp\left(\frac{t^2}{16} \log^2 \frac{x}{4\pi n^2} + 0.626\right) - 1 \right)$$

$$e_{C,0} \leq \left(\frac{x}{4\pi}\right)^{-\frac{1+y}{4}} \exp\left(-\frac{t}{16} \log^2 \frac{x}{4\pi} + \frac{1.24 \times (3^y + 3^{-y})}{N - 0.125} + \frac{3|\log \frac{x}{4\pi} + i\frac{\pi}{2}| + 10.44}{x - 8.52}\right)$$

Hence,

If Lower bound \geq Upper bound then $H_t(x+iy) \neq 0$


$\sum_{d=1}^D \frac{\lambda_d}{d^s} = \prod_{p \leq P} \left(1 - \frac{b'_p}{p^s}\right)$

Choice of 'Euler mollifiers'



Real example of trajectories of real and complex zeros of $H_t(x+iy)$

Zeros get denser as one moves away from the origin, so there are more zeros to the right of x_n than to the left, hence their trajectories "lean" leftwards.

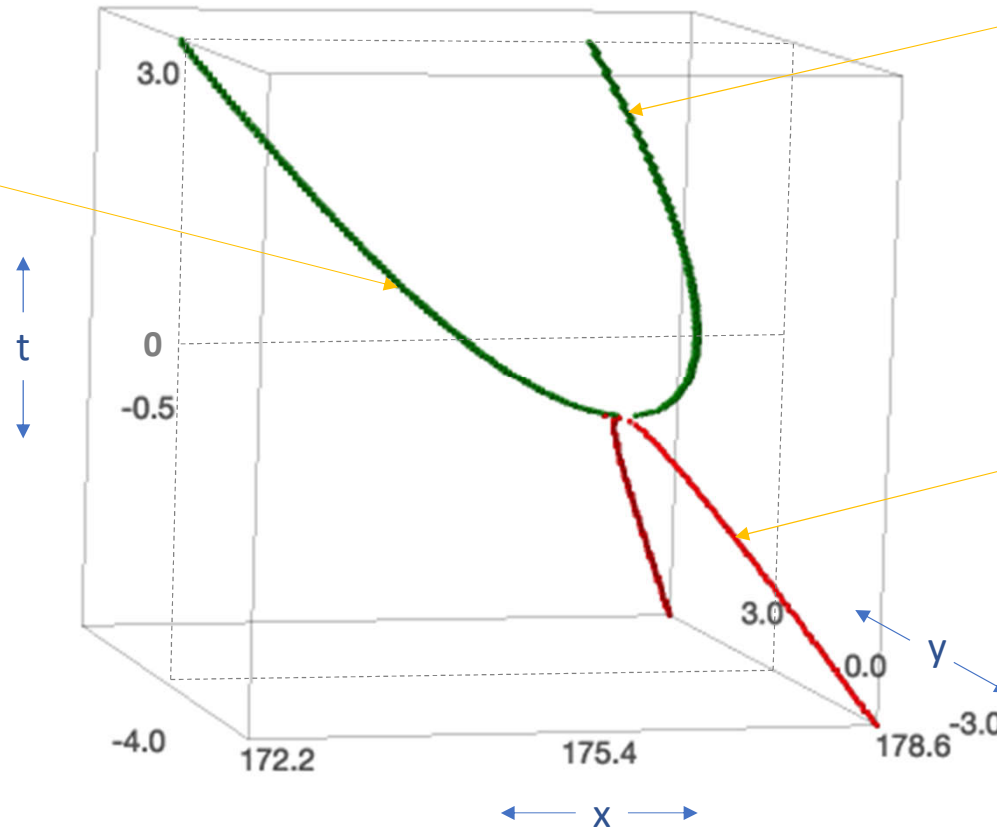

Once a zero becomes real, it stays real forever and ends up roughly equally spaced with:


$$z_{j+1}(t) - z_j(t) = (1 + o(1)) \frac{4\pi}{\log z_j(t)}$$

The complex parts of zeros attract each other and the real parts repel each other. From isolating the imaginary "force", it can be derived that all complex zeroes will be forced into the real axis in a finite time leading to the bound:

$$\Lambda \leq t + \frac{1}{2} \sigma_{max}^2(t)$$


— trajectory of a complex zero — trajectory of a real zero

“Barrier” approach to assure $H_t(x+iy) \neq 0$ for a certain $y > y_0, t_0$.

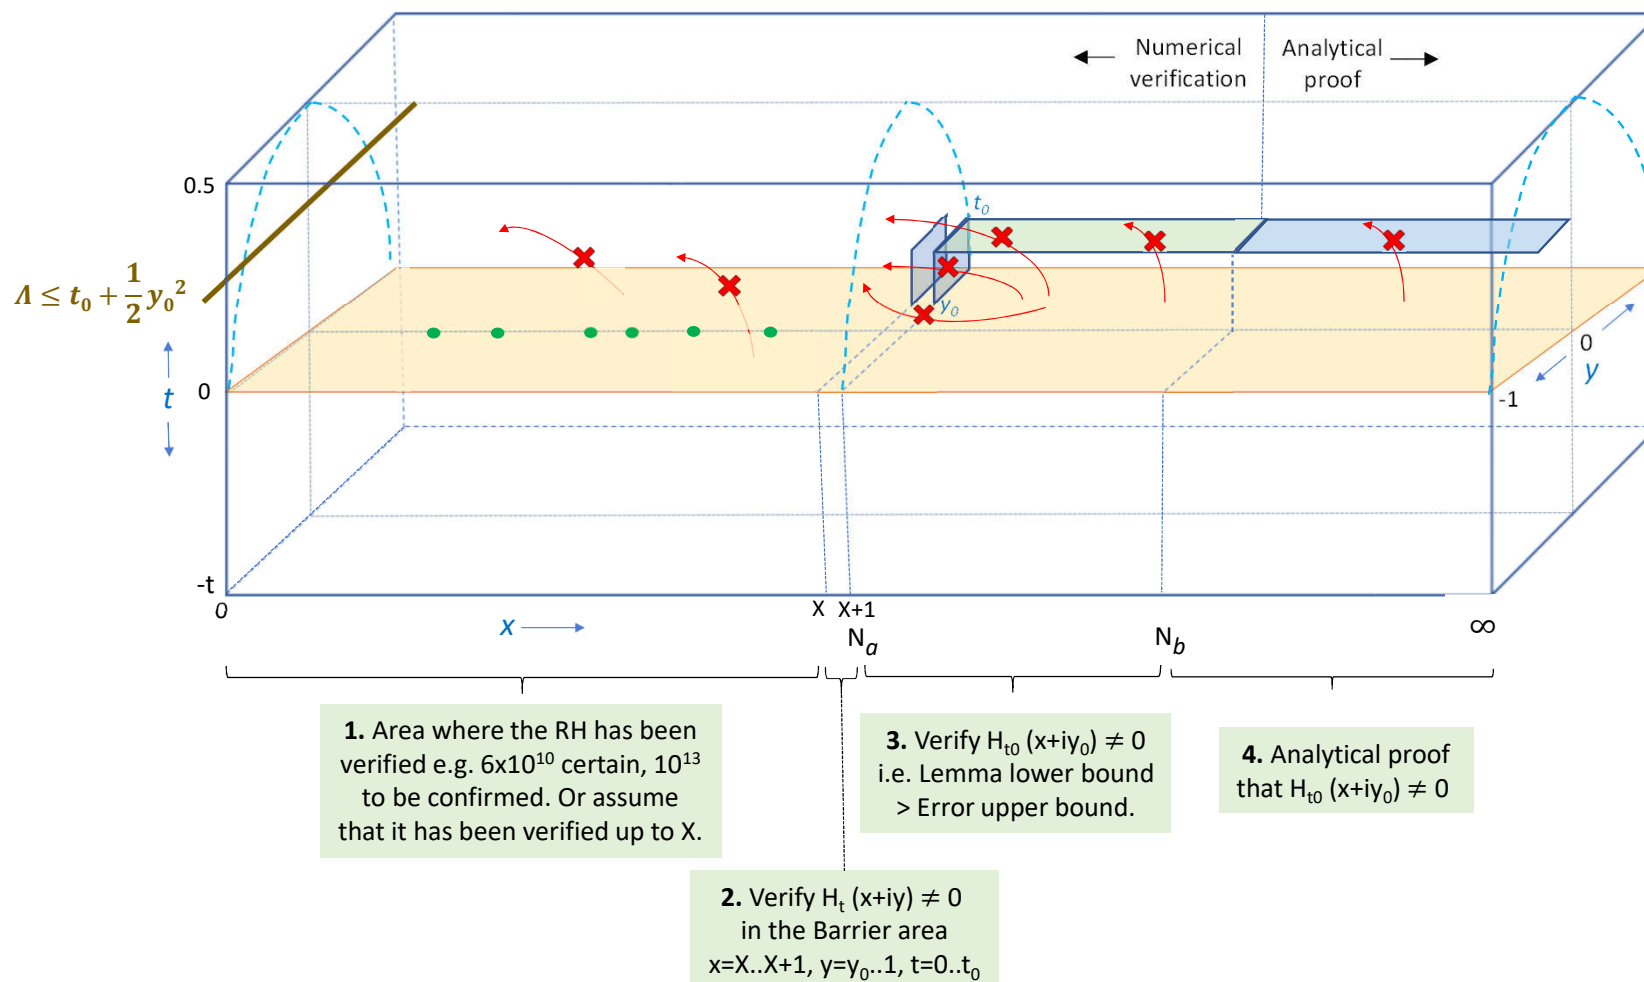

→ Possible trajectories of a complex zeros that should be “blocked”.

“Barrier” approach: how to clear the barrier?

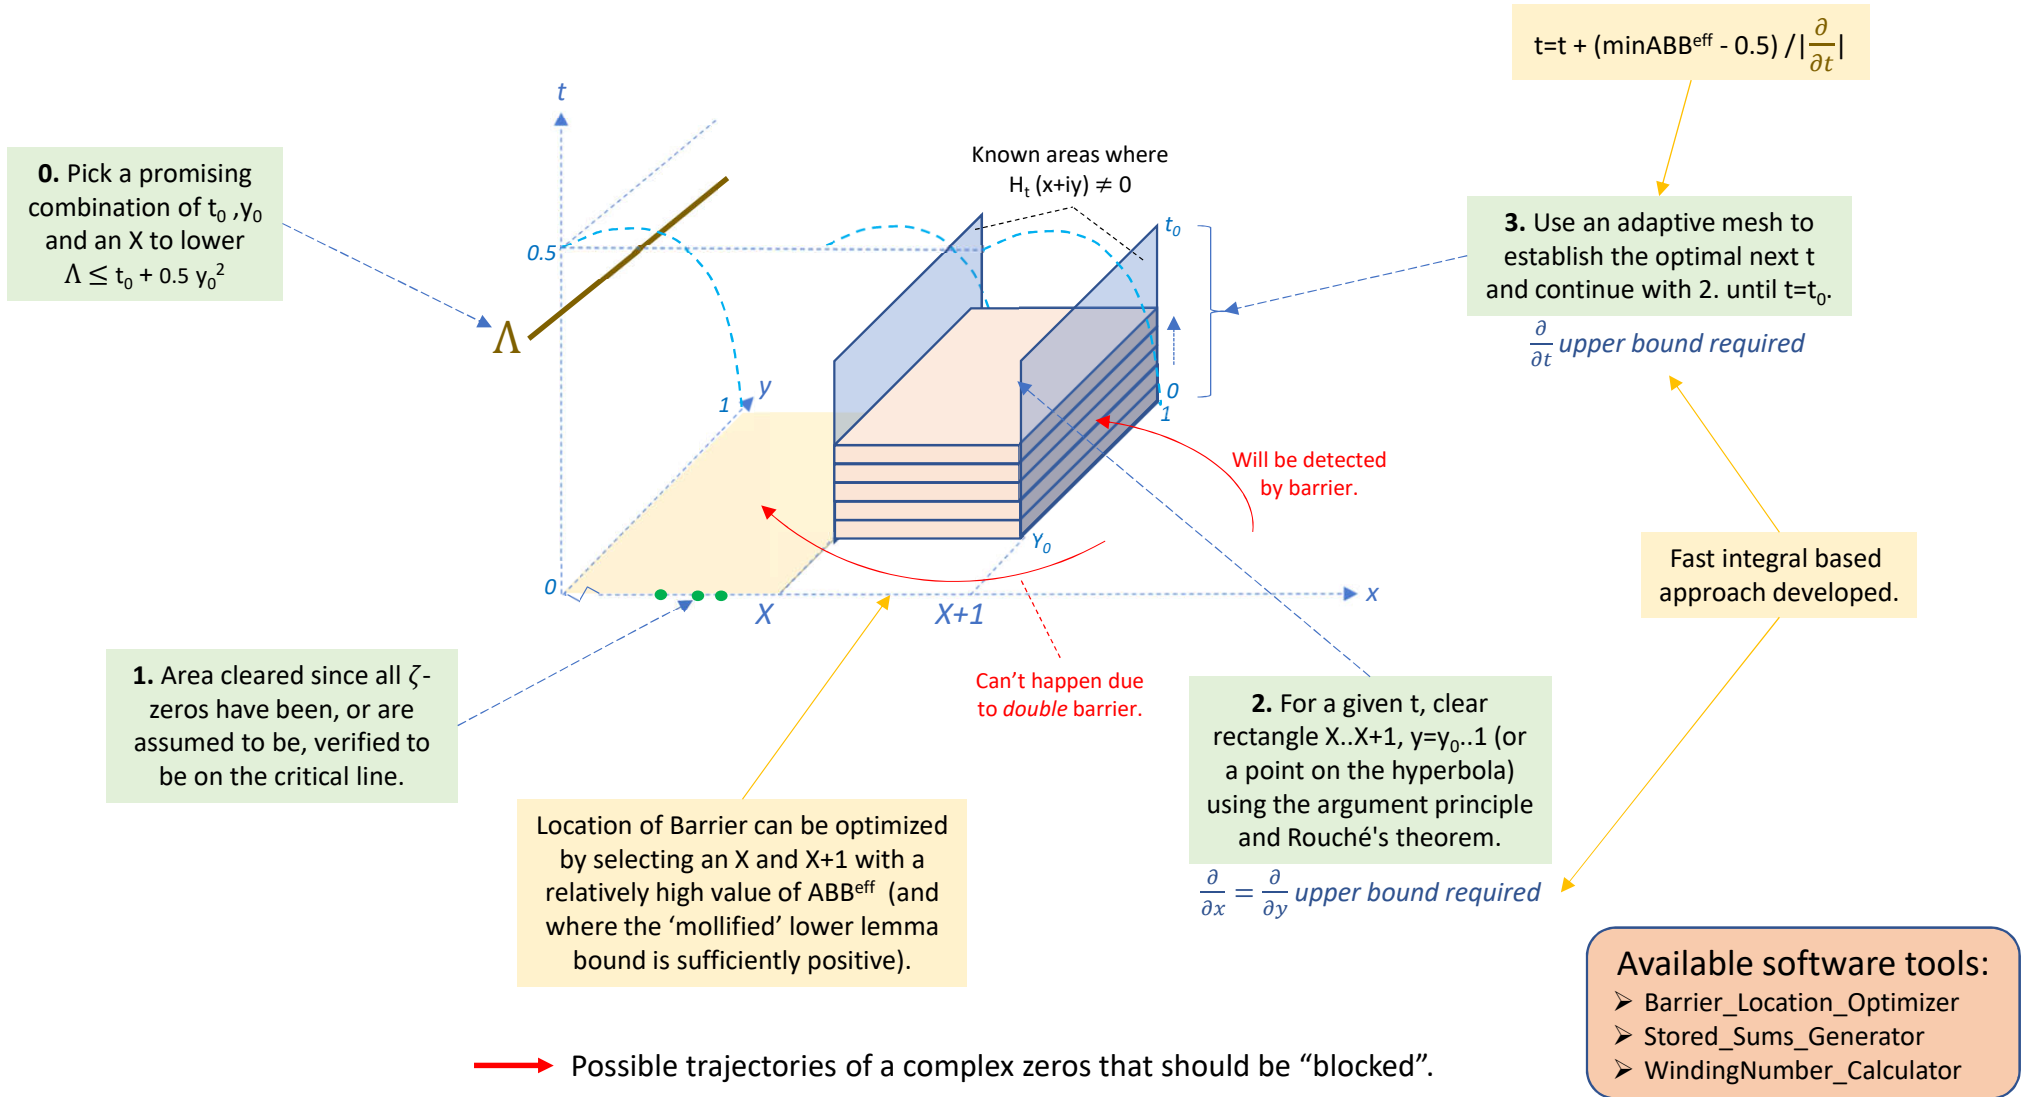


$$t = t + (\min ABB^{eff} - 0.5) / \left| \frac{\partial}{\partial t} \right|$$

$\frac{\partial}{\partial t}$ upper bound required

$\frac{\partial}{\partial x} = \frac{\partial}{\partial y}$ upper bound required

- Available software tools:
- Barrier_Location_Optimizer
 - Stored_Sums_Generator
 - WindingNumber_Calculator

“Barrier” approach: how to verify the area from the barrier up to N_b ?

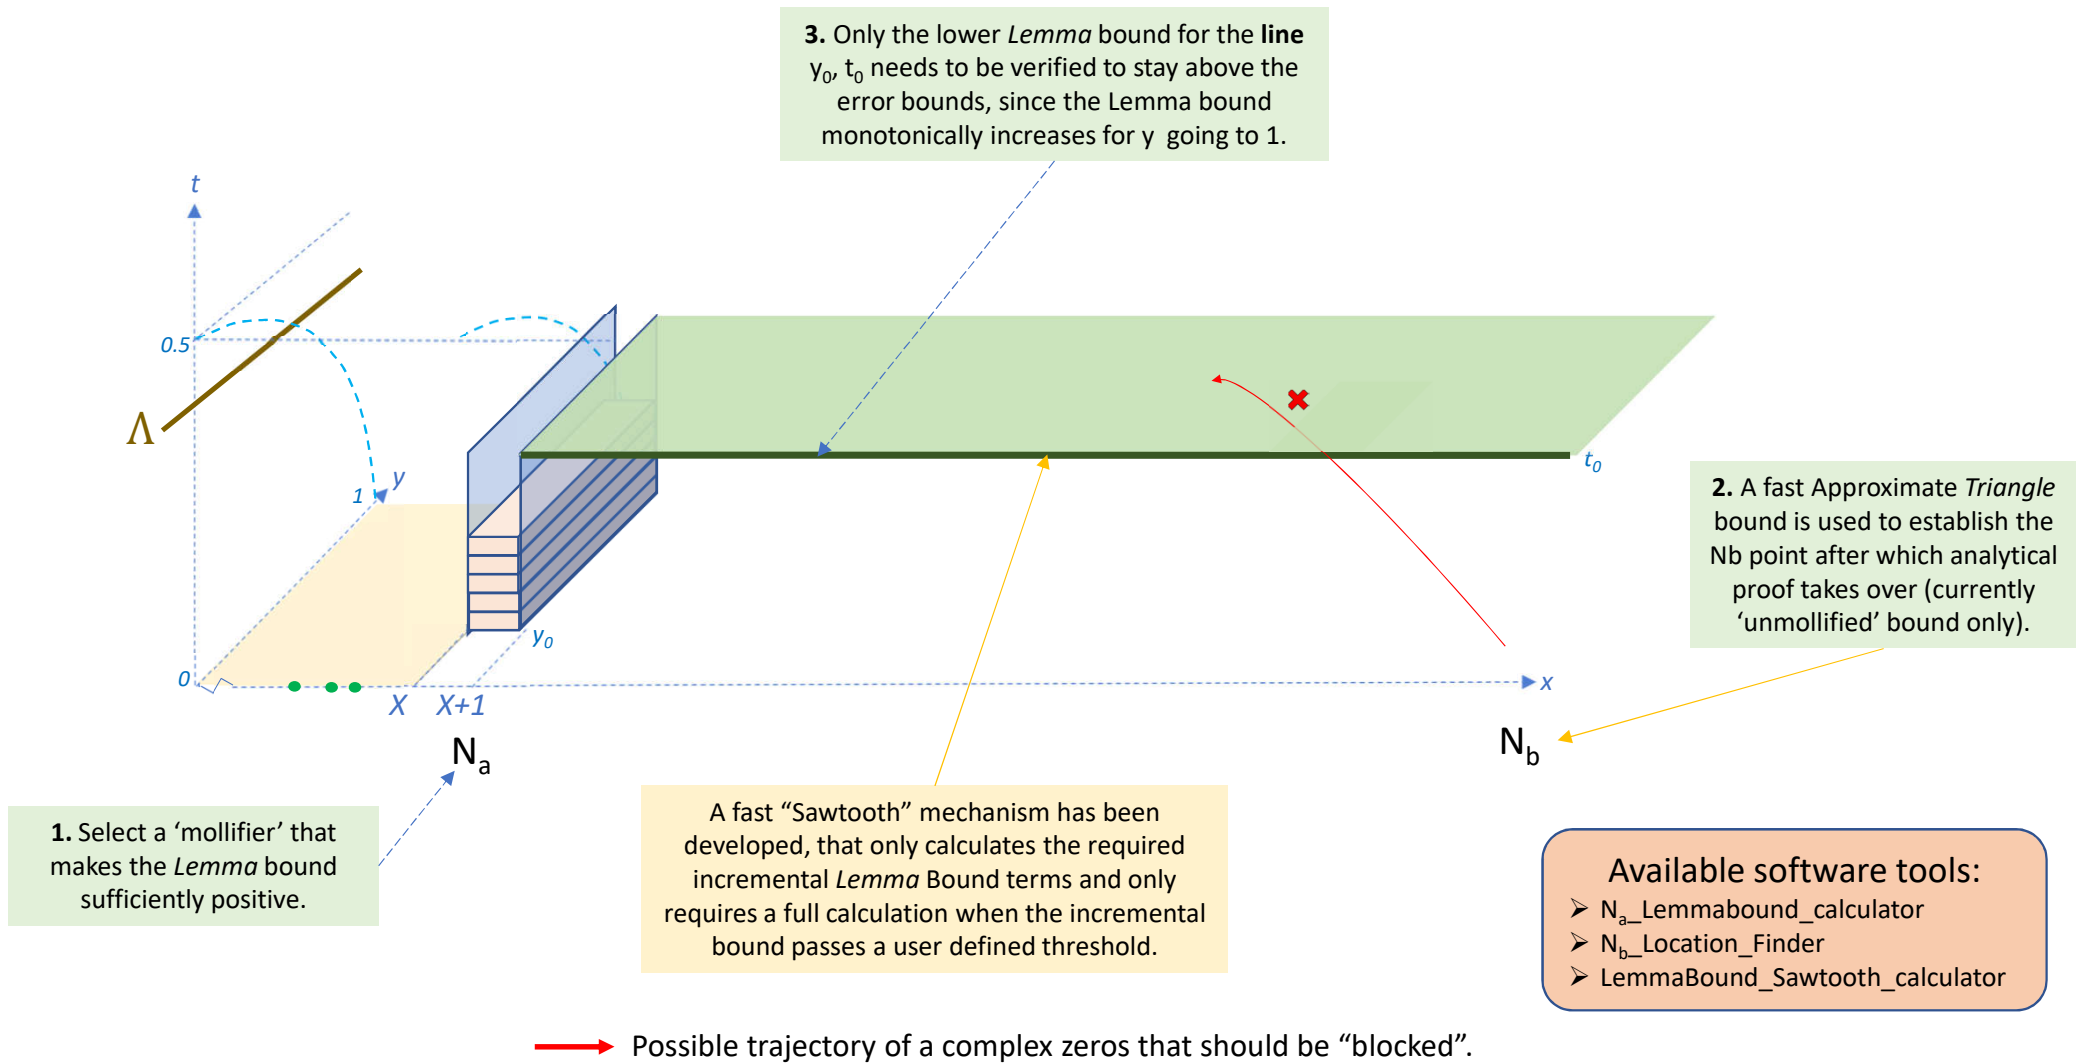

The Barrier model in action: some real numbers (wip)

Selected with Barrier Location optimizer			Selected with LemmaBound utility					Selected with N_b Location finder				
x	Barrier offset	RH verified?	t_0	y_0	Λ	Winding number	mollifier #primes	Lemma bound value	N_a	Triangle bound value	N_b	
6.00E+10	155019	yes	0.20	0.20	0.22	0	4	0.067	69098	0.077	1.7E+06	✓
1.00E+11	78031	yes	0.19	0.20	0.21	0	4	0.067	89206	0.081	6.0E+06	✓
1.00E+12	46880	yes	0.18	0.20	0.20	0	3	0.135	282094	0.089	1.3E+07	✓
5.00E+12	194858	yes ¹⁾	0.17	0.20	0.19	0	3	0.180	630783	0.116	1.5E+07	✓
1.00E+13	9995	not yet	0.16	0.20	0.18	0	3	0.109	892062	0.091	3.0E+07	✓
1.00E+14	2659	not yet	0.15	0.20	0.17	0	3	0.195	2820947	0.076	7.0E+07	
1.00E+15	21104	not yet	0.14	0.20	0.16	0	3	0.251	8920620	0.073	2.0E+08	
1.00E+16	172302	not yet	0.13	0.20	0.15	0	3	0.278	28209479	0.077	7.0E+08	
1.00E+17	31656	not yet	0.12	0.20	0.14	0	3	0.279	89206205	0.080	3.0E+09	
1.00E+18	44592	not yet	0.11	0.20	0.13	tbd	2	0.207	282094791	0.103	2.0E+10	
1.00E+19	12010	not yet	0.10	0.20	0.12	tbd	2	0.128	892062059	0.097	1.5E+11	
1.00E+20	37221	not yet	0.09	0.20	0.11	tbd	3	0.037	2820947918	0.075	1.5E+12	

1) Gourdon-Demichel 2004

Software used and useful links

All software was developed in two languages and all results were reconciled:

- Symbolic math programming language - **pari/gp** (<https://pari.math.u-bordeaux.fr>)
 - Short development time
 - Relatively fast

- Arithmetic Balls C-based library - **Arb** (<http://arblib.org>)
 - Longer development time
 - Very fast (up to 20 x pari/gp)

All software and results are free to use (under the LGPL-terms) and can be found here:

https://github.com/km-git-acc/dbn_upper_bound